

Loop-Powered AC Voltage Transmitter

DIN RAIL / PANEL MOUNT, AVERAGE RMS



CR4620
Single Element Transmitter
1.0 to 600 VAC Input Range



CR4640
Two Element Transmitter
1.0 to 600 VAC Input Range

CR Magnetics has a wide selection of Potential Transformers to extend the range of any part.
Contact factory for more information.

The **CR4600** Series, Loop-Powered AC Voltage Transmitters are designed to provide a 4 - 20 mADC output that is proportional to the average RMS AC voltage input. These devices are best suited for general applications, such as fixed frequency voltage supplies.

Applications


Monitor for over/under voltage
Sense phase loss
Power monitoring
Multi-point instrumentation needs

Features

35mm DIN Rail or Panel Mount
Outputs isolated from inputs
One or two element
Connection diagram printed on case

Regulatory Agencies

Recognized to meet UL 61010B-1
Constructed to meet CAN/CSA-C22.2, No. 61010-1-2004
Meets requirement of IEC 61010-1 and BS EN 61010-1

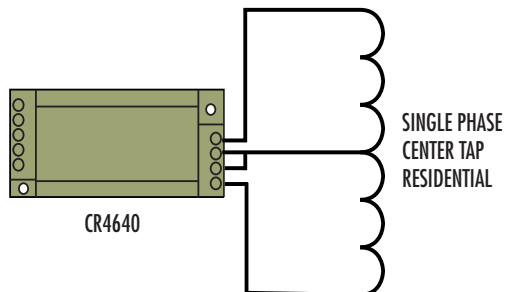

TYPICAL APPLICATION RESIDENTIAL POWER

PART NUMBERS

Part Number	Element Count	Output Range
CR4620	-	Single element with 4 - 20 mADC output
CR4640	-	Two element with 4 - 20 mADC output

☐ Add suffix for input range

- 50** - 0-50 VAC
- 150** - 0-150 VAC
- 250** - 0-250 VAC
- 500** - 0-500 VAC *

Ranges available up to and including 600 VAC


* UL Recognized up to 300 Vac

Loop-Powered AC Voltage Transmitter


DIN RAIL / PANEL MOUNT, AVERAGE RMS

SPECIFICATIONS


Basic Accuracy:.....	0.5%	Cleaning:.....	Water-dampened cloth
Calibration:.....	Average Sensing, RMS Calibrated	MTBF:.....	Greater than 100 K hours
Thermal Drift:.....	500 PPM/°C	Frequency Range:....	20 Hz - 400 Hz
Operating Temperature:.....	0°C to + 60°C	Typical Load:.....	0 - 300 Ω @ 24 VDC
Installation Category:.....	CAT II	Relative Humidity:.....	5% to 95%, Non-Condensing
Vibration Tested To:.....	IEC 60068-2-6,1995	Torque Specs:.....	3.0 inch lbs. (0.4Nm)
Pollution Degree:.....	2	Weight:.....	0.5 lbs.
Response Time:	250 ms		
Altitude:.....	2000 meter max.		
Insulation Voltage:.....	2500 VDC		
Supply Voltage:.....	Loop Powered 24 Vdc $\pm$ 10%		

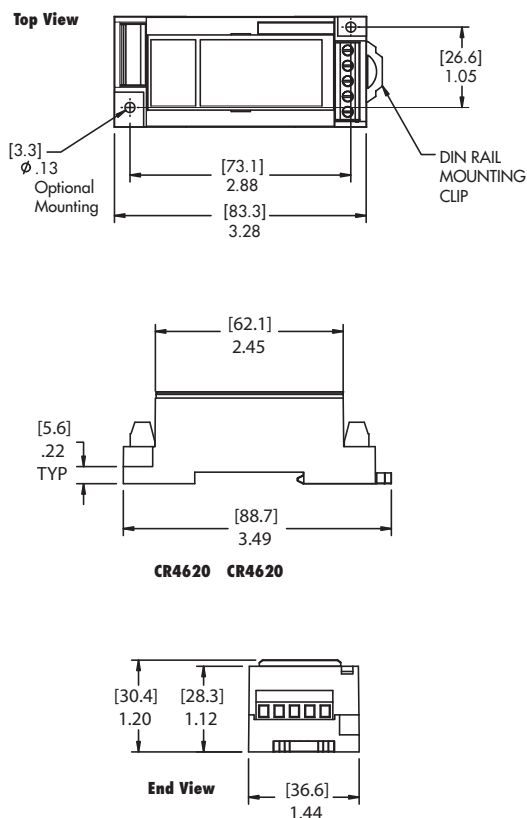

OUTLINE DRAWING




CR4620 One Element 4 - 20 mA DC Output

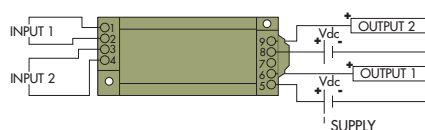

CR4640 Two Element 4 - 20 mA DC Output



CR4620 One Element with External Voltage Transformers **

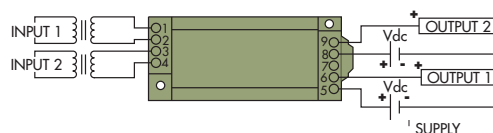

CR4640 Two Element with External Voltage Transformers **

CONNECTION DIAGRAM

** USE CR MAGNETICS LOW AND MEDIUM VOLTAGE POTENTIAL TRANSFORMERS (SECTION G)

NOTE: The building installation must have a switch or circuit-breaker that is in close proximity and within easy reach of the operator. The switch or circuit breaker shall be marked as the disconnecting device for the equipment.