



**Crimzon® ZLR32300**

***Z8® Low-Voltage ROM  
MCU with Infrared Timers***

**Product Specification**



**Maxim Integrated Products  
120 San Gabriel Drive  
Sunnyvale, CA 94086  
United States**

**408-737-7600  
[www.maxim-ic.com](http://www.maxim-ic.com)**

Copyright © 2009 Maxim Integrated Products

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. Maxim retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time. While the information furnished herein is held to be accurate and reliable, no responsibility will be assumed by Maxim for its use. Furthermore, the information contained herein does not convey to the purchaser of microelectronic devices any license under the patent right of any manufacturer.

Maxim is a registered trademark of Maxim Integrated Products, Inc.

All other products or service names used in this publication are for identification purposes only, and may be trademarks or registered trademarks of their respective companies. All other trademarks or registered trademarks mentioned herein are the property of their respective holders.

Z8 is a registered trademark of Zilog, Inc.

Crimzon is a registered trademark of Universal Electronics Inc.



## Revision History

Each instance in the Revision History table reflects a change to this document from its previous revision. For more details, refer to the corresponding pages and appropriate links in the table below.

| Date          | Revision Level | Description                                                        | Page Number        |
|---------------|----------------|--------------------------------------------------------------------|--------------------|
| April 2009    | 13             | Changed to Maxim product                                           | All                |
| February 2008 | 12             | Updated the <a href="#">Ordering Information</a> section.          | <a href="#">92</a> |
| January 2008  | 11             | Updated the <a href="#">Ordering Information</a> section.          | <a href="#">92</a> |
| August 2007   | 10             | Updated the Disclaimer section and implemented style guide.        | All                |
| February 2007 | 09             | Updated <a href="#">Low-Voltage Detection Register—LVD(D)0CH</a> . | <a href="#">60</a> |
| May 2006      | 08             | Added Pin 22 to SMR Block input, <a href="#">Figure 32</a> .       | <a href="#">54</a> |
| December 2005 | 07             | Updated section clock and Input/output port.                       | 50, 14             |



# Table of Contents

|                                                      |           |
|------------------------------------------------------|-----------|
| <b>Architectural Overview</b>                        | <b>1</b>  |
| Development Features                                 | 2         |
| <b>Functional Block Diagram</b>                      | <b>4</b>  |
| <b>Pin Description</b>                               | <b>6</b>  |
| <b>Pin Functions</b>                                 | <b>11</b> |
| XTAL1 Crystal 1 (Time-Based Input)                   | 11        |
| XTAL2 Crystal 2 (Time-Based Output)                  | 11        |
| Input/Output Ports                                   | 11        |
| RESET (Input, Active Low)                            | 19        |
| <b>Functional Description</b>                        | <b>20</b> |
| Program Memory                                       | 20        |
| RAM                                                  | 20        |
| Expanded Register File                               | 21        |
| Register File                                        | 25        |
| Stack                                                | 26        |
| Timers                                               | 26        |
| Counter/Timer Functional Blocks                      | 35        |
| Interrupts                                           | 45        |
| Clock                                                | 48        |
| Power Management                                     | 49        |
| Port Configuration                                   | 50        |
| Stop Mode Recovery                                   | 51        |
| Watchdog Timer Mode                                  | 57        |
| Low-Voltage Detection                                | 60        |
| <b>Expanded Register File Control Registers (0D)</b> | <b>62</b> |
| <b>Expanded Register File Control Registers (0F)</b> | <b>69</b> |
| <b>Standard Control Registers</b>                    | <b>73</b> |
| <b>Electrical Characteristics</b>                    | <b>80</b> |
| Absolute Maximum Ratings                             | 80        |
| <b>Standard Test Conditions</b>                      | <b>81</b> |
| Capacitance                                          | 81        |
| <b>DC Characteristics</b>                            | <b>82</b> |
| <b>AC Characteristics</b>                            | <b>84</b> |
| <b>Packaging</b>                                     | <b>86</b> |
| <b>Ordering Information</b>                          | <b>92</b> |
| Part Number Description                              | 93        |



Index ..... 94

Customer Support ..... 98



# Architectural Overview

Maxim's Crimzon® ZLR32300 is an ROM-based member of the MCU family of infrared microcontrollers. With 237 B of general-purpose RAM and 4 KB to 32 KB of ROM, CMOS microcontrollers offer fast-executing, efficient use of memory, sophisticated interrupts, input/output (I/O) bit manipulation capabilities, automated pulse generation/reception, and internal key-scan pull-up transistors.

The Crimzon ZLR32300 architecture (see [Figure 1](#) on page 4) is based on Maxim's 8-bit microcontroller core with an Expanded Register File allowing access to register-mapped peripherals, I/O circuits, and powerful counter/timer circuitry. The Z8® offers a flexible

I/O scheme, an efficient register and address space structure, and a number of ancillary features that are useful in many consumer, automotive, computer peripheral, and battery-operated hand-held applications.

There are three basic address spaces available to support a wide range of configurations:

1. Program Memory
2. Register File
3. Expanded Register File

The register file is composed of 256 bytes of RAM. It includes four I/O port registers, 16 control and status registers, and 236 general-purpose registers. The Expanded Register File consists of two additional register groups (F and D).

To unburden the program from coping with such real-time problems as generating complex waveforms or receiving and demodulating complex waveform/pulses, the Crimzon ZLR32300 offers a new intelligent counter/timer architecture with 8-bit and

16-bit counter/timers (see [Figure 2](#) on page 5). Also included are a large number of user-selectable modes and two on-board comparators to process analog signals with separate reference voltages.

► **Note:** All signals with an overline, " $\overline{\phantom{x}}$ ", are active Low. For example,  $\overline{B/W}$ , in which WORD is active Low, and  $\overline{B/W}$ , in which BYTE is active Low.

Power connections use the conventional descriptions listed in Table 1.

**Table 1. Power Connections**

| Connection | Circuit         | Device          |
|------------|-----------------|-----------------|
| Power      | V <sub>CC</sub> | V <sub>DD</sub> |
| Ground     | GND             | V <sub>SS</sub> |

## Development Features

Table 2 lists the features of Crimzon ZLR32300 family.

**Table 2. Crimzon ZLR32300 Family Features**

| Device           | ROM (KB)         | RAM* (Bytes) | I/O Lines    | Voltage Range |
|------------------|------------------|--------------|--------------|---------------|
| Crimzon ZLR32300 | 4, 8, 16, 24, 32 | 237          | 32, 24 or 16 | 2.0–3.6 V     |
| *General purpose |                  |              |              |               |

The development features of Crimzon ZLR32300 include:


- Low power consumption—5 mW (typical)
- Three standby modes:
  - STOP—1.4  $\mu$ A (typical)
  - HALT—0.5 mA (typical)
  - Low voltage
- Special architecture to automate generation and reception of complex pulses or signals:
  - One programmable 8-bit counter/timer with two capture registers and two load registers
  - One programmable 16-bit counter/timer with one 16-bit capture register pair and one 16-bit load register pair
  - Programmable input glitch filter for pulse reception
- Six priority interrupts
  - Three external
  - Two assigned to counter/timers
  - One low-voltage detection interrupt
- Low-voltage detection and high-voltage detection Flags
- Programmable Watchdog Timer/Power-on reset (WDT/POR) circuits
- Two independent comparators with programmable interrupt polarity



- Mask selectable pull-up transistors on ports 0, 1, 2, 3
- ROM options
  - Port 0: 0–3 pull-up transistors
  - Port 0: 4–7 pull-up transistors
  - Port 1: 0–3 pull-up transistors
  - Port 1: 4–7 pull-up transistors
  - Port 2: 0–7 pull-up transistors
  - Port 3: 0–3 pull-up transistors
  - WDT enabled at POR

## Functional Block Diagram

Figure 1 displays the ZLR32300 MCU functional block diagram.

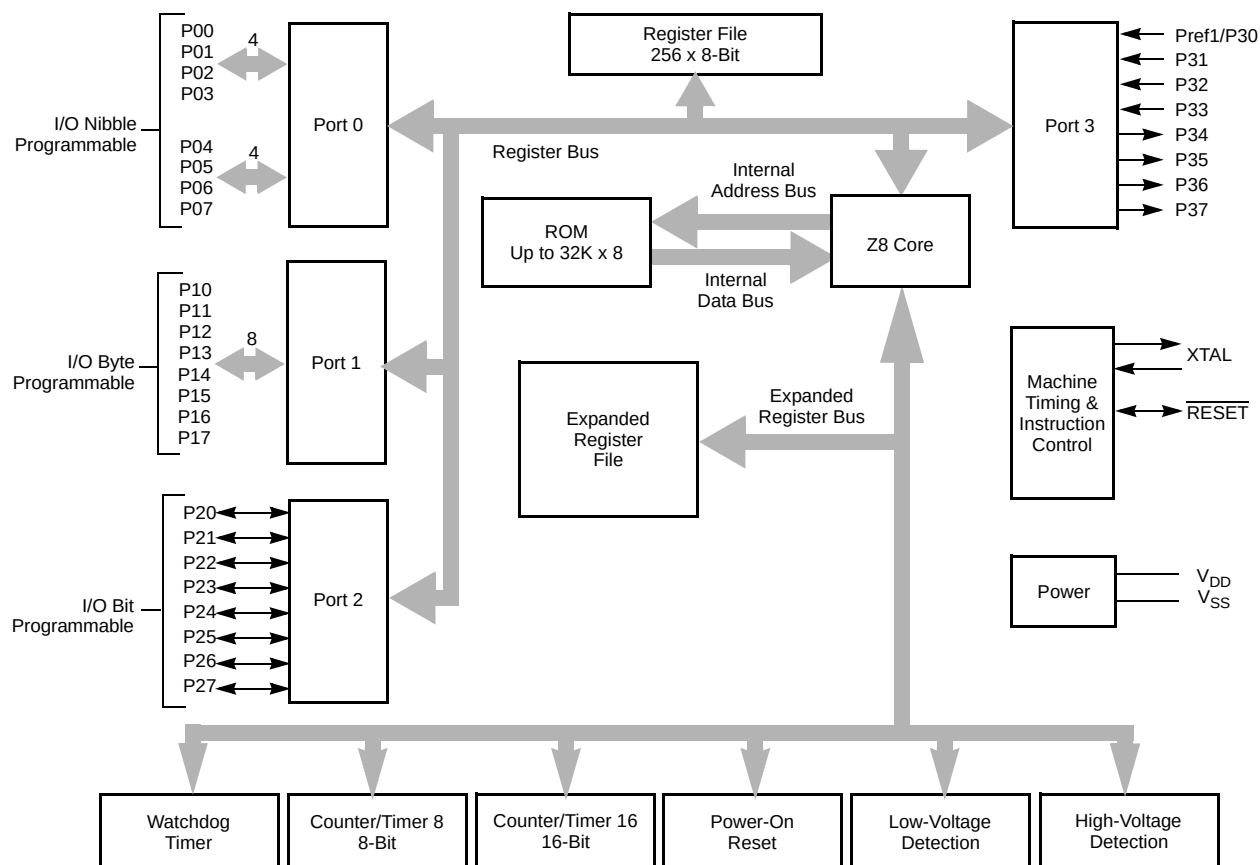

Note: Refer to the specific package for available pins.

**Figure 1. Functional Block Diagram**

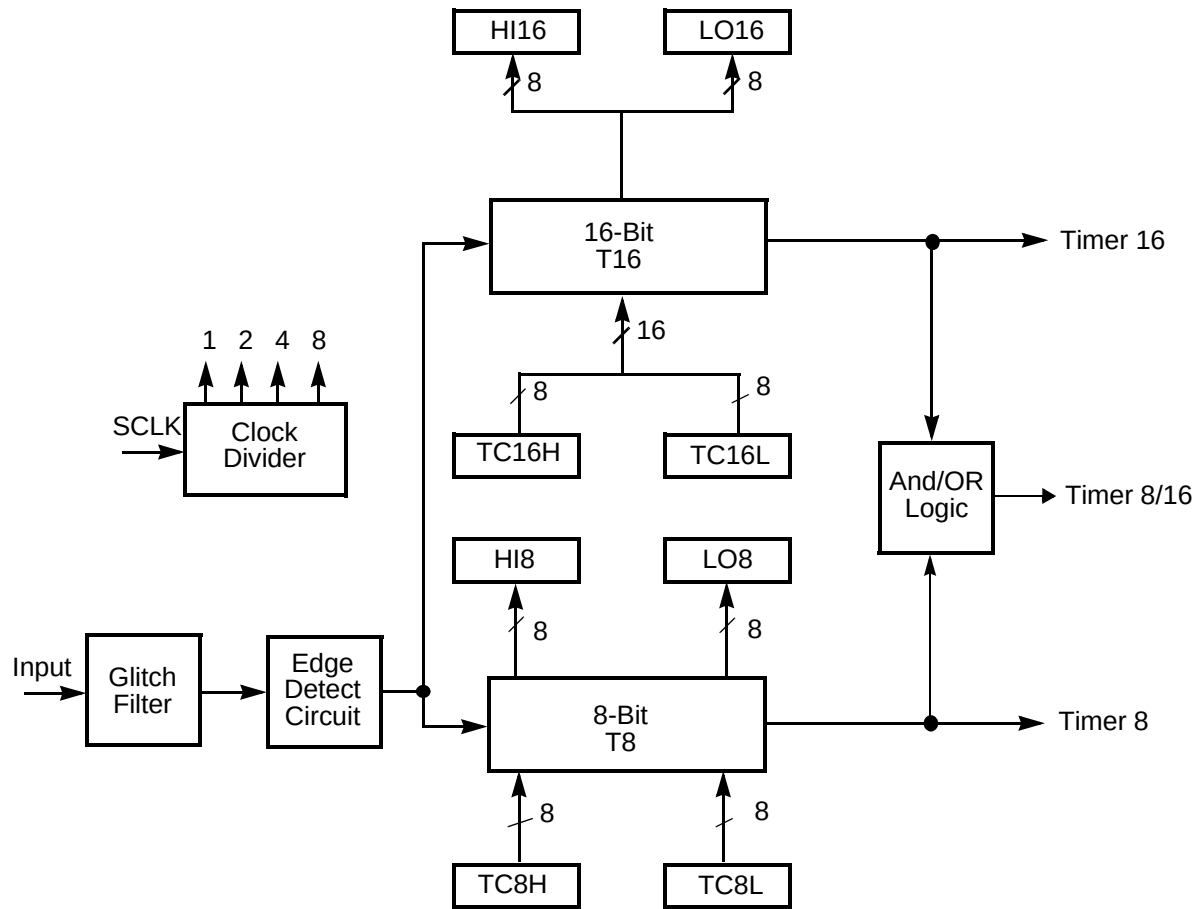


**Figure 2. Counter/Timers Diagram**



## Pin Description

The pin configuration for the 20-pin PDIP/SOIC/SSOP is displayed in [Figure 3](#) and described in Table 3. The pin configuration for the 28-pin PDIP/SOIC/SSOP is displayed in [Figure 4](#) on page 7 and described in Table 4 on page 7. The pin configurations for the 48-pin SSOP versions are displayed in [Figure 5](#) on page 8 and described in Table 5 on page 8.

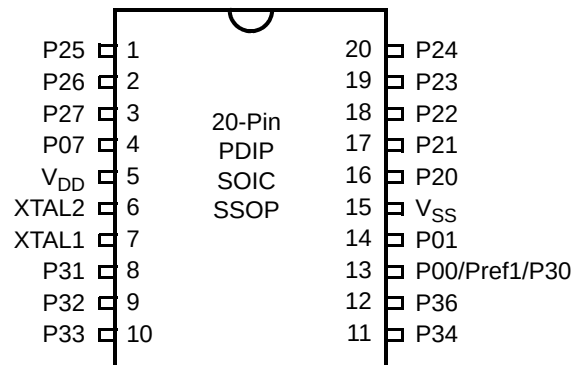


**Figure 3. 20-Pin PDIP/SOIC/SSOP Pin Configuration**

**Table 3. 20-Pin PDIP/SOIC/SSOP Pin Identification**

| Pin No | Symbol          | Function                                             | Direction                                   |
|--------|-----------------|------------------------------------------------------|---------------------------------------------|
| 1–3    | P25–P27         | Port 2, Bits 5,6,7                                   | Input/Output                                |
| 4      | P07             | Port 0, Bit 7                                        | Input/Output                                |
| 5      | V <sub>DD</sub> | Power Supply                                         |                                             |
| 6      | XTAL2           | Crystal Oscillator Clock                             | Output                                      |
| 7      | XTAL1           | Crystal Oscillator Clock                             | Input                                       |
| 8–10   | P31–P33         | Port 3, Bits 1,2,3                                   | Input                                       |
| 11,12  | P34, P36        | Port 3, Bits 4,6                                     | Output                                      |
| 13     | P00/Pref1/P30   | Port 0, Bit 0/Analog reference input<br>Port 3 Bit 0 | Input/Output for P00<br>Input for Pref1/P30 |
| 14     | P01             | Port 0, Bit 1                                        | Input/Output                                |
| 15     | V <sub>SS</sub> | Ground                                               |                                             |
| 16–20  | P20–P24         | Port 2, Bits 0,1,2,3,4                               | Input/Output                                |

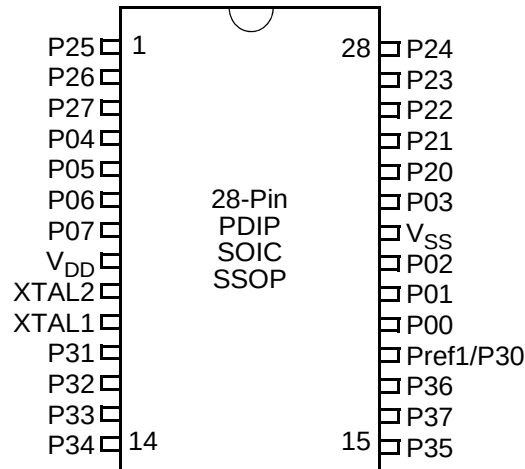


Figure 4. 28-Pin PDIP/SOIC/SSOP Pin Configuration

Table 4. 28-Pin PDIP/SOIC/SSOP Pin Identification

| Pin   | Symbol                    | Direction    | Description                                                                     |
|-------|---------------------------|--------------|---------------------------------------------------------------------------------|
| 1-3   | P25-P27                   | Input/Output | Port 2, Bits 5,6,7                                                              |
| 4-7   | P04-P07                   | Input/Output | Port 0, Bits 4,5,6,7                                                            |
| 8     | V <sub>DD</sub>           |              | Power supply                                                                    |
| 9     | XTAL2                     | Output       | Crystal, oscillator clock                                                       |
| 10    | XTAL1                     | Input        | Crystal, oscillator clock                                                       |
| 11-13 | P31-P33                   | Input        | Port 3, Bits 1,2,3                                                              |
| 14    | P34                       | Output       | Port 3, Bit 4                                                                   |
| 15    | P35                       | Output       | Port 3, Bit 5                                                                   |
| 16    | P37                       | Output       | Port 3, Bit 7                                                                   |
| 17    | P36                       | Output       | Port 3, Bit 6                                                                   |
| 18    | Pref1/P30<br>Port 3 Bit 0 | Input        | Analog ref input; connect to V <sub>CC</sub> if not used<br>Input for Pref1/P30 |
| 19-21 | P00-P02                   | Input/Output | Port 0, Bits 0,1,2                                                              |
| 22    | V <sub>SS</sub>           |              | Ground                                                                          |
| 23    | P03                       | Input/Output | Port 0, Bit 3                                                                   |
| 24-28 | P20-P24                   | Input/Output | Port 2, Bits 0-4                                                                |

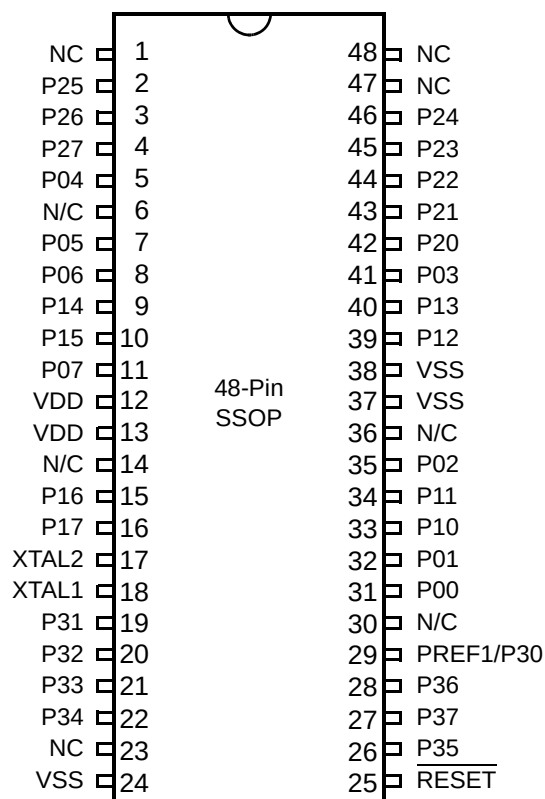


Figure 5. 48-Pin SSOP Pin Configuration

Table 5. 48-Pin Configuration

| 48-Pin SSOP No | Symbol |
|----------------|--------|
| 31             | P00    |
| 32             | P01    |
| 35             | P02    |
| 41             | P03    |
| 5              | P04    |
| 7              | P05    |
| 8              | P06    |
| 11             | P07    |
| 33             | P10    |
| 34             | P11    |



**Table 5. 48-Pin Configuration (Continued)**

| 48-Pin SSOP No | Symbol          |
|----------------|-----------------|
| 39             | P12             |
| 40             | P13             |
| 9              | P14             |
| 10             | P15             |
| 15             | P16             |
| 16             | P17             |
| 42             | P20             |
| 43             | P21             |
| 44             | P22             |
| 45             | P23             |
| 46             | P24             |
| 2              | P25             |
| 3              | P26             |
| 4              | P27             |
| 19             | P31             |
| 20             | P32             |
| 21             | P33             |
| 22             | P34             |
| 26             | P35             |
| 28             | P36             |
| 27             | P37             |
| 23             | NC              |
| 47             | NC              |
| 1              | NC              |
| 25             | RESET           |
| 18             | XTAL1           |
| 17             | XTAL2           |
| 12, 13         | V <sub>DD</sub> |
| 24, 37, 38     | V <sub>SS</sub> |
| 29             | Pref1/P30       |
| 48             | NC              |
| 6              | NC              |



**Table 5. 48-Pin Configuration (Continued)**

| 48-Pin SSOP No | Symbol |
|----------------|--------|
| 14             | NC     |
| 30             | NC     |
| 36             | NC     |



## Pin Functions

### XTAL1 Crystal 1 (Time-Based Input)

This pin connects a parallel-resonant crystal or ceramic resonator, to the on-chip oscillator input. Additionally, an optional external single-phase clock can be coded to the on-chip oscillator input.

### XTAL2 Crystal 2 (Time-Based Output)

This pin connects a parallel-resonant, crystal or ceramic resonant to the on-chip oscillator output.

## Input/Output Ports



### Caution:

The CMOS input buffer for each Port 0, 1, or 2 pin is always connected to the pin, even when the pin is configured as an output. If the pin is configured as an open-drain output and no external signal is applied, a High output state can cause the CMOS input buffer to float. This might lead to excessive leakage current of more than 100  $\mu$ A. To prevent this leakage, connect the pin to an external signal with a defined logic level or ensure its output state is Low, especially during STOP mode.

Internal pull-ups are disabled on any given pin or group of port pins when programmed into output mode.

Port 0, 1, and 2 have input and output capability. The input logic is always present no matter whether the port is configured as input or output. When doing a READ instruction, the MCU reads the actual value at the input logic but not from the output buffer. In addition, the instructions of OR, AND, and XOR have the Read-Modify-Write sequence. The MCU first reads the port, and then modifies the value and load back to the port.

Precaution must be taken if the port is configured as open-drain output or if the port is driving any circuit that makes the voltage different from the desired output logic. For example, pins P00–P07 are not connected to anything else. If it is configured as open-drain output with output logic as



ONE, it is a floating port and reads back as ZERO. The following instruction sets P00-P07 all LOW.

```
AND P0, #F0
```

### **Port 0 (P07–P00)**

Port 0 is an 8-bit, bidirectional, CMOS-compatible port. These eight I/O lines are configured under software control as a nibble I/O port. The output drivers are push-pull or open-drain controlled by bit D2 in the PCON register.

If one or both nibbles are needed for I/O operation, they must be configured by writing to the Port 0 mode register. After a hardware reset, Port 0 is configured as an input port.

An optional pull-up transistor is available as a mask option on all Port 0 bits with nibble select.

► **Note:** The Port 0 direction is reset to be input following an Stop Mode Recovery.

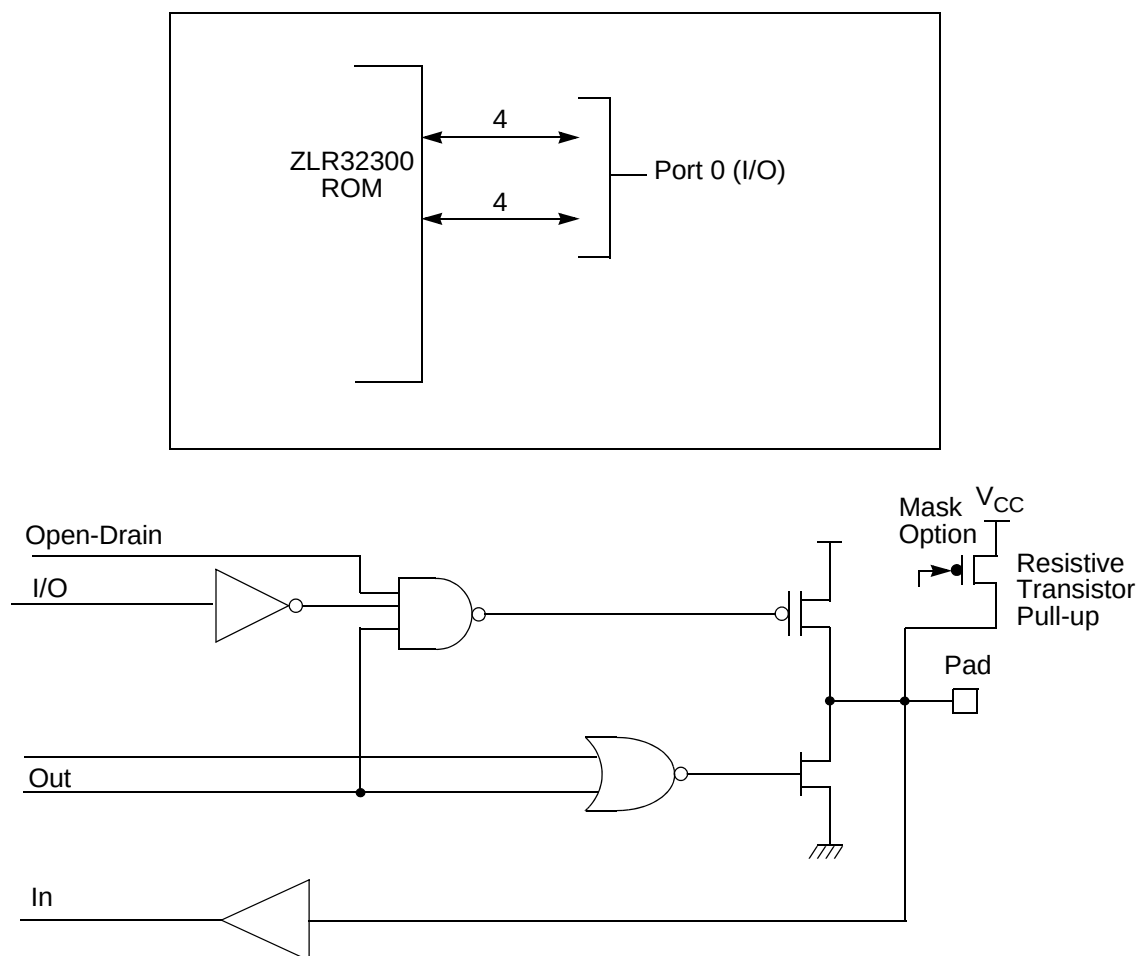


**Figure 6. Port 0 Configuration**

### Port 1 (P17–P10)

Port 1 (see [Figure 7](#)) can be configured for standard port input or output mode. After POR, Port 1 is configured as an input port. The output drivers are either push-pull or open-drain and are controlled by bit D1 in the PCON register.



**Note:**

The Port 1 direction is reset to be input following an SMR.

In 20- and 28-pin packages, Port 1 is reserved. A write to this register will have no effect and will always read FF.

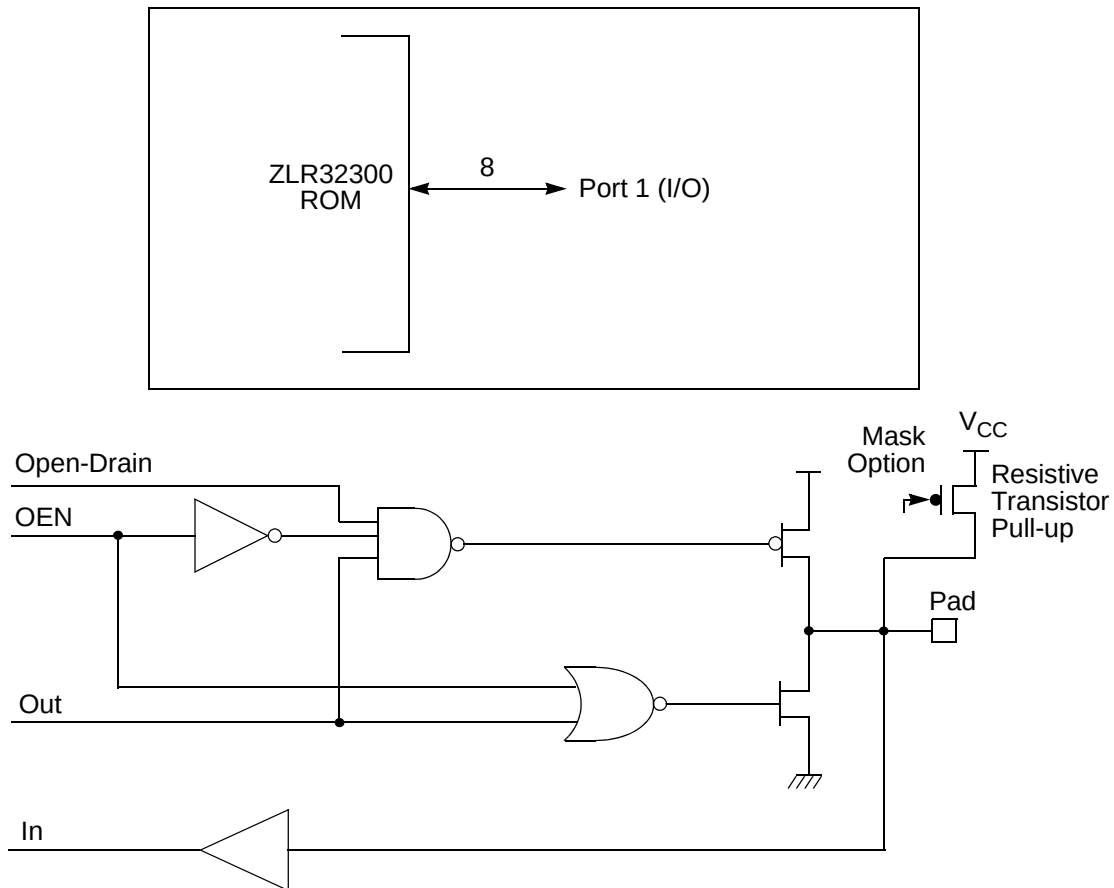


**Figure 7. Port 1 Configuration**

**Port 2 (P27–P20)**

Port 2 is an 8-bit, bidirectional, CMOS-compatible I/O port (see [Figure 8](#) on page 15). These eight I/O lines can be independently configured under software control as inputs or outputs. Port 2 is always available for I/O operation. A mask option is available to connect eight pull-up transistors on this port. Bits programmed as outputs are globally programmed as either push-pull or open-drain. The POR resets with the eight bits of Port 2 configured as inputs.

Port 2 also has an 8-bit input OR and AND gate, which can be used to wake up the part. P20 can be programmed to access the edge-detection circuitry in DEMODULATION mode.

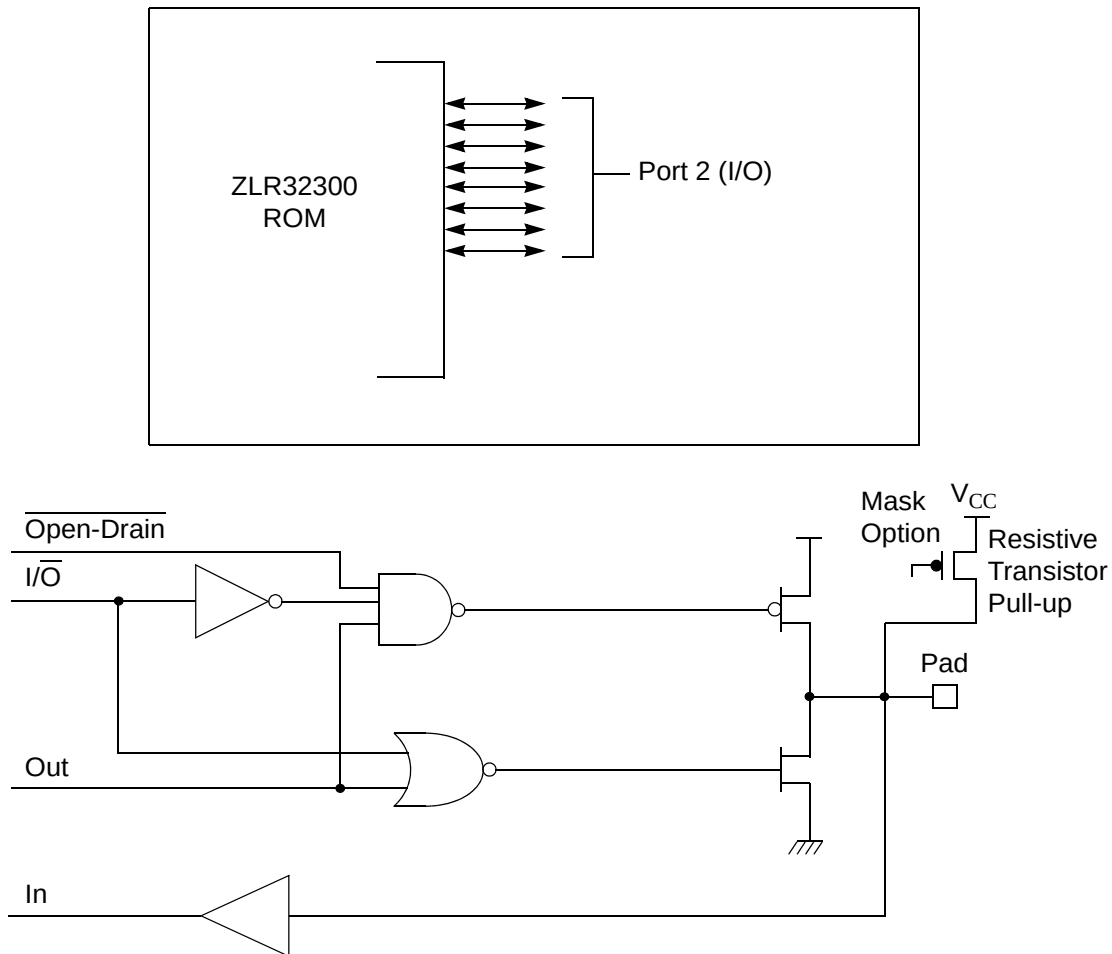


**Figure 8. Port 2 Configuration**

### Port 3 (P37–P30)

Port 3 is a 8-bit, CMOS-compatible fixed I/O port (see [Figure 9](#) on page 16). Port 3 consists of four fixed input (P33–P30) and four fixed output (P37–P34), which can be configured under software control for interrupt and as output from the counter/timers. P30, P31, P32, and P33 are standard CMOS inputs; P34, P35, P36, and P37 are push-pull outputs.

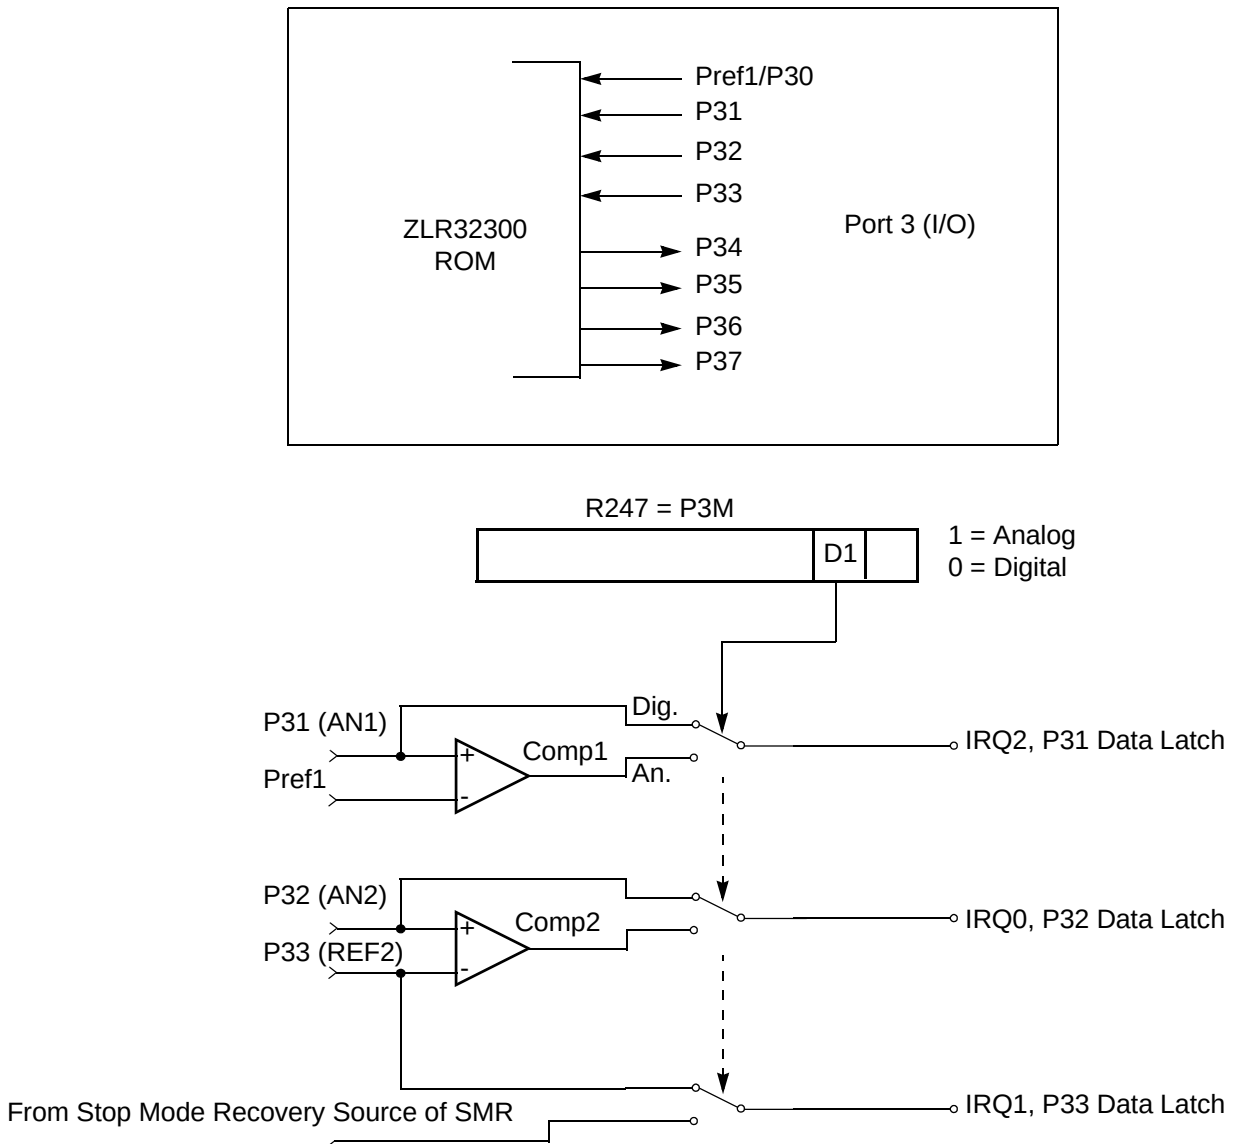


**Figure 9. Port 3 Configuration**

Two on-board comparators process analog signals on P31 and P32, with reference to the voltage on Pref1 and P33. The Analog function is enabled by programming the Port 3 Mode Register (bit 1). P31 and P32 are programmable as rising, falling, or both edge triggered interrupts (IRQ register bits 6 and 7). Pref1 and P33 are the comparator reference voltage inputs. Access to the Counter Timer edge-detection circuit is through P31 or P20 (see [T8](#) and [T16 Common Func-](#)



tions—CTR1(0D)01h on page 30). Other edge detect and IRQ modes are described in Table 6.

► **Note:** Comparators are powered down by entering STOP mode. For P31–P33 to be used in a SMR source, these inputs must be placed into DIGITAL mode.

**Table 6. Port 3 Pin Function Summary**

| Pin       | I/O | Counter/Timers | Comparator | Interrupt |
|-----------|-----|----------------|------------|-----------|
| Pref1/P30 | IN  |                | RF1        |           |
| P31       | IN  | IN             | AN1        | IRQ2      |
| P32       | IN  |                | AN2        | IRQ0      |
| P33       | IN  |                | RF2        | IRQ1      |
| P34       | OUT | T8             | AO1        |           |
| P35       | OUT | T16            |            |           |
| P36       | OUT | T8/16          |            |           |
| P37       | OUT |                | AO2        |           |
| P20       | I/O | IN             |            |           |

Port 3 also provides output for each of the counter/timers and the AND/OR Logic (see [Figure 10](#) on page 18). Control is performed by programming bits D5–D4 of CTR1, bit 0 of CTR0, and bit 0 of CTR2.

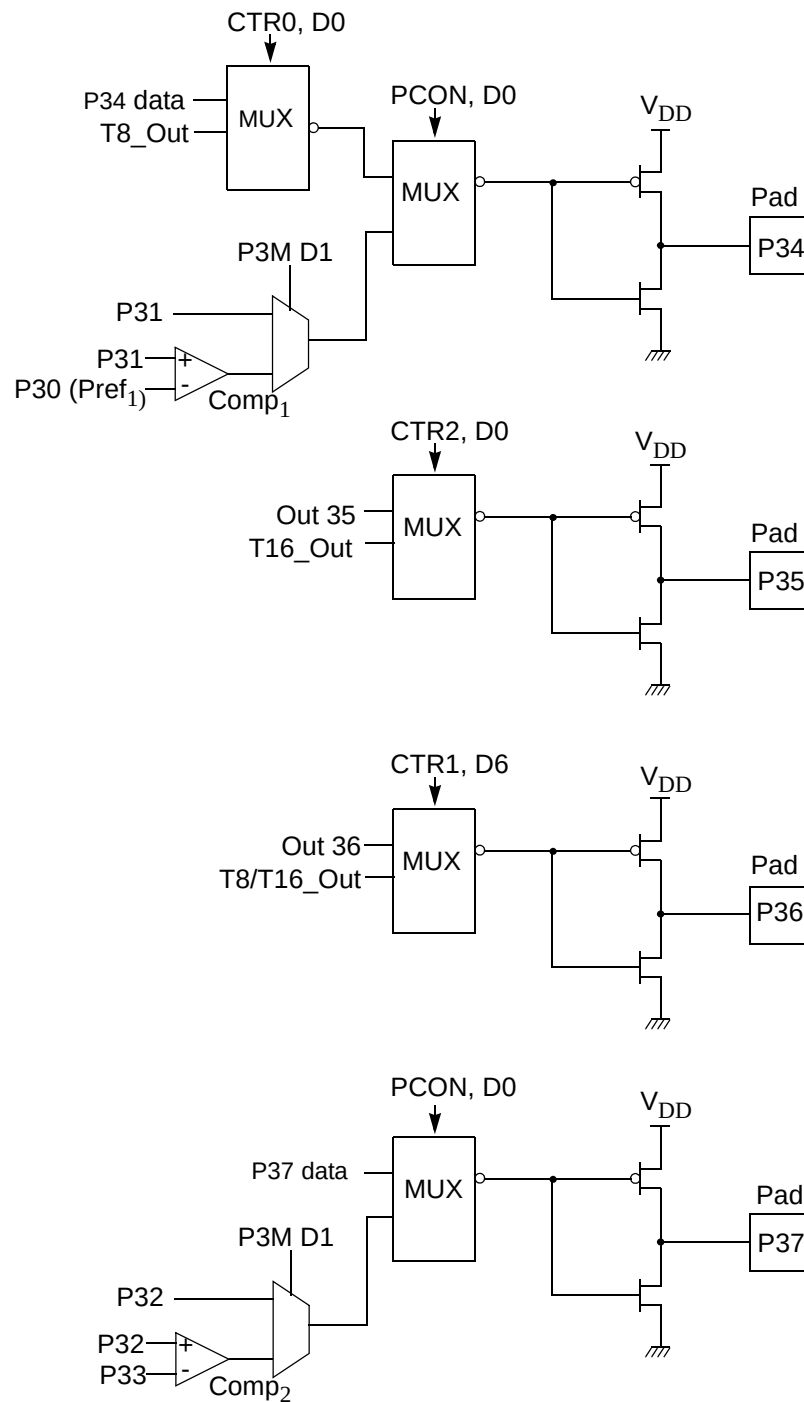


**Figure 10. Port 3 Counter/Timer Output Configuration**



### Comparator Inputs

In ANALOG mode, P31 and P32 have a comparator front end. The comparator reference is supplied to P33 and Pref1. In this mode, the P33 internal data latch and its corresponding IRQ1 are diverted to the SMR sources (excluding P31, P32, and P33) as displayed in [Figure 9](#) on page 16. In DIGITAL mode, P33 is used as D3 of the Port 3 input register, which then generates IRQ1.

- **Note:** Comparators are powered down by entering STOP mode. For P31–P33 to be used in a SMR source, these inputs must be placed into DIGITAL mode.

### Comparator Outputs

These channels can be programmed to be output on P34 and P37 through the PCON register.

### RESET (Input, Active Low)

Reset initializes the MCU and is accomplished either through Power-On, Watchdog Timer, Stop Mode Recovery, Low-Voltage detection, or external reset. During Power-On Reset and Watchdog Timer Reset, the internally generated reset drives the reset pin Low for the POR time. Any devices driving the external reset line must be open-drain to avoid damage from a possible conflict during reset conditions. Pull-up is provided internally.

When the ZLR32300 asserts (Low) the RESET pin, the internal pull-up is disabled. The ZLR32300 does not assert the RESET pin when under VBO.

- **Note:** The external Reset does not initiate an exit from STOP mode.



# Functional Description

This device incorporates special functions to enhance the Z8® functionality in consumer and battery-operated applications.

## Program Memory

This device addresses 32 KB of ROM memory. The first 12 bytes are reserved for interrupt vectors. These locations contain the six 16-bit vectors that correspond to the six available interrupts (see [Figure 11](#) on page 21).

## RAM

This device features 256 B of RAM.

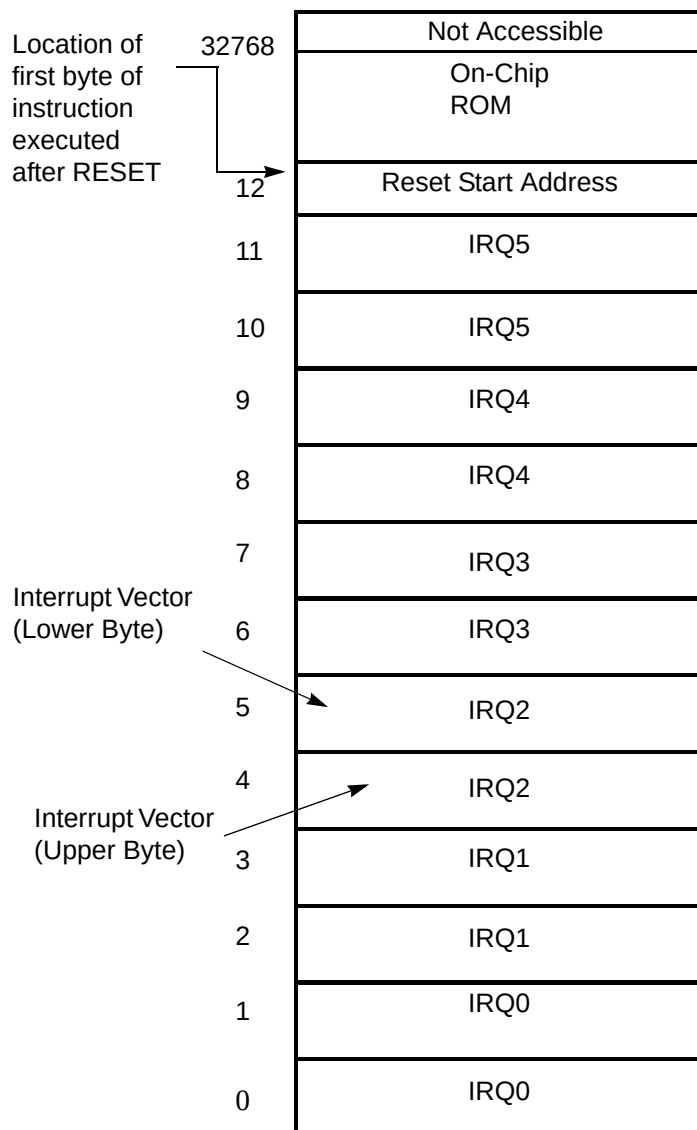


Figure 11. Program Memory Map (32 K ROM)

## Expanded Register File

The register file has been expanded to allow for additional system control registers and for mapping of additional peripheral devices into the register address area. The Z8 register address space (R0 through R15) has been implemented as 16 banks, with 16 registers per bank. These register groups are known as the



ERF (Expanded Register File). Bits 7–4 of register RP select the working register group. Bits 3–0 of register RP select the expanded register file bank.

► **Note:** An expanded register bank is also referred to as an expanded register group (see [Figure 12](#) on page 23).

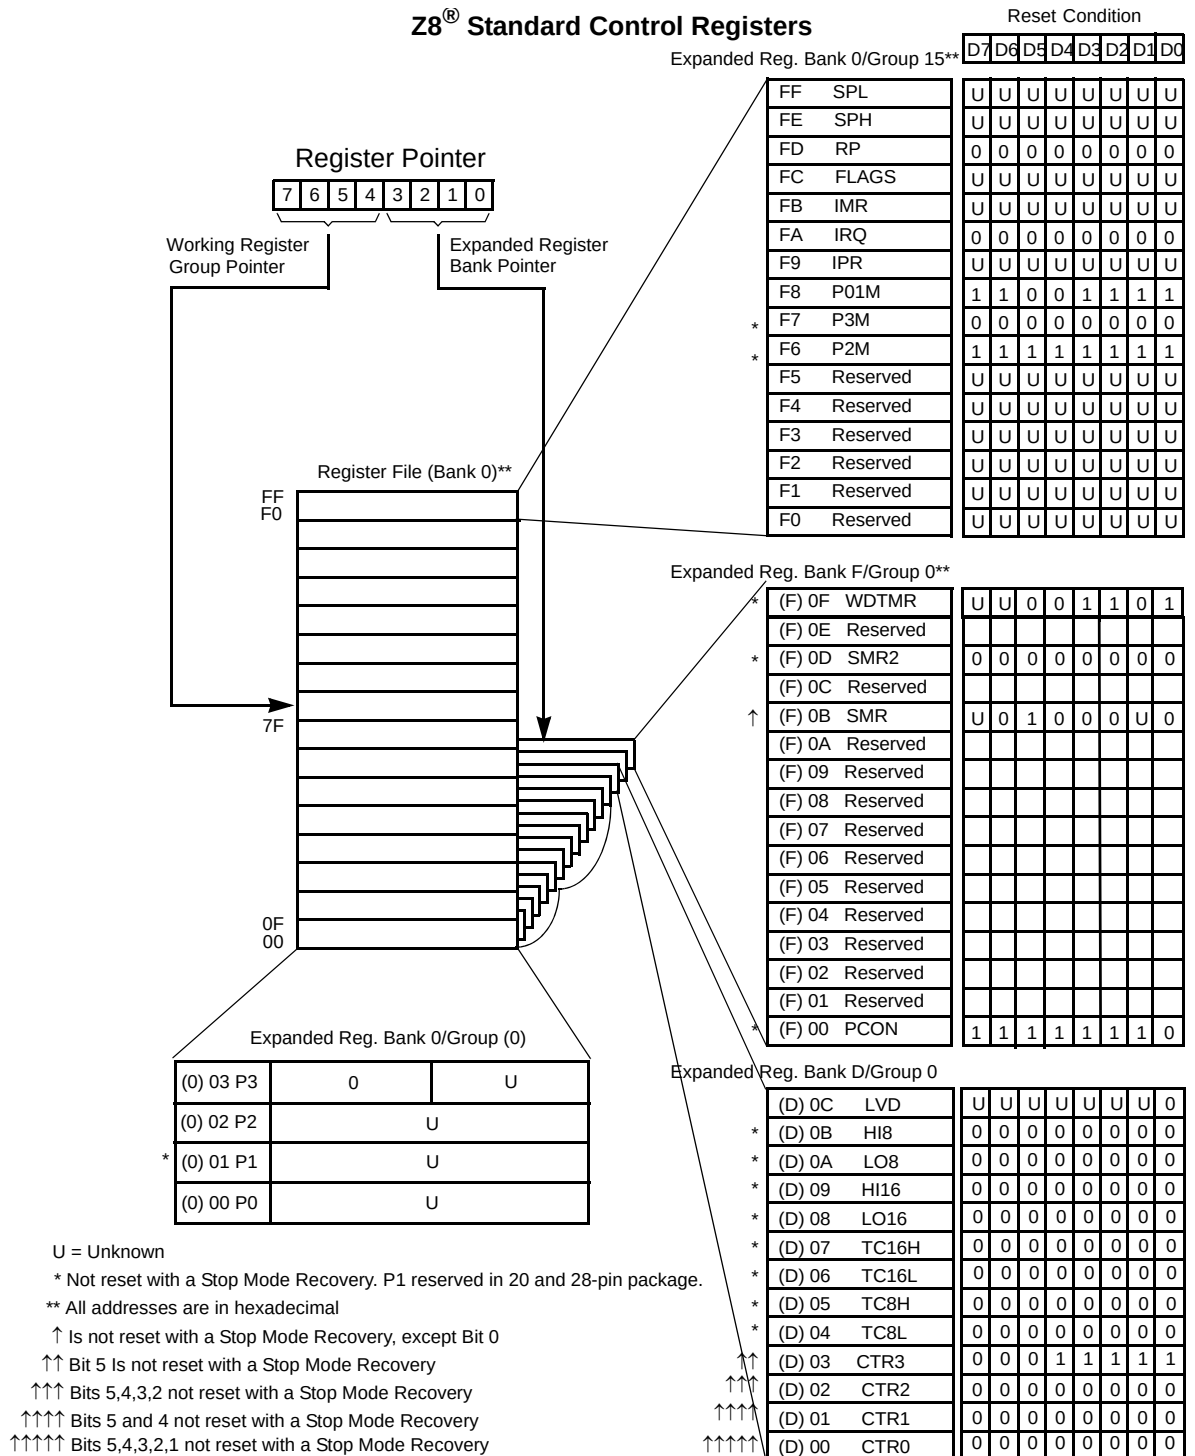


**Figure 12. Expanded Register File Architecture**



The upper nibble of the register pointer (see [Figure 13](#)) selects which working register group of 16 bytes in the register file, is accessed out of the possible 256. The lower nibble selects the expanded register file bank and, in the case of the Crimzon ZLR32300 family, banks 0, F, and D are implemented. A 0h in the lower nibble allows the normal register file (bank 0) to be addressed. Any other value from 1h to Fh exchanges the lower 16 registers to an expanded register bank.

R253 RP

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

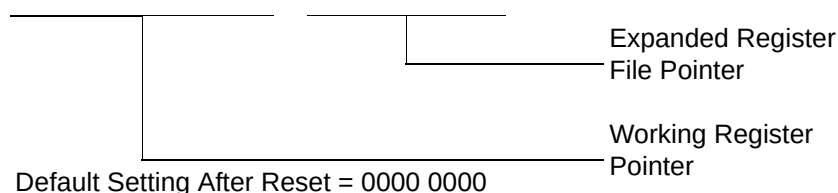


**Figure 13. Register Pointer**

**Example:** Crimzon ZLR32300 (see [Figure 12](#) on page 23).

R253 RP = 00h

R0 = Port 0

R1 = Port 1

R2 = Port 2

R3 = Port 3

But if:

R253 RP = 0Dh

R0 = CTR0

R1 = CTR1

R2 = CTR2

R3 = CTR3

The counter/timers are mapped into ERF group D. Access is easily performed using the following:

```
LD          RP, #0Dh          ; Select ERF D
for access to bank D

; (working
register group 0)
LD          R0, #xx           ; load CTR0
LD          1, #xx            ; load CTR1
```



```
LD                                R1, 2                                ; CTR2→CTR1

LD                                RP, #0Dh                            ; Select ERF D
for access to bank D                                                    ; (working
register group 0)
LD                                RP, #7Dh                            ; Select
expanded register bank D and working                                   ; register
group 7 of bank 0 for access.
LD                                71h, 2
; CTR2→register 71h
LD                                R1, 2
; CTR2→register 71h
```

## Register File

The register file (bank 0) consists of 4 I/O port registers, 237 general-purpose registers, 16 control and status registers (R0–R3, R4–R239, and R240–R255, respectively), and two expanded registers groups in Banks D (see Table 7 on page 28) and F. Instructions can access registers directly or indirectly through an 8-bit address field, thereby allowing a short, 4-bit register address to use the Register Pointer (see [Figure 14](#) on page 26). In the 4-bit mode, the register file is divided into 16 working register groups, each occupying 16 continuous locations. The Register Pointer addresses the starting location of the active working register group.



**Note:**

Working register group E0–EF can only be accessed through working registers and indirect addressing modes.

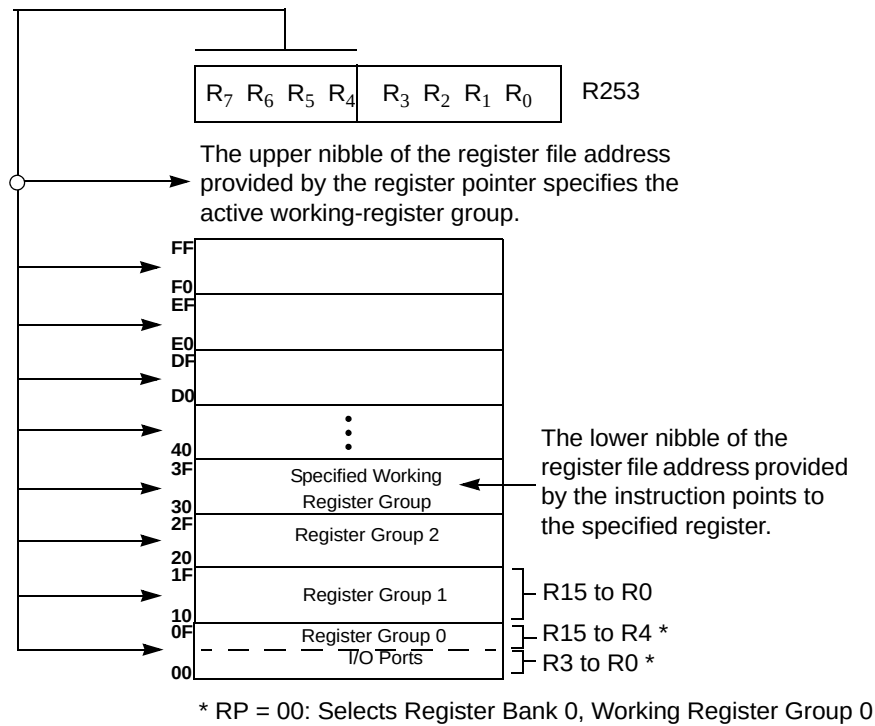


**Figure 14. Register Pointer—Detail**

## Stack

The internal register file is used for the stack. An 8-bit Stack Pointer SPL (R255) is used for the internal stack that resides in the general-purpose registers (R4–R239). SPH (R254) can be used as a general-purpose register.

## Timers

### T8\_Capture\_HI—HI8(D)0BH

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 1.

| Field         | Bit Position | Description                 |
|---------------|--------------|-----------------------------|
| T8_Capture_HI | [7:0]        | R/W Captured Data—No Effect |

**T8\_Capture\_LO—L08(D)0AH**

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 0.

| Field         | Bit Position | Description                 |
|---------------|--------------|-----------------------------|
| T8_Capture_LO | [7:0]        | R/W Captured Data—No Effect |

**T16\_Capture\_HI—HI16(D)09H**

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the MS-Byte of the data.

| Field          | Bit Position | Description                 |
|----------------|--------------|-----------------------------|
| T16_Capture_HI | [7:0]        | R/W Captured Data—No Effect |

**T16\_Capture\_LO—L016(D)08H**

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the LS-Byte of the data.

| Field          | Bit Position | Description                 |
|----------------|--------------|-----------------------------|
| T16_Capture_LO | [7:0]        | R/W Captured Data—No Effect |

**Counter/Timer2 MS-Byte Hold Register—TC16H(D)07H**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_HI | [7:0]        | R/W Data    |

**Counter/Timer2 LS-Byte Hold Register—TC16L(D)06H**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_LO | [7:0]        | R/W Data    |

**Counter/Timer8 High Hold Register—TC8H(D)05H**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_HI | [7:0]        | R/W Data    |

**Counter/Timer8 Low Hold Register—TC8L(D)04H**

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_LO | [7:0]        | R/W Data    |

**CTR0 Counter/Timer8 Control Register—CTR0(D)00H**

Table 7 lists and briefly describes the fields for this register.

**Table 7. CTR0(D)00H Counter/Timer8 Control Register**

| Field            | Bit Position |     | Value | Description                    |
|------------------|--------------|-----|-------|--------------------------------|
| T8_Enable        | 7-----       | R/W | 0*    | Counter Disabled               |
|                  |              |     | 1     | Counter Enabled                |
|                  |              |     | 0     | Stop Counter                   |
|                  |              |     | 1     | Enable Counter                 |
| Single/Modulo-N  | -6-----      | R/W | 0*    | Modulo-N                       |
|                  |              |     | 1     | Single Pass                    |
| Time_Out         | --5-----     | R/W | 0**   | No Counter Time-Out            |
|                  |              |     | 1     | Counter Time-Out Occurred      |
|                  |              |     | 0     | No Effect                      |
|                  |              |     | 1     | Reset Flag to 0                |
| T8_Clock         | ---43---     | R/W | 0 0** | SCLK                           |
|                  |              |     | 0 1   | SCLK/2                         |
|                  |              |     | 1 0   | SCLK/4                         |
|                  |              |     | 1 1   | SCLK/8                         |
| Capture_INT_Mask | -----2--     | R/W | 0**   | Disable Data Capture Interrupt |
|                  |              |     | 1     | Enable Data Capture Interrupt  |
| Counter_INT_Mask | -----1-      | R/W | 0**   | Disable Time-Out Interrupt     |
|                  |              |     | 1     | Enable Time-Out Interrupt      |
| P34_Out          | -----0       | R/W | 0*    | P34 as Port Output             |
|                  |              |     | 1     | T8 Output on P34               |

\*Indicates the value upon Power-on reset.

\*\*Indicates the value upon Power-on reset. Not reset with a Stop Mode Recovery.



### T8 Enable

This field enables T8 when set (written) to 1.

### Single/Modulo-N

When set to 0 (Modulo-N), the counter reloads the initial value when the terminal count is reached. When set to 1 (single-pass), the counter stops when the terminal count is reached.

### Timeout

This bit is set when T8 times out (terminal count reached). To reset this bit, write a 1 to its location.



#### Caution:

Writing a 1 is the only way to reset the Terminal Count status condition. Reset this bit before using/enabling the counter/timers.

The first clock of T8 might not have complete clock width and can occur any time when enabled.



#### Note:

Ensure to manipulate CTR0, bit 5 and CTR1, bits 0 and 1 (DEMODULATION mode) when using the OR or AND commands. These instructions use a Read-Modify-Write sequence in which the current status from the CTR0 and CTR1 registers is ORed or ANDed with the designated value and then written back into the registers.

### T8 Clock

These bits define the frequency of the input signal to T8.

**Capture\_INT\_Mask**

Set this bit to allow an interrupt when data is captured into either LO8 or HI8 upon a positive or negative edge detection in DEMODULATION mode.

**Counter\_INT\_Mask**

Set this bit to allow an interrupt when T8 has a timeout.

**P34\_Out**

This bit defines whether P34 is used as a normal output pin or the T8 output.

**T8 and T16 Common Functions—CTR1(0D)01h**

This register controls the functions in common with the T8 and T16.

Table 8 lists and briefly describes the fields for this register.

**Table 8. CTR1(0D)01H T8 and T16 Common Functions**

| Field                         | Bit Position |     | Value | Description       |
|-------------------------------|--------------|-----|-------|-------------------|
| Mode                          | 7-----       | R/W | 0*    | TRANSMIT mode     |
|                               |              |     | 1     | DEMODULATION mode |
| P36_Out/<br>Demodulator_Input | -6-----      | R/W | 0*    | TRANSMIT mode     |
|                               |              |     | 1     | Port Output       |
|                               |              |     | 0*    | T8/T16 Output     |
|                               |              |     | 1     | DEMODULATION mode |
| T8/T16_Logic/<br>Edge_Detect  | --54----     | R/W | 0*    | P31               |
|                               |              |     | 1     | P20               |
|                               |              |     | 00**  | TRANSMIT mode     |
|                               |              |     | 01    | AND               |
|                               |              |     | 10    | OR                |
|                               |              |     | 11    | NOR               |
|                               |              |     | 00**  | NAND              |
|                               |              |     | 01    | DEMODULATION mode |
|                               |              |     | 00**  | Falling Edge      |
|                               |              |     | 01    | Rising Edge       |
|                               |              |     | 10    | Both Edges        |
|                               |              |     | 11    | Reserved          |

**Table 8. CTR1(0D)01H T8 and T16 Common Functions (Continued)**

| Field                              | Bit Position |     | Value | Description            |
|------------------------------------|--------------|-----|-------|------------------------|
| Transmit_Submode/<br>Glitch_Filter | ----32--     | R/W | 00    | TRANSMIT mode          |
|                                    |              |     | 01    | Normal Operation       |
|                                    |              |     | 10    | PING-PONG mode         |
|                                    |              |     | 11    | T16_Out = 0            |
|                                    |              |     | 11    | T16_Out = 1            |
|                                    |              |     | 00    | DEMODULATION mode      |
|                                    |              |     | 01    | No Filter              |
|                                    |              |     | 10    | 4 SCLK Cycle           |
|                                    |              |     | 11    | 8 SCLK Cycle           |
|                                    |              |     | 11    | Reserved               |
| Initial_T8_Out/<br>Rising Edge     | -----1-      | R/W | 0     | TRANSMIT mode          |
|                                    |              |     | 1     | T8_OUT is 0 Initially  |
|                                    |              | R   | 0     | T8_OUT is 1 Initially  |
|                                    |              |     | 1     | DEMODULATION mode      |
|                                    |              | W   | 0     | No Rising Edge         |
|                                    |              |     | 1     | Rising Edge Detected   |
|                                    |              |     | 0     | No Effect              |
|                                    |              |     | 1     | Reset Flag to 0        |
| Initial_T16_Out/<br>Falling_Edge   | -----0       | R/W | 0     | TRANSMIT mode          |
|                                    |              |     | 1     | T16_OUT is 0 Initially |
|                                    |              | R   | 0     | T16_OUT is 1 Initially |
|                                    |              |     | 1     | DEMODULATION mode      |
|                                    |              | W   | 0     | No Falling Edge        |
|                                    |              |     | 1     | Falling Edge Detected  |
|                                    |              |     | 0     | No Effect              |
|                                    |              |     | 1     | Reset Flag to 0        |

\*Default at Power-On Reset.

\*\*Default at Power-On Reset. Not reset with a Stop Mode Recovery.

**Mode**

If the result is 0, the counter/timers are in TRANSMIT mode; otherwise, they are in DEMODULATION mode.

**P36\_Out/Demodulator\_Input**

In TRANSMIT mode, this bit defines whether P36 is used as a normal output pin or the combined output of T8 and T16.

In DEMODULATION mode, this bit defines whether the input signal to the Counter/Timers is from P20 or P31.

If the input signal is from Port 31, a capture event may also generate an IRQ2 interrupt. To prevent generating an IRQ2, either disable the IRQ2 interrupt by clearing its IMR bit D2 or use P20 as the input.

**T8/T16\_Logic/Edge \_Detect**

In TRANSMIT mode, this field defines how the outputs of T8 and T16 are combined (AND, OR, NOR, NAND).

In DEMODULATION mode, this field defines which edge should be detected by the edge detector.

**Transmit\_Submode/Glitch Filter**

In TRANSMIT mode, this field defines whether T8 and T16 are in the PING-PONG mode or in independent normal operation mode. Setting this field to 'NORMAL OPERATION mode' terminates the 'PING-PONG mode' operation. When set to 10, T16 is immediately forced to a 0; a setting of 11 forces T16 to output a 1.

In DEMODULATION mode, this field defines the width of the glitch that must be filtered out.

**Initial\_T8\_Out/Rising\_Edge**

In TRANSMIT mode, if 0, the output of T8 is set to 0 when it starts to count. If 1, the output of T8 is set to 1 when it starts to count. When the counter is not enabled and this bit is set to 1 or 0, T8\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D1.

In DEMODULATION mode, this bit is set to 1 when a rising edge is detected in the input signal. In order to reset the mode, a 1 should be written to this location.

**Initial\_T16 Out/Falling \_Edge**

In TRANSMIT mode, if it is 0, the output of T16 is set to 0 when it starts to count. If it is 1, the output of T16 is set to 1 when it starts to count. This bit is effective only in Normal or PING-PONG mode (CTR1, D3; D2). When the counter is not enabled and this bit is set, T16\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D0.

In DEMODULATION mode, this bit is set to 1 when a falling edge is detected in the input signal. In order to reset it, a 1 must be written to this location.

► **Note:** Modifying CTR1 (D1 or D0) while the counters are enabled causes unpredictable output from T8/16\_OUT.

**CTR2 Counter/Timer 16 Control Register—CTR2(D)02H**

Table 9 on page 33 lists and briefly describes the fields for this register.



Table 9. CTR2(D)02H: Counter/Timer16 Control Register

| Field            | Bit Position |     | Value | Description                 |
|------------------|--------------|-----|-------|-----------------------------|
| T16_Enable       | 7-----       | R   | 0*    | Counter Disabled            |
|                  |              |     | 1     | Counter Enabled             |
|                  |              | W   | 0     | Stop Counter                |
|                  |              |     | 1     | Enable Counter              |
| Single/Modulo-N  | -6-----      | R/W | 0*    | TRANSMIT mode               |
|                  |              |     | 1     | Modulo-N                    |
|                  |              |     | 0     | Single Pass                 |
|                  |              |     | 1     | DEMODULATION mode           |
| Time_Out         | --5-----     | R   | 0**   | T16 Recognizes Edge         |
|                  |              |     | 1     | T16 Does Not Recognize Edge |
|                  |              | W   | 0     | No Counter Timeout          |
|                  |              |     | 1     | Counter Timeout Occurred    |
| T16_Clock        | ---43---     | R/W | 00**  | No Effect                   |
|                  |              |     | 01    | Reset Flag to 0             |
|                  |              |     | 10    | SCLK                        |
|                  |              |     | 11    | SCLK/2                      |
| Capture_INT_Mask | -----2--     | R/W | 0**   | SCLK/4                      |
|                  |              |     | 1     | SCLK/8                      |
| Counter_INT_Mask | -----1-      | R/W | 0*    | Disable Data Capture Int.   |
|                  |              |     | 1     | Enable Data Capture Int.    |
| P35_Out          | -----0       | R/W | 0*    | Disable Timeout Int.        |
|                  |              |     | 1     | Enable Timeout Int.         |

\*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.

**T16\_Enable**

This field enables T16 when set to 1.

**Single/Modulo-N**

In TRANSMIT mode, when set to 0, the counter reloads the initial value when it reaches the terminal count. When set to 1, the counter stops when the terminal count is reached.



In DEMODULATION mode, when set to 0, T16 captures and reloads on detection of all the edges. When set to 1, T16 captures and detects on the first edge but ignores the subsequent edges. For details, see the description of T16 DEMODULATION mode on page 42.

#### Time\_Out

This bit is set when T16 times out (terminal count reached). To reset the bit, write a 1 to this location.

#### T16\_Clock

This bit defines the frequency of the input signal to Counter/Timer16.

#### Capture\_INT\_Mask

This bit is set to allow an interrupt when data is captured into LO16 and HI16.

#### Counter\_INT\_Mask

Set this bit to allow an interrupt when T16 times out.

#### P35\_Out

This bit defines whether P35 is used as a normal output pin or T16 output.

#### CTR3 T8/T16 Control Register—CTR3(D)03H

Table 10 lists and briefly describes the fields for this register. This register allows the T<sub>8</sub> and T<sub>16</sub> counters to be synchronized.

**Table 10. CTR3 (D)03H: T8/T16 Control Register**

| Field                  | Bit Position |     | Value | Description       |
|------------------------|--------------|-----|-------|-------------------|
| T <sub>16</sub> Enable | 7-----       | R   | 0**   | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| T <sub>8</sub> Enable  | -6-----      | R   | 0**   | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| Sync Mode              | --5-----     | R/W | 0*    | Disable Sync Mode |
|                        |              |     | 1     | Enable Sync Mode  |

**Table 10. CTR3 (D)03H: T8/T16 Control Register (Continued)**

| Field    | Bit Position |   | Value | Description        |
|----------|--------------|---|-------|--------------------|
| Reserved | ---43210     | R | 1     | Always reads 11111 |
|          |              | W | x     | No Effect          |


\*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with a Stop Mode Recovery.

## Counter/Timer Functional Blocks

### Input Circuit

The edge detector monitors the input signal on P31 or P20. Based on CTR1 D5–D4, a pulse is generated at the Pos Edge or Neg Edge line when an edge is detected. Glitches in the input signal that have a width less than specified (CTR1 D3, D2) are filtered out (see [Figure 15](#)).

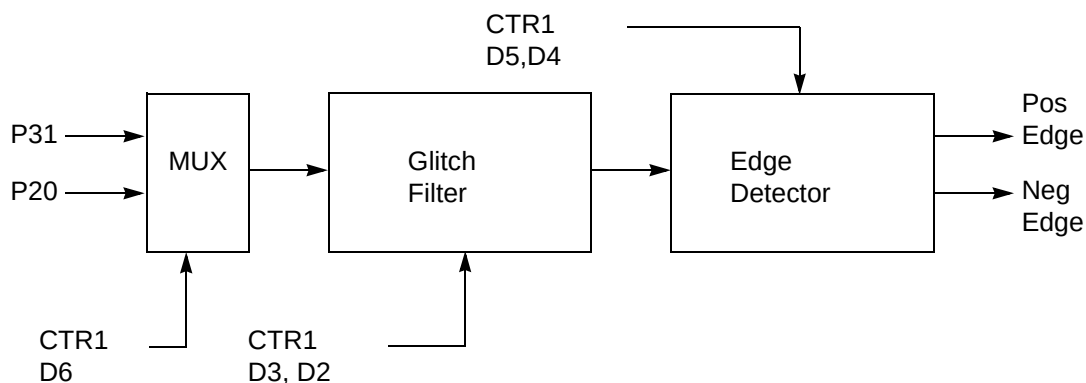**Figure 15. Glitch Filter Circuitry**

### T8 TRANSMIT Mode

Before T8 is enabled, the output of T8 depends on CTR1, D1. If it is 0, T8\_OUT is 1; if it is 1, T8\_OUT is 0 (see [Figure 16](#) on page 36).

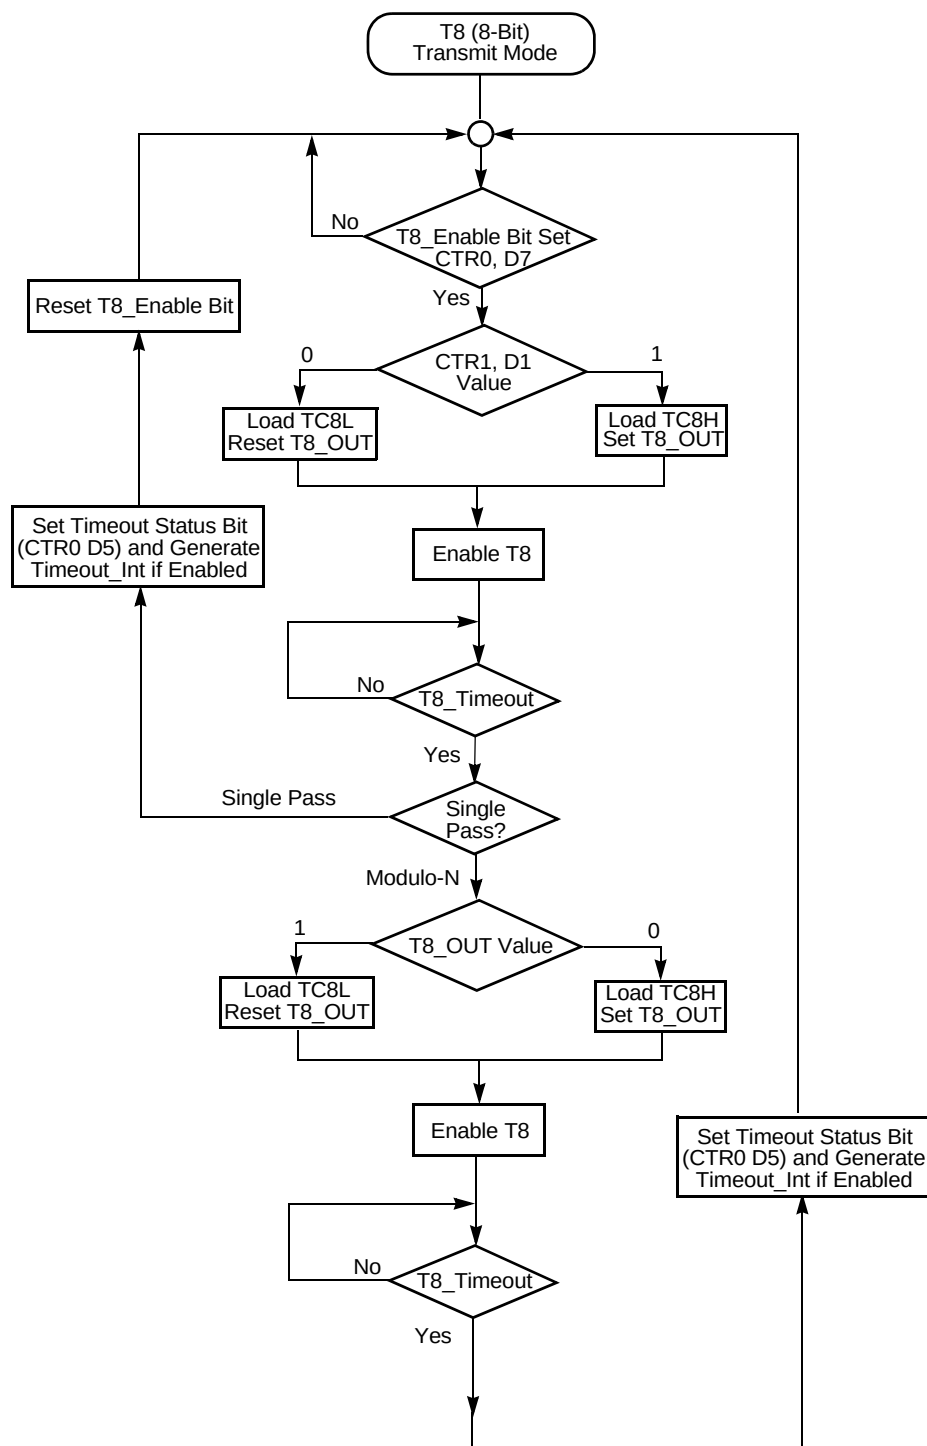


Figure 16. TRANSMIT Mode Flowchart

When T8 is enabled, the output T8\_OUT switches to the initial value (CTR1, D1). If the initial value (CTR1, D1) is 0, TC8L is loaded; otherwise, TC8H is loaded into the counter. In SINGLE-PASS mode (CTR0, D6), T8 counts down to 0 and stops, T8\_OUT toggles, the timeout status bit (CTR0, D5) is set, and a timeout interrupt can be generated if it is enabled (CTR0, D1). In MODULO-N mode, upon reaching terminal count, T8\_OUT is toggled, but no interrupt is generated. From that point, T8 loads a new count (if the T8\_OUT level now is 0), TC8L is loaded; if it is 1, TC8H is loaded. T8 counts down to 0, toggles T8\_OUT, and sets the timeout status bit (CTR0, D5), thereby generating an interrupt if enabled (CTR0, D1). One cycle is thus completed. T8 then loads from TC8H or TC8L according to the T8\_OUT level and repeats the cycle. See [Figure 17](#).

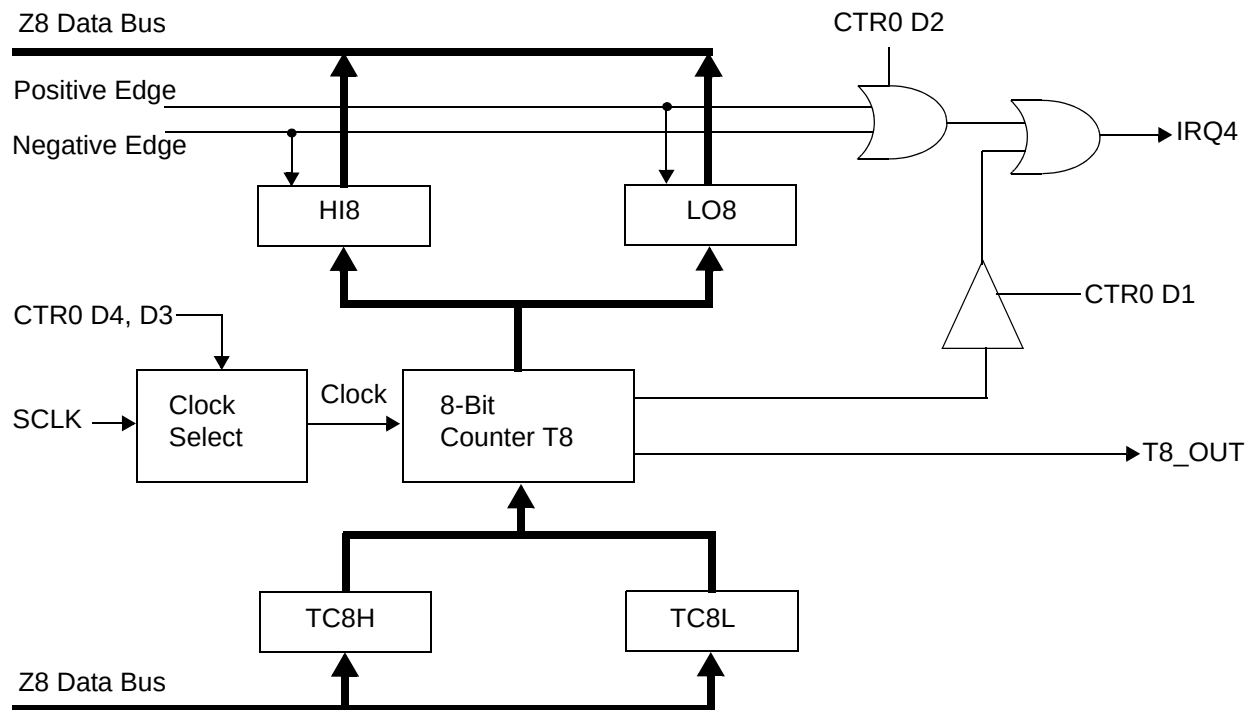


**Figure 17.8-Bit Counter/Timer Circuits**

You can modify the values in TC8H or TC8L at any time. The new values take effect when they are loaded.



**Caution:**

To ensure known operation do not write these registers at the time the values are to be loaded into the counter/timer.

*An initial count of 1 is not allowed (a non-function occurs). An initial count of 0 causes TC8 to count from 0 to FFH to FEH.*

► **Note:** The letter H denotes hexadecimal values.

Transition from 0 to FFH is not a timeout condition.

⚠ **Caution:** Using the same instructions for stopping the counter/timers and setting the status bits is not recommended.

Two successive commands are necessary. First, the counter/timers must be stopped. Second, the status bits must be reset. These commands are required because it takes one counter/timer clock interval for the initiated event to actually occur. See [Figure 18](#) and [Figure 19](#).

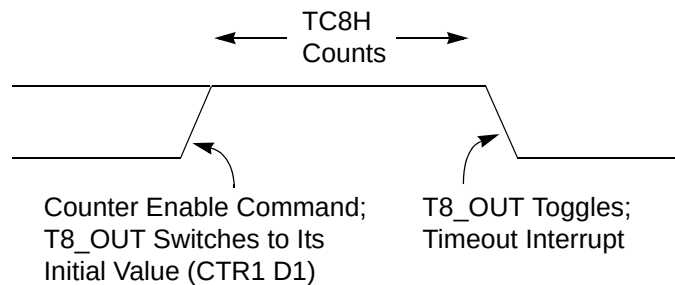


**Figure 18. T8\_OUT in SINGLE-PASS Mode**

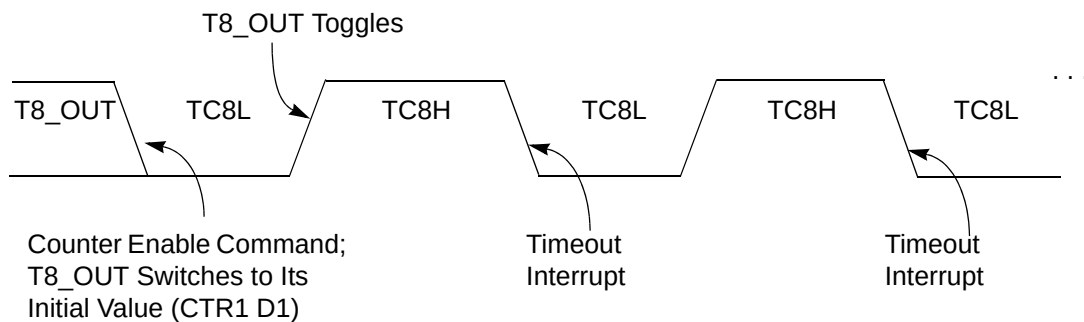


**Figure 19. T8\_OUT in MODULO-N Mode**

## T8 DEMODULATION Mode

You must program TC8L and TC8H to FFh. After T8 is enabled, when the first edge (rising, falling, or both depending on CTR1, D5; D4) is detected, it starts to count down. When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current value of T8 is complemented and put into one of the capture registers. If it is a positive edge, data is put into LO8; if it is a negative edge, data is put into HI8. From that point, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt can be generated if enabled (CTR0, D2). Meanwhile, T8 is loaded with FFh and starts counting again. If T8 reaches 0, the timeout status bit (CTR0, D5) is set, and an interrupt can be generated if enabled (CTR0, D1). T8 then continues counting from FFh (see Figure 20 and Figure 21).

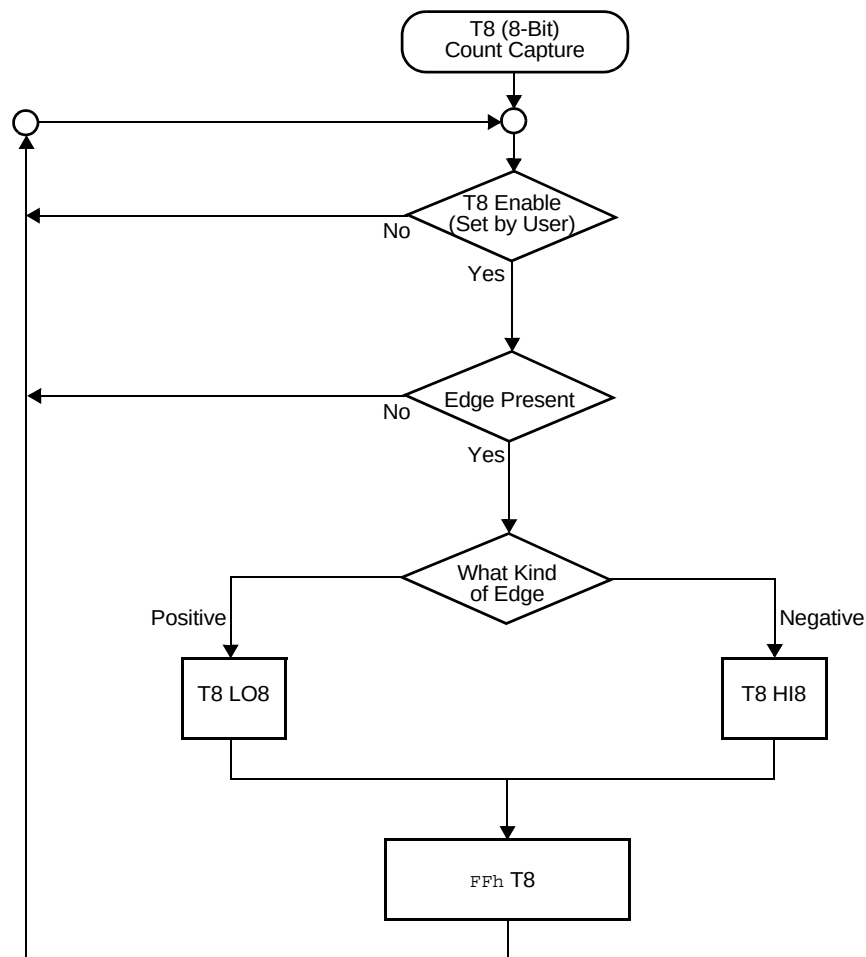


Figure 20.DEMODULATION Mode Count Capture Flowchart

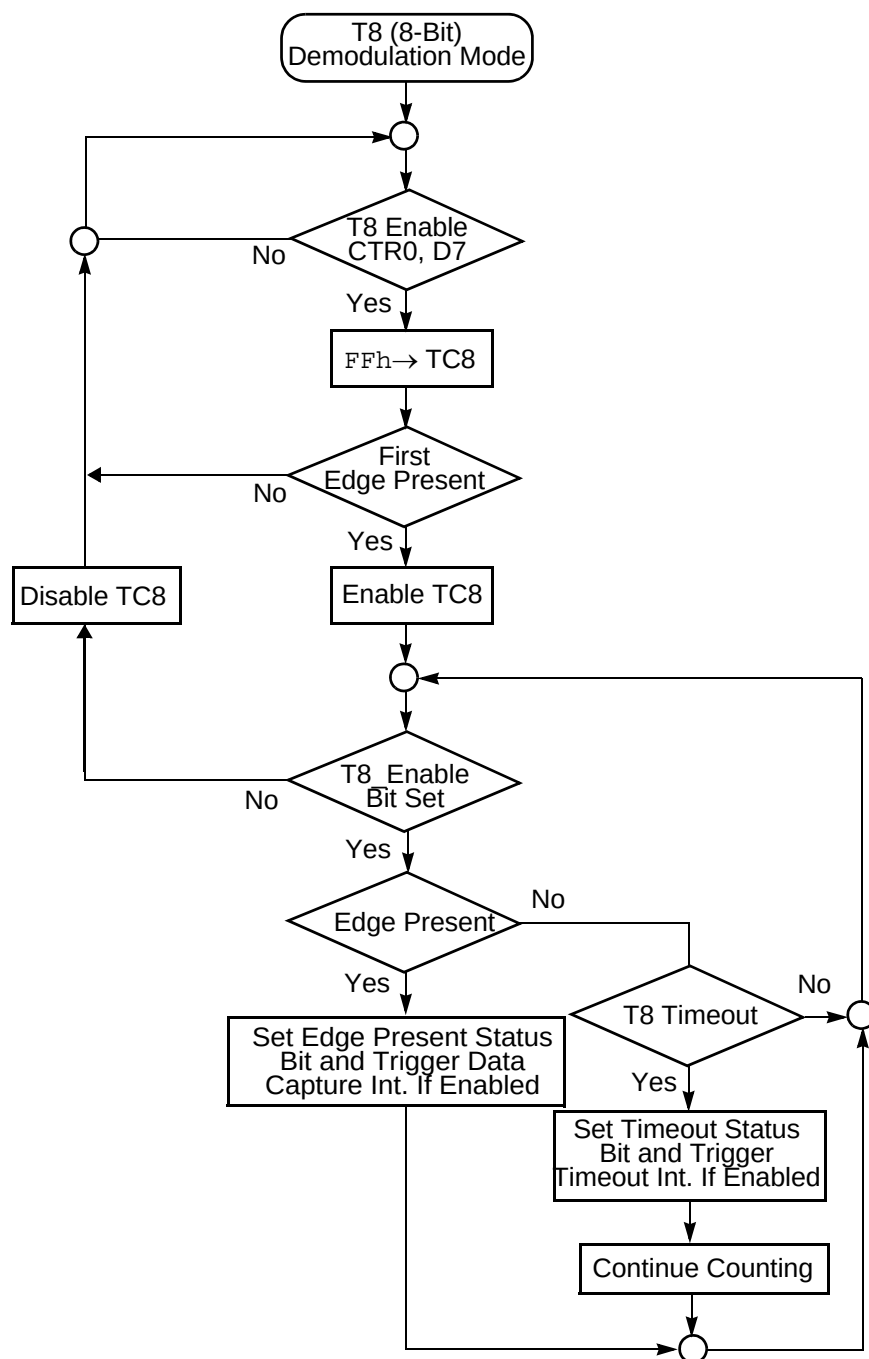


**Figure 21. DEMODULATION Mode Flowchart**

### T16 TRANSMIT Mode

In NORMAL or PING-PONG mode, the output of T16 when not enabled, is dependent on CTR1, D0. If it is a 0, T16\_OUT is a 1; if it is a 1, T16\_OUT is 0. You can force the output of T16 to either a 0 or 1 whether it is enabled or not by programming CTR1 D3; D2 to a 10 or 11.

When T16 is enabled, TC16H \* 256 + TC16L is loaded, and T16\_OUT is switched to its initial value (CTR1, D0). When T16 counts down to 0, T16\_OUT is toggled (in NORMAL or PING-PONG mode), an interrupt (CTR2, D1) is generated (if enabled), and a status bit (CTR2, D5) is set (see [Figure 22](#)).

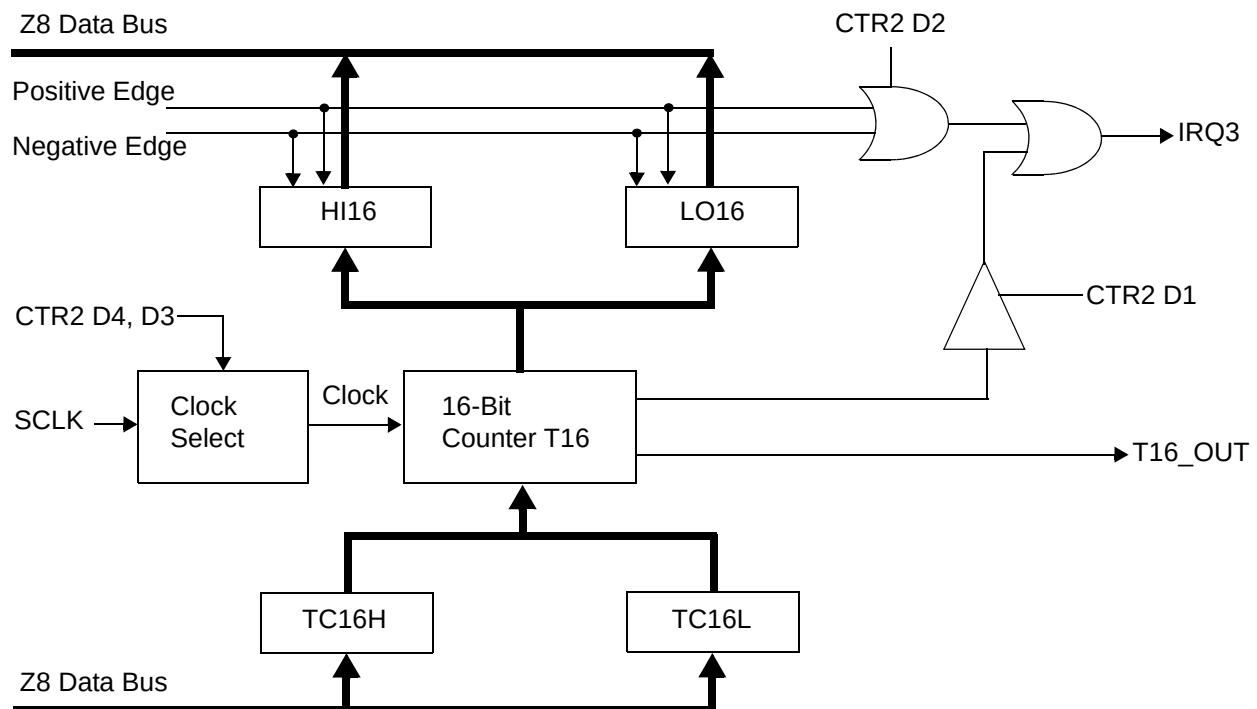


**Figure 22.16-Bit Counter/Timer Circuits**

► **Note:** Global interrupts override this function as described in [Interrupts](#) on page 45.

If T16 is in SINGLE-PASS mode, it is stopped at this point (see [Figure 23](#) on page 42). If it is in MODULO-N mode, it is loaded with TC16H \* 256 + TC16L, and the counting continues (see [Figure 24](#) on page 42).

You can modify the values in TC16H and TC16L at any time. The new values take effect when they are loaded.



**Caution:**

Do not load these registers at the time the values are to be loaded into the counter/timer to ensure known operation. An initial count of 1 is not allowed. An initial count of 0 causes T16 to count from 0 to FFFFH to FFFE<sub>H</sub>. Transition from 0 to FFFF<sub>H</sub> is not a timeout condition.

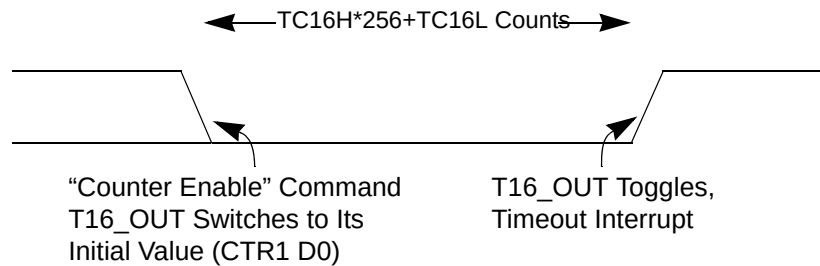


**Figure 23. T16\_OUT in SINGLE-PASS Mode**

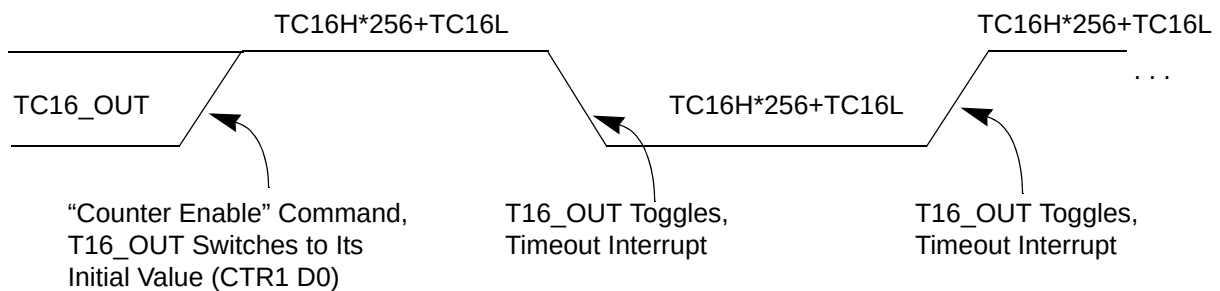


**Figure 24. T16\_OUT in Modulo-N Mode**

**T16 DEMODULATION Mode**

You must program TC16L and TC16H to FFF<sub>H</sub>. After T16 is enabled, and the first edge (rising, falling, or both depending on CTR1 D5; D4) is detected, T16 captures HI16 and LO16, reloads, and begins counting.

**If D6 of CTR2 Is 0**

When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current count in T16 is complemented and put into HI16 and LO16. When data is captured, one of the edge detect status bits (CTR1, D1; D0) is set and an interrupt is generated if enabled (CTR2, D2). T16 is loaded with FFFF<sub>H</sub> and starts again.



This T16 mode is generally used to measure space time, the length of time between bursts of carrier signal (marks).

#### If D6 of CTR2 Is 1

T16 ignores the subsequent edges in the input signal and continues counting down. A timeout of T8 causes T16 to capture its current value and generate an interrupt if enabled (CTR2, D2). In this case, T16 does not reload and continues counting. If the D6 bit of CTR2 is toggled (by writing a 0 then a 1 to it), T16 captures and reloads on the next edge (rising, falling, or both depending on CTR1, D5; D4), continuing to ignore subsequent edges.

This T16 mode generally measures mark time, the length of an active carrier signal burst.

If T16 reaches 0, T16 continues counting from `FFFFH`. Meanwhile, a status bit (CTR2 D5) is set, and an interrupt timeout can be generated if enabled (CTR2 D1).

#### PING-PONG Mode

This operation mode is only valid in TRANSMIT mode. T8 and T16 must be programmed in SINGLE-PASS mode (CTR0, D6; CTR2, D6), and PING-PONG mode must be programmed in CTR1, D3; D2. You can begin the operation by enabling either T8 or T16 (CTR0, D7 or CTR2, D7). For example, if T8 is enabled, T8\_OUT is set to this initial value (CTR1, D1). According to T8\_OUT's level, TC8H or TC8L is loaded into T8. After the terminal count is reached, T8 is disabled, and T16 is enabled. T16\_OUT then switches to its initial value (CTR1, D0), data from TC16H and TC16L is loaded, and T16 starts to count. After T16 reaches the terminal count, it stops, T8 is enabled again, repeating the entire cycle. Interrupts can be allowed when T8 or T16 reaches terminal control (CTR0, D1; CTR2, D1). To stop the ping-pong operation, write 00 to bits D3 and D2 of CTR1. See [Figure 25](#).

► **Note:** Enabling Ping-Pong operation while the counter/timers are running might cause intermittent counter/timer function. Disable

the counter/timers and reset the Status Flags before instituting this operation.

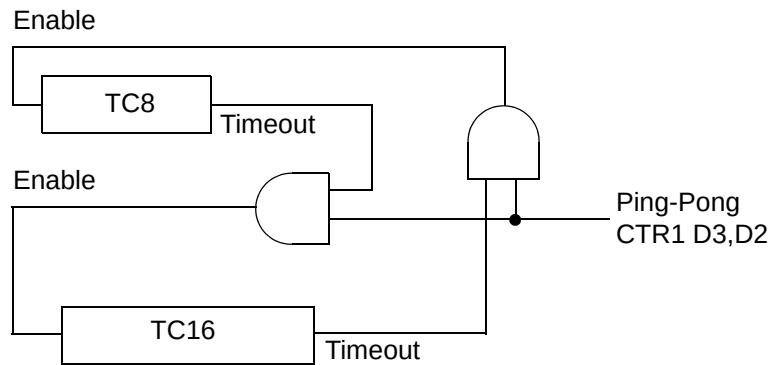


**Figure 25. PING-PONG Mode Diagram**

#### Initiating PING-PONG Mode

First, make sure both counter/timers are not running. Set T8 into SINGLE-PASS mode (CTR0, D6), set T16 into SINGLE-PASS mode (CTR2, D6), and set the PING-PONG mode (CTR1, D2; D3). These instructions can be in random order. Finally, start PING-PONG mode by enabling either T8 (CTR0, D7) or T16 (CTR2, D7). See [Figure 26](#).

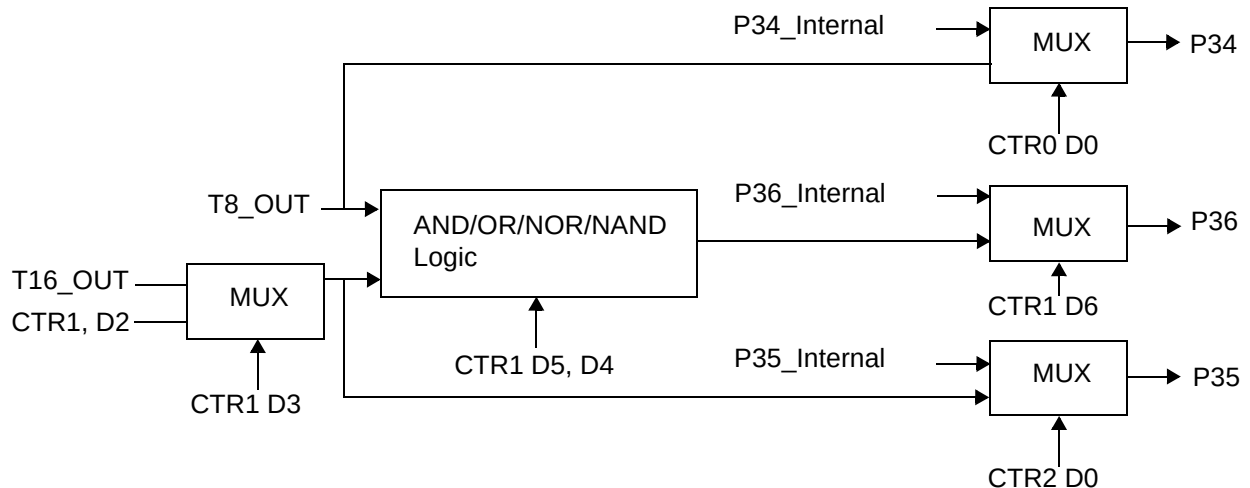


**Figure 26. Output Circuit**

The initial value of T8 or T16 must not be 1. If you stop the timer and restart the timer, reload the initial value to avoid an unknown previous value.



### During PING-PONG Mode

The enable bits of T8 and T16 (CTR0, D7; CTR2, D7) are set and cleared alternately by hardware. The timeout bits (CTR0, D5; CTR2, D5) are set every time the counter/timers reach the terminal count.

### Timer Output

The output logic for the timers is displayed in [Figure 26](#) on page 44. P34 is used to output T8-OUT when D0 of CTR0 is set. P35 is used to output the value of T16-OUT when D0 of CTR2 is set. When D6 of CTR1 is set, P36 outputs the logic combination of T8-OUT and T16-OUT determined by D5 and D4 of CTR1.

## Interrupts

The Crimzon ZLR32300 features six different interrupts (see Table 11 on page 47). The interrupts are maskable and prioritized (see [Figure 27](#) on page 46). The six sources are divided as follows: three sources are claimed by Port 3 lines P33–P31, two by the counter/timers (see Table 11 on page 47) and one for Low-Voltage detection. The Interrupt Mask Register (globally or individually) enables or disables the six interrupt requests.

The source for IRQ is determined by bit 1 of the Port 3 mode register (P3M). In DIGITAL mode, Pin P33 is the source. In ANALOG mode the output of the Stop Mode Recovery source logic is used as the source for the interrupt. See [Figure 32](#) on page 54.

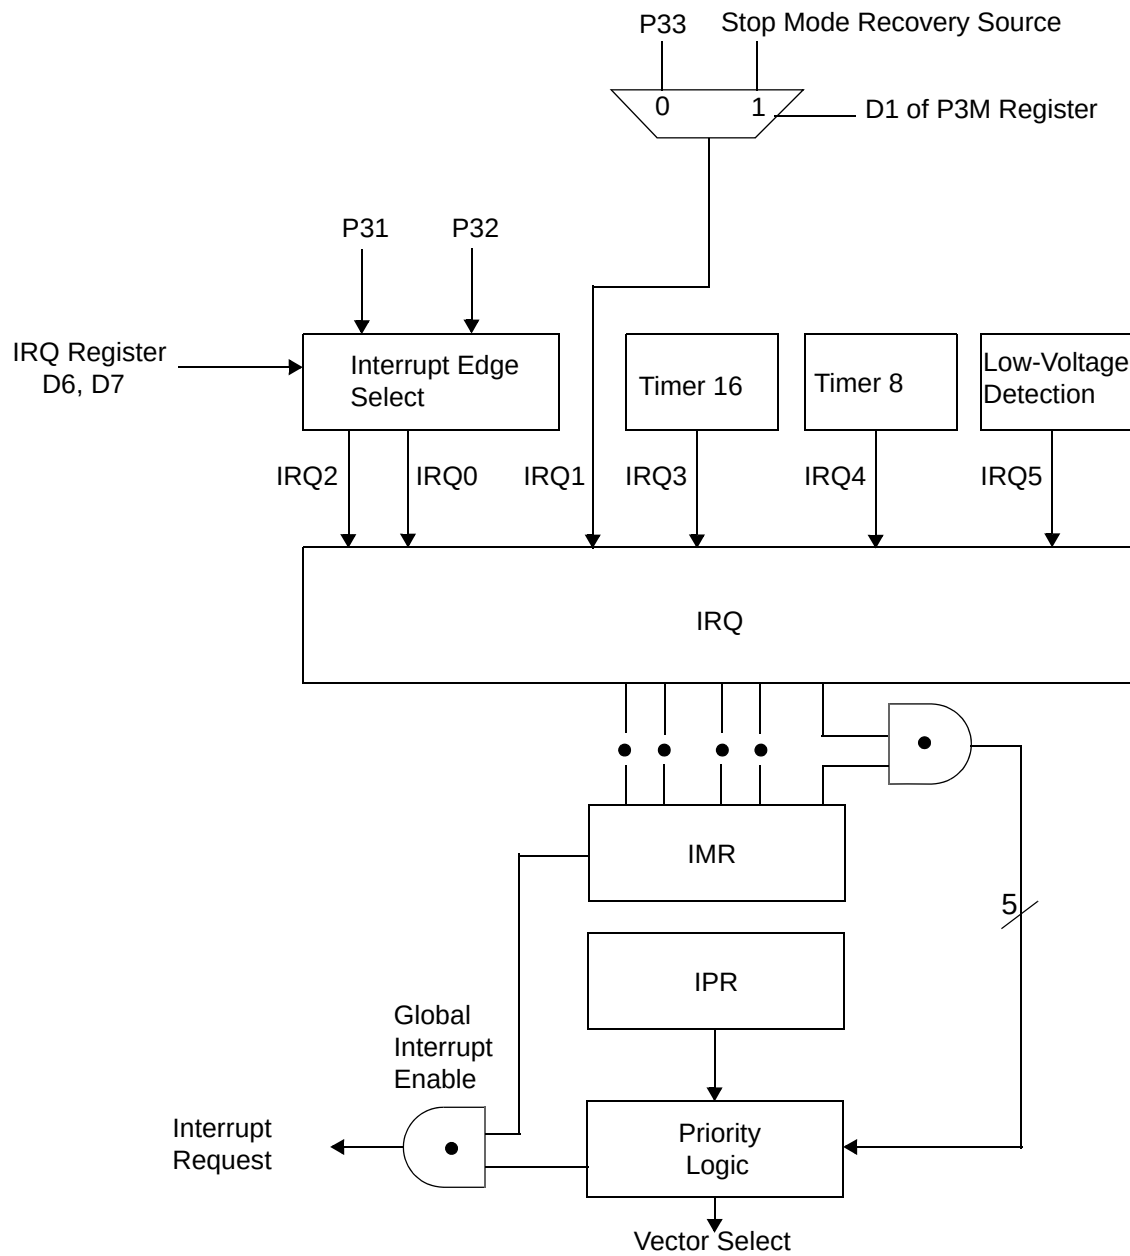


**Figure 27. Interrupt Block Diagram**

**Table 11. Interrupt Types, Sources, and Vectors**

| Name | Source               | Vector Location | Comments                                       |
|------|----------------------|-----------------|------------------------------------------------|
| IRQ0 | P32                  | 0,1             | External (P32), Rising, Falling Edge Triggered |
| IRQ1 | P33                  | 2,3             | External (P33), Falling Edge Triggered         |
| IRQ2 | P31, T <sub>IN</sub> | 4,5             | External (P31), Rising, Falling Edge Triggered |
| IRQ3 | T16                  | 6,7             | Internal                                       |
| IRQ4 | T8                   | 8,9             | Internal                                       |
| IRQ5 | LVD                  | 10,11           | Internal                                       |

When more than one interrupt is pending, priorities are resolved by a programmable priority encoder controlled by the Interrupt Priority Register. An interrupt machine cycle activates when an interrupt request is granted. As a result, all subsequent interrupts are disabled, and the Program Counter and Status Flags are saved. The cycle then branches to the Program Memory vector location reserved for that interrupt. All Crimzon ZLR32300 interrupts are vectored through locations in the Program Memory. This memory location and the next byte contain the 16-bit address of the interrupt service routine for that particular interrupt request. To accommodate polled interrupt systems, interrupt inputs are masked, and the Interrupt Request register is polled to determine which of the interrupt requests require service.

An interrupt resulting from AN1 is mapped into IRQ2, and an interrupt from AN2 is mapped into IRQ0. Interrupts IRQ2 and IRQ0 can be rising, falling, or both edge triggered. You can program these interrupts. The software can poll to identify the state of the pin.

Programming bits for the Interrupt Edge Select are located in the IRQ Register (R250), bits D7 and D6. The configuration is indicated in Table 12.

**Table 12. IRQ Register**


| IRQ |    | Interrupt Edge |            |
|-----|----|----------------|------------|
| D7  | D6 | IRQ2 (P31)     | IRQ0 (P32) |
| 0   | 0  | F              | F          |
| 0   | 1  | F              | R          |
| 1   | 0  | R              | F          |
| 1   | 1  | R/F            | R/F        |

**Note:** F = Falling Edge; R = Rising Edge

## Clock

The device's on-chip oscillator has a high-gain, parallel-resonant amplifier, for connection to a crystal, ceramic resonator, or any suitable external clock source (XTAL1 = Input, XTAL2 = Output). The crystal must be AT cut, 1 MHz to 8 MHz maximum, with a series resistance (RS) less than or equal to 100  $\Omega$ . The on-chip oscillator can be driven with a suitable external clock source.

The crystal must be connected across XTAL1 and XTAL2 using the recommended capacitors from each pin to ground. The typical capacitor value is 10 pF for 8 MHz. Also check with the crystal supplier for the optimum capacitance.

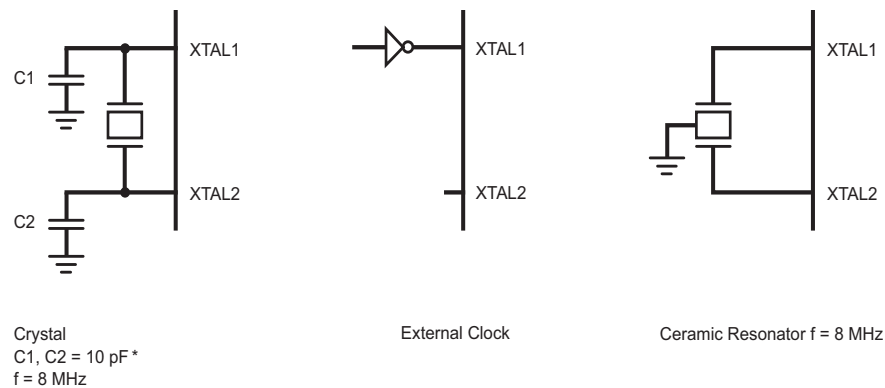

\*Note: preliminary value.

**Figure 28. Oscillator Configuration**

Maxim's IR MCU supports crystal, resonator, and oscillator. Most resonators have a frequency tolerance of less than  $\pm 0.5\%$ , which is enough for remote control application. Resonator has a very fast startup time, which is around few hundred microseconds. Most crystals have a frequency tolerance of less than 50 ppm ( $\pm 0.005\%$ ). However, crystal needs longer startup time than the resonator. The large loading capacitance slows down the oscillation startup time. Maxim® suggests not to use more than 10 pF loading capacitor for the crystal. If the stray capacitance of the PCB or the crystal is high, the loading capacitance C1 and C2 must be reduced further to ensure stable oscillation before the  $T_{POR}$  (Power-On Reset time is typically 5–6 ms, see Table 20 on page 85).

For Stop Mode Recovery operation, bit 5 of SMR register allows you to select the Stop Mode Recovery delay, which is the  $T_{POR}$ . If Stop Mode Recovery delay is not selected, the MCU executes instruction immediately after it wakes up from the



STOP mode. If resonator or crystal is used as a clock source then Stop Mode Recovery delay has to be selected (bit 5 of SMR = 1).

For resonator and crystal oscillator, the oscillation ground must go directly to the ground pin of the microcontroller. The oscillation ground must use the shortest distance from the microcontroller ground pin and it must be isolated from other connections.

## Power Management

### Power-On Reset

A timer circuit clocked by a dedicated on-board RC-oscillator is used for the Power-on reset timer function. The POR time allows  $V_{DD}$  and the oscillator circuit to stabilize before instruction execution begins.

The POR timer circuit is a one-shot timer triggered by one of three conditions:

- Power Fail to Power OK status, including Waking up from  $V_{BO}$  Standby
- Stop Mode Recovery (if D5 of SMR = 1)
- WDT Timeout

The POR timer is 2.5 ms minimum. Bit 5 of the Stop Mode Register determines whether the POR timer is bypassed after Stop Mode Recovery (typical for external clock).

### HALT Mode

This instruction turns OFF the internal CPU clock, but not the XTAL oscillation. The counter/timers and external interrupts IRQ0, IRQ1, IRQ2, IRQ3, IRQ4, and IRQ5 remain active. The devices are recovered by interrupts, either externally or internally generated. An interrupt request must be executed (enabled) to exit HALT mode. After the interrupt service routine, the program continues from the instruction after HALT mode.

### STOP Mode

This instruction turns OFF the internal clock and external crystal oscillation, reducing the standby current to 10  $\mu$ A or less. STOP mode is terminated only by a reset, such as WDT timeout, POR, SMR or external reset. This condition causes the processor to restart the application program at address 000CH. To enter STOP (or HALT) mode, first flush the instruction pipeline to avoid suspending execution in mid-instruction. Execute a NOP (Opcode = FFH) immediately before the appropriate sleep instruction, as follows:



```

FF          NOP          ; clear the pipeline
6F          STOP         ; enter STOP mode

or

FF          NOP          ; clear the pipeline
7F          HALT         ; enter HALT Mode

```


## Port Configuration

### Port Configuration Register

The Port Configuration (PCON) register (see [Figure 29](#)) configures the comparator output on Port 3. It is located in the expanded register 2 at Bank F, location 00.

PCON(FH)00h

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

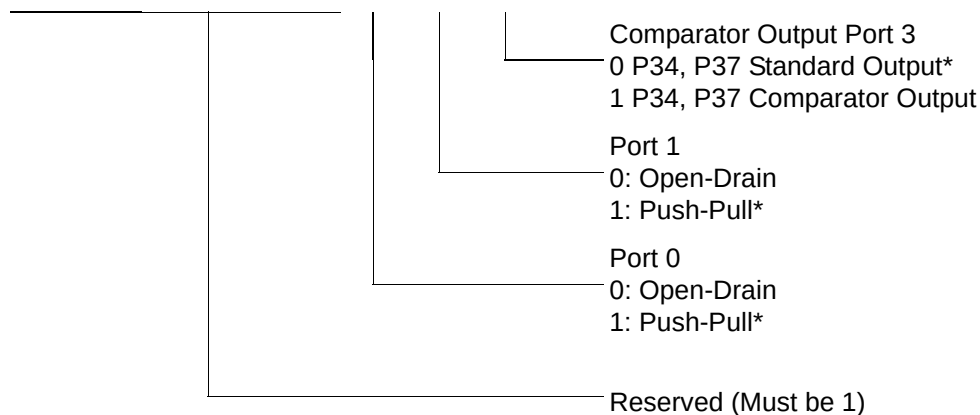

\*Default setting after reset.

**Figure 29. Port Configuration Register (PCON) (Write Only)**

### Comparator Output Port 3 (D0)

Bit 0 controls the comparator used in Port 3. A 1 in this location brings the comparator outputs to P34 and P37, and a 0 releases the Port to its standard I/O configuration.

### Port 1 Output Mode (D1)

Bit 1 controls the output mode of port 1. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.

## Port 0 Output Mode (D2)

Bit 2 controls the output mode of port 0. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.

## Stop Mode Recovery


## Stop Mode Recovery Register

This register selects the clock divide value and determines the mode of Stop Mode Recovery (see [Figure 30](#)). All bits are write only except bit 7, which is read only. Bit 7 is a Flag bit that is hardware set on the condition of Stop recovery and reset by a power-on cycle. Bit 6 controls whether a low level or a high level at the XOR-gate input (see [Figure 32](#) on page 54) is required from the recovery source. Bit 5 controls the reset delay after recovery. Bits D2, D3, and D4 of the SMR register specify the source of the Stop Mode Recovery signal. Bit D0 determines if SCLK/TCLK are divided by 16 or not. The SMR is located in Bank F of the Expanded Register Group at address 0BH.

SMR(0F)0Bh

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

SCLK/TCLK Divide-by-16  
 0 OFF \* \*  
 1 ON  
 Reserved (Must be 0)

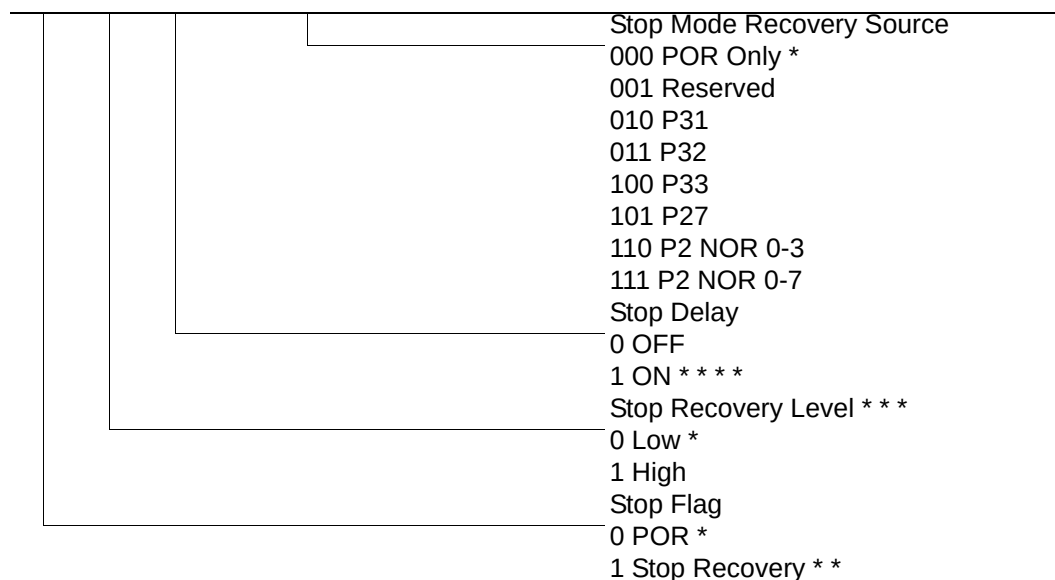

\*Default setting after reset.

\* \*Default setting after reset and Stop Mode Recovery.

\* \* \*At the XOR gate input.

\* \* \* \*Default setting after reset. Recommended to be set to 1 if using a crystal or resonator clock source.

**Figure 30. Stop Mode Recovery Register**

### SCLK/TCLK Divide-by-16 Select (D0)

D0 of the SMR controls a divide-by-16 prescaler of SCLK/TCLK (see [Figure 31](#)). This control selectively reduces device power consumption during normal processor execution (SCLK control) and/or HALT mode (where TCLK sources interrupt logic). After Stop Mode Recovery, this bit is set to a 0.

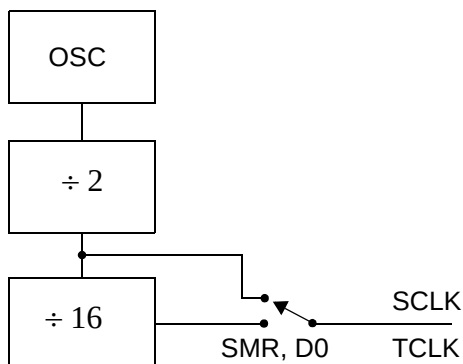


**Figure 31. SCLK Circuit**



### Stop Mode Recovery Source (D2, D3, and D4)

These three bits of the SMR specify the wake-up source of the Stop recovery (see [Figure 32](#) and [Table 14](#)).

### Stop Mode Recovery Register 2—SMR2(F)0Dh

Table 13 lists and briefly describes the fields for this register.

**Table 13. SMR2(F)0Dh:Stop Mode Recovery Register 2\***

| Field          | Bit Position |   | Value                                                             | Description                                                                                                                                                                                      |
|----------------|--------------|---|-------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reserved       | 7-----       |   | 0                                                                 | Reserved (Must be 0)                                                                                                                                                                             |
| Recovery Level | -6-----      | W | 0 <sup>†</sup><br>1                                               | Low<br>High                                                                                                                                                                                      |
| Reserved       | --5-----     |   | 0                                                                 | Reserved (Must be 0)                                                                                                                                                                             |
| Source         | ---432--     | W | 000 <sup>†</sup><br>001<br>010<br>011<br>100<br>101<br>110<br>111 | A. POR Only<br>B. NAND of P23–P20<br>C. NAND of P27–P20<br>D. NOR of P33–P31<br>E. NAND of P33–P31<br>F. NOR of P33–P31, P00, P07<br>G. NAND of P33–P31, P00, P07<br>H. NAND of P33–P31, P22–P20 |
| Reserved       | -----10      |   | 00                                                                | Reserved (Must be 0)                                                                                                                                                                             |

\*Port pins configured as outputs are ignored as an SMR source.

<sup>†</sup>Indicates the value upon Power-On Reset.

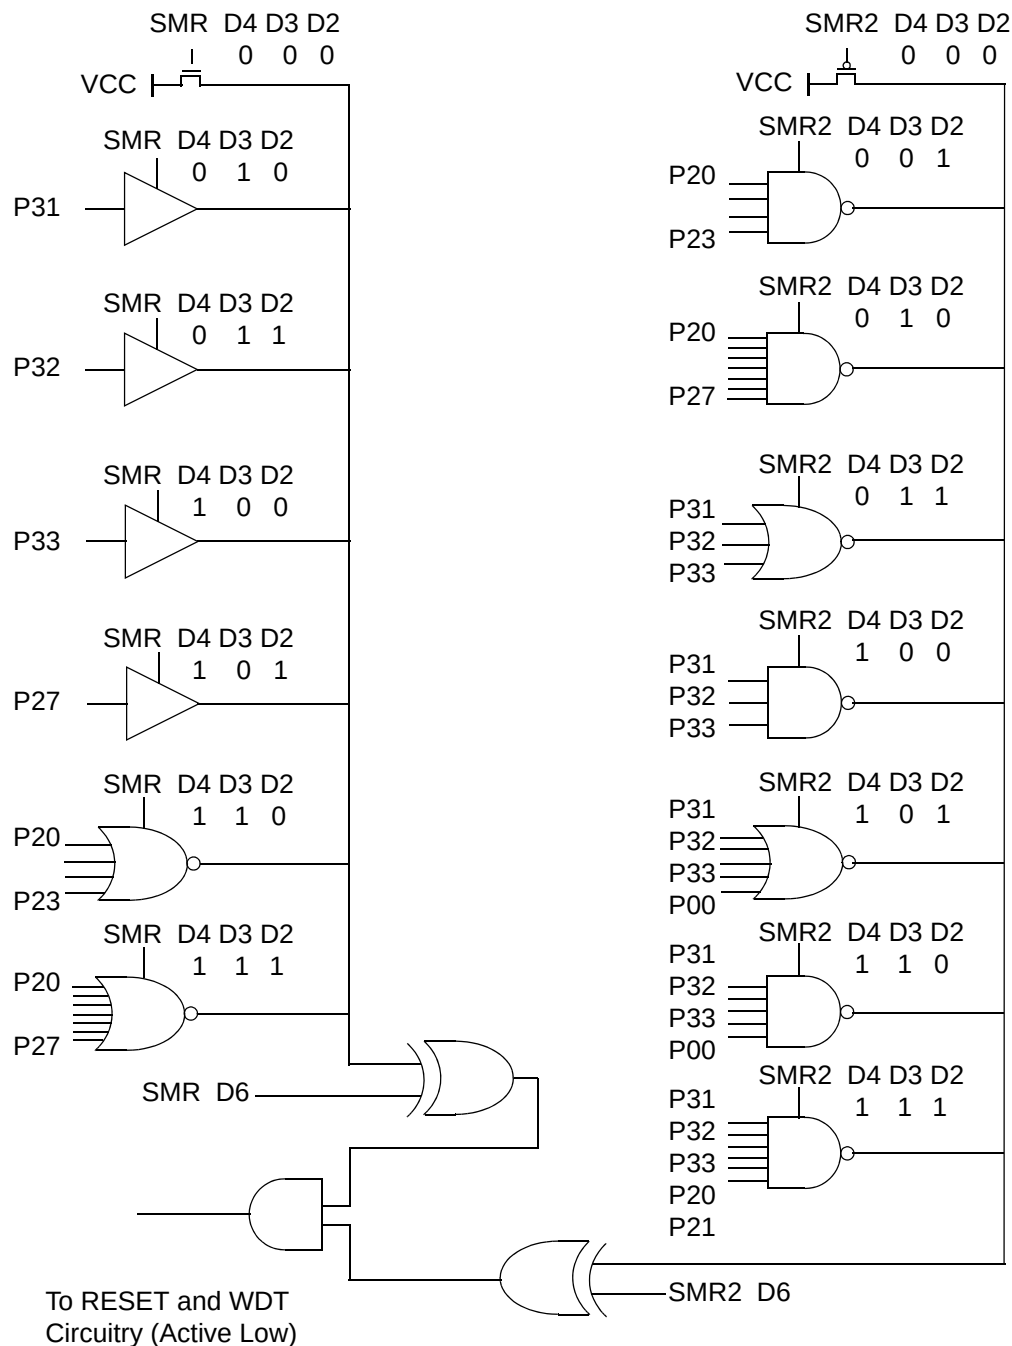


**Figure 32. Stop Mode Recovery Source**

**Table 14. Stop Mode Recovery Source**

| SMR:432 |    |    | Operation                          |
|---------|----|----|------------------------------------|
| D4      | D3 | D2 | Description of Action              |
| 0       | 0  | 0  | POR and/or external reset recovery |
| 0       | 0  | 1  | Reserved                           |
| 0       | 1  | 0  | P31 transition                     |
| 0       | 1  | 1  | P32 transition                     |
| 1       | 0  | 0  | P33 transition                     |
| 1       | 0  | 1  | P27 transition                     |
| 1       | 1  | 0  | Logical NOR of P20 through P23     |
| 1       | 1  | 1  | Logical NOR of P20 through P27     |

► **Note:** Any Port 2 bit defined as an output drives the corresponding input to the default state. This condition allows the remaining inputs to control the AND/OR function. See SMR2 register on page 56 for other recover sources.

#### Stop Mode Recovery Delay Select (D5)

This bit, if low, disables the  $T_{POR}$  delay after Stop Mode Recovery. The default configuration of this bit is 1. If the 'fast' wake up is selected, the Stop Mode Recovery source must be kept active for at least 10  $T_{pC}$ .

► **Note:** This bit must be set to 1 if using a crystal or resonator clock source. The  $T_{POR}$  delay allows the clock source to stabilize before executing instructions.

#### Stop Mode Recovery Edge Select (D6)

A 1 in this bit position indicates that a High level on any one of the recovery sources wakes the Crimzon ZLR32300 from STOP mode. A 0 indicates Low level recovery. The default is 0 on POR.

#### Cold or Warm Start (D7)


This bit is read only. It is set to 1 when the device is recovered from STOP mode. The bit is set to 0 when the device reset is other than Stop Mode Recovery.



### Stop Mode Recovery Register 2 (SMR2)

This register determines the mode of Stop Mode Recovery for SMR2 (see [Figure 33](#)).

SMR2(0F)Dh

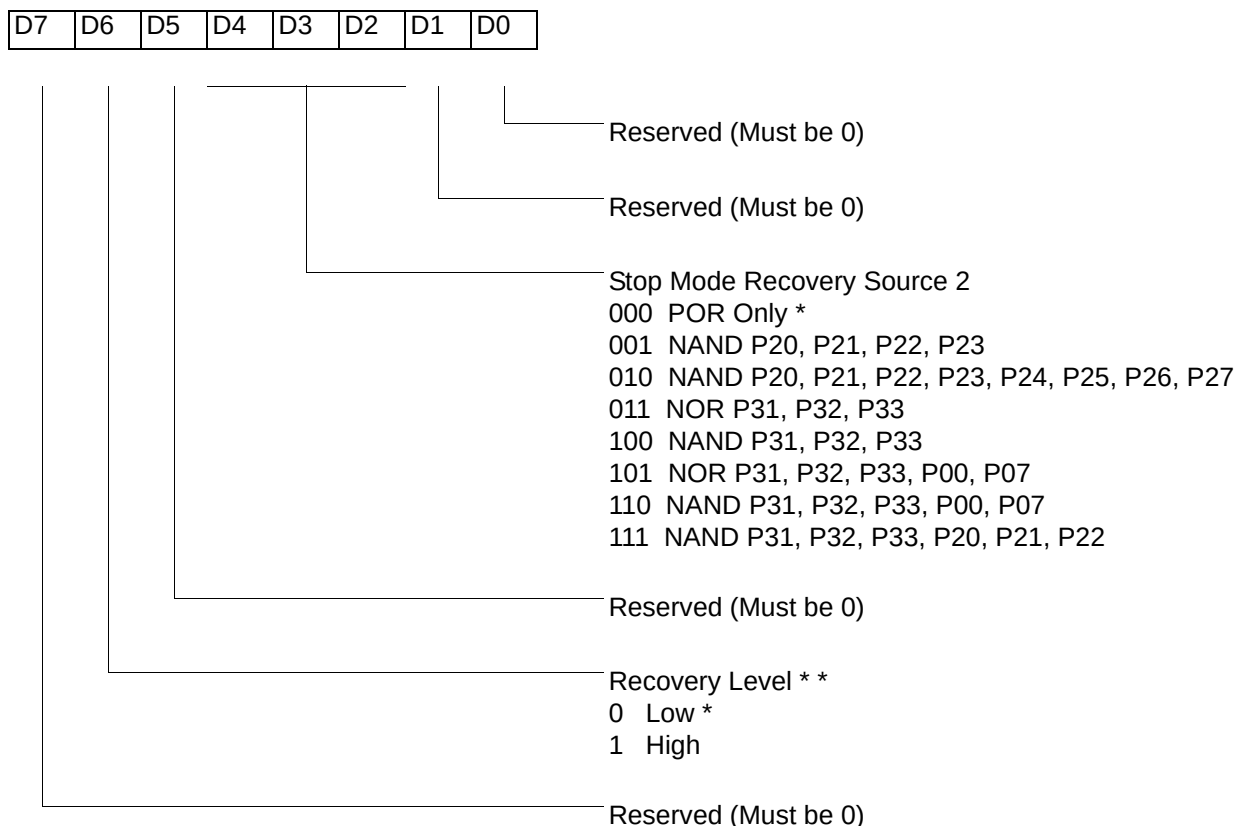

**Note:** If used in conjunction with SMR, either of the two specified events causes a Stop Mode Recovery.

\*Default setting after reset.

\*\*At the XOR gate input.

**Figure 33. Stop Mode Recovery Register 2 ((0F)DH:D2–D4, D6 Write Only)**

If SMR2 is used in conjunction with SMR, either of the specified events causes a Stop Mode Recovery.

► **Note:** Port pins configured as outputs are ignored as an SMR or SMR2 recovery source. For example, if the NAND or P23–P20 is selected as the recovery source and P20 is configured as an



output, the remaining SMR pins (P23–P21) form the NAND equation.


## Watchdog Timer Mode

### Watchdog Timer Mode Register (WDTMR)

The Watchdog Timer is a retriggerable one-shot timer that resets the Z8 if it reaches its terminal count. The WDT must initially be enabled by executing the WDT instruction. On subsequent executions of the WDT instruction, the WDT is refreshed. The WDT circuit is driven by an on-board RC-oscillator. The WDT instruction affects the Zero (Z), Sign (S), and Overflow (V) Flags.

The POR clock source the internal RC-oscillator. Bits 0 and 1 of the WDT register control a tap circuit that determines the minimum timeout period. Bit 2 determines whether the WDT is active during HALT, and Bit 3 determines WDT activity during Stop. Bits 4 through 7 are reserved (see Figure 34). This register is accessible only during the first 60 processor cycles (120 XTAL clocks) from the execution of the first instruction after Power-on reset, Watchdog Reset, or a Stop Mode Recovery (see Figure 33 on page 56). After this point, the register cannot be modified by any means (intentional or otherwise). The WDTMR cannot be read. The register is located in Bank F of the Expanded Register Group at address location 0Fh. It is organized as displayed in Figure 34.

WDTMR(0F)0Fh

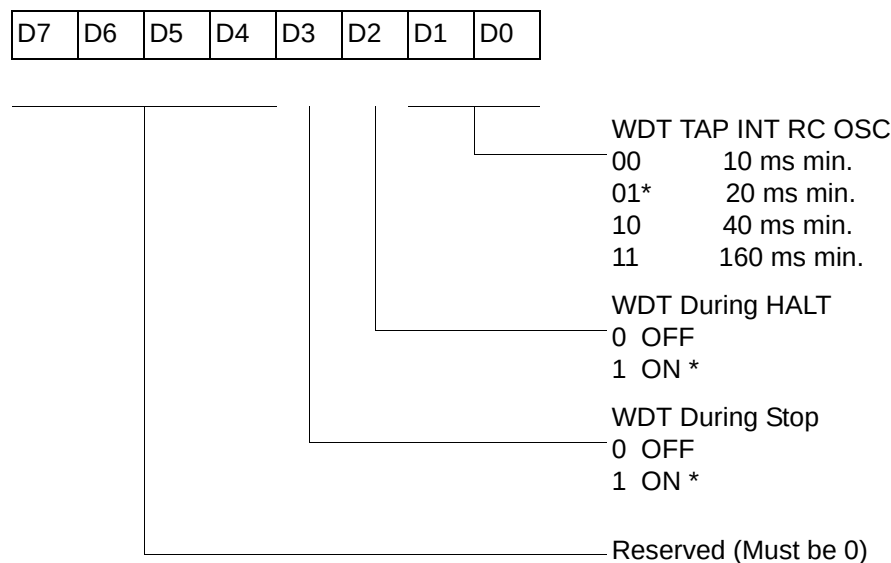

\*Default setting after reset.

**Figure 34. Watchdog Timer Mode Register (Write Only)**

**WDT Time Select (D0, D1)**


This bit selects the WDT time period. It is configured as indicated in Table 15.

**Table 15. Watchdog Timer Time Select**

| D1 | D0 | Timeout of Internal RC-Oscillator |
|----|----|-----------------------------------|
| 0  | 0  | 10 ms min.                        |
| 0  | 1  | 20 ms min.                        |
| 1  | 0  | 40 ms min.                        |
| 1  | 1  | 160 ms min.                       |

**WDTMR During Halt (D2)**

This bit determines whether or not the WDT is active during HALT mode. A 1 indicates active during HALT. The default is 1. See [Figure 35](#).

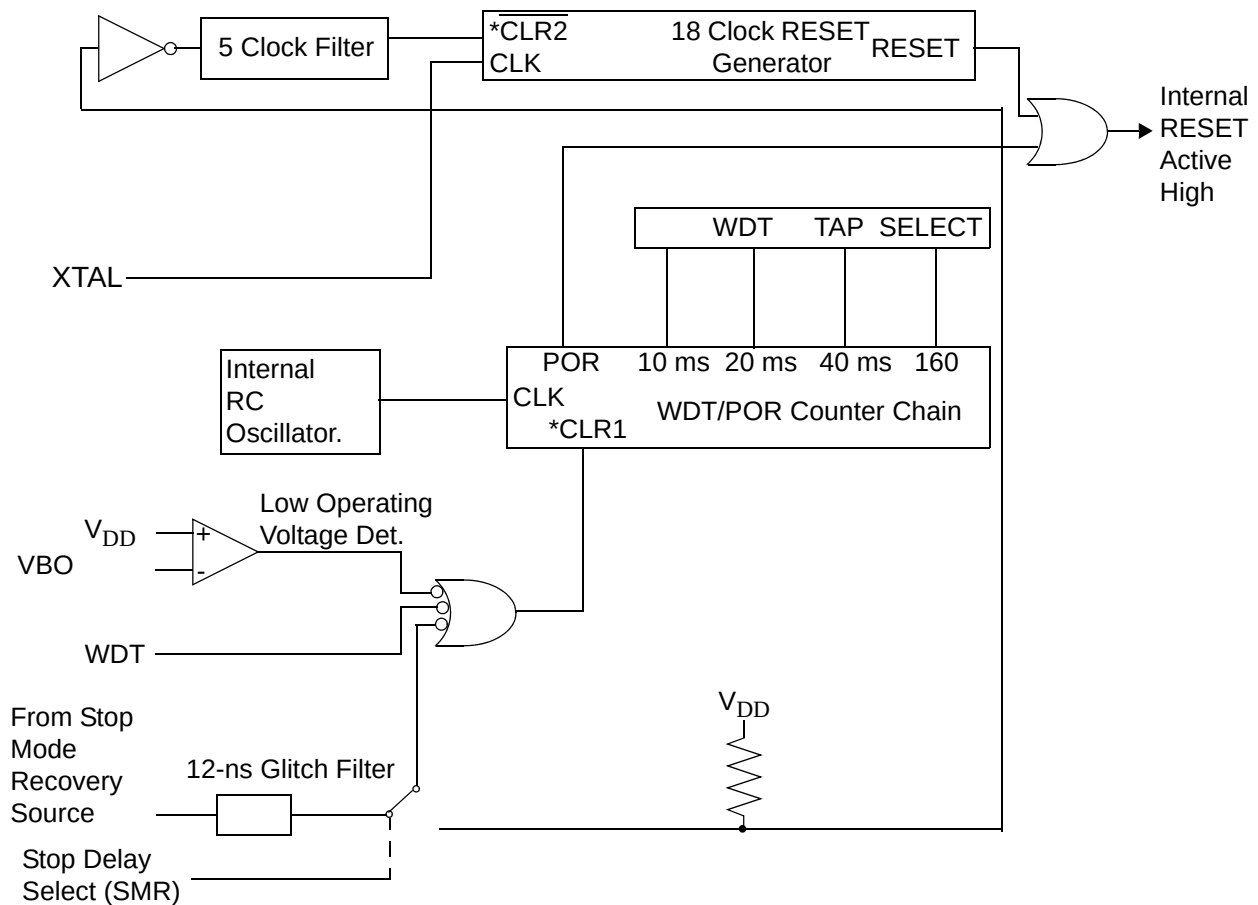

\* CLR1 and  $\overline{\text{CLR2}}$  enable the WDT/POR and 18 Clock Reset timers respectively upon a Low-to-High input translation.

**Figure 35. Resets and WDT**

### WDTMR During STOP (D3)

This bit determines whether or not the WDT is active during STOP mode. A 1 indicates active during Stop. The default is 1.

### ROM Selectable Options

There are seven ROM Selectable Options to choose from based on ROM code requirements. These are listed in Table 16.

**Table 16. ROM Selectable Options**

|                                  |        |
|----------------------------------|--------|
| Port 00–03 Pull-Ups              | ON/OFF |
| Port 04–07 Pull-Ups              | ON/OFF |
| Port 10–13 Pull-Ups              | ON/OFF |
| Port 14–17 Pull-Ups              | ON/OFF |
| Port 20–27 Pull-Ups              | ON/OFF |
| Port 3 Pull-Ups                  | ON/OFF |
| Watchdog Timer at Power-On Reset | ON/OFF |

**Voltage Brownout/Standby**

An on-chip Voltage Comparator checks that the  $V_{DD}$  is at the required level for correct operation of the device. Reset is globally driven when  $V_{DD}$  falls below  $V_{BO}$ . A small drop in  $V_{DD}$  causes the XTAL1 and XTAL2 circuitry to stop the crystal or resonator clock. If the  $V_{DD}$  is allowed to stay above  $V_{RAM}$ , the RAM content is preserved. When the power level is returned to above  $V_{BO}$ , the device performs a POR and functions normally.

**Low-Voltage Detection****Low-Voltage Detection Register—LVD(D)0CH**

► **Note:** Voltage detection does not work at STOP mode.

| Field | Bit Position |     |         | Description                    |
|-------|--------------|-----|---------|--------------------------------|
| LVD   | 76543---     |     |         | Reserved<br>No Effect          |
|       | ----2--      | R   | 1<br>0* | HVD Flag set<br>HVD Flag reset |
|       | -----1-      | R   | 1<br>0* | LVD Flag set<br>LVD Flag reset |
|       | -----0       | R/W | 1<br>0* | Enable VD<br>Disable VD        |

\*Default after POR.



- **Note:** Do not modify register P01M while checking a low-voltage condition. Switching noise of both ports 0 and 1 together might trigger the LVD Flag.

### Voltage Detection and Flags

The Voltage Detection register (LVD, register 0Ch at the expanded register bank 0Dh) offers an option of monitoring the  $V_{CC}$  voltage. The voltage detection is enabled when bit 0 of LVD register is set. Once voltage detection is enabled, the  $V_{CC}$  level is monitored in real time. The Flags in the LVD register valid 20  $\mu$ s after voltage detection is enabled. The HVD Flag (bit 2 of the LVD register) is set only if  $V_{CC}$  is higher than  $V_{HVD}$ . The LVD Flag (bit 1 of the LVD register) is set only if  $V_{CC}$  is lower than the  $V_{LVD}$ . When voltage detection is enabled, the LVD Flag also triggers IRQ5. The IRQ bit 5 latches the low voltage condition until it is cleared by instructions or reset. The IRQ5 interrupt is served if it is enabled in the IMR register. Otherwise, bit 5 of IRQ register is latched as a Flag only.

- **Note:** If it is necessary to receive an LVD interrupt upon power-up at an operating voltage lower than the low-battery detect threshold, enable interrupts using the Enable Interrupt (EI) instruction prior to enabling the voltage detection.




## Expanded Register File Control Registers (0D)

The expanded register file control registers (0D) are displayed in [Figure 36](#) on page 63 through [Figure 40](#) on page 68.



CTR0(0D)00h

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

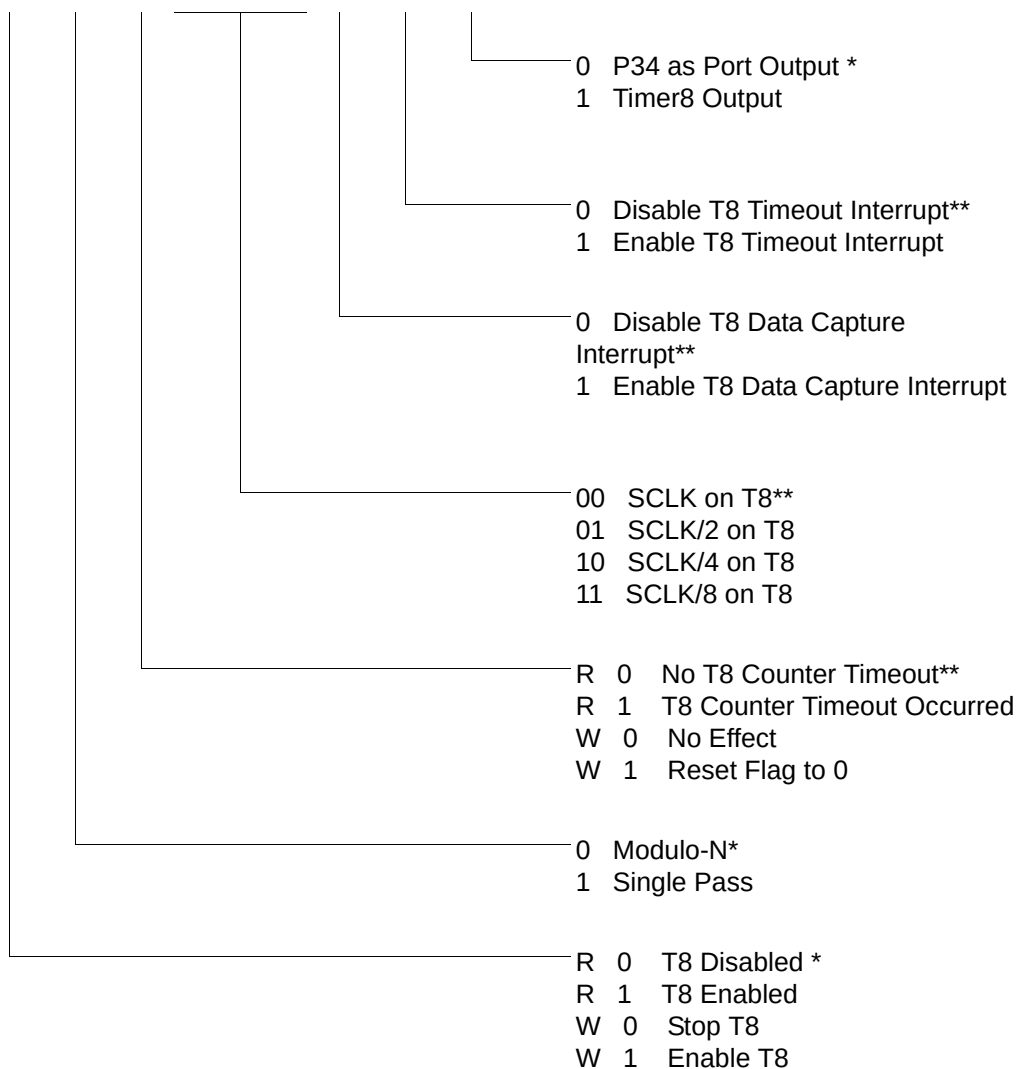

\*Default setting after reset.


\*\*Default setting after reset. Not reset with a Stop Mode Recovery.

**Figure 36.TC8 Control Register ((0D)00H: Read/Write Except Where Noted)**



CTR1(0D)01h

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

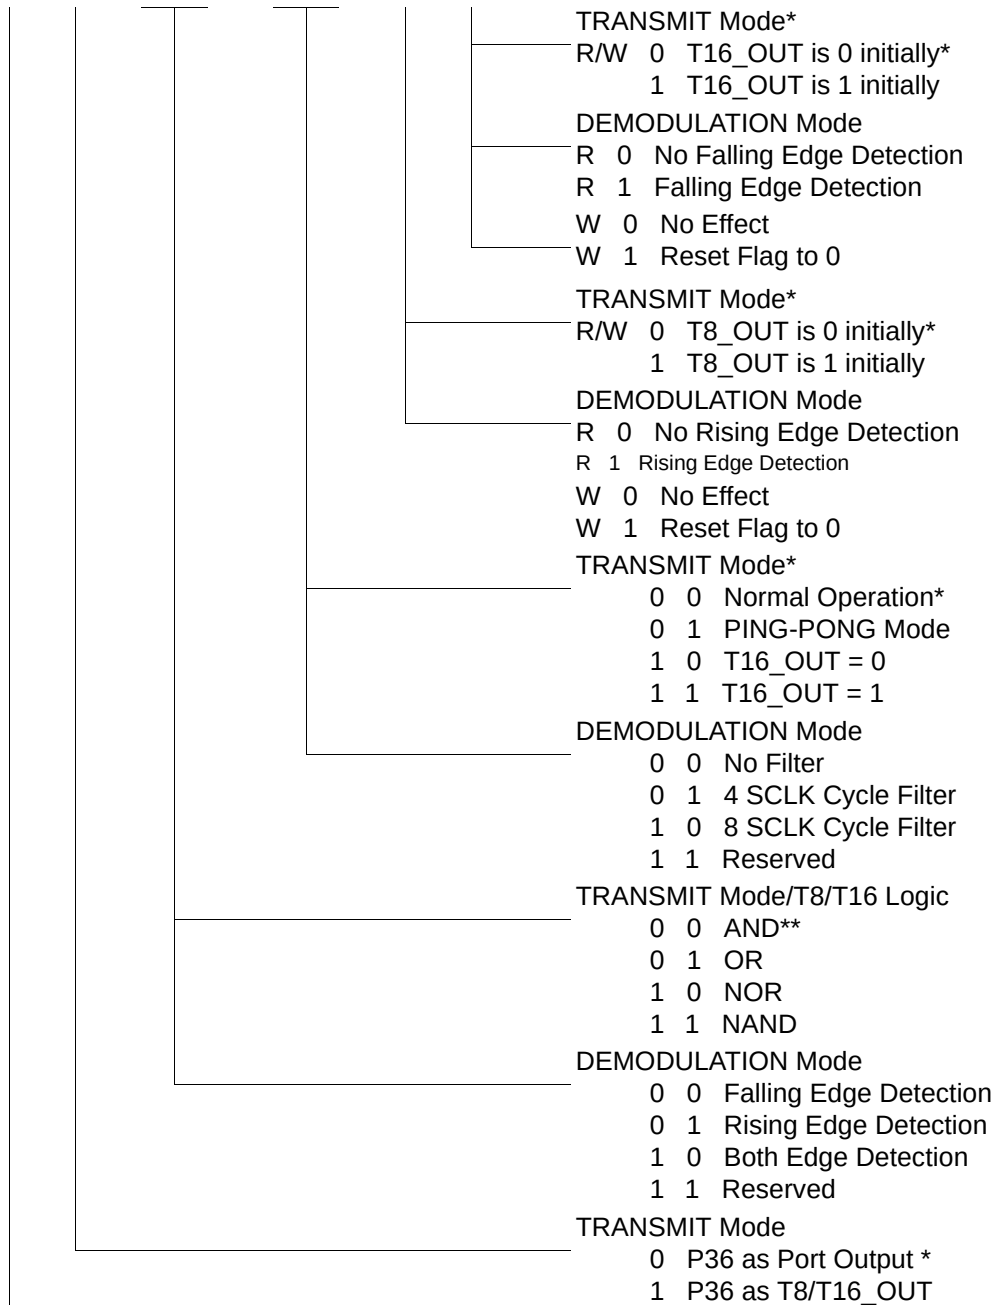



CTR1(0D)01h

|                                                                     |                            |
|---------------------------------------------------------------------|----------------------------|
|                                                                     | DEMULATION Mode            |
|                                                                     | 0 P31 as Demodulator Input |
|                                                                     | 1 P20 as Demodulator Input |
|                                                                     | TRANSMIT/DEMULATION Mode   |
| *Default setting after reset.                                       | 0 TRANSMIT Mode *          |
|                                                                     | 1 DEMODULATION Mode        |
| **Default setting after reset. Not reset with a Stop Mode Recovery. |                            |

**Figure 37.T8 and T16 Common Control Functions ((0D)01H: Read/Write)**


► **Note:** Ensure differentiating the TRANSMIT mode from DEMODULATION mode. Depending on which of these two modes is operating, the CTR1 bit has different functions. Changing from one mode to another cannot be performed



without disabling the  
counter/timers.

CTR2(0D)02h

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

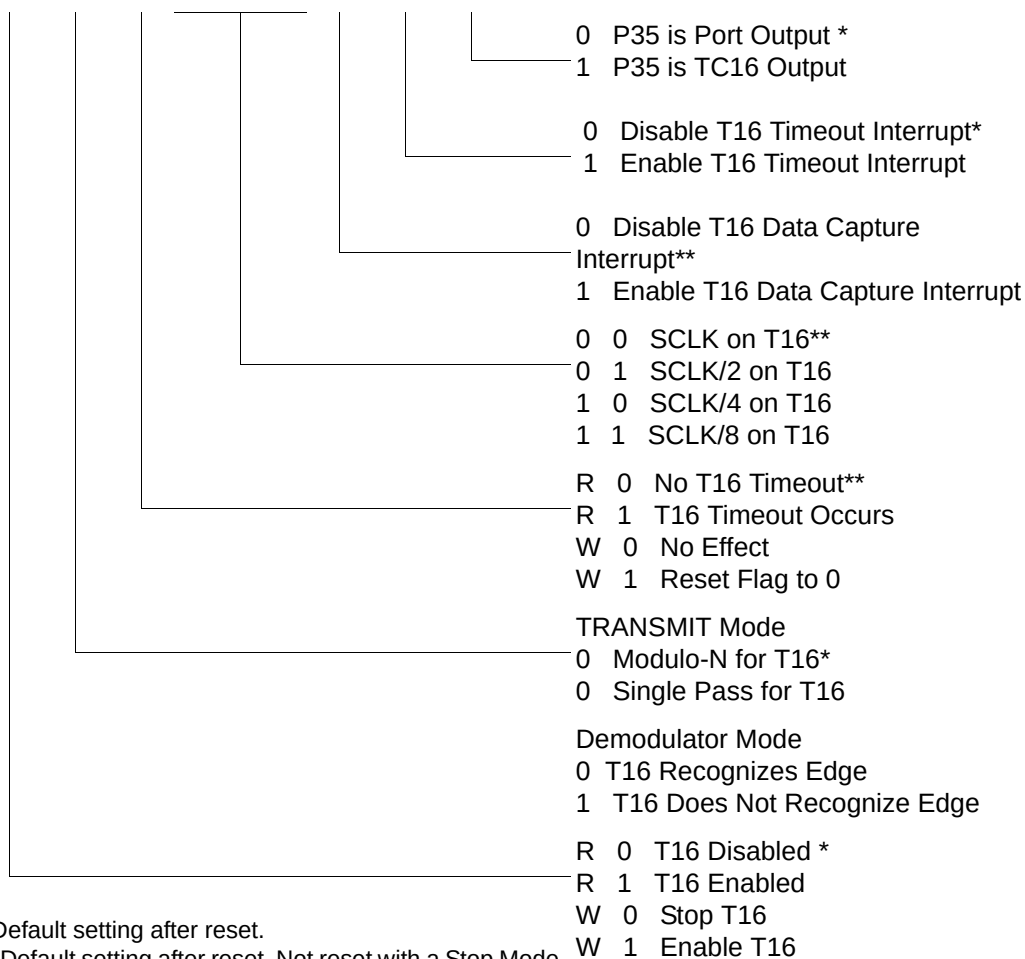

\*Default setting after reset.


\*\*Default setting after reset. Not reset with a Stop Mode Recovery.

**Figure 38. T16 Control Register ((0D) 2H: Read/Write Except Where Noted)**



CTR3(0D)03h

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

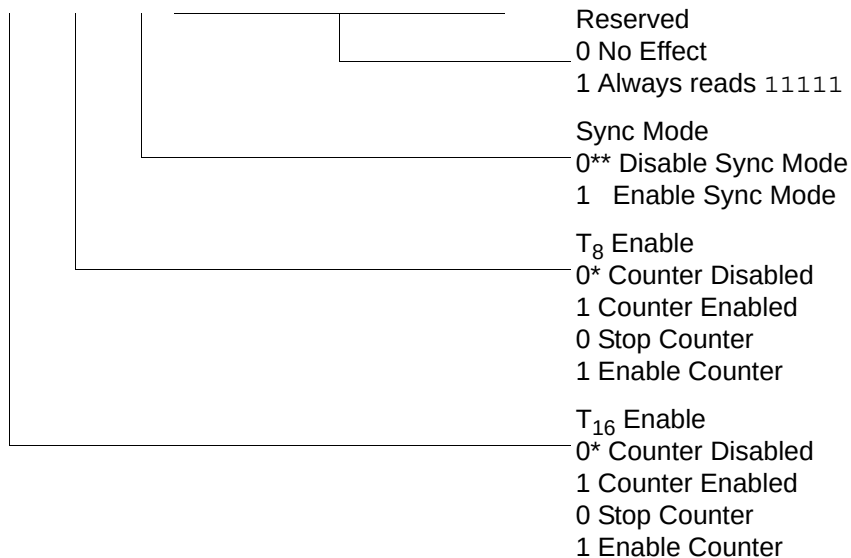

\*Default setting after reset.

\*\*Default setting after reset. Not reset with a Stop Mode Recovery.


**Figure 39. T8/T16 Control Register (0D)03H: Read/Write (Except Where Noted)**

► **Note:** If Sync Mode is enabled, the first pulse of T8 (carrier) is always synchronized with T16 (demodulated signal). It can always provide a full carrier pulse.



LVD(0D)0Ch

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

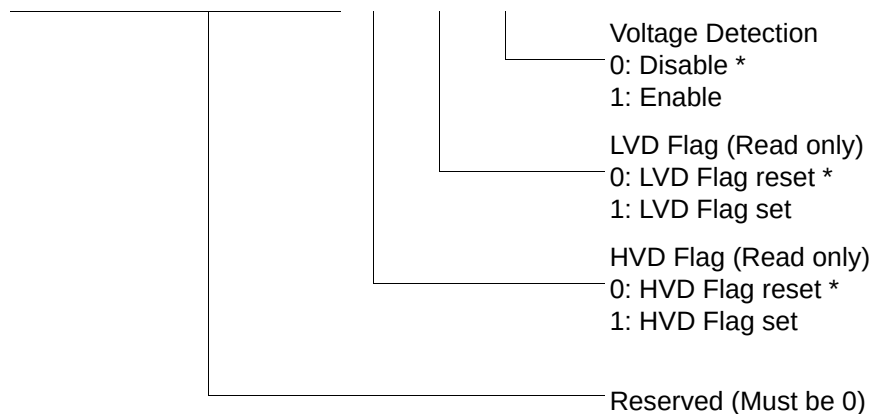

\*Default setting after reset.

**Figure 40. Voltage Detection Register**


► **Note:** Do not modify register P01M while checking a low-voltage condition. Switching noise of both ports 0 and 1 together might trigger the LVD Flag.



## Expanded Register File Control Registers (0F)

The expanded register file control registers (0F) are displayed in [Figure 41](#) on page 69 through [Figure 54](#) on page 79.

PCON(0F)00h

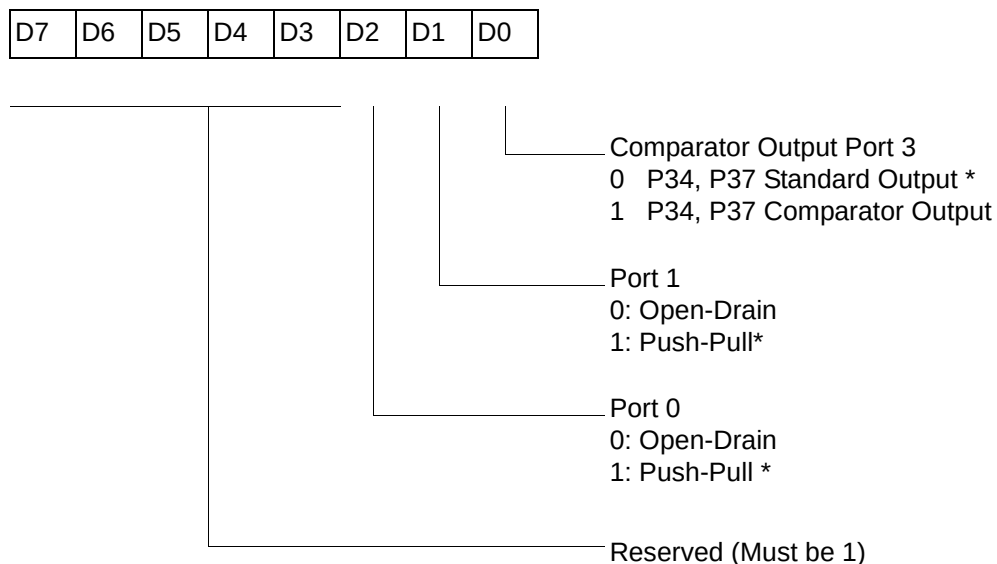


\*Default setting after reset.

**Figure 41. Port Configuration Register (PCON)(0F)00H: Write Only)**



SMR(0F)0Bh

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

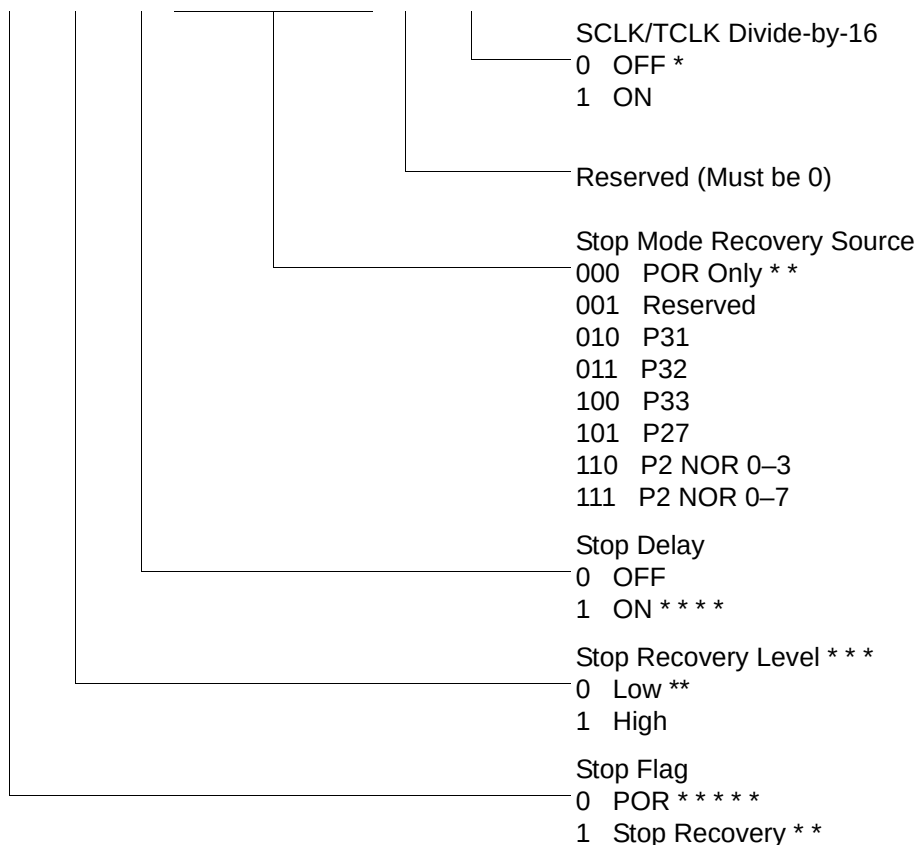

\*Default setting after reset.

\*\*Default setting after reset and Stop Mode Recovery.

\*\*\*At the XOR gate input.

\*\*\*\*Default setting after reset. Recommended to be set to 1 if using a crystal or resonator clock source. Not reset with Stop Mode Recovery.


\*\*\*\*\*Default setting after Power-On Reset.

**Figure 42. Stop Mode Recovery Register ((0F)0BH: D6–D0=Write Only, D7=Read Only)**



SMR2(0F)0Dh

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

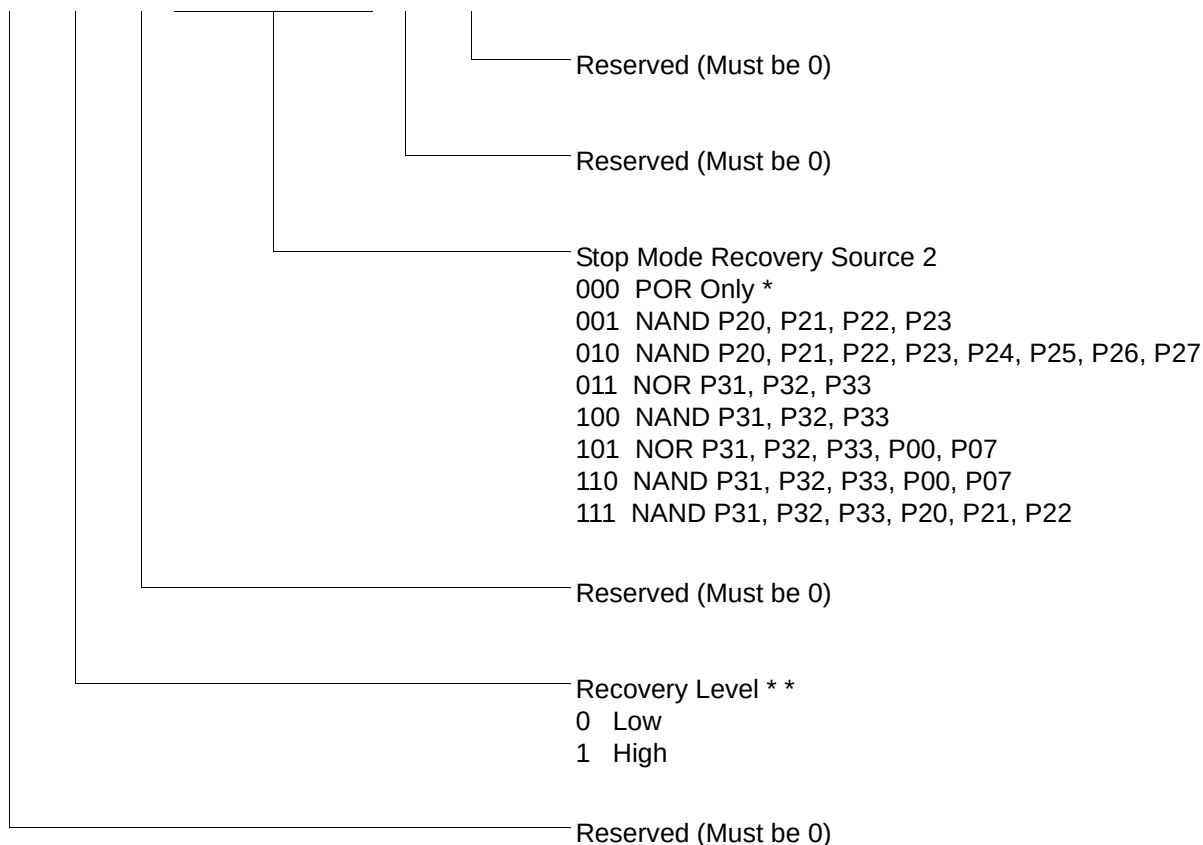

**Note:** If used in conjunction with SMR, either of the two specified events causes a Stop Mode Recovery.

\*Default setting after reset. Not reset with a Stop Mode Recovery.


\* \*At the XOR gate input.

**Figure 43. Stop Mode Recovery Register 2 ((0F)0DH:D2–D4, D6 Write Only)**



WDTMR(0F)0Fh

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

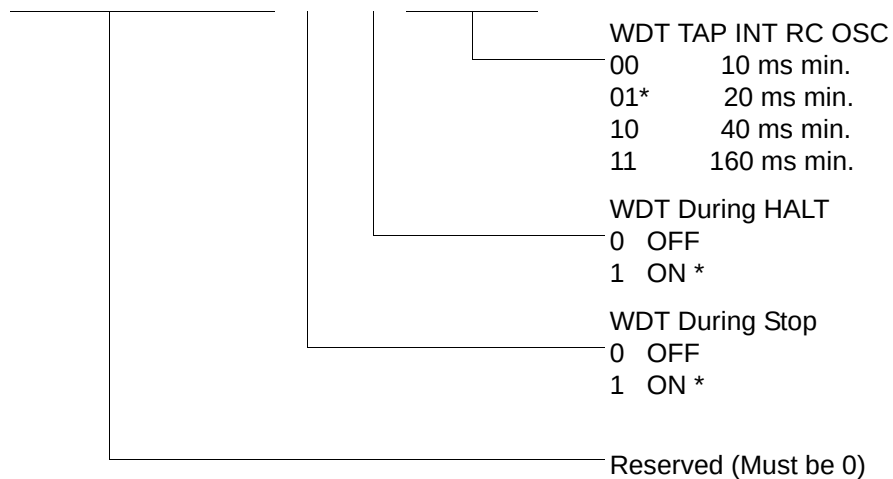

\*Default setting after reset. Not reset wit a Stop Mode Recovery.

**Figure 44. Watchdog Timer Register ((0F) 0FH: Write Only)**



## Standard Control Registers

The standard control registers are displayed in [Figure 45](#) through [Figure 54](#) on page 79.

R246P2M(F6H)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

|  |  |  |  |  |  |  |  |                                                                               |  |
|--|--|--|--|--|--|--|--|-------------------------------------------------------------------------------|--|
|  |  |  |  |  |  |  |  | P27–P20 I/O Definition<br>0 Defines bit as OUTPUT<br>1 Defines bit as INPUT * |  |
|  |  |  |  |  |  |  |  |                                                                               |  |
|  |  |  |  |  |  |  |  |                                                                               |  |


\*Default setting after reset. Not reset wit a Stop Mode Recovery.

**Figure 45. Port 2 Mode Register (F6H: Write Only)**



R247P3M(F7H)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

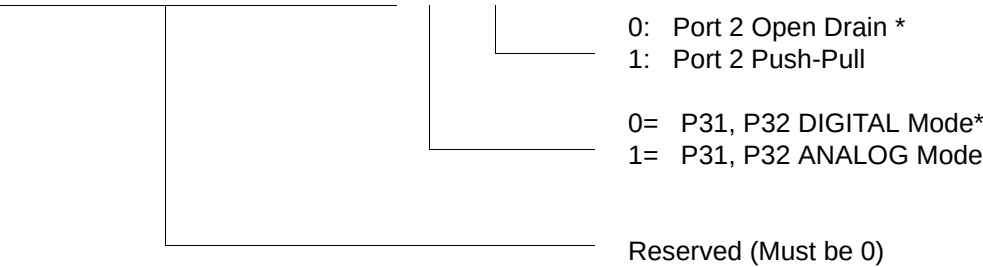


\*Default setting after reset. Not reset wit a Stop Mode recovery.

Figure 46. Port 3 Mode Register (F7H: Write Only)



R248 P01M(F8H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

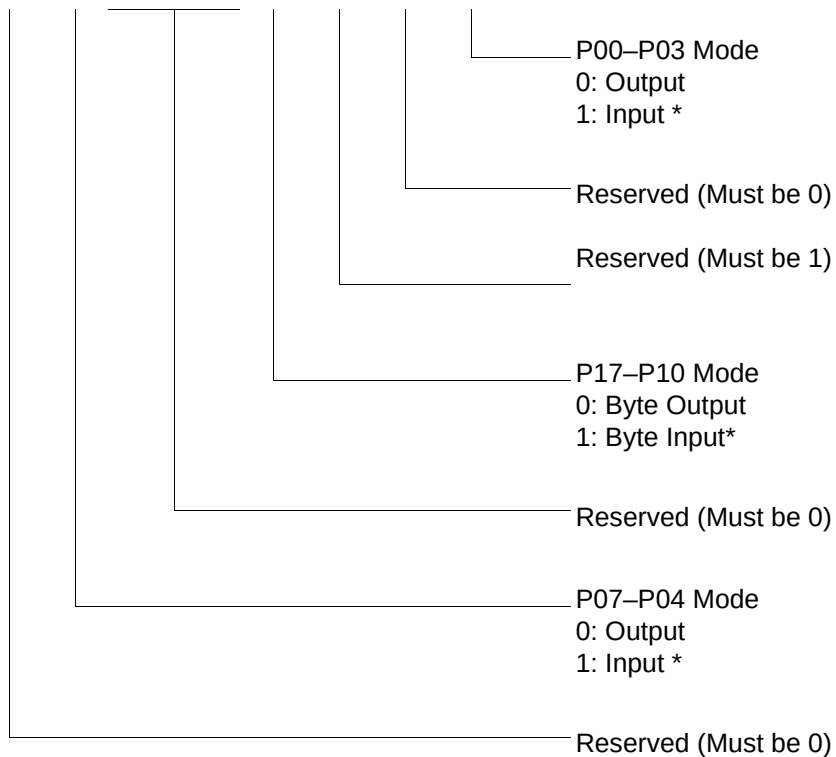

\*Default setting after reset; only P00, P01, and P07 are available on Crimzon ZLR32300 20-pin configurations.

**Figure 47.Port 0 and 1 Mode Register (F8H: Write Only)**



R249 IPR(F9H)

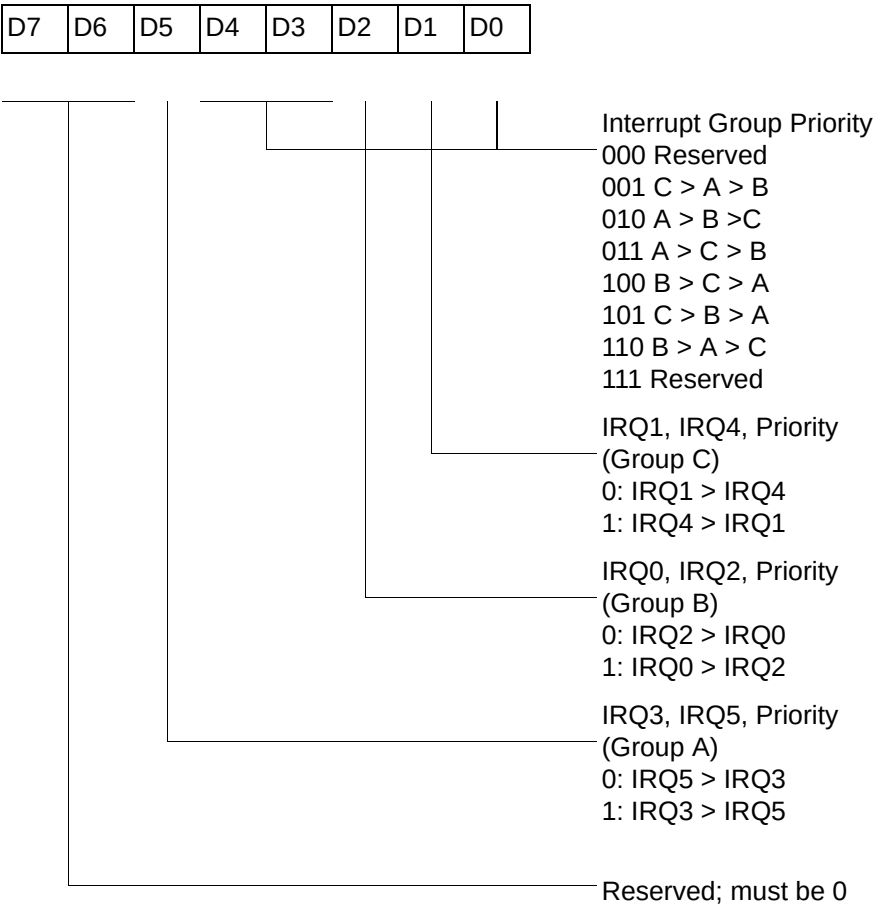


Figure 48. Interrupt Priority Register (F9H: Write Only)



R250 IRQ(FAH)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|


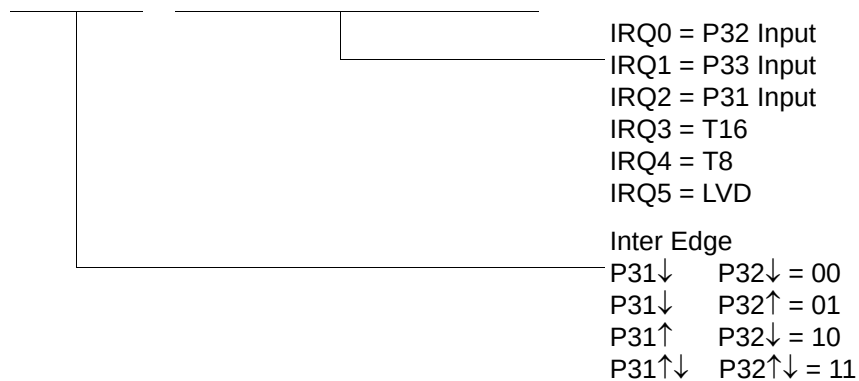


**Figure 49. Interrupt Request Register (FAH: Read/Write)**

R251 IMR(FBH)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

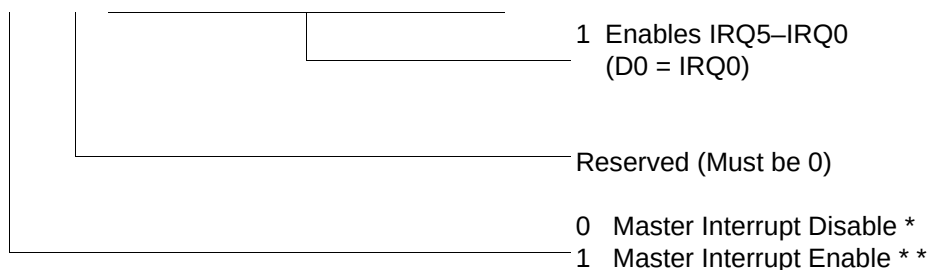

\*Default setting after reset.

\*\*Only by using EI, DI instruction; DI is required before changing the IMR register.

**Figure 50. Interrupt Mask Register (FBH: Read/Write)**



R252 Flags(FCH)


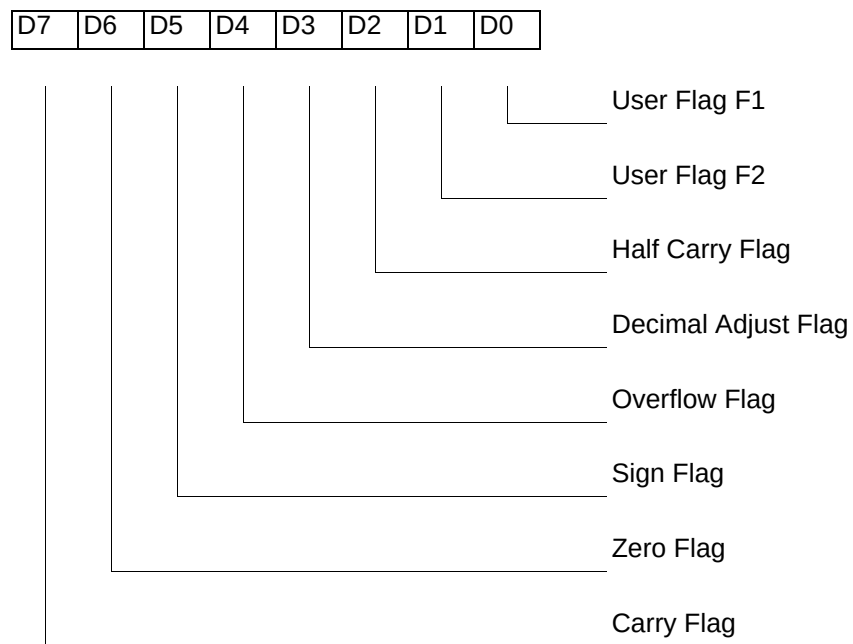


**Figure 51.Flag Register (FCH: Read/Write)**

R253 RP(FDH)

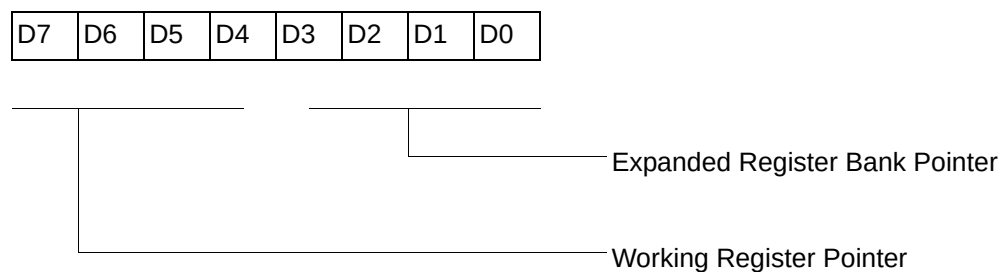

Default setting after reset = 0000 0000

**Figure 52.Register Pointer (FDH: Read/Write)**



R254 SPH(FEH)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

General-Purpose Register

**Figure 53.Stack Pointer High (FEH: Read/Write)**

R255 SPL(FFH)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Stack Pointer Low  
Byte (SP7–SP0)

**Figure 54.Stack Pointer Low (FFH: Read/Write)**



# Electrical Characteristics

## Absolute Maximum Ratings

Stresses greater than those listed in Table 17 might cause permanent damage to the device. This rating is a stress rating only. Functional operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for an extended period might affect device reliability.

**Table 17. Absolute Maximum Ratings**

| Parameter                                           | Minimum | Maximum | Units   | Notes |
|-----------------------------------------------------|---------|---------|---------|-------|
| Ambient temperature under bias                      | 0       | +70     | C       |       |
| Storage temperature                                 | −65     | +150    | C       |       |
| Voltage on any pin with respect to $V_{SS}$         | −0.3    | +4.0    | V       | 1     |
| Voltage on $V_{DD}$ pin with respect to $V_{SS}$    | −0.3    | +3.6    | V       |       |
| Maximum current on input and/or inactive output pin | −5      | +5      | $\mu$ A |       |
| Maximum output current from active output pin       | −25     | +25     | mA      |       |
| Maximum current into $V_{DD}$ or out of $V_{SS}$    |         | 75      | mA      |       |

<sup>1</sup>This voltage applies to all pins except the following:  $V_{DD}$  and  $\overline{\text{RESET}}$ .

## Standard Test Conditions

The characteristics listed in this product specification apply for standard test conditions as noted. All voltages are referenced to GND. Positive current flows into the referenced pin (see [Figure 55](#) on page 81).

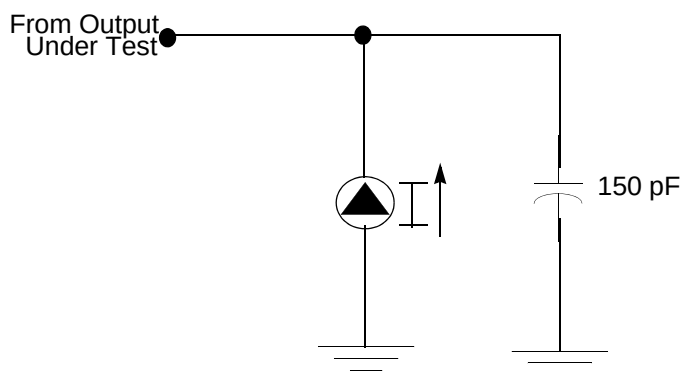


**Figure 55.**Test Load Diagram

## Capacitance

Table 18 lists the capacitances.

**Table 18.**Capacitance

| Parameter                                                                                                                                     | Maximum |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Input capacitance                                                                                                                             | 12 pF   |
| Output capacitance                                                                                                                            | 12 pF   |
| I/O capacitance                                                                                                                               | 12 pF   |
| <b>Note:</b> $T_A = 25\text{ }^{\circ}\text{C}$ , $V_{CC} = \text{GND} = 0\text{ V}$ , $f = 1.0\text{ MHz}$ , unmeasured pins returned to GND |         |



## DC Characteristics

Table 19.DC Characteristics

| $T_A = 0\text{ }^{\circ}\text{C to } +70\text{ }^{\circ}\text{C}$ |                                          |          |              |        |                 |               |                                                         |         |
|-------------------------------------------------------------------|------------------------------------------|----------|--------------|--------|-----------------|---------------|---------------------------------------------------------|---------|
| Symbol                                                            | Parameter                                | $V_{CC}$ | Minimum      | Typ(7) | Maximum         | Units         | Conditions                                              | Notes   |
| $V_{CC}$                                                          | Supply Voltage                           |          | 2.0          |        | 3.6             | V             | See <a href="#">notes 5</a>                             | 5       |
| $V_{CH}$                                                          | Clock Input High Voltage                 | 2.0-3.6  | $0.8V_{CC}$  |        | $V_{CC}+0.3$    | V             | Driven by External Clock Generator                      |         |
| $V_{CL}$                                                          | Clock Input Low Voltage                  | 2.0-3.6  | $V_{SS}-0.3$ |        | 0.5             | V             | Driven by External Clock Generator                      |         |
| $V_{IH}$                                                          | Input High Voltage                       | 2.0-3.6  | $0.7V_{CC}$  |        | $V_{CC}+0.3$    | V             |                                                         |         |
| $V_{IL}$                                                          | Input Low Voltage                        | 2.0-3.6  | $V_{SS}-0.3$ |        | $0.2 V_{CC}$    | V             |                                                         |         |
| $V_{OH1}$                                                         | Output High Voltage                      | 2.0-3.6  | $V_{CC}-0.4$ |        |                 | V             | $I_{OH} = -0.5\text{ mA}$                               |         |
| $V_{OH2}$                                                         | Output High Voltage (P36, P37, P00, P01) | 2.0-3.6  | $V_{CC}-0.8$ |        |                 | V             | $I_{OH} = -7\text{ mA}$                                 |         |
| $V_{OL1}$                                                         | Output Low Voltage                       | 2.0-3.6  |              |        | 0.4             | V             | $I_{OL} = 4.0\text{ mA}$                                |         |
| $V_{OL2}$                                                         | Output Low Voltage (P00, P01, P36, P37)  | 2.0-3.6  |              |        | 0.8             | V             | $I_{OL} = 10\text{ mA}$                                 |         |
| $V_{OFFSET}$                                                      | Comparator Input Offset Voltage          | 2.0-3.6  |              |        | 25              | mV            |                                                         |         |
| $V_{REF}$                                                         | Comparator Reference Voltage             | 2.0-3.6  | 0            |        | $V_{DD} - 1.75$ | V             |                                                         |         |
| $I_{IL}$                                                          | Input Leakage                            | 2.0-3.6  | -1           |        | 1               | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$ Pull-ups disabled      |         |
| $R_{PU}$                                                          | Pull-Up Resistance                       |          | 225          |        | 675             | K $\Omega$    | $V_{IN} = 0\text{ V}$ ; Pullups selected by mask option |         |
|                                                                   |                                          |          | 75           |        | 275             | K $\Omega$    |                                                         |         |
| $I_{OL}$                                                          | Output Leakage                           | 2.0-3.6  | -1           |        | 1               | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$                        |         |
| $I_{CC}$                                                          | Supply Current                           | 2.0      |              | 1.2    | 3               | mA            | at 8.0 MHz                                              | 1, 2    |
|                                                                   |                                          | 3.6      |              | 2.2    | 5               | mA            | at 8.0 MHz                                              | 1, 2    |
| $I_{CC1}$                                                         | Standby Current (HALT mode)              | 2.0      |              | 0.5    | 1.6             | mA            | $V_{IN} = 0\text{ V}$ , $V_{CC}$ at 8.0 MHz             | 1, 2, 6 |
|                                                                   |                                          | 3.6      |              | 0.8    | 2.0             | mA            | Same as above                                           | 1, 2, 6 |



**Table 19.DC Characteristics (Continued)**

| $T_A = 0\text{ }^{\circ}\text{C to } +70\text{ }^{\circ}\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                    |          |         |        |         |               |                                                                                      |       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------|---------|--------|---------|---------------|--------------------------------------------------------------------------------------|-------|
| Symbol                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Parameter                          | $V_{CC}$ | Minimum | Typ(7) | Maximum | Units         | Conditions                                                                           | Notes |
| $I_{CC2}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Standby Current<br>(STOP mode)     | 2.0      |         | 1.5    | 8       | $\mu\text{A}$ | $V_{IN} = 0\text{ V}$ , $V_{CC}$                                                     | 3     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                    | 3.6      |         | 2.1    | 10      | $\mu\text{A}$ | WDT is not                                                                           | 3     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                    | 2.0      |         | 4.7    | 20      | $\mu\text{A}$ | Running                                                                              | 3     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                    | 3.6      |         | 7.4    | 30      | $\mu\text{A}$ | Same as above<br>$V_{IN} = 0\text{ V}$ , $V_{CC}$<br>WDT is Running<br>Same as above | 3     |
| $I_{LV}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Standby Current<br>(Low Voltage)   |          |         | 1.0    | 6       | $\mu\text{A}$ | Measured at 1.3 V                                                                    | 4     |
| $V_{BO}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | $V_{CC}$ Low Voltage<br>Protection |          |         | 1.8    | 2.0     | V             | 8 MHz maximum<br>Ext. CLK Freq.                                                      |       |
| $V_{LVD}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $V_{CC}$ Low Voltage<br>Detection  |          |         | 2.4    |         | V             |                                                                                      |       |
| $V_{HVD}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | $V_{CC}$ High Voltage<br>Detection |          |         | 2.7    |         | V             |                                                                                      |       |
| Notes:<br>1. All outputs unloaded, inputs at rail.<br>2. $CL1 = CL2 = 100\text{ pF}$ .<br>3. Oscillator stopped.<br>4. Oscillator stops when $V_{CC}$ falls below $V_{BO}$ limit.<br>5. It is strongly recommended to add a filter capacitor (minimum $0.1\text{ }\mu\text{F}$ ), physically close to VDD and GND if operating voltage fluctuations are anticipated, such as those resulting from driving an Infrared LED.<br>6. Comparator and Timers are on. Interrupt disabled.<br>7. Typical values shown are at $25\text{ }^{\circ}\text{C}$ . |                                    |          |         |        |         |               |                                                                                      |       |

## AC Characteristics

Figure 56 on page 84 and Table 20 on page 85 describe the AC characteristics.

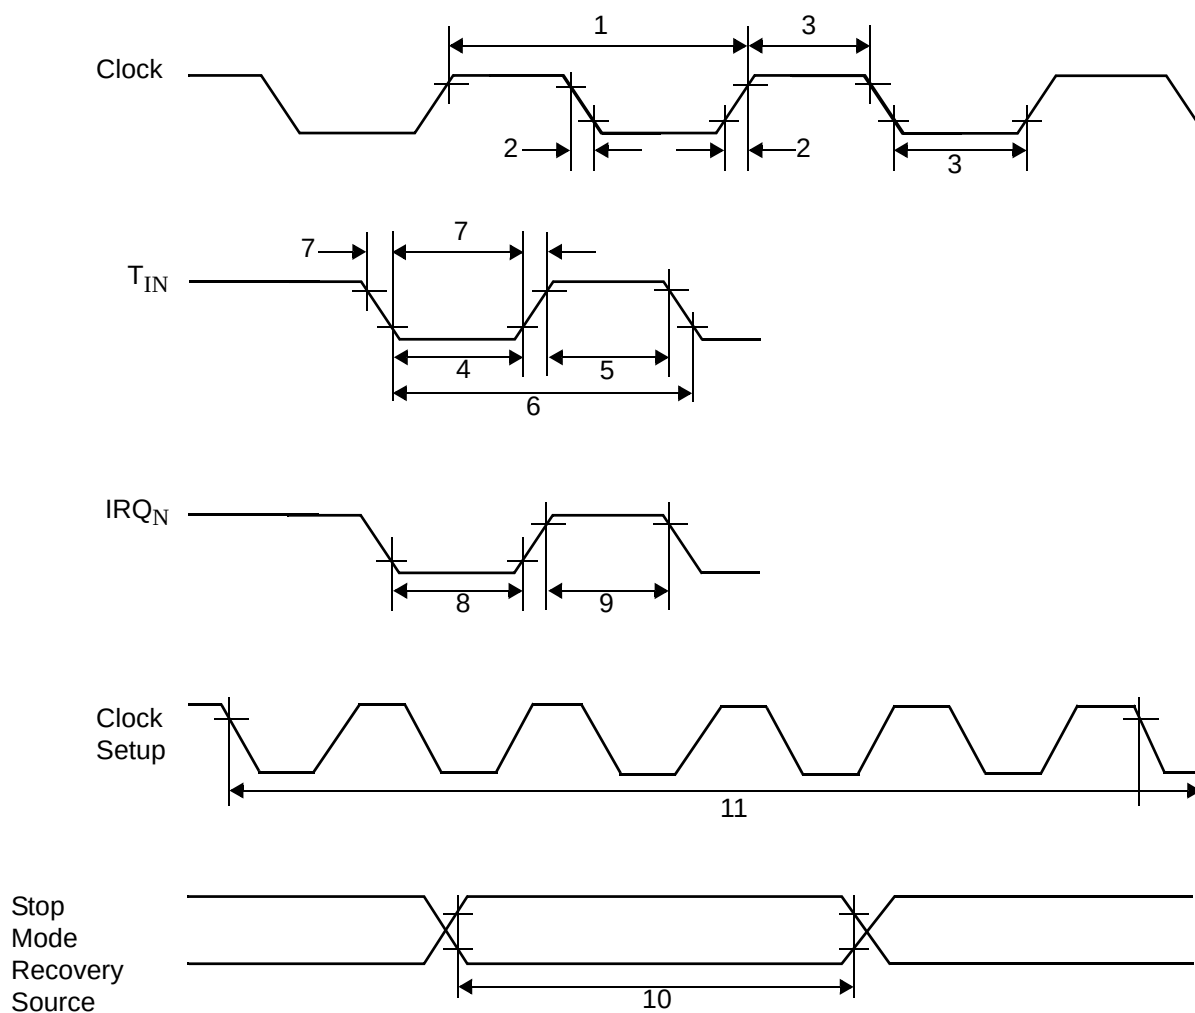


**Figure 56. AC Timing Diagram**



Table 20.AC Characteristics

| T <sub>A</sub> =0 °C to +70 °C<br>8.0 MHz                                                                                                                                                             |                  |                                      |                                          |                       |         |                      |        |                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------------------|------------------------------------------|-----------------------|---------|----------------------|--------|---------------------------------------------------|
| No                                                                                                                                                                                                    | Symbol           | Parameter                            | V <sub>CC</sub>                          | Minimum               | Maximum | Units                | Notes  | Watchdog<br>Timer<br>Mode<br>Register<br>(D1, D0) |
| 1                                                                                                                                                                                                     | TpC              | Input Clock Period                   | 2.0–3.6                                  | 121                   | DC      | ns                   | 1      |                                                   |
| 2                                                                                                                                                                                                     | TrC,TfC          | Clock Input Rise and<br>Fall Times   | 2.0–3.6                                  |                       | 25      | ns                   | 1      |                                                   |
| 3                                                                                                                                                                                                     | TwC              | Input Clock Width                    | 2.0–3.6                                  | 37                    |         | ns                   | 1      |                                                   |
| 4                                                                                                                                                                                                     | TwTinL           | Timer Input<br>Low Width             | 2.0<br>3.6                               | 100<br>70             |         | ns                   | 1      |                                                   |
| 5                                                                                                                                                                                                     | TwTinH           | Timer Input High<br>Width            | 2.0–3.6                                  | 3TpC                  |         |                      | 1      |                                                   |
| 6                                                                                                                                                                                                     | TpTin            | Timer Input Period                   | 2.0–3.6                                  | 8TpC                  |         |                      | 1      |                                                   |
| 7                                                                                                                                                                                                     | TrTin,TfTin      | Timer Input Rise and<br>Fall Timers  | 2.0–3.6                                  |                       | 100     | ns                   | 1      |                                                   |
| 8                                                                                                                                                                                                     | TwIL             | Interrupt Request<br>Low Time        | 2.0<br>3.6                               | 100<br>70             |         | ns                   | 1, 2   |                                                   |
| 9                                                                                                                                                                                                     | TwIH             | Interrupt Request<br>Input High Time | 2.0–3.6                                  | 10TpC                 |         |                      | 1, 2   |                                                   |
| 10                                                                                                                                                                                                    | Twsm             | Stop Mode Recovery<br>Width Spec     | 2.0–3.6                                  | 12<br>10TpC           |         | ns                   | 3<br>4 |                                                   |
| 11                                                                                                                                                                                                    | Tost             | Oscillator<br>Start-Up Time          | 2.0–3.6                                  |                       | 5TpC    |                      | 4      |                                                   |
| 12                                                                                                                                                                                                    | Twdt             | Watchdog Timer<br>Delay Time         | 2.0–3.6<br>2.0–3.6<br>2.0–3.6<br>2.0–3.6 | 10<br>20<br>40<br>160 |         | ms<br>ms<br>ms<br>ms |        | 0, 0<br>0, 1<br>1, 0<br>1, 1                      |
| 13                                                                                                                                                                                                    | T <sub>POR</sub> | Power-On Reset                       | 2.0–3.6                                  | 2.5                   | 10      | ms                   |        |                                                   |
| Notes:<br>1. Timing Reference uses 0.9 V <sub>CC</sub> for a logic 1 and 0.1 V <sub>CC</sub> for a logic 0.<br>2. Interrupt request through Port 3 (P33–P31).<br>3. SMR – D5 = 1.<br>4. SMR – D5 = 0. |                  |                                      |                                          |                       |         |                      |        |                                                   |



# Packaging

Package information for all versions of Crimzon ZLR32300 is displayed in Figure 57 through Figure 63 on page 91.

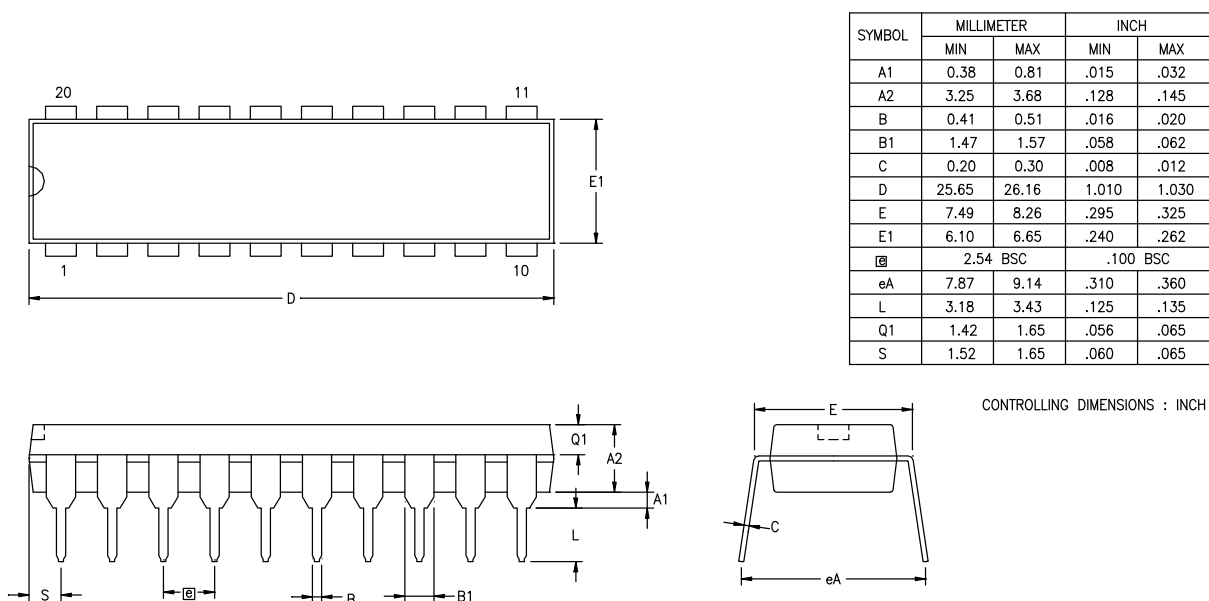


Figure 57.20-Pin PDIP Package Diagram

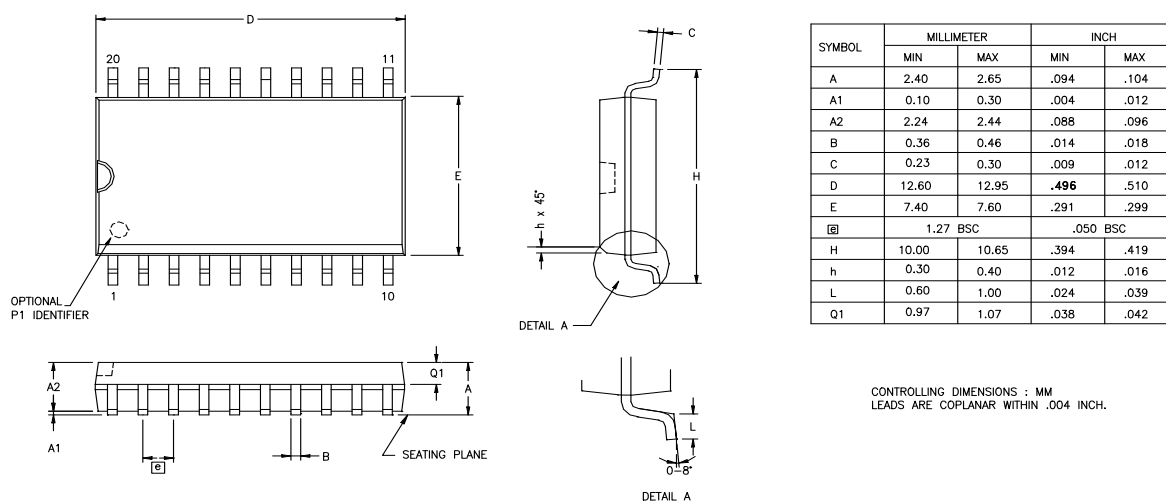


Figure 58.20-Pin SOIC Package Diagram


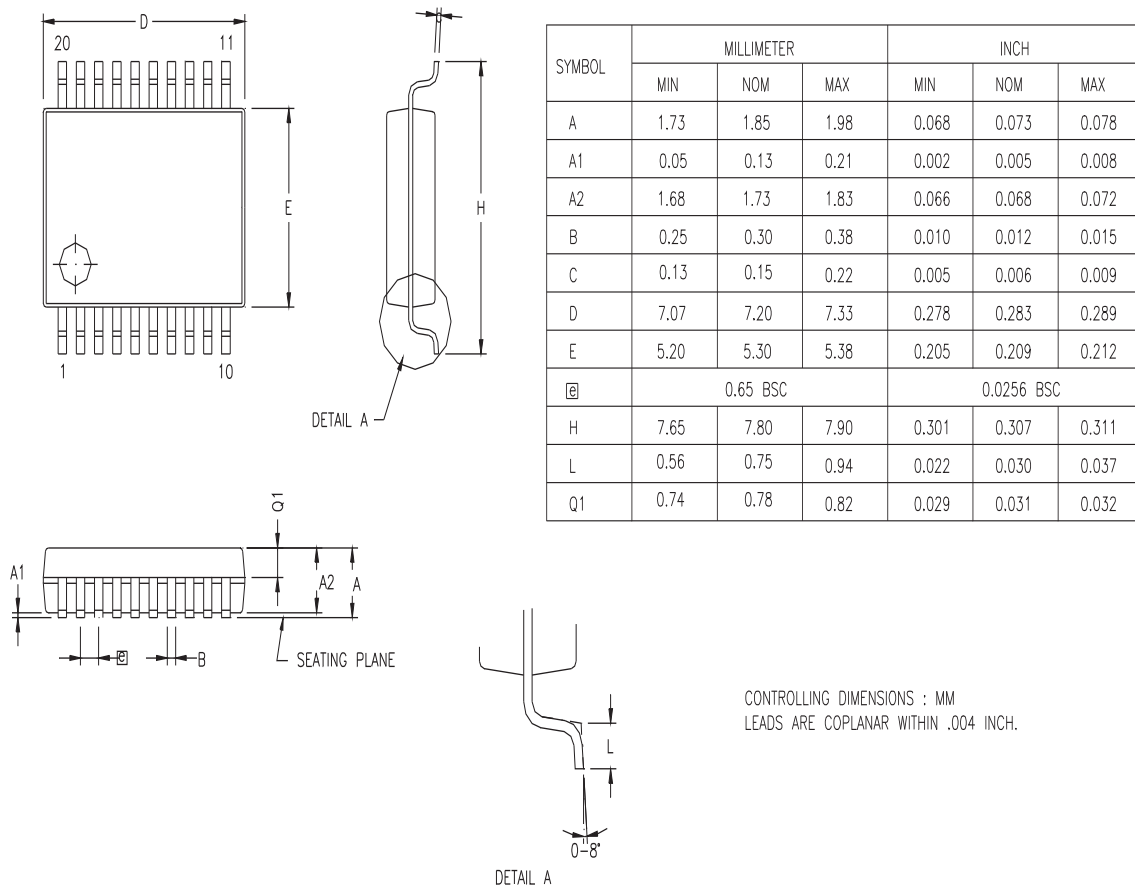



Figure 59. 20-Pin SSOP Package Diagram

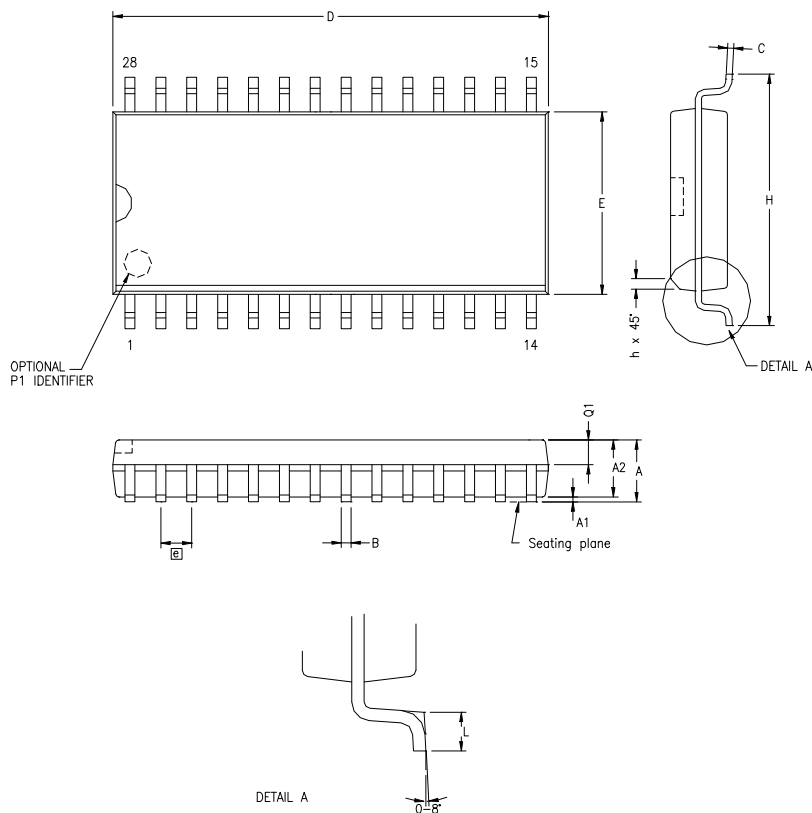

| SYMBOL | MILLIMETER |       | INCH     |      |
|--------|------------|-------|----------|------|
|        | MIN        | MAX   | MIN      | MAX  |
| A      | 2.40       | 2.64  | .094     | .104 |
| A1     | 0.10       | 0.30  | .004     | .012 |
| A2     | 2.24       | 2.44  | .088     | .096 |
| B      | 0.36       | 0.46  | .014     | .018 |
| C      | 0.23       | 0.30  | .009     | .012 |
| D      | 17.78      | 18.00 | .700     | .710 |
| E      | 7.40       | 7.60  | .291     | .299 |
| G      | 1.27 BSC   |       | .050 BSC |      |
| H      | 10.00      | 10.65 | .394     | .419 |
| h      | 0.30       | 0.71  | .012     | .028 |
| L      | 0.61       | 1.00  | .024     | .039 |
| Q1     | 0.97       | 1.09  | .038     | .043 |

CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH.

Figure 60. 28-Pin SOIC Package Diagram

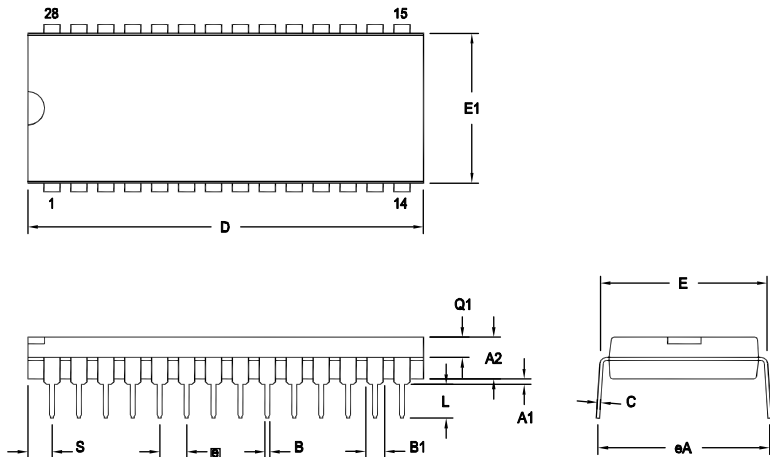

| OPTION TABLE |          |
|--------------|----------|
| OPTION #     | PACKAGE  |
| 01           | STANDARD |
| 02           | IDF      |

Note: ZILOG supplies both options for production. Component layout PCB design should cover bigger option 01.

| SYMBOL | OPT # | MILLIMETER |       | INCH     |       |
|--------|-------|------------|-------|----------|-------|
|        |       | MIN        | MAX   | MIN      | MAX   |
| A1     |       | 0.38       | 1.02  | .015     | .040  |
| A2     |       | 3.18       | 4.19  | .125     | .165  |
| B      |       | 0.38       | 0.53  | .015     | .021  |
| B1     | 01    | 1.40       | 1.65  | .055     | .065  |
|        | 02    | 1.14       | 1.40  | .045     | .055  |
| C      |       | 0.23       | 0.38  | .009     | .015  |
| D      | 01    | 36.58      | 37.34 | 1.440    | 1.470 |
|        | 02    | 35.31      | 35.94 | 1.390    | 1.415 |
| E      |       | 15.24      | 15.75 | .600     | .620  |
| E1     | 01    | 13.59      | 14.10 | .535     | .555  |
|        | 02    | 12.83      | 13.08 | .505     | .515  |
| e      |       | 2.54 TYP   |       | .100 BSC |       |
| eA     |       | 15.49      | 16.76 | .610     | .660  |
| L      |       | 3.05       | 3.81  | .120     | .150  |
| Q1     | 01    | 1.40       | 1.91  | .055     | .075  |
|        | 02    | 1.40       | 1.78  | .055     | .070  |
| S      | 01    | 1.52       | 2.29  | .060     | .090  |
|        | 02    | 1.02       | 1.52  | .040     | .060  |

CONTROLLING DIMENSIONS : INCH

Figure 61. 28-Pin PDIP Package Diagram


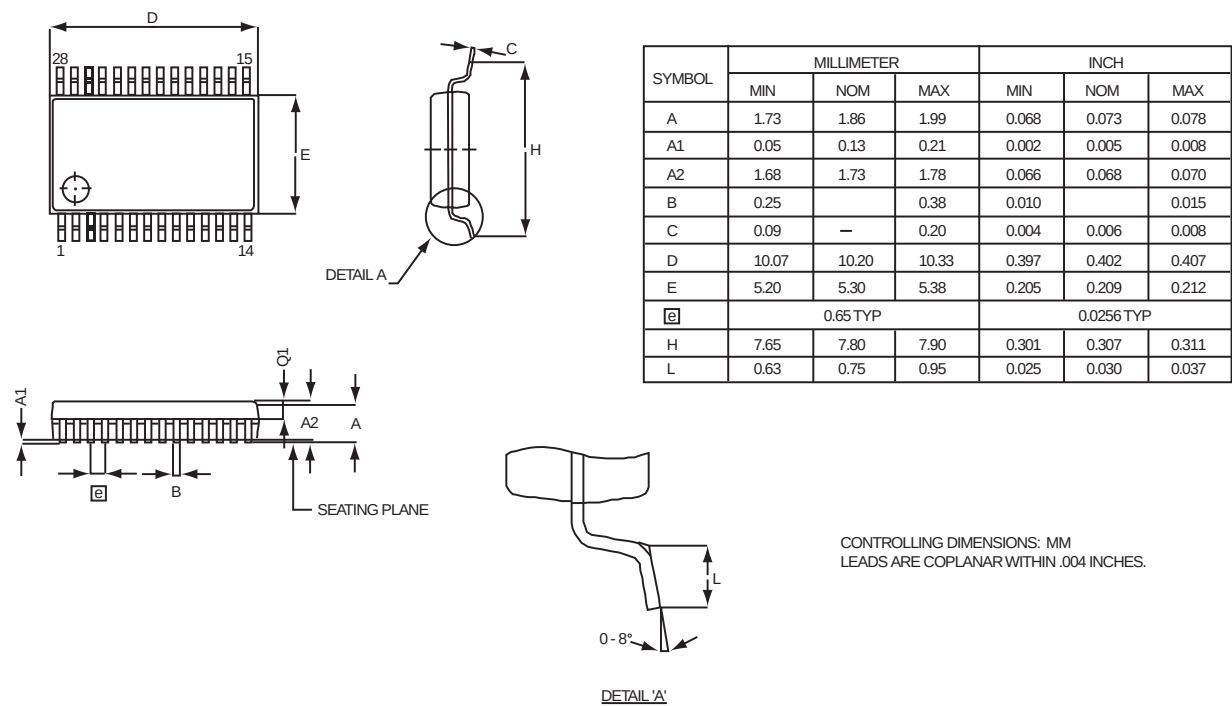


Figure 62. 28-Pin SSOP Package Diagram

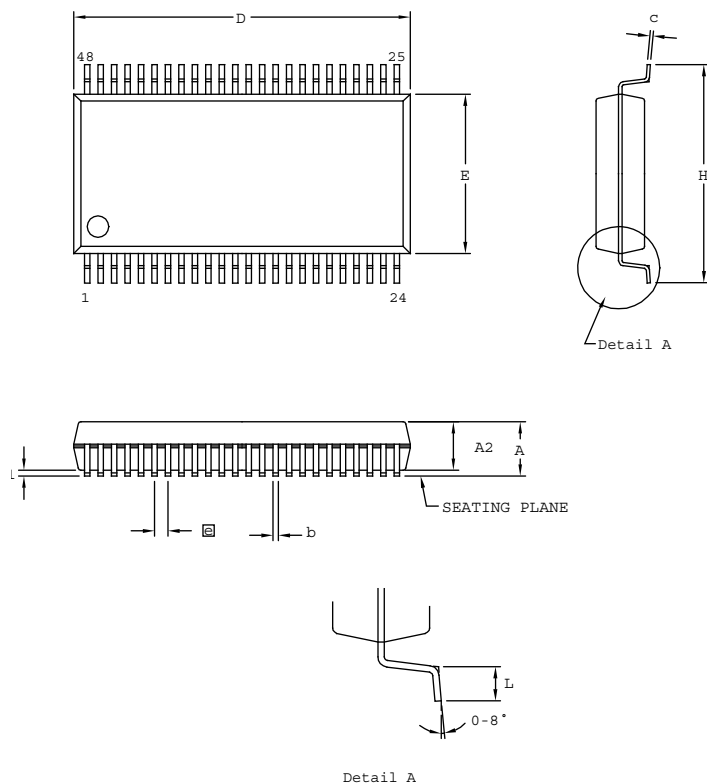

| SYMBOL | MILLIMETER |       | INCH      |        |
|--------|------------|-------|-----------|--------|
|        | MIN        | MAX   | MIN       | MAX    |
| A      | 2.41       | 2.79  | 0.095     | 0.110  |
| A1     | 0.23       | 0.38  | 0.009     | 0.015  |
| A2     | 2.18       | 2.39  | 0.086     | 0.094  |
| b      | 0.20       | 0.34  | 0.008     | 0.0135 |
| c      | 0.13       | 0.25  | 0.005     | 0.010  |
| D      | 15.75      | 16.00 | 0.620     | 0.630  |
| E      | 7.39       | 7.59  | 0.291     | 0.299  |
| Ⓢ      | 0.635 BSC  |       | 0.025 BSC |        |
| H      | 10.16      | 10.41 | 0.400     | 0.410  |
| L      | 0.51       | 1.016 | 0.020     | 0.040  |

CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH

Figure 63. 48-Pin SSOP Package Design

► **Note:** Contact Maxim® on the actual bonding diagram and coordinate for chip-on-board assembly.



## Ordering Information

The following table provides part number, description, and memory size of Crimzon ZLR32300.

| Memory Size                                                                       | Part Number           | Description          |
|-----------------------------------------------------------------------------------|-----------------------|----------------------|
| 32 K                                                                              | <b>ZLR32300H4832G</b> | 48-pin SSOP 32 K ROM |
|                                                                                   | <b>ZLR32300H2832G</b> | 28-pin SSOP 32 K ROM |
|                                                                                   | <b>ZLR32300P2832G</b> | 28-pin PDIP 32 K ROM |
|                                                                                   | <b>ZLR32300S2832G</b> | 28-pin SOIC 32 K ROM |
|                                                                                   | ZLR32300H2032G        | 20-pin SSOP 32 K ROM |
|                                                                                   | <b>ZLR32300P2032G</b> | 20-pin PDIP 32 K ROM |
|                                                                                   | <b>ZLR32300S2032G</b> | 20-pin SOIC 32 K ROM |
| 24 K                                                                              | <b>ZLR32300H4824G</b> | 48-pin SSOP 24 K ROM |
|                                                                                   | <b>ZLR32300H2824G</b> | 28-pin SSOP 24 K ROM |
|                                                                                   | <b>ZLR32300P2824G</b> | 28-pin PDIP 24 K ROM |
|                                                                                   | ZLR32300S2824G        | 28-pin SOIC 24 K ROM |
|                                                                                   | <b>ZLR32300H2024G</b> | 20-pin SSOP 24 K ROM |
|                                                                                   | ZLR32300P2024G        | 20-pin PDIP 24 K ROM |
|                                                                                   | ZLR32300S2024G        | 20-pin SOIC 24 K ROM |
| 16 K                                                                              | <b>ZLR32300H4816G</b> | 48-pin SSOP 16 K ROM |
| 8 K                                                                               | <b>ZLR32300H4808G</b> | 48-pin SSOP 8 K ROM  |
| 4 K                                                                               | ZLR32300H4804G        | 48-pin SSOP 4 K ROM  |
| <b>Development Tools</b>                                                          |                       |                      |
| ZLP128ICE01ZEMG* In-Circuit Emulator                                              |                       |                      |
| Note: *ZLP128ICE01ZEMG has been replaced by an improved version, ZCRMZNICE01ZEMG. |                       |                      |
| ZLP323ICE01ZACG 40-PDIP/48-SSOP Accessory Kit                                     |                       |                      |
| ZCRMZNICE01ZEMG Crimzon In-Circuit Emulator                                       |                       |                      |
| ZCRMZN00100KITG Crimzon In-Circuit Emulator Development Kit                       |                       |                      |
| ZCRMZNICE01ZACG 20-Pin Accessory Kit                                              |                       |                      |
| ZCRMZNICE02ZACG 40/48-Pin Accessory Kit                                           |                       |                      |



| Memory Size | Part Number | Description |
|-------------|-------------|-------------|
|-------------|-------------|-------------|

**Note:** Contact [www.maxim-ic.com](http://www.maxim-ic.com) for the die form.

For fast results, contact your local Maxim sales office for assistance in ordering the part desired.

## Part Number Description

Maxim part numbers consist of a number of components, as displayed in [Figure 64](#). The example part number ZLR32300H2832G is a Crimzon masked ROM product in a 28-pin SSOP package, with 32 KB of ROM and built with lead-free solder.

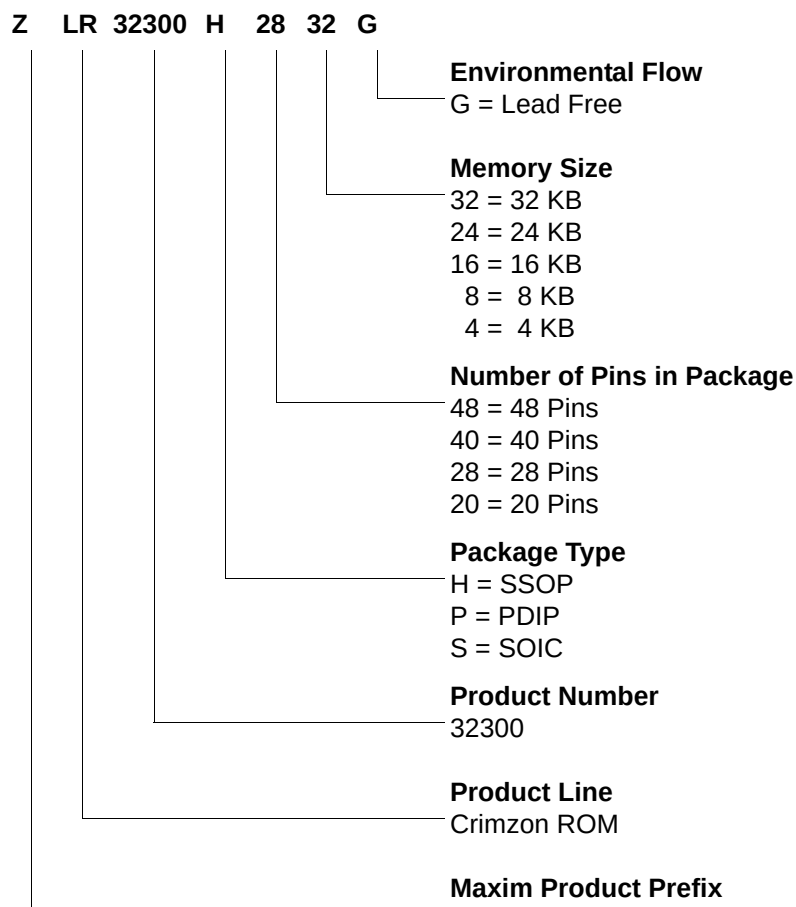


**Figure 64. Part Number Description Example**



# Index

## Numerics

- 16-bit counter/timer circuits 41
- 20-pin DIP package diagram 86
- 20-pin SSOP package diagram 87
- 28-pin DIP package diagram 89
- 28-pin SOIC package diagram 88
- 28-pin SSOP package diagram 90
- 48-pin SSOP package diagram 91
- 8-bit counter/timer circuits 37

## A

- absolute maximum ratings 80
- AC
  - characteristics 84
  - timing diagram 84
- address spaces, basic 1
- architecture 1
  - expanded register file 23

## B

- basic address spaces 1
- block diagram, ZLP32300 functional 4

## C

- capacitance 81
- characteristics
  - AC 84
  - DC 82
- clock 48
- comparator inputs/outputs 19
- configuration
  - port 0 13
  - port 1 14
  - port 2 15
  - port 3 16
  - port 3 counter/timer 18

## counter/timer

- 16-bit circuits 41
- 8-bit circuits 37
- brown-out voltage/standby 60
- clock 48
- demodulation mode count capture flowchart 39
- demodulation mode flowchart 40
- EPROM selectable options 60
- glitch filter circuitry 35
- halt instruction 49
- input circuit 35
- interrupt block diagram 46
- interrupt types, sources and vectors 47
- oscillator configuration 48
- output circuit 44
- ping-pong mode 43
- port configuration register 50
- resets and WDT 59
- SCLK circuit 52
- stop instruction 49
- stop mode recovery register 52
- stop mode recovery register 2 56
- stop mode recovery source 54
- T16 demodulation mode 42
- T16 transmit mode 41
- T16\_OUT in modulo-N mode 42
- T16\_OUT in single-pass mode 42
- T8 demodulation mode 39
- T8 transmit mode 35
- T8\_OUT in modulo-N mode 38
- T8\_OUT in single-pass mode 38
- transmit mode flowchart 36
- voltage detection and flags 61
- watchdog timer mode register 57
- watchdog timer time select 58

CTR(D)01h T8 and T16 Common Functions 30

Customer Feedback Form 98

## D

- DC characteristics 82
- demodulation mode
  - count capture flowchart 39
  - flowchart 40



T16 42  
T8 39  
description  
pin 6

## E

### EPROM

- selectable options 60
- expanded register file 21
- expanded register file architecture 23
- expanded register file control registers 68
  - flag 78
  - interrupt mask register 77
  - interrupt priority register 76
  - interrupt request register 77
  - port 0 and 1 mode register 75
  - port 2 configuration register 73
  - port 3 mode register 74
  - port configuration register 73
  - register pointer 78
  - stack pointer high register 79
  - stack pointer low register 79
  - stop-mode recovery register 70
  - stop-mode recovery register 2 71
  - T16 control register 66
  - T8 and T16 common control functions register 65
  - T8/T16 control register 67
  - TC8 control register 62
  - watch-dog timer register 72

## F

### features

- standby modes 2

### functional description

- counter/timer functional blocks 35
  - CTR(D)01h register 30
  - CTR0(D)00h register 28
  - CTR2(D)02h register 32
  - CTR3(D)03h register 34
- expanded register file 21
- expanded register file architecture 23

- HI16(D)09h register 27
- HI8(D)0Bh register 26
- L08(D)0Ah register 27
- LOI6(D)08h register 27
- program memory map 21
- RAM 20
- register description 60
- register file 25
- register pointer 24
- register pointer detail 26
- SMR2(F)0D1h register 35
- stack 26
- TC16H(D)07h register 27
- TC16L(D)06h register 27
- TC8H(D)05h register 28
- TC8L(D)04h register 28

## G

- glitch filter circuitry 35

## H

- halt instruction, counter/timer 49

## I

- input circuit 35
- interrupt block diagram, counter/timer 46
- interrupt types, sources and vectors 47

## L

- low-voltage detection register 60

## M

- memory, program 20
- modulo-N mode
  - T16\_OUT 42
  - T8\_OUT 38



## O

oscillator configuration 48  
output circuit, counter/timer 44

## P

package information  
    20-pin DIP package diagram 86  
    20-pin SSOP package diagram 87  
    28-pin DIP package diagram 89  
    28-pin SOIC package diagram 88  
    28-pin SSOP package diagram 90  
    48-pin SSOP package diagram 91  
pin configuration  
    20-pin DIP/SOIC/SSOP 6  
    28-pin DIP/SOIC/SSOP 7  
    40- and 48-pin 8  
    48-pin SSOP 8  
pin functions  
    port 0 (P07 - P00) 12  
    port 0 (P17 - P10) 13  
    port 0 configuration 13  
    port 1 configuration 14  
    port 2 (P27 - P20) 14  
    port 2 (P37 - P30) 15  
    port 2 configuration 15  
    port 3 configuration 16  
    port 3 counter/timer configuration 18  
    reset) 19  
    XTAL1 (time-based input 11  
    XTAL2 (time-based output) 11  
ping-pong mode 43  
port 0 configuration 13  
port 0 pin function 12  
port 1 configuration 14  
port 1 pin function 13  
port 2 configuration 15  
port 2 pin function 14  
port 3 configuration 16  
port 3 pin function 15  
port 3 counter/timer configuration 18  
port configuration register 50  
power connections 2  
power supply 6

program memory 20  
    map 21

## R

ratings, absolute maximum 80  
register 56  
    CTR(D)01h 30  
    CTR0(D)00h 28  
    CTR2(D)02h 32  
    CTR3(D)03h 34  
    flag 78  
    HI16(D)09h 27  
    HI8(D)0Bh 26  
    interrupt priority 76  
    interrupt request 77  
    interruptmask 77  
    L016(D)08h 27  
    L08(D)0Ah 27  
    LVD(D)0Ch 60  
    pointer 78  
    port 0 and 1 75  
    port 2 configuration 73  
    port 3 mode 74  
    port configuration 50, 73  
    SMR2(F)0Dh 35  
    stack pointer high 79  
    stack pointer low 79  
    stop mode recovery 52  
    stop mode recovery 2 56  
    stop-mode recovery 70  
    stop-mode recovery 2 71  
    T16 control 66  
    T8 and T16 common control functions 65  
    T8/T16 control 67  
    TC16H(D)07h 27  
    TC16L(D)06h 27  
    TC8 control 62  
    TC8H(D)05h 28  
    TC8L(D)04h 28  
    voltage detection 68  
    watch-dog timer 72  
register description  
    Counter/Timer2 LS-Byte Hold 27



- Counter/Timer2 MS-Byte Hold 27
- Counter/Timer8 Control 28
- Counter/Timer8 High Hold 28
- Counter/Timer8 Low Hold 28
- CTR2 Counter/Timer 16 Control 32
- CTR3 T8/T16 Control 34
- Stop Mode Recovery2 35
- T16\_Capture\_LO 27
- T8 and T16 Common functions 30
- T8\_Capture\_HI 26
- T8\_Capture\_LO 27
- register file 25
  - expanded 21
- register pointer 24
  - detail 26
- reset pin function 19
- resets and WDT 59

## S

- SCLK circuit 52
- single-pass mode
  - T16\_OUT 42
  - T8\_OUT 38
- stack 26
- standard test conditions 81
- standby modes 2
- stop instruction, counter/timer 49
- stop mode recovery
  - 2 register 56
  - source 54
- stop mode recovery 2 56
- stop mode recovery register 52

## T

- T16 transmit mode 41
- T16\_Capture\_HI 27
- T8 transmit mode 35
- T8\_Capture\_HI 26
- test conditions, standard 81
- test load diagram 81
- timing diagram, AC 84
- transmit mode flowchart 36

## V

- VCC 6
- voltage
  - brown-out/standby 60
  - detection and flags 61
- voltage detection register 68

## W

- watchdog timer
  - mode register watchdog timer mode register 57
  - time select 58

## X

- XTAL1 6
- XTAL1 pin function 11
- XTAL2 6
- XTAL2 pin function 11



# Customer Support

For any comments, detail technical questions, or reporting problems, please visit Maxim's Technical Support at <https://support.maxim-ic.com/micro>.