

## Description

Electronic circuit breaker type ESS20-0.. is designed to ensure **selective** disconnection of individual loads in systems which are powered by a DC 24 V switch-mode power supply.

DC 24 V power supplies, which are widely used in industry today, will shut down the output in the event of an overload with the result that one faulty load in the system can lead to complete disconnection of all loads. As well as an unidentified failure this also means stoppage of the whole system.

Through **selective** disconnection the ESS20-0.. responds much faster to overload or short circuit conditions than the switch-mode power supply. This is achieved by a combination of active current limitation and well-proven circuit breaker technology including physical isolation. The ESS20-0.. limits the highest possible current to 1.8 or 1.5 times the selected rated current of the circuit breaker. Thus it is possible to switch on capacitive loads of up to 75,000  $\mu$ F lamp loads, but they are disconnected only in the event of an overload or short circuit.

For optimal adjustment to the application conditions the current rating of the ESS20-0.. can be selected in fixed values from 0.5 A...10 A and in adjustable variants 1 A/2 A or 3 A/6 A. Failure and status indication are provided by a bicolour LED and an integral signal contact.

The ESS20-0.. features a width of only 12.5 mm and can be plugged into the E-T-A power distribution socket Module 17plus and SVSxx (for ESS20-003) ensuring ease of installation and saving space in control cabinets.

## Features

- Selective load protection with physical isolation in the event of a fault.
- All types of loads can be connected (small DC motors etc. on request).
- Active current limitation (1.8 or 1.5 times rated current  $I_N = 8$  A or 10 A) for safe connection of capacitive loads up to 75,000  $\mu$ F and on overload/short circuit.
- Electronic trip characteristic.
- Reliable overload disconnection with  $1.1 \times I_N$  plus, even with long load lines or small cable cross sections (see table 2).
- Selectable current ratings (fixed values 0.5 A...10 A or two steps: 1 A/2 A or 3 A/6 A).
- Manual ON/OFF button (push-push actuation).
- Clear status and failure indication.
- Width per unit only 12.5 mm.
- Plug-in mounting utilising power distribution system Module 17plus or SVSxx (for ESS20-003), see product group 7.

## Approvals

Authority	Norm	Voltage ratings	Current ratings
UL	UL 1077	DC 24 V	0.5...10 A
VDE	IEC/EN 60934	DC 24 V	0.5...10 A (fixed current ratings)

## Notes

- The user should ensure that the cable cross sections of the relevant load circuit are suitable for the current rating of the ESS20 used.
- Automatic start-up of machinery after shut down must be prevented (Machinery Directive 98/37/EG and EN 60204-1). In the event of a short circuit or overload the load circuit will be disconnected electronically by the ESS20.



ESS20-0..

## Technical data ( $T_{\text{ambient}} = 25$ °C, operating voltage $U_S = \text{DC } 24 \text{ V}$ )

### Operating data

Operating voltage $U_S$	DC 24 V (18...32 V)
Current rating $I_N$	fixed current ratings: 0.5 A, 1 A, 2 A, 3 A, 4 A, 6 A, 8 A, 10 A switchable: 1 A/2 A or 3 A/6 A
Power consumption	typically 13 mA
Trip current (bimetal)	typically 0.3 A (only in the event of a failure, before physical isolation)
Status indication by means of	<b>bicolour LED:</b> GREEN: unit is ON, power-MOSFET is switched on ORANGE: in the event of overload or short circuit until physical isolation LED not lighted: push button in OFF position <b>potential-free signal contact</b> (change-over contact) <b>OFF-position of push button</b>

### Reverse polarity protection of $U_S$

internal bimetal (fail-safe element) trips, push button moves into OFF position

### Load circuit

Load output	Power-MOSFET switching output (high side switch)
Max. data of load with side-by-side mounting	see table 1
Voltage drop at $I_N$	see table 1
Overload disconnection	typically $1.1 \times I_N$ (0.05...1.35 $\times I_N$ )
Short-circuit current $I_k$	typically $1.8 \times I_N$ / active current limitation
Trip time for physical isolation	see time/current characteristics typically 5 sec at $I_{\text{load}} > 1.1 \times I_N$
for electronic disconnection	typically 5 sec...100 ms at $I_{\text{load}} > 1.8 \times I_N$ or $1.5 \times I_N$

Temperature disconnection internal temperature monitoring with physical isolation

### Low voltage monitoring

load output  
OFF at  $U_S < 7$  V  
ON at  $U_S > 16$  V

Starting delay  $t_{\text{start}}$  typically 0.3 sec after every switch-on and after applying  $U_S$

### Disconnection of load circuit

single pole (switch contact)

- by push-push actuation of the blue push button
- upon electronic fault disconnection (overload, short circuit)
- with reverse polarity

Free-wheeling circuit external free-wheeling diode recommended with inductive load

Several load outputs must not be connected in parallel.

## Technical data ( $T_{\text{ambient}} = 25^{\circ}\text{C}$ , operating voltage $U_S = \text{DC } 24\text{ V}$ )

### Fault indication, signal output

Fault indications potential-free auxiliary contact change-over (SC-SO / SC-SI) simultaneously with physical isolation  
max. DC 30 V / 0.5 A, min. 10 V / 10 mA

Signal output ESS20-001 (single signalisation N/O)  
blue push button in ON position:  
signal contact SC-SI is closed  
blue push button in OFF position:  
signal contact SC-SI is open

Signal output ESS20-003 (group signalisation N/C)  
blue push button in ON position:  
signal contact SC-SO is closed  
(SC-SI is open)  
blue push button in OFF position:  
signal contact SC-SO is open  
(SC-SI is closed)

Visual indication LED lighted in ORANGE  
(until physical isolation)

### General data

Backup fuse for ESS20-0.. not required because of the integral redundant fail-safe element (thermal E-T-A circuit breaker)  
push button in OFF position when fail-safe element has tripped.

Blade terminals 6.3 mm to EN 60934-6.3-0.8

Housing material plastics material

Mounting of housing plug-in mounting utilising power distribution system Module 17plus or SVSxx

Ambient temperature 0...+50 °C (without condensation, see EN 60204-1)

Storage temperature -20...+70 °C

Humidity 96 hrs/95 % RH/40 °C to IEC 60068-2-78, test Cab. climate class 3K3 to EN 60721

Vibration 3 g, test to IEC 60068-2-6 test Fc

Degree of protection housing: IP30 DIN 40050 terminals: IP00 DIN 40050

EMC (EMC directive, CE logo) emission: EN 61000-6-3 susceptibility: EN 61000-6-2

Insulation co-ordination (IEC 60934) 0.5 kV/2 pollution degree 2 re-inforced insulation in operating area

Dielectric strength (see dimensions)  
operating area test voltage AC 1000 V  
installation area test voltage AC 500 V  
load circuit-signal contact test voltage AC 500 V

Insulation resistance (OFF condition) > 100 MΩ (DC 500 V)  
[LINE (+) – LOAD (+)]

Approvals CE logo  
UL 1077, File E67320  
Supplementary Protectors for use in Electrical Equipment IEC/EN 60934 (fixed current ratings)

Dimensions (W x H x D) 12.5 x 105 x 60 mm

Mass approx. 65 g

Table 1: voltage drop, current limitation, max. load current

current rating $I_N$	typically voltage drop $U_{\text{ON}}$ at $I_N$	active current limitation (typically)	max. load current at 100 % ON duty	
			$T_U = 40^{\circ}\text{C}$	$T_U = 50^{\circ}\text{C}$
0.5 A	100 mV	1.8 x $I_N$	0.5 A	0.5 A
1 A	140 mV	1.8 x $I_N$	1 A	1 A
2 A	180 mV	1.8 x $I_N$	2 A	2 A
3 A	140 mV	1.8 x $I_N$	3 A	3 A
4 A	190 mV	1.8 x $I_N$	4 A	4 A
6 A	280 mV	1.8 x $I_N$	6 A	5 A
8 A	220 mV	1.5 x $I_N$	8 A	7 A
10 A	280 mV	1.5 x $I_N$	10 A	9 A
1 A/2 A	140 mV/280 mV	1.8 x $I_N$	1 A/2 A	1 A/2 A
3 A/6 A	140 mV/280 mV	1.8 x $I_N$	3 A/6 A	3 A/5 A

Attention: when mounted side-by-side without convection the ESS20-0.. should not carry more than 80 % of its rated load with 100 % ON duty because of the integral thermal circuit breaker.

## Ordering information

### Type No.

ESS20 Electronic Circuit Breaker with current limitation (e.g. typically 1.8 times rated current or  $1.5 \times I_N$ , see table 1)

### Version

0 with physical isolation in the event of a failure

### Control input

0 without control input

### Signal output

1 signal contact N/O (single signalisation)  
2 signal contact N/C (single signalisation)  
3 signal contact changeover (group signalisation)

### Operating voltage

DC 24 V rated voltage DC 24 V

### Current rating

0.5 A

1 A

2 A

3 A

4 A

6 A

8 A

10 A

1 A/2 A (selectable)


3 A/6 A (selectable)

ESS20 - 0 0 3 - DC 24 V - 3 A/6 A ordering example (recommended type)

## Preferred types

Preferred types	Standard current ratings (A)									
	0.5	1	2	3	4	6	8	10	1/2/3/6	
ESS20-003-DC24V	x	x	x	x	x	x	x	x	x	
ESS20-001-DC24V	x	x	x	x	x	x	x	x	x	


## Dimensions

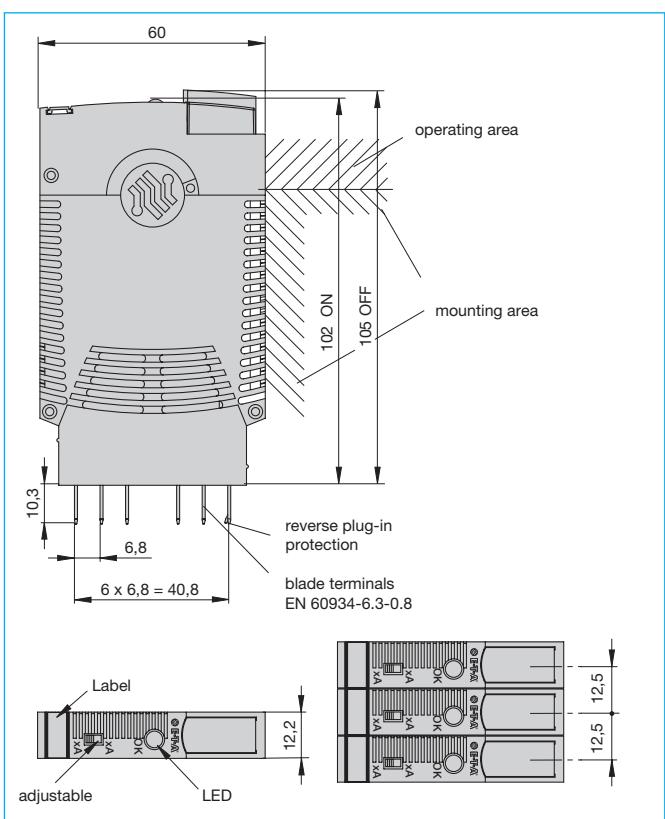


This is a metric design and millimeter dimensions take precedence (  $\frac{\text{mm}}{\text{inch}}$  )

Terminal wiring diagrams (e. g. adjustable 3 A/6 A)


ESS20-001-...

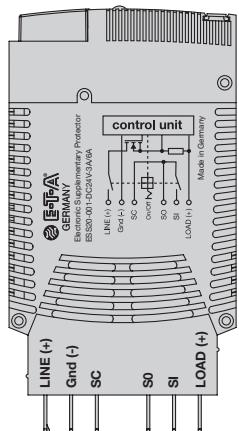

ESS20-002-...

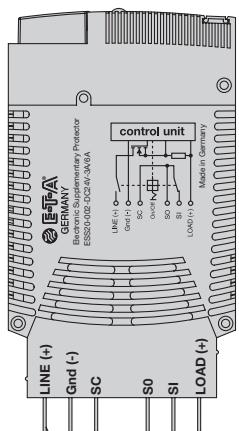


ESS20-003- ...

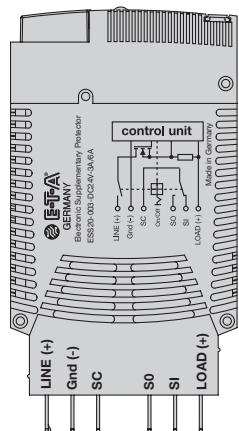


Basic circuit diagrams (e. g. adjustable 3 A/6 A)


ESS20-001-... (single signalisation N/O)

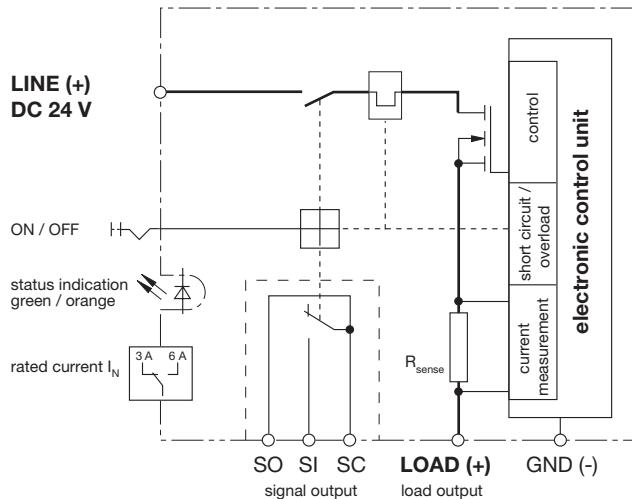


ESS20-002-... (single signalisation N/C)

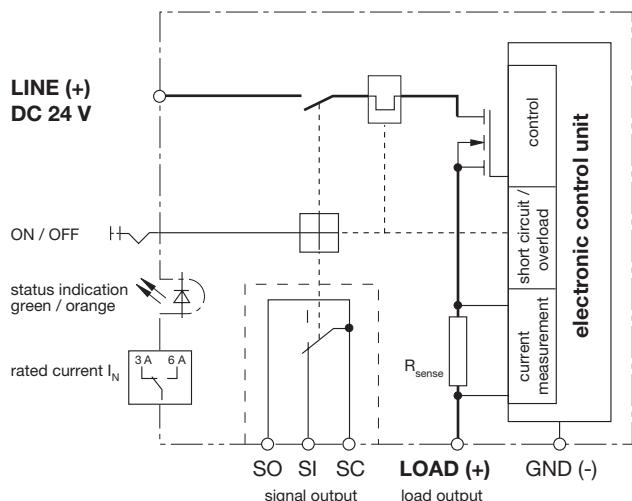

ESS20-003- ... (group signalisation with change over)

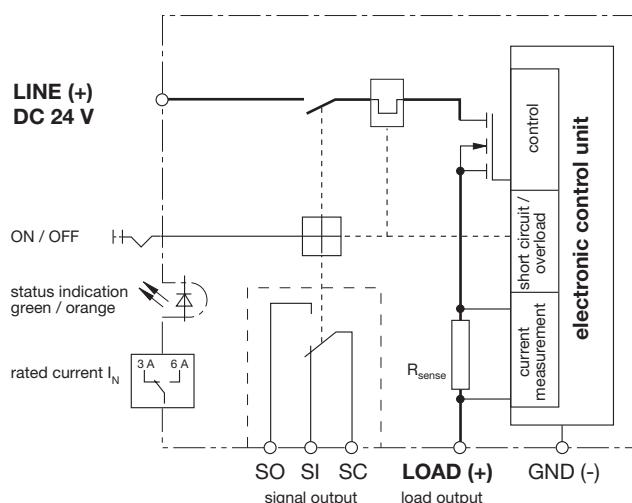

## Time/Current characteristic curve ( $T_A = 25^\circ\text{C}$ )

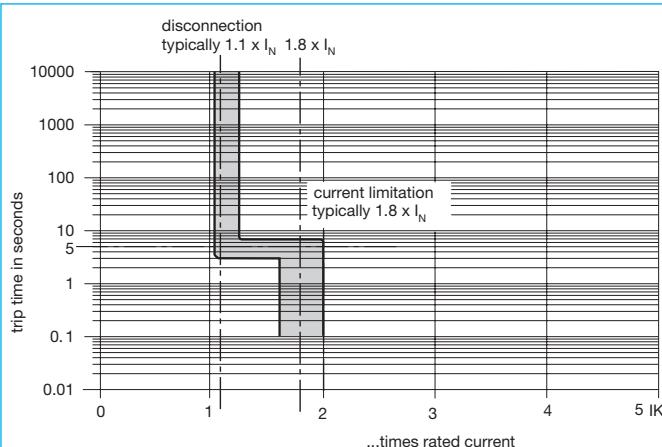

\*1) current limitation typically  $1.8 \times I_N$  times rated current at  $I_N = 0.5 \text{ A} \dots 6 \text{ A}$   
 current limitation typically  $1.5 \times I_N$  times rated current at  $I_N = 8 \text{ A} \dots 10 \text{ A}$

- The trip time is typically 5 s in the range between  $1.1$  and  $1.8 \times I_N^{*1}$ .
- Electronic current limitation starts at typically  $1.8 \times I_N^{*1}$  which means that under all overload conditions (independent of the power supply and the resistance of the load circuit) the max. overload until disconnection will not exceed  $1.8 \times I_N^{*1}$  times the current rating. Trip time is between 100 ms (short circuit current  $I_K$ ) and 5 sec (at overload with high line attenuation).
- Without the current limitation activated at typically  $1.8 \times I_N^{*1}$  a considerably higher overload current would flow in the event of an overload or short circuit.
- After detection of an overload or short circuit the LED changes colour from GREEN to ORANGE. The LED will no longer be lighted after the circuit breaker has tripped.
- Resetting the circuit breaker is not possible before the integral bimetal has cooled down (approx. 10 sec).

Table 2: Reliable trip of ESS20

Reliable trip of ESS20 with different cable lengths and cross sections												
Resistivity of copper $\rho = 0.0178 \text{ (Ohm} \times \text{mm}^2\text{) / m}$												
$U_S = \text{DC } 19.2 \text{ V} (= 80\% \text{ v. } 24 \text{ V})$	voltage drop of ESS20 and tolerance of trip point (typically $1.1 \times I_N = 1.05 \dots 1.35 \times I_N$ ) have been taken into account.											
ESS20-selected rating $I_N$ (in A) → e. g. trip current $I_{ab} = 1.25 \times I_N$ (in A) → $R_{\max}$ in Ohm = $(U_S / I_{ab}) - 0.050$ →	3	6	→ ESS20 trips after 3...5 s									
3.75      7.5      5.07      2.51												
The ESS20 reliably trips from 0 Ohm to max. circuitry resistance $R_{\max}$												
Cable cross section $A$ in $\text{mm}^2$ →	0.14	0.25	0.34	0.5	0.75	1	1.5					
cable length $L$ in meter (= single length)	cable resistance in Ohm = $(R_0 \times 2 \times L) / A$											
5	1.27	0.71	0.52	0.36	0.24	0.18	0.12					
10	2.54	1.42	1.05	0.71	0.47	0.36	0.24					
15	3.81	2.14	1.57	1.07	0.71	0.53	0.36					
20	5.09	2.85	2.09	1.42	0.95	0.71	0.47					
25	6.36	3.56	2.62	1.78	1.19	0.89	0.59					
30	7.63	4.27	3.14	2.14	1.42	1.07	0.71					
35	8.90	4.98	3.66	2.49	1.66	1.25	0.83					
40	10.17	5.70	4.19	2.85	1.90	1.42	0.95					
45	11.44	6.41	4.71	3.20	2.14	1.60	1.07					
50	12.71	7.12	5.24	3.56	2.37	1.78	1.19					
75	19.07	10.68	7.85	5.34	3.56	2.67	1.78					
100	25.34	14.24	10.47	7.12	4.75	3.56	2.37					
125	31.79	17.80	13.09	8.90	5.93	4.45	2.97					
150	38.14	21.36	15.71	10.68	7.12	5.34	3.56					
175	44.50	24.92	18.32	12.46	8.31	6.23	4.15					
200	50.86	28.48	20.94	14.24	9.49	7.12	4.75					
225	57.21	32.04	23.56	16.02	10.68	8.01	5.34					
250	63.57	35.60	26.18	17.80	11.87	8.90	5.93					
Example 1:	max. length at $1.5 \text{ mm}^2$ and $3 \text{ A} \rightarrow 214 \text{ m}$											
Example 2:	max. length at $1.5 \text{ mm}^2$ and $6 \text{ A} \rightarrow 106 \text{ m}$											
Example 3:	mixed wiring: $R1 = 40 \text{ m in } 1.5 \text{ mm}^2$ and $R2 = 5 \text{ m in } 0.25 \text{ mm}^2$ : (Control cabinet – sensor/actuator level) $R1 = 0.95 \text{ Ohm}$ , $R2 = 0.71 \text{ Ohm}$ <b>Total (<math>R1 + R2</math>) = 1.66 Ohm</b>											



