

TENMA®

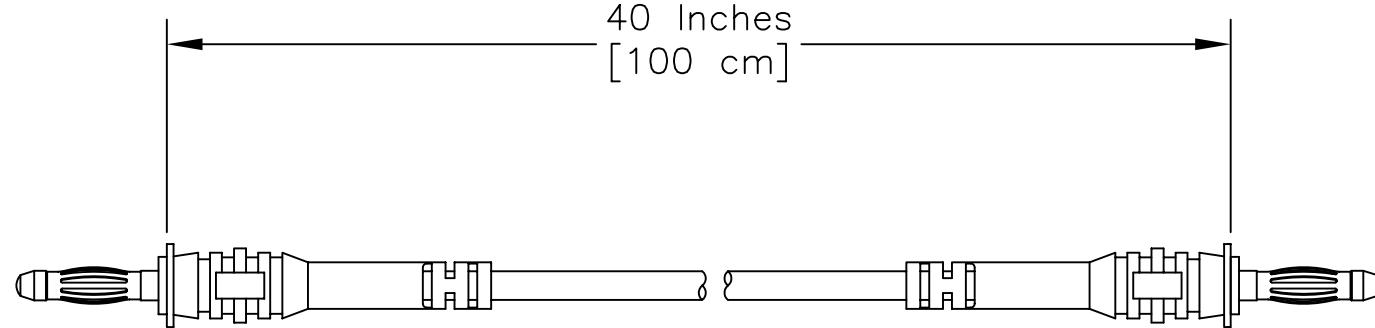
ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1355	A	RELEASED	JWM	1/3/04	HO	1/14/04	JC	1/23/04

**NOTES:**

1. Rating: 1,200V, 12 Amps AC/DC
2. Materials:
 - Body-Polyamide (Nylon)
 - Plug - Bronze & Brass Nickel Plated
3. Lead Wire:
 - Jacket - Flexible PVC
 - Color: Black
 - Conductor: 0.75mm²
4. Temperature: -20°C - +80°C
5. Internal Resistance: 20 milliohms

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED
HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE
BELIEVE TO BE ACCURATE AND RELIABLE. SINCE
CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE
USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT
FOR THE INTENDED USE AND ASSUME ALL RISK AND
LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:
UNLESS OTHERWISE
SPECIFIED,
DIMENSIONS ARE
FOR REFERENCE
PURPOSES ONLY.

DRAWN BY: Jeff McVicker DATE: 1/2/04
CHECKED BY: Hisham Odish DATE: 1/14/04
APPROVED BY: John Cole DATE: 1/23/04

DRAWING TITLE:
Plug Lead, 4mm Straight Plug to Straight Plug, Black
SIZE DWG. NO. ELECTRONIC FILE REV
A 76-112 84N2153.dwg A
SCALE: NTS U.O.M.: INCHES [mm] SHEET: 1 OF 1