

## FEATURES

- **Low Noise:** 0.25ppm<sub>p-p</sub> (0.1Hz to 10Hz)  
625nV<sub>p-p</sub> for the LTC6655-2.5
- **Low Drift:** 2ppm/°C Max
- **High Accuracy:** ±0.025% Max
- **No Humidity Sensitivity (LS8 Package)**
- **Thermal Hysteresis (LS8):** 30ppm (–40°C to 85°C)
- **Long-Term Drift (LS8):** 20ppm/√kHr
- 100% Tested at –40°C, 25°C and 125°C
- Load Regulation: <10ppm/mA
- Sinks and Sources Current: ±5mA
- Low Dropout: 500mV
- Maximum Supply Voltage: 13.2V
- Low Power Shutdown: <20μA Max
- Available Output Voltages: 1.25V, 2.048V, 2.5V, 3V, 3.3V, 4.096V, 5V
- Available in an 8-Lead MSOP and High Stability Hermetic 5mm × 5mm LS8 Packages

## APPLICATIONS

- Instrumentation and Test Equipment
- High Resolution Data Acquisition Systems
- Weigh Scales
- Precision Battery Monitors
- Precision Regulators
- Medical Equipment

## DESCRIPTION

The LTC®6655 is a complete family of precision bandgap voltage references, offering exceptional noise and drift performance. This low noise and drift is ideally suited for the high resolution measurements required by instrumentation and test equipment. In addition, the LTC6655 is fully specified over the temperature range of –40°C to 125°C, ensuring its suitability for demanding automotive and industrial applications. Advanced curvature compensation allows this bandgap reference to achieve a drift of less than 2ppm/°C with a predictable temperature characteristic and an output voltage accurate to ±0.025%, reducing or eliminating the need for calibration.


The LTC6655 can be powered from as little as 500mV above the output voltage to as much as 13.2V. Superior load regulation with source and sink capability, coupled with exceptional line rejection, ensures consistent performance over a wide range of operating conditions. A shutdown mode is provided for low power applications.

The LTC6655 references are offered in an 8-lead MSOP package and an 8-lead LS8 package. The LS8 is a 5mm × 5mm surface mount hermetic package that provides outstanding stability.


LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

**Basic Connection**

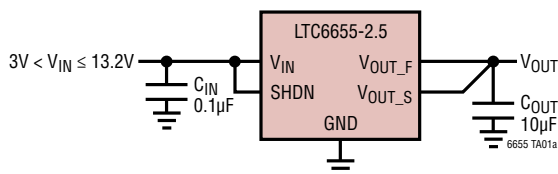

**Low Frequency 0.1Hz to 10Hz Noise (LTC6655-2.5)**

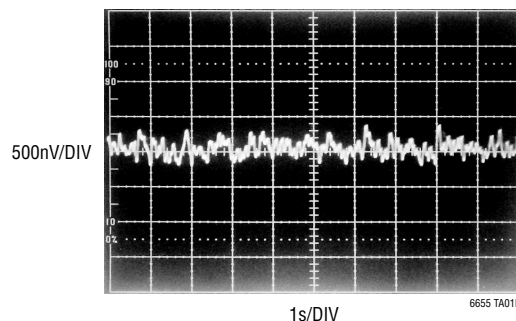

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Input Voltage

$V_{IN}$  to GND .....  $-0.3V$  to  $13.2V$

SHDN to GND .....  $-0.3V$  to  $(V_{IN} + 0.3V)$

Output Voltage:

$V_{OUT\_F}$  .....  $-0.3V$  to  $(V_{IN} + 0.3V)$

$V_{OUT\_S}$  .....  $-0.3V$  to  $6V$

Output Short-Circuit Duration ..... Indefinite


Operating Temperature Range (Note 2) ..  $-40^{\circ}C$  to  $125^{\circ}C$

Storage Temperature Range (Note 2) .....  $-65^{\circ}C$  to  $150^{\circ}C$

Lead Temperature Range (Soldering, 10 sec)

(Note 3) .....  $300^{\circ}C$

## PIN CONFIGURATION

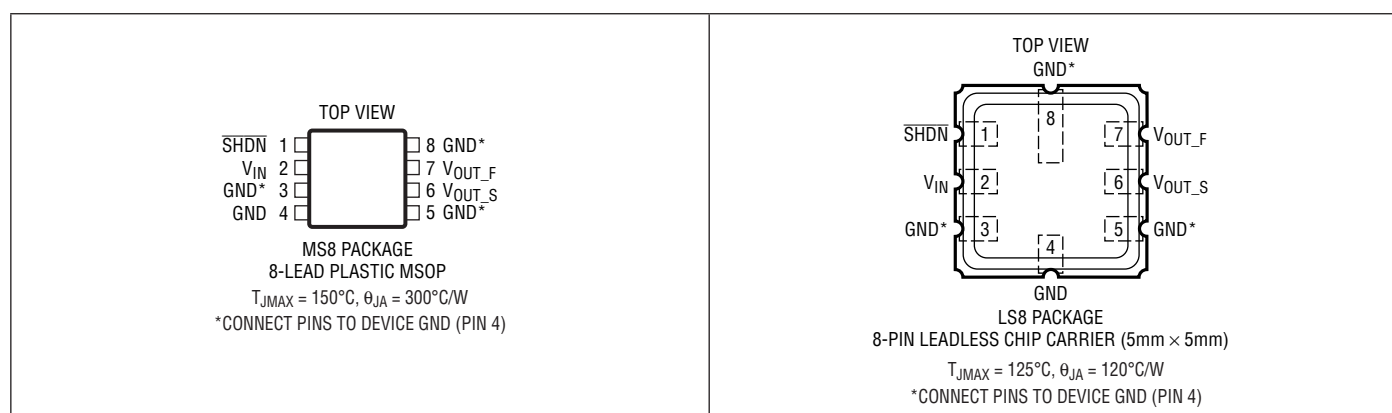

## ORDER INFORMATION

| LEAD FREE FINISH       | TAPE AND REEL            | PART MARKING* | PACKAGE DESCRIPTION            | SPECIFIED TEMPERATURE RANGE      |
|------------------------|--------------------------|---------------|--------------------------------|----------------------------------|
| LTC6655BHMS8-1.25#PBF  | LTC6655BHMS8-1.25#TRPBF  | LTFDG         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-1.25#PBF  | LTC6655CHMS8-1.25#TRPBF  | LTFDG         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-2.048#PBF | LTC6655BHMS8-2.048#TRPBF | LTFDH         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-2.048#PBF | LTC6655CHMS8-2.048#TRPBF | LTFDH         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-2.5#PBF   | LTC6655BHMS8-2.5#TRPBF   | LTFCY         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-2.5#PBF   | LTC6655CHMS8-2.5#TRPBF   | LTFCY         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-3#PBF     | LTC6655BHMS8-3#TRPBF     | LTFDJ         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-3#PBF     | LTC6655CHMS8-3#TRPBF     | LTFDJ         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-3.3#PBF   | LTC6655BHMS8-3.3#TRPBF   | LTFDK         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-3.3#PBF   | LTC6655CHMS8-3.3#TRPBF   | LTFDK         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-4.096#PBF | LTC6655BHMS8-4.096#TRPBF | LTFDM         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-4.096#PBF | LTC6655CHMS8-4.096#TRPBF | LTFDM         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHMS8-5#PBF     | LTC6655BHMS8-5#TRPBF     | LTFDN         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHMS8-5#PBF     | LTC6655CHMS8-5#TRPBF     | LTFDN         | 8-Lead Plastic MSOP            | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655BHLS8-2.5 #PBF† | N/A                      | 665525        | 8-Lead Ceramic LCC (5mm x 5mm) | $-40^{\circ}C$ to $125^{\circ}C$ |
| LTC6655CHLS8-2.5 #PBF† | N/A                      | 665525        | 8-Lead Ceramic LCC (5mm x 5mm) | $-40^{\circ}C$ to $125^{\circ}C$ |

Consult LTC Marketing for parts specified with wider operating temperature ranges.\*The temperature grade is identified by a label on the shipping container.

†This product is only offered in trays. For more information refer to <http://www.linear.com/packaging/>

Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

## AVAILABLE OPTIONS

| OUTPUT VOLTAGE | INITIAL ACCURACY | TEMPERATURE COEFFICIENT | PART NUMBER <sup>†</sup>                 |
|----------------|------------------|-------------------------|------------------------------------------|
| 1.250          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-1.25<br>LTC6655CHMS8-1.25   |
| 2.048          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-2.048<br>LTC6655CHMS8-2.048 |
| 2.500          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-2.5<br>LTC6655CHMS8-2.5     |
|                | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHLS8-2.5<br>LTC6655CHLS8-2.5     |
| 3.000          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-3.0<br>LTC6655CHMS8-3.0     |
| 3.300          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-3.3<br>LTC6655CHMS8-3.3     |
| 4.096          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-4.096<br>LTC6655CHMS8-4.096 |
| 5.000          | 0.025%<br>0.05%  | 2ppm/°C<br>5ppm/°C      | LTC6655BHMS8-5<br>LTC6655CHMS8-5         |

<sup>†</sup>See Order Information section for complete part number listing.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} = V_{OUT} + 0.5\text{V}$ ,  $V_{OUT\_S}$  connected to  $V_{OUT\_F}$ , unless otherwise noted.

| PARAMETER                                       | CONDITIONS                                                                                                                                                                |            | MIN    | TYP             | MAX   | UNITS         |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------|-----------------|-------|---------------|
| Output Voltage                                  | LTC6655B                                                                                                                                                                  |            | -0.025 |                 | 0.025 | %             |
|                                                 | LTC6655C                                                                                                                                                                  |            | -0.05  |                 | 0.05  | %             |
| Output Voltage Temperature Coefficient (Note 4) | LTC6655B                                                                                                                                                                  | ●          |        | 1               | 2     | ppm/°C        |
|                                                 | LTC6655C                                                                                                                                                                  | ●          |        | 2.5             | 5     | ppm/°C        |
| Line Regulation                                 | $V_{OUT} + 0.5\text{V} \leq V_{IN} \leq 13.2\text{V}$ , $\overline{\text{SHDN}} = V_{IN}$                                                                                 |            |        | 5               | 25    | ppm/V         |
|                                                 |                                                                                                                                                                           | ●          |        |                 | 40    | ppm/V         |
| Load Regulation (Note 5)                        | $I_{SOURCE} = 5\text{mA}$                                                                                                                                                 | LTC6655MS8 | ●      | 3               | 15    | ppm/mA        |
|                                                 |                                                                                                                                                                           | LTC6655LS8 | ●      | 3               | 15    | ppm/mA        |
|                                                 | $I_{SINK} = 5\text{mA}$                                                                                                                                                   | LTC6655MS8 | ●      | 10              | 30    | ppm/mA        |
|                                                 |                                                                                                                                                                           | LTC6655LS8 | ●      | 20              | 45    | ppm/mA        |
| Operating Voltage (Note 6)                      | LTC6655-1.25, LTC6655-2.048, LTC6655-2.5<br>$I_{SOURCE} = 5\text{mA}$ , $V_{OUT}$ Error $\leq 0.1\%$                                                                      |            | ●      | 3               | 13.2  | V             |
|                                                 | LTC6655-3, LTC6655-3.3, LTC6655-4.096, LTC6655-5<br>$I_{SOURCE} = \pm 5\text{mA}$ , $V_{OUT}$ Error $\leq 0.1\%$<br>$I_{OUT} = 0\text{mA}$ , $V_{OUT}$ Error $\leq 0.1\%$ |            | ●      | $V_{OUT} + 0.5$ | 13.2  | V             |
|                                                 |                                                                                                                                                                           |            | ●      | $V_{OUT} + 0.2$ | 13.2  | V             |
| Output Short-Circuit Current                    | Short $V_{OUT}$ to GND                                                                                                                                                    |            |        | 20              |       | mA            |
|                                                 | Short $V_{OUT}$ to $V_{IN}$                                                                                                                                               |            |        | 20              |       | mA            |
| Shutdown Pin ( $\overline{\text{SHDN}}$ )       | Logic High Input Voltage                                                                                                                                                  | ●          | 2.0    |                 |       | V             |
|                                                 | Logic High Input Current, $\overline{\text{SHDN}} = 2\text{V}$                                                                                                            | ●          |        |                 | 12    | $\mu\text{A}$ |
|                                                 | Logic Low Input Voltage                                                                                                                                                   | ●          |        |                 | 0.8   | V             |
|                                                 | Logic Low Input Current, $\overline{\text{SHDN}} = 0.8\text{V}$                                                                                                           | ●          |        |                 | 15    | $\mu\text{A}$ |
| Supply Current                                  | No Load                                                                                                                                                                   | ●          |        | 5               | 7     | mA            |
|                                                 |                                                                                                                                                                           |            |        |                 | 7.5   | mA            |

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} = V_{OUT} + 0.5\text{V}$ ,  $V_{OUT\_S}$  connected to  $V_{OUT\_F}$ , unless otherwise noted.

| PARAMETER                                  | CONDITIONS                                                                                                                                                                        | MIN | TYP            | MAX | UNITS                                                |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------|-----|------------------------------------------------------|
| Shutdown Current                           | SHDN Tied to GND ●                                                                                                                                                                |     |                | 20  | $\mu\text{A}$                                        |
| Output Voltage Noise (Note 7)              | $0.1\text{Hz} \leq f \leq 10\text{Hz}$<br>$10\text{Hz} \leq f \leq 1\text{kHz}$                                                                                                   |     | 0.25<br>0.67   |     | ppm <sub>P-P</sub><br>ppm <sub>RMS</sub>             |
| Turn-On Time                               | 0.1% Settling, $C_{OUT} = 2.7\mu\text{F}$                                                                                                                                         |     | 400            |     | $\mu\text{s}$                                        |
| Long-Term Drift of Output Voltage (Note 8) | LTC6655MS8<br>LTC6655LS8                                                                                                                                                          |     | 60<br>20       |     | ppm/ $\sqrt{\text{kHr}}$<br>ppm/ $\sqrt{\text{kHr}}$ |
| Hysteresis (Note 9)                        | LTC6655MS8<br>$\Delta T = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$\Delta T = -40^\circ\text{C}$ to $85^\circ\text{C}$<br>$\Delta T = -40^\circ\text{C}$ to $125^\circ\text{C}$ |     | 20<br>30<br>60 |     | ppm<br>ppm<br>ppm                                    |
|                                            | LTC6655LS8<br>$\Delta T = 0^\circ\text{C}$ to $70^\circ\text{C}$<br>$\Delta T = -40^\circ\text{C}$ to $85^\circ\text{C}$<br>$\Delta T = -40^\circ\text{C}$ to $125^\circ\text{C}$ |     | 5<br>30<br>80  |     | ppm<br>ppm<br>ppm                                    |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Precision may be affected if the parts are stored outside of the specified temperature range. Large temperature changes may cause changes in device performance due to thermal hysteresis. For best performance, extreme temperatures should be avoided whenever possible.

**Note 3:** The stated temperature is typical for soldering of the leads during manual rework. For detailed IR reflow recommendations, refer to the Applications Information section.

**Note 4:** Temperature coefficient is measured by dividing the maximum change in output voltage by the specified temperature range.

**Note 5:** Load regulation is measured on a pulse basis from no load to the specified load current. Load current does not include the 2mA sense current. Output changes due to die temperature change must be taken into account separately.

**Note 6:** Excludes load regulation errors. Minimum supply for the LTC6655-1.25, LTC6655-2.048 and LTC6655-2.5 is set by internal circuitry supply requirements, regardless of load condition. Minimum supply for the LTC6655-3, LTC6655-3.3, LTC6655-4.096 and LTC6655-5 is specified by load current.

**Note 7:** Peak-to-peak noise is measured with a 2-pole highpass filter at 0.1Hz and 3-pole lowpass filter at 10Hz. The unit is enclosed in a still-air environment to eliminate thermocouple effects on the leads, and the test time is 10 seconds. Due to the statistical nature of noise, repeating

noise measurements will yield larger and smaller peak values in a given measurement interval. By repeating the measurement for 1000 intervals, each 10 seconds long, it is shown that there are time intervals during which the noise is higher than in a typical single interval, as predicted by statistical theory. In general, typical values are considered to be those for which at least 50% of the units may be expected to perform similarly or better. For the 1000 interval test, a typical unit will exhibit noise that is less than the typical value listed in the Electrical Characteristics table in more than 50% of its measurement intervals. See Application Note 124 for noise testing details. RMS noise is measured with a spectrum analyzer in a shielded environment.


**Note 8:** Long-term stability typically has a logarithmic characteristic and therefore, changes after 1000 hours tend to be much smaller than before that time. Total drift in the second thousand hours is normally less than one-third that of the first thousand hours with a continuing trend toward reduced drift with time. Long-term stability is also affected by differential stresses between the IC and the board material created during board assembly.

**Note 9:** Hysteresis in output voltage is created by mechanical stress that differs depending on whether the IC was previously at a higher or lower temperature. Output voltage is always measured at  $25^\circ\text{C}$ , but the IC is cycled to the hot or cold temperature limit before successive measurements. Hysteresis is roughly proportional to the square of the temperature change. For instruments that are stored at well controlled temperatures (within 20 or 30 degrees of operational temperature), hysteresis is usually not a significant error source. Typical hysteresis is the worst case of  $25^\circ\text{C}$  to cold to  $25^\circ\text{C}$  or  $25^\circ\text{C}$  to hot to  $25^\circ\text{C}$ , preconditioned by one thermal cycle.


# TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most voltage options of the LTC6655. Curves from the LTC6655-1.25, LTC6655-2.5 and the LTC6655-5 represent the range of performance across the entire family of references. Characteristic curves for other output voltages fall between these curves and can be estimated based on their voltage output.


**1.25V Low Frequency  
0.1Hz to 10Hz Noise**

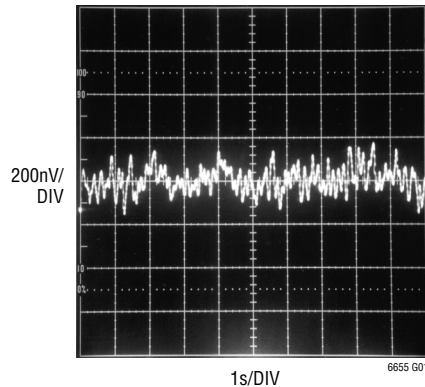


**1.25V Output Voltage  
Temperature Drift**

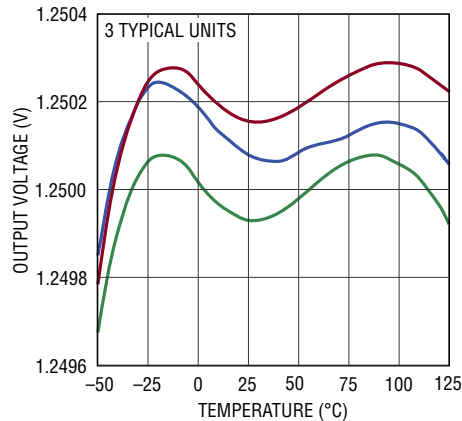


**1.25V Load Regulation (Sourcing)**

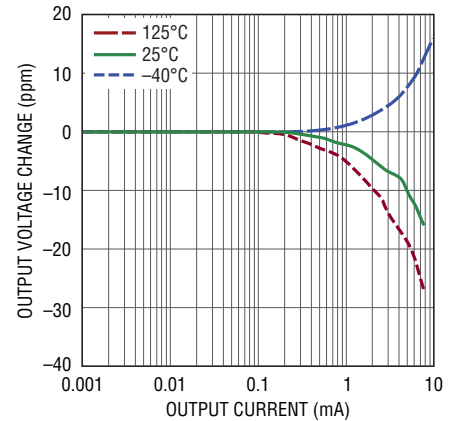


**1.25V Load Regulation (Sinking)**

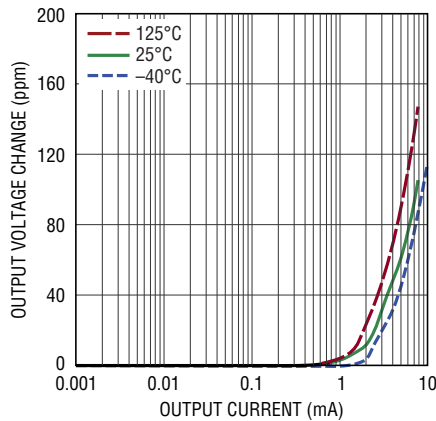


**1.25V Output Voltage Noise  
Spectrum**

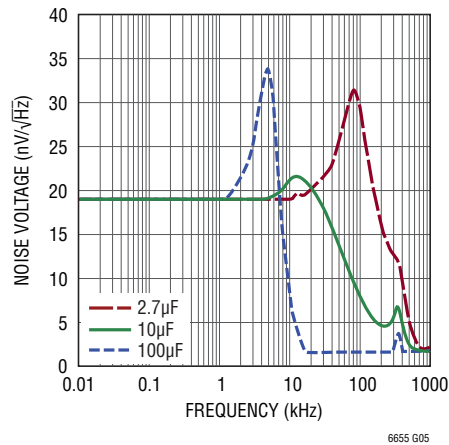


**1.25V Sinking Current with a  
3.3µF Output Capacitor**

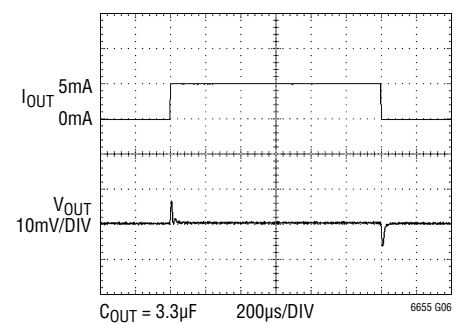


**1.25V Sourcing Current with a  
3.3µF Output Capacitor**

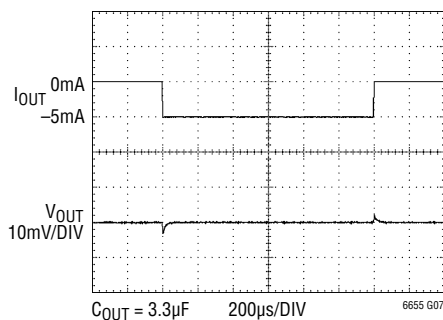

**1.25V Shutdown Supply Current  
vs Input Voltage**

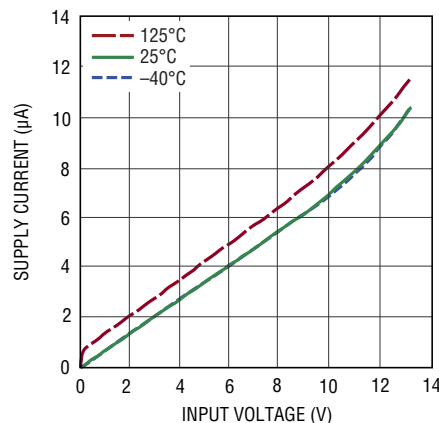


**1.25V  $V_{OUT}$  Distribution**

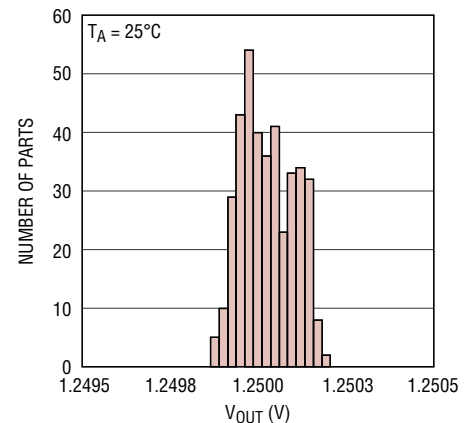


## TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most voltage options of the LTC6655. Curves from the LTC6655-1.25, LTC6655-2.5 and the LTC6655-5 represent the range of performance across the entire family of references. Characteristic curves for other output voltages fall between these curves and can be estimated based on their voltage output.


**2.5V Low Frequency  
0.1Hz to 10Hz Noise**

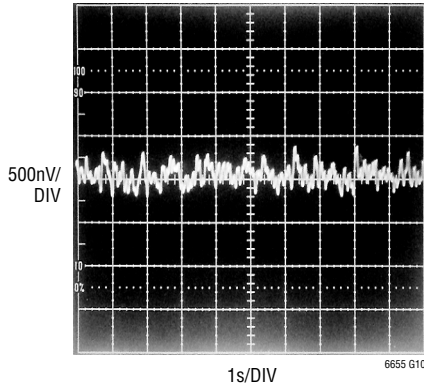


**2.5V Output Voltage  
Temperature Drift**

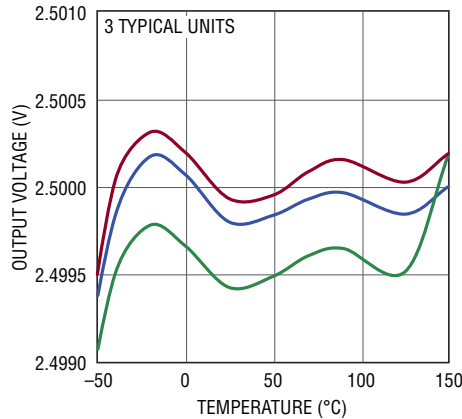


**2.5V Load Regulation (Sourcing)**

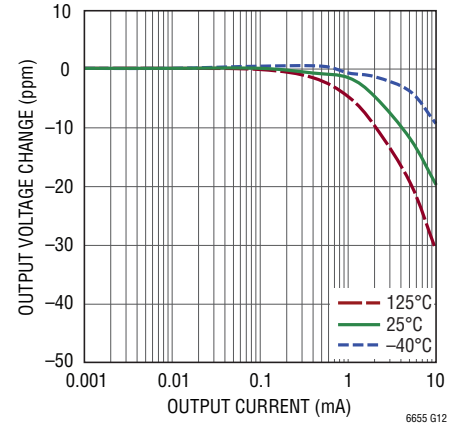


**2.5V Load Regulation (Sinking)**

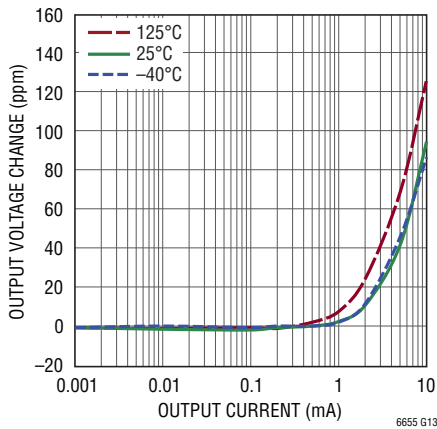


**2.5V Supply Current  
vs Input Voltage**

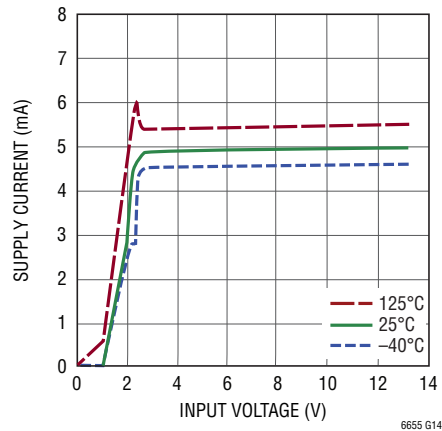


**2.5V Shutdown Supply Current  
vs Input Voltage**

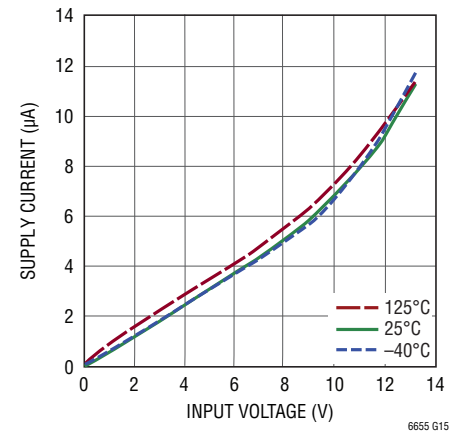


**2.5V Minimum  $V_{IN} - V_{OUT}$   
Differential (Sourcing)**

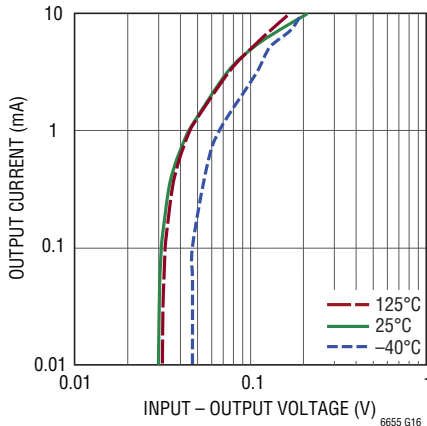

**2.5V Minimum  $V_{IN} - V_{OUT}$   
Differential (Sinking)**

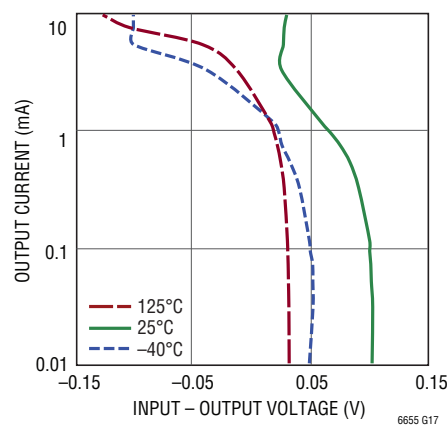


**2.5V Output Voltage Noise  
Spectrum**

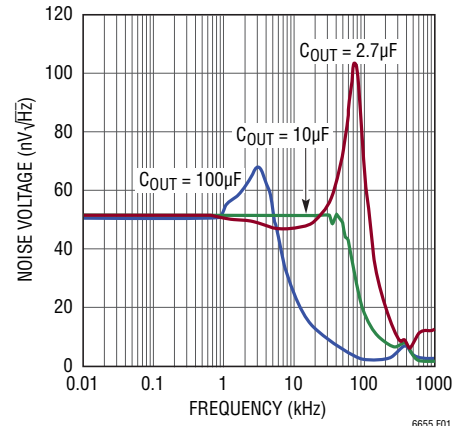


## TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most voltage options of the LTC6655. Curves from the LTC6655-1.25, LTC6655-2.5 and the LTC6655-5 represent the range of performance across the entire family of references. Characteristic curves for other output voltages fall between these curves and can be estimated based on their voltage output.


2.5V  $V_{OUT}$  Distribution

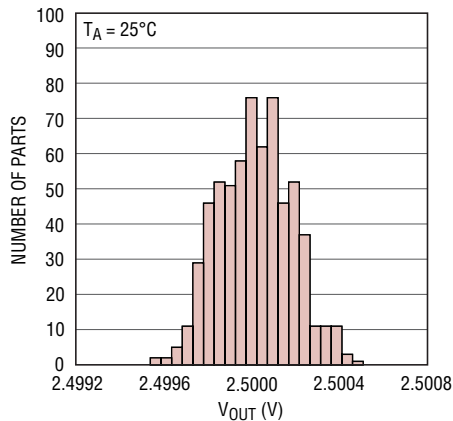


2.5V Temperature Drift Distribution

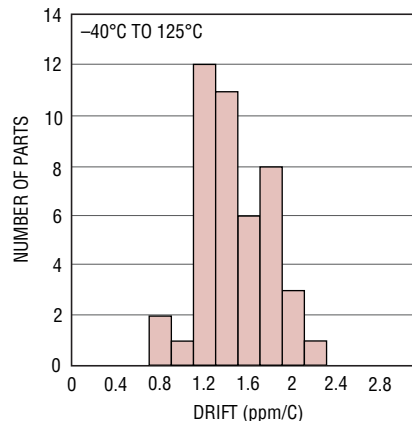


2.5V  $\overline{\text{SHDN}}$  Input Voltage Thresholds vs  $V_{IN}$

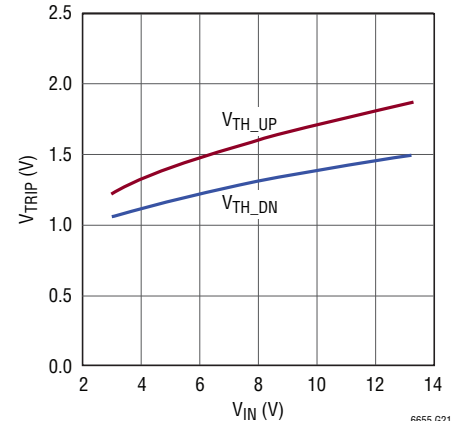


2.5V Power Supply Rejection Ratio vs Frequency

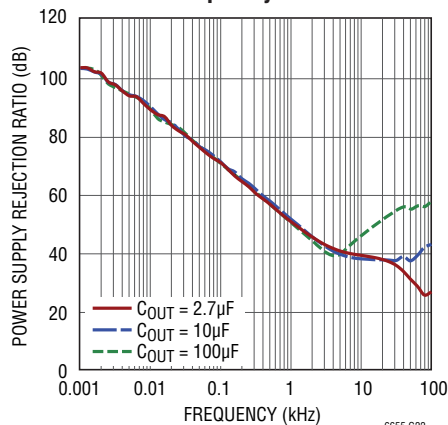

2.5V Output Impedance vs Frequency

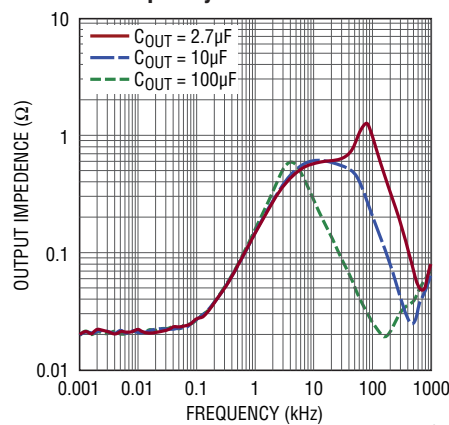


2.5V Line Regulation

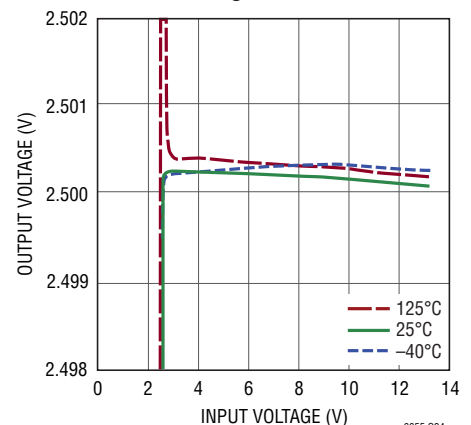


## TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most voltage options of the LTC6655. Curves from the LTC6655-1.25, LTC6655-2.5 and the LTC6655-5 represent the range of performance across the entire family of references. Characteristic curves for other output voltages fall between these curves and can be estimated based on their voltage output.


**5V Low Frequency  
0.1Hz to 10Hz Noise**

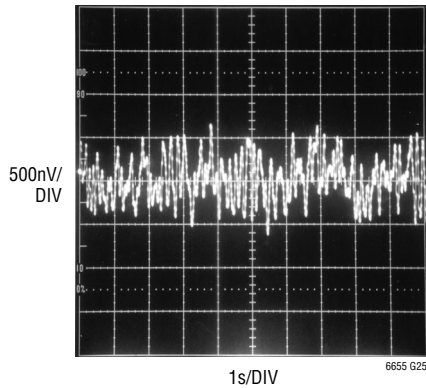


**5V Output Voltage  
Temperature Drift**

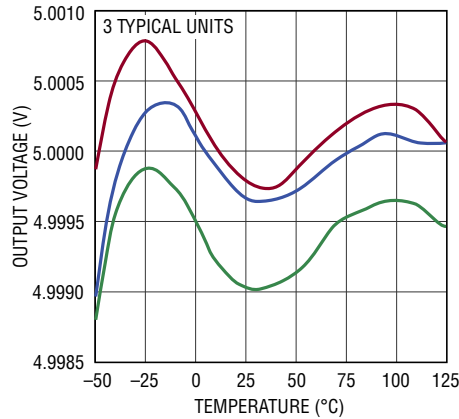


**5V Load Regulation (Sourcing)**

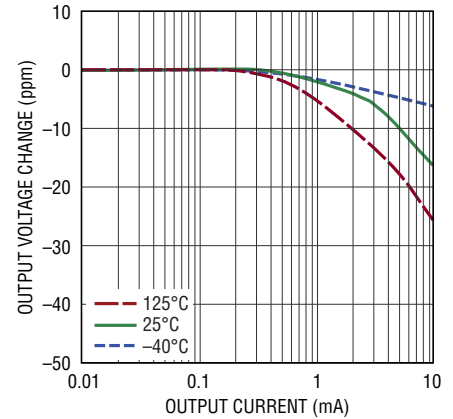


**5V Load Regulation (Sinking)**

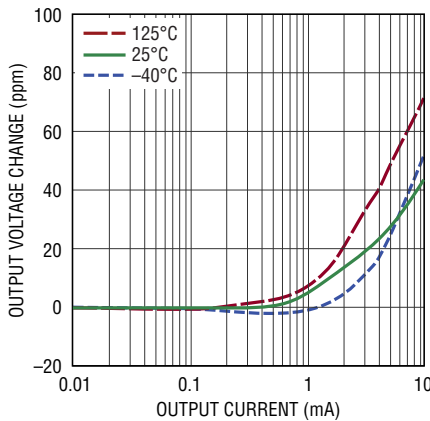


**5V Supply Current  
vs Input Voltage**

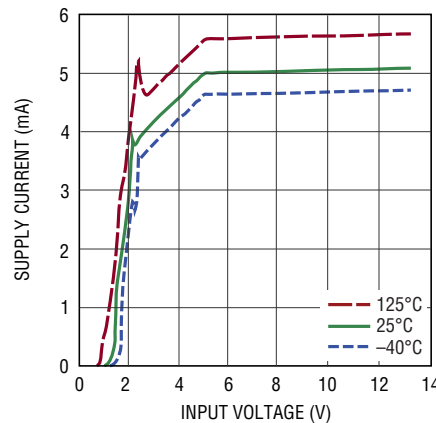


**5V Output Voltage Noise  
Spectrum**

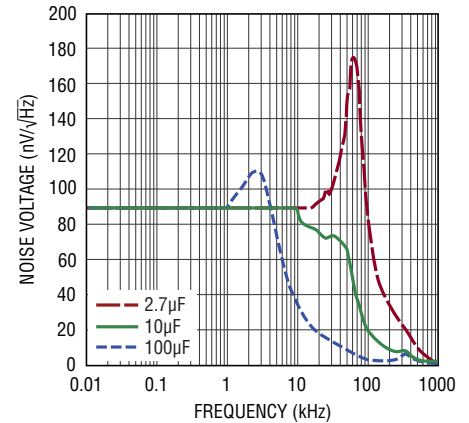


**5V Minimum  $V_{IN}-V_{OUT}$   
Differential (Sourcing)**

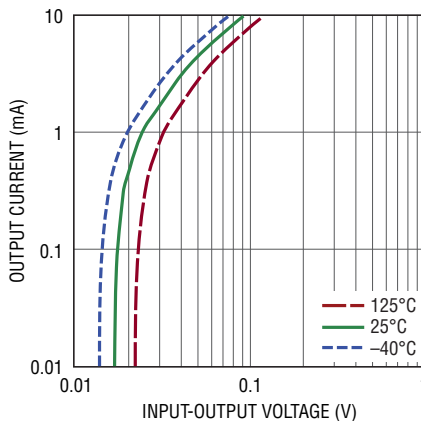

**5V Minimum  $V_{IN}-V_{OUT}$   
Differential (Sinking)**

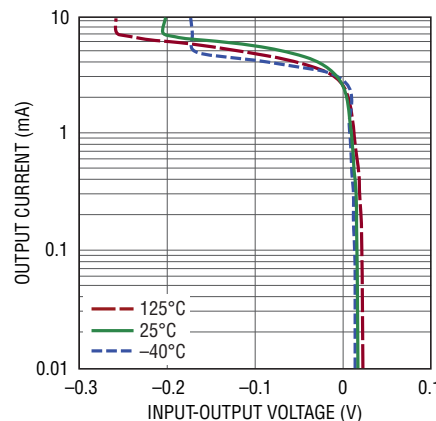

**5V Start-Up Response with a  
3.3μF Output Capacitor**

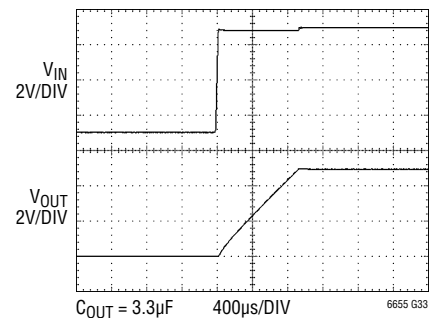

## PIN FUNCTIONS

**$\overline{\text{SHDN}}$  (Pin 1):** Shutdown Input. This active low input powers down the device to  $<20\mu\text{A}$ . If left open, an internal pull-up resistor puts the part in normal operation. It is recommended to tie this pin high externally for best performance during normal operation.

**$V_{\text{IN}}$  (Pin 2):** Power Supply. Bypass  $V_{\text{IN}}$  with a  $0.1\mu\text{F}$ , or larger, capacitor to GND.


**GND (Pin 4):** Device Ground. This pin is the main ground and must be connected to a noise-free ground plane.

**$V_{\text{OUT\_S}}$  (Pin 6):**  $V_{\text{OUT}}$  Sense Pin. Connect this pin at the load and route with a wide metal trace to minimize load regulation errors. This pin sinks  $2\text{mA}$ . Output error is  $R_{\text{TRACE}} \cdot 2\text{mA}$ , regardless of load current. For load currents  $<100\mu\text{A}$ , tie directly to  $V_{\text{OUT\_F}}$  pin.

**$V_{\text{OUT\_F}}$  (Pin 7):**  $V_{\text{OUT}}$  Force Pin. This pin sources and sinks current to the load. An output capacitor of  $2.7\mu\text{F}$  to  $100\mu\text{F}$  is required.

**GND (Pins 3, 5, 8):** Internal Function. Ground these pins.

## BLOCK DIAGRAM

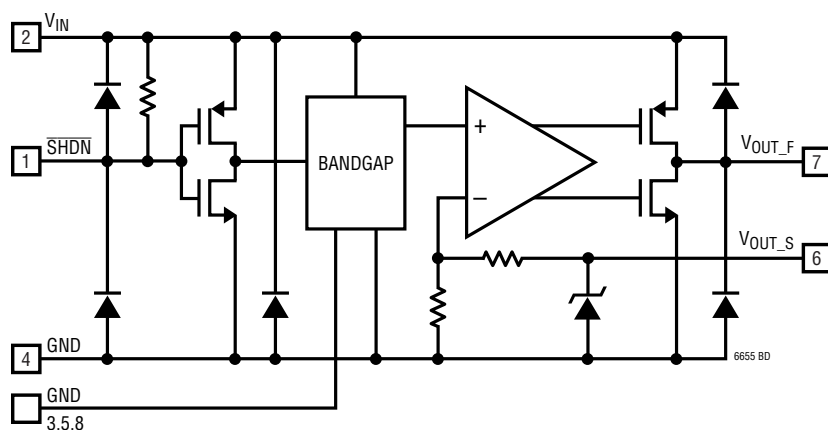

## APPLICATIONS INFORMATION

### Bypass and Load Capacitors

The LTC6655 voltage references require a 0.1 $\mu$ F or larger input capacitor located close to the part to improve power supply rejection. An output capacitor with a value between 2.7 $\mu$ F and 100 $\mu$ F is also required.

The output capacitor has a direct effect on the stability, turn-on time and settling behavior. Choose a capacitor with low ESR to insure stability. Resistance in series with the output capacitor (ESR) introduces a zero in the output buffer transfer function and could cause instability. The 2.7 $\mu$ F to 100 $\mu$ F range includes several types of capacitors that are readily available as through-hole and surface mount components. It is recommended to keep ESR less than or equal to 0.1 $\Omega$ . Capacitance and ESR are both frequency dependent. At higher frequencies capacitance drops and ESR increases. To insure stable operation the output capacitor should have the required values at 100kHz.

In order to achieve the best performance, caution should be used when choosing a capacitor. X7R ceramic capacitors are small, come in appropriate values and are relatively stable over a wide temperature range. However, for a low noise application X7R capacitors may not be suitable since they may exhibit a piezoelectric effect. The mechanical vibrations cause a charge displacement in the ceramic dielectric and the resulting perturbation can look like noise. If X7R capacitors are necessary, a thorough bench evaluation should be completed to verify proper performance.

For very low noise applications where every nanovolt counts, film capacitors should be considered for their low noise and lack of piezoelectric effects. Film capacitors such as polyester, polystyrene, polycarbonate, and polypropylene have good temperature stability. Additional care must be taken as polystyrene and polypropylene have an upper temperature limit of 85°C to 105°C. Above these temperatures, the working voltages need to be derated according to manufacturer's specifications. Another type of film capacitor is polyphenylene sulfide (PPS). These devices work over a wide temperature range, are stable, and have large capacitance values beyond 1 $\mu$ F. In general, film capacitors are found in surface mount and leaded packages. Table 1 is a partial list of capacitor companies and some of their available products.

In voltage reference applications, film capacitor lifetime is affected by temperature and applied voltage. When polyester capacitors are operated beyond their rated temperatures (some capacitors are not rated for operation above 85°C) they need to be derated. Voltage derating is usually accomplished as a ratio of applied voltage to rated voltage limit. Contact specific film capacitor manufacturers to determine exact lifetime and derating information.

The lifetime of X7R capacitors is long, especially for reference applications. Capacitor lifetime is degraded by operating near or exceeding the rated voltage, at high temperature, with AC ripple or some combination of these. Most reference applications have AC ripple only during transient events.

**Table 1. Film Capacitor Companies**

| COMPANY              | DIELECTRIC                  | AVAILABLE CAPACITANCE       | TEMPERATURE RANGE | TYPE                             |
|----------------------|-----------------------------|-----------------------------|-------------------|----------------------------------|
| Cornell Dublier      | Polyester                   | 0.5 $\mu$ F to 10 $\mu$ F   | –55°C to 125°C    | DME                              |
| Dearborn Electronics | Polyester                   | 0.1 $\mu$ F to 12 $\mu$ F   | –55°C to 125°C    | 218P, 430P, 431P, 442P, and 410P |
| Tecate               | Polyester                   | 0.01 $\mu$ F to 18 $\mu$ F  | –40°C to 105°C    | 901, 914, and 914D               |
| Wima                 | Polyester                   | 10 $\mu$ F to 22 $\mu$ F    | –55°C to 100°C    | MKS 4, MKS 2-XL                  |
| Vishay               | Polyester                   | 1000pF to 15 $\mu$ F        | –55°C to 125°C    | MKT1820                          |
| Vishay               | Polycarbonate               | 0.01 $\mu$ F to 10 $\mu$ F  | –55°C to 100°C    | MKC1862, 632P                    |
| Dearborn Electronics | Polyphenylene Sulfide (PPS) | 0.01 $\mu$ F to 15 $\mu$ F  | –55°C to 125°C    | 820P, 832P, 842P, 860P, and 880P |
| Wima                 | Polyphenylene Sulfide (PPS) | 0.01 $\mu$ F to 6.8 $\mu$ F | –55°C to 140°C    | SMD-PPS                          |

## APPLICATIONS INFORMATION

The choice of output capacitor also affects the bandwidth of the reference circuitry and resultant noise peaking. As shown in Figure 1, the bandwidth is inversely proportional to the value of the output capacitor.

Noise peaking is related to the phase margin of the output buffer. Higher peaking generally indicates lower phase margin. Other factors affecting noise peaking are temperature, input voltage, and output load current.

### Start-Up and Load Transient Response

Results for the transient response plots (Figures 3 to 8) were produced with the test circuit shown in Figure 2 unless otherwise indicated.

The turn-on time is slew limited and determined by the short-circuit current, the output capacitor, and output voltage as shown in the equation:

$$t_{ON} = V_{OUT} \cdot \frac{C_{OUT}}{I_{SC}}$$

For example, the LTC6655-2.5V, with a 3.3 $\mu$ F output capacitor and a typical short-circuit current of 20mA, the start-up time would be approximately:

$$2.5V \cdot \frac{3.3 \cdot 10^{-6}F}{0.02A} = 412\mu s$$

The resulting turn-on time is shown in Figure 3. Here the output capacitor is 3.3 $\mu$ F and the input capacitor is 0.1 $\mu$ F.

Figure 4 shows the output response to a 500mV step on  $V_{IN}$ . The output response to a current step sourcing and sinking is shown in Figures 5 and 6, respectively.

Figure 7 shows the output response as the current goes from sourcing to sinking.

### Shutdown Mode

The LTC6655 family of references can be shut down by tying the  $\overline{SHDN}$  pin to ground. There is an internal pull-up resistor tied to this pin. If left unconnected this pin rises to  $V_{IN}$  and the part is enabled. Due to the low internal pull-up current, it is recommended that the  $\overline{SHDN}$  pin be pulled high externally for normal operation to prevent accidental

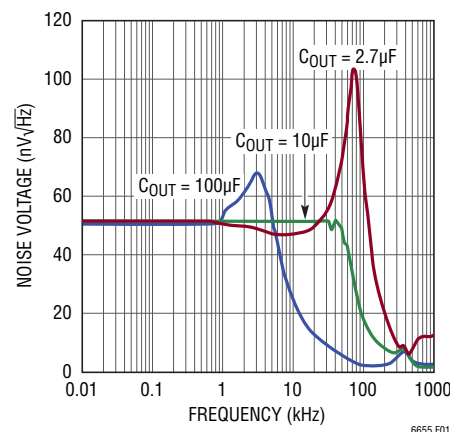


Figure 1. Output Voltage Noise Spectrum

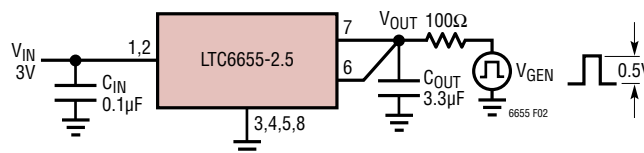


Figure 2. Transient Load Test Circuit

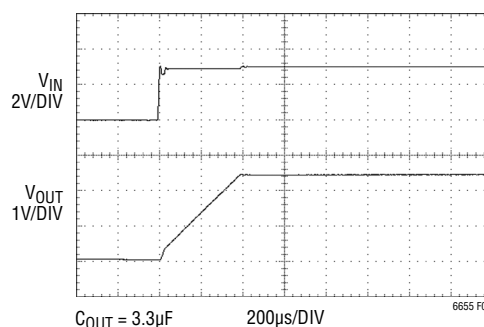


Figure 3. Start-Up Response

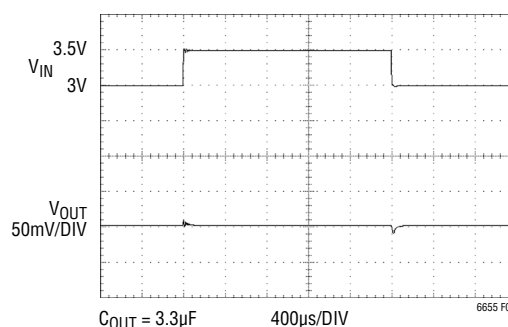


Figure 4. Output Response with a 500mV Step On  $V_{IN}$

## APPLICATIONS INFORMATION

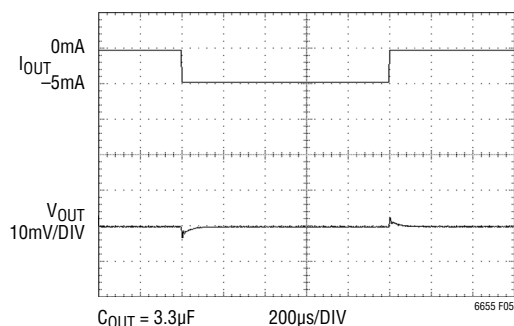


Figure 5. Output Response with a 5mA Load Step Sourcing

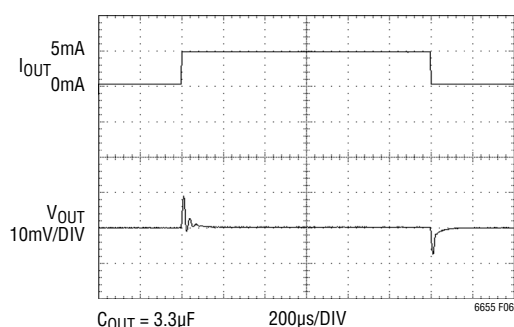


Figure 6. Output Response with 5mA Load Step Sinking

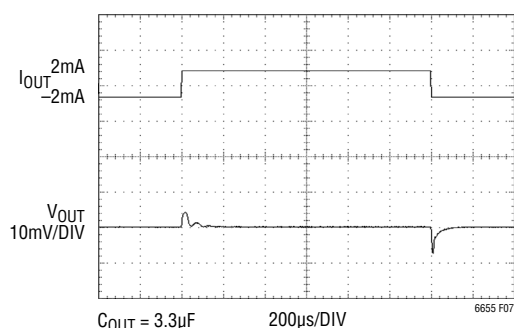


Figure 7. Output Response Showing a Sinking to Sourcing Transition

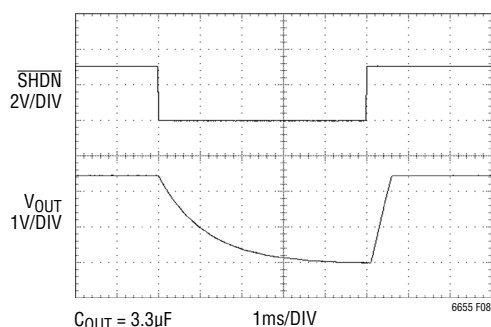


Figure 8. Shutdown Response with 5mA Source Load

shutdown due to system noise or leakage currents. The turn-on/turn-off response due to shutdown is shown in Figure 8.

To control shutdown from a low voltage source, a MOSFET can be used as a pull-down device as shown in Figure 9. Note that an external resistor is unnecessary. A MOSFET with a low drain-to-source leakage over the operating temperature range should be chosen to avoid inadvertently pulling down the  $\overline{\text{SHDN}}$  pin. A resistor may be added from  $\overline{\text{SHDN}}$  to  $V_{\text{IN}}$  to overcome excessive MOSFET leakage.

The  $\overline{\text{SHDN}}$  thresholds have some dependency on  $V_{\text{IN}}$  and temperature as shown in the Typical Performance Characteristics section. Avoid leaving  $\overline{\text{SHDN}}$  at a voltage between the thresholds as this will cause an increase in supply current due to shoot-through current.

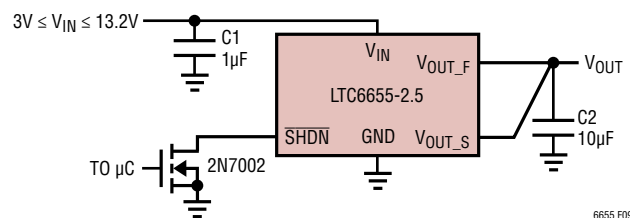


Figure 9. Open-Drain Shutdown Circuit

## Long-Term Drift

Long-term drift cannot be extrapolated from accelerated high temperature testing. This erroneous technique gives drift numbers that are wildly optimistic. The only way long-term drift can be determined is to measure it over the time interval of interest.

The LTC6655 long-term drift data was collected on 80 parts that were soldered into printed circuit boards similar to a *real world* application. The boards were then placed into a constant temperature oven with a  $T_A = 35^\circ\text{C}$ , their outputs were scanned regularly and measured with an 8.5 digit DVM. Typical long-term drift is illustrated in Figure 10a. The hermetic LS8 package provides additional stability as shown in Figure 10b.

## APPLICATIONS INFORMATION

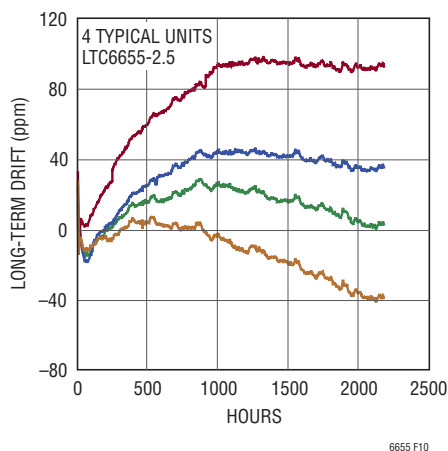


Figure 10a. Long-Term Drift

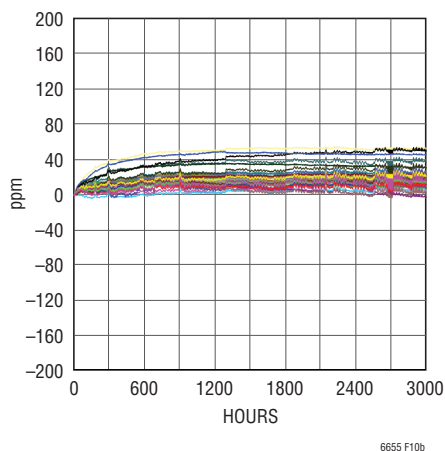


Figure 10b. LT6655-2.5V CLCC

### Hysteresis

Thermal hysteresis is a measure of change of output voltage as a result of temperature cycling. Figure 11 illustrates the typical hysteresis based on data taken from the LTC6655-2.5. A proprietary design technique minimizes thermal hysteresis.

### Humidity Sensitivity

Plastic mould compounds absorb water. With changes in relative humidity, plastic packaging materials change the amount of pressure they apply to the die inside, which

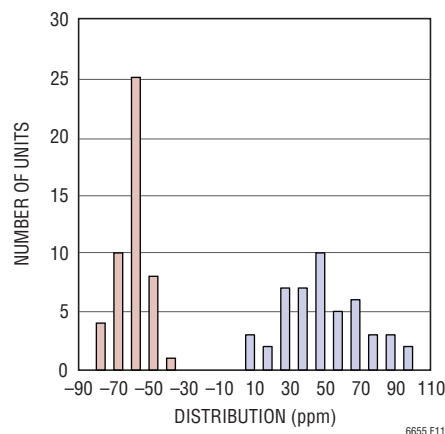


Figure 11. Hysteresis Plot  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$

can cause slight changes in the output of a voltage reference, usually on the order of 100ppm. The LS8 package is hermetic, so it is not affected by humidity, and is therefore more stable in environments where humidity may be a concern. However, PC board material may absorb water and apply mechanical stress to the LTC6655LS8. Proper board materials and layout are essential.

### Power Dissipation

Power dissipation for the LTC6655 depends on  $V_{IN}$  and load current. Figure 12 illustrates the power consumption versus  $V_{IN}$  under a no-load and 5mA load condition at room temperature for the LTC6655-2.5. Other voltage options display similar behavior.

The MSOP8 package has a thermal resistance ( $\theta_{JA}$ ) equal to  $300^{\circ}\text{C}/\text{W}$ . Under the maximum loaded condition, the increase in die temperature is over  $35^{\circ}\text{C}$ . If operated at these conditions with an ambient temperature of  $125^{\circ}\text{C}$ , the absolute maximum junction temperature rating of the device would be exceeded. Although the maximum junction temperature is  $150^{\circ}\text{C}$ , for best performance it is recommended to not exceed a junction temperature of  $125^{\circ}\text{C}$ . The plot in Figure 13 shows the recommended maximum ambient temperature limits for differing  $V_{IN}$  and load conditions using a maximum junction temperature of  $125^{\circ}\text{C}$ .

## APPLICATIONS INFORMATION

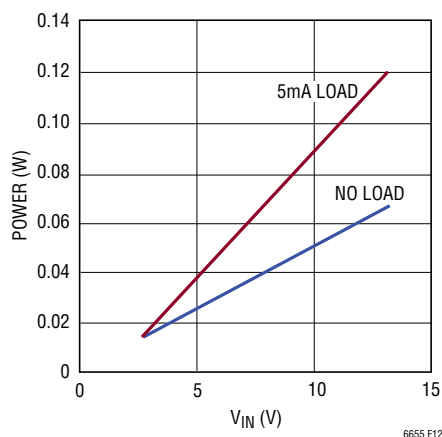


Figure 12. LTC6655-2.5 Power Consumption

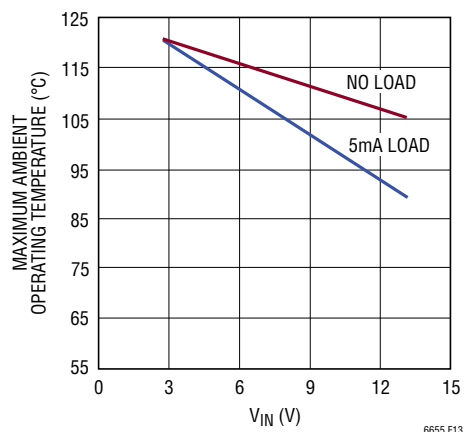


Figure 13. LTC6655-2.5 Maximum Ambient Operating Temperature

## PC Board Layout

The LTC6655 reference is a precision device that is factory trimmed to an initial accuracy of  $\pm 0.025\%$ , as shown in the Typical Performance Characteristic section. The mechanical stress caused by soldering parts to a printed circuit board may cause the output voltage to shift and the temperature coefficient to change.

To reduce the effects of stress-related shifts, mount the reference near the short edge of a printed circuit board or in a corner. In addition, slots can be cut into the board

on two sides of the device to reduce mechanical stress. A thicker and smaller board is stiffer and less prone to bend. Finally, use stress relief, such as flexible standoffs, when mounting the board.

Additional precautions include making sure the solder joints are clean and the board is flux free to avoid leakage paths. A sample PCB layout is shown in Figure 14.

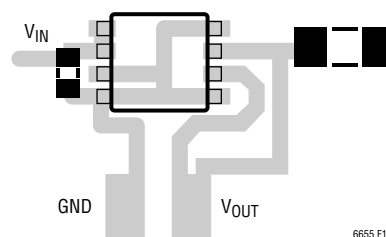


Figure 14. Sample PCB Layout

## Load Regulation

To take advantage of the V<sub>OUT</sub> Kelvin force/sense pins, the V<sub>OUT\_S</sub> pin should be connected separately from the V<sub>OUT\_F</sub> pin as shown in Figure 15.

The V<sub>OUT\_S</sub> pin sinks 2mA, which is unusual for a Kelvin connection. However, this is required to achieve the exceptional low noise performance. The  $I \cdot R$  drop on the V<sub>OUT\_S</sub> line directly affects load regulation. The V<sub>OUT\_S</sub> trace should be as short and wide as practical to minimize series resistance. The V<sub>OUT\_S</sub> trace adds error as  $R_{TRACE} \cdot 2\text{mA}$ , so a  $0.1\Omega$  trace adds 200 $\mu\text{V}$  error. The V<sub>OUT\_F</sub> pin is not as important as the V<sub>OUT\_S</sub> pin in this regard. An  $I \cdot R$  drop on the V<sub>OUT\_F</sub> pin increases the minimum supply

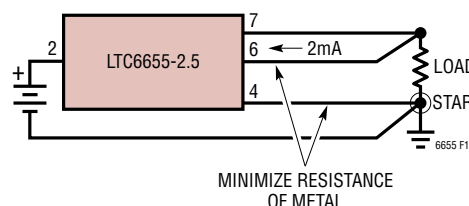


Figure 15. Kelvin Connection for Good Load Regulation

## APPLICATIONS INFORMATION

voltage when sourcing current, but does not directly affect load regulation. For light loading of the output (maximum output current  $<100\mu\text{A}$ ),  $V_{\text{OUT}_S}$  should be tied to  $V_{\text{OUT}_F}$  by the shortest possible path to reduce errors caused by resistance in the sense trace.

Careful attention to grounding is also important, especially when sourcing current. The return load current can produce an  $I \cdot R$  drop causing poor load regulation. Use a “star” ground connection and minimize the ground to load metal resistance. Although there are several pins that are required to be connected to ground, Pin 4 is the actual ground for return current.

### Optimal Noise Performance

The LTC6655 offers extraordinarily low noise for a bandgap reference—only 0.25ppm in 0.1Hz to 10Hz. As a result, system noise performance may be dominated by system design and physical layout.

Some care is required to achieve the best possible noise performance. The use of dissimilar metals in component leads and PC board traces creates thermocouples. Variations in thermal resistance, caused by uneven air flow, create differential lead temperatures, thereby causing thermoelectric voltage noise at the output of the reference. Minimizing the number of thermocouples, as well as limiting airflow, can substantially reduce these errors. Additional information can be found in Linear Technology Application Note 82. Position the input and load capacitors close to the part. Although the LTC6655 has a DC PSRR of over 100dB, the power supply should be as stable as possible to guarantee optimal performance. A plot of the 0.1Hz to 10Hz low frequency noise is shown in the Typical Performance Characteristic section. Noise performance

can be further improved by wiring several LTC6655s in parallel as shown in the Typical Applications section. With this technique the noise is reduced by  $\sqrt{N}$ , where N is the number of LTC6655s in parallel.

### Noise Specification

Noise in any frequency band is a random function based on physical properties such as thermal noise, shot noise, and flicker noise. The most precise way to specify a random error such as noise is in terms of its statistics, for example as an RMS value. This allows for relatively simple maximum error estimation, generally involving assumptions about noise bandwidth and crest factor. Unlike wideband noise, low frequency noise, typically specified in a 0.1Hz to 10Hz band, has traditionally been specified in terms of expected error, illustrated as peak-to-peak error. Low frequency noise is generally measured with an oscilloscope over a 10 second time frame. This is a pragmatic approach, given that it can be difficult to measure noise accurately at low frequencies, and that it can also be difficult to agree on the statistical characteristics of the noise, since flicker noise dominates the spectral density. While practical, a random sampling of 10 second intervals is an inadequate method for representation of low frequency noise, especially for systems where this noise is a dominant limit of system performance. Given the random nature of noise, the output voltage may be observed over many time intervals, each giving different results. Noise specifications that were determined using this method are prone to subjectivity, and will tend toward a mean statistical value, rather than the maximum noise that is likely to be produced by the device in question.

APPLICATIONS INFORMATION

Because the majority of voltage reference data sheets express low frequency noise as a typical number, and as it tends to be illustrated with a repeatable plot near the mean of a distribution of peak-to-peak values, the LTC6655 data sheet provides a similarly defined typical specification in order to allow a reasonable direct comparison against similar products. Data produced with this method generally suggests that in a series of 10 second output voltage measurements, at least half the observations should have a peak-to-peak value that is below this number. For example, the LTC6655-2.5 measures less than 0.25ppm<sub>P-P</sub> in at least 50% of the 10 second observations.

As mentioned above, the statistical distribution of noise is such that if observed for long periods of time, the peak error in output voltage due to noise may be much larger than that observed in a smaller interval. The likely maximum error due to noise is often estimated using the RMS value, multiplied by an estimated crest factor, assumed to be in the range of 6 to 8.4. This maximum possible value will only be observed if the output voltage is measured for very long periods of time. Therefore, in addition to the common method, a more thorough approach to measuring noise has been used for the LTC6655 (described in detail in Linear Technology's AN124) that allows more information to be obtained from the result. In particular, this method characterizes the noise over a significantly greater length of time, resulting in a more complete description of low frequency noise. The peak-to-peak voltage is measured for 10 second intervals over hundreds of intervals. In addition, an electronic peak-detect circuit stores an objective

value for each interval. The results are then summarized in terms of the fraction of measurement intervals for which observed noise is below a specified level. For example, the LTC6655-2.5 measures less than 0.27ppm<sub>P-P</sub> in 80% of the measurement intervals, and less than 0.295ppm<sub>P-P</sub> in 95% of observation intervals. This statistical variation in noise is illustrated in Table 2 and Figure 17. The test circuit is shown in Figure 16.

Table 2

|     | Low Frequency Noise (ppm <sub>P-P</sub> ) |
|-----|-------------------------------------------|
| 50% | 0.246                                     |
| 60% | 0.252                                     |
| 70% | 0.260                                     |
| 80% | 0.268                                     |
| 90% | 0.292                                     |

This method of testing low frequency noise is superior to more common methods. The results yield a comprehensive statistical description, rather than a single observation. In addition, the direct measurement of output voltage over time gives an actual representation of peak noise, rather than an estimate based on statistical assumptions such as crest factor. Additional information can be derived from a measurement of low frequency noise spectral density, as shown in Figure 18.

It should be noted from Figure 18 that the LTC6655 has not only a low wideband noise, but an exceptionally low flicker noise corner of 1Hz! This substantially reduces low frequency noise, as well as long-term variation in peak noise.

# APPLICATIONS INFORMATION


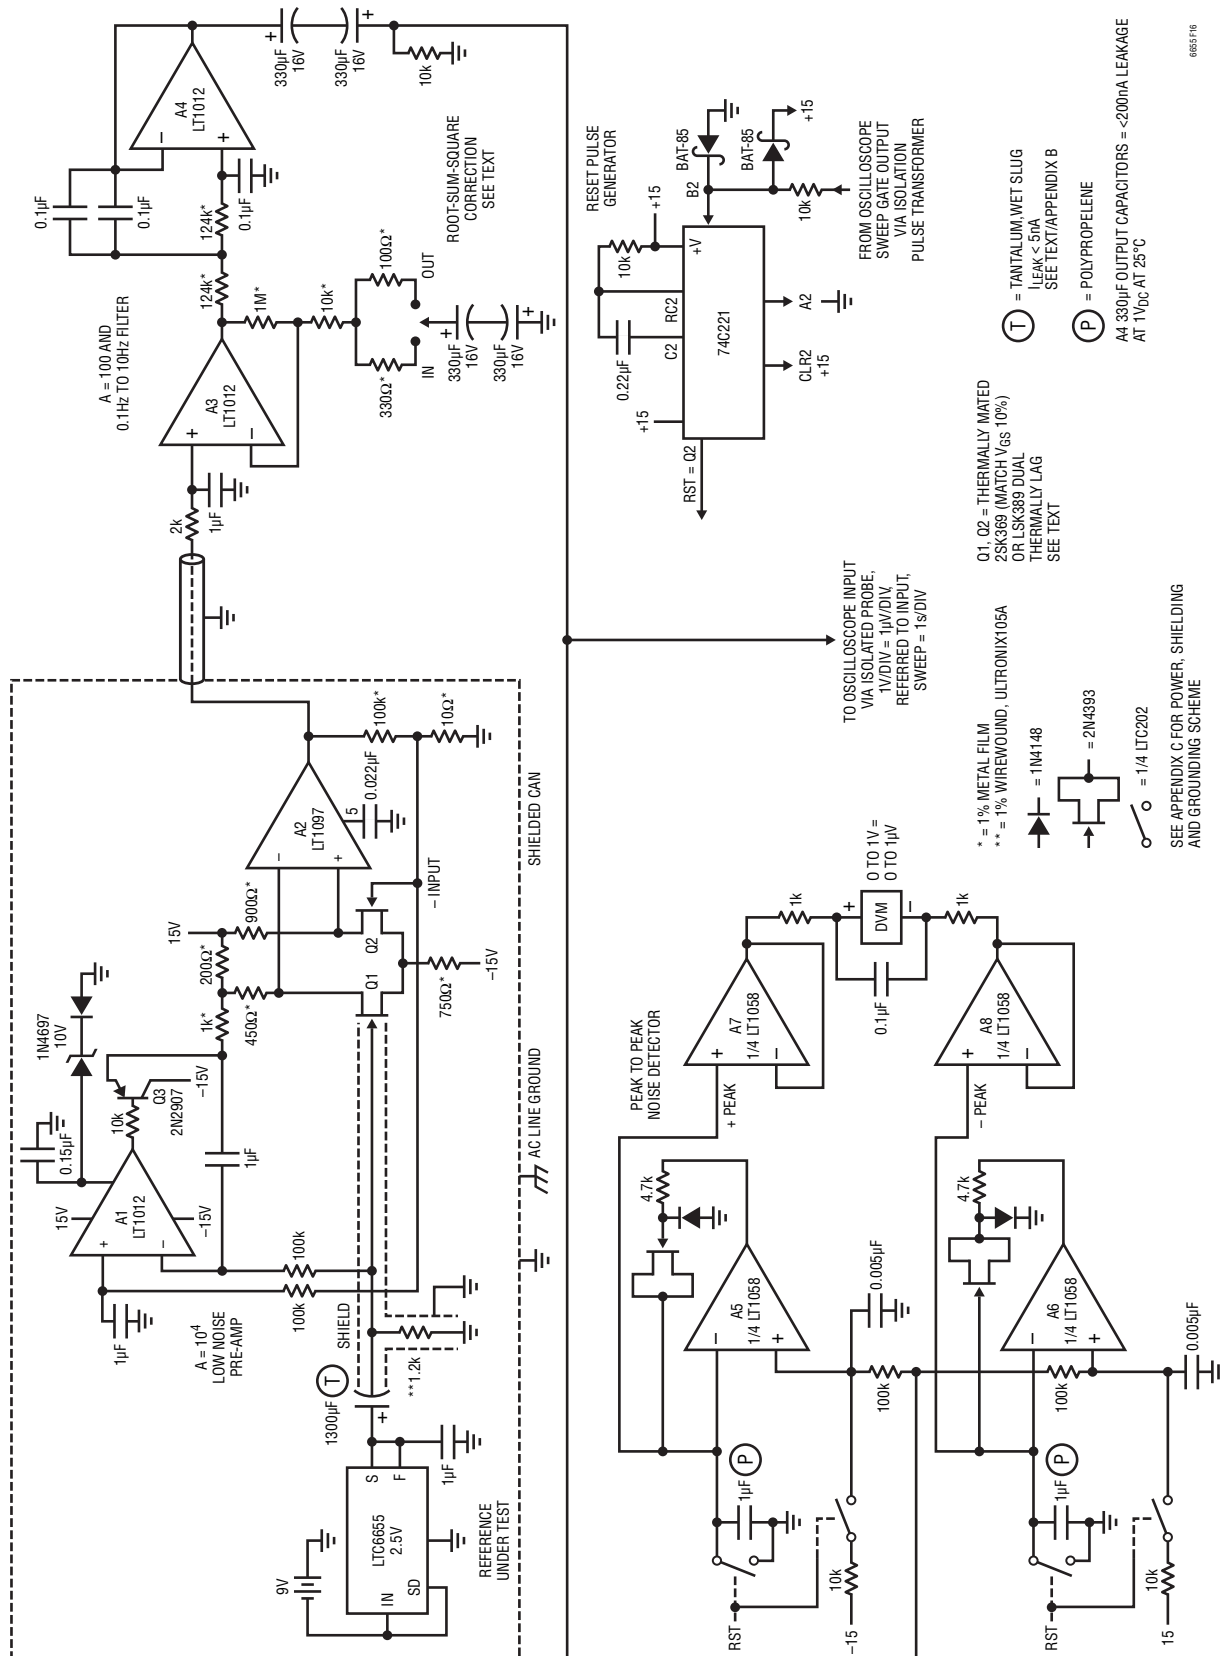



Figure 16. Detailed Noise Test Circuitry. See Application Note 124.

## APPLICATIONS INFORMATION

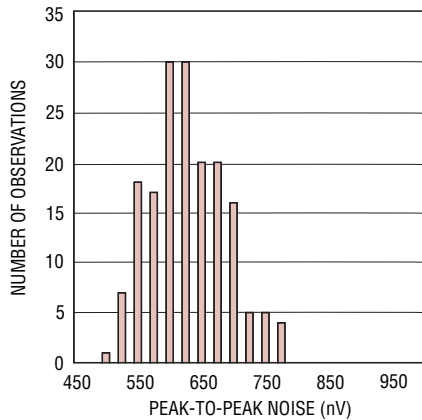

6655 F17

Figure 17. Low Frequency Noise Histogram of the LTC6655-2.5

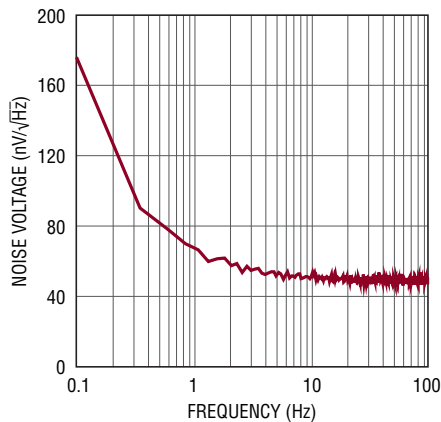

6655 F18


Figure 18. LTC6655-2.5 Low Frequency Noise Spectrum

## IR Reflow Shift

The mechanical stress of soldering a part to a board can cause the output voltage to shift. Moreover, the heat of an IR reflow or convection soldering oven can also cause the output voltage to shift. The materials that make up a semiconductor device and its package have different rates of expansion and contraction. After a part undergoes the extreme heat of a lead-free IR reflow profile, like the one


shown in Figure 19, the output voltage shifts. After the device expands, due to the heat, and then contracts, the stresses on the die have changed position. This shift is similar, but more extreme than thermal hysteresis.

Experimental results of IR reflow shift are shown below in Figure 20. These results show only shift due to reflow and not mechanical stress.

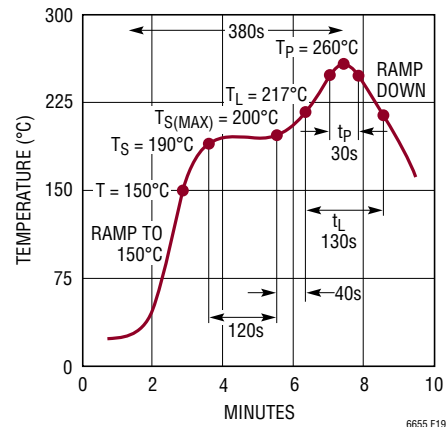

6655 F19

Figure 19. Lead-Free Reflow Profile

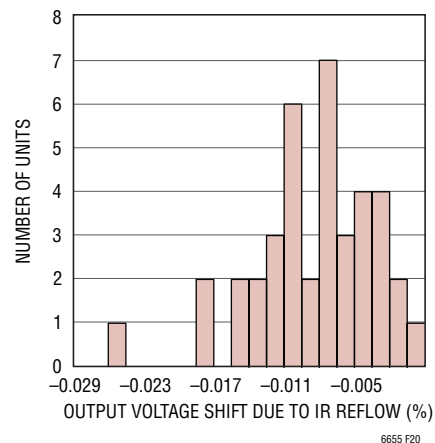


6655 F20


Figure 20. Output Voltage Shift Due to IR Reflow

# TYPICAL APPLICATIONS


Extended Supply Range Reference

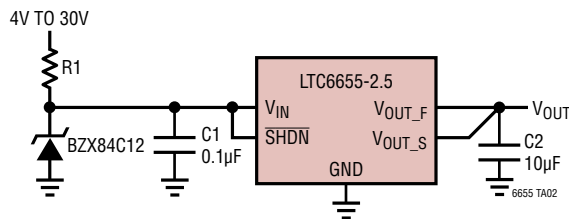


Extended Supply Range Reference

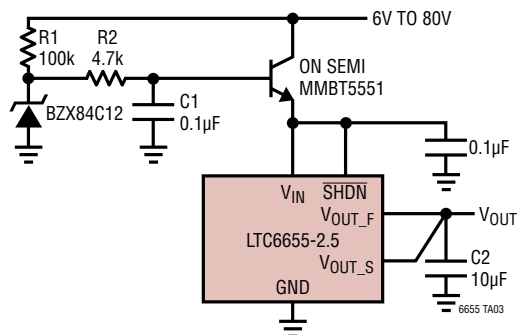


Boosted Output Current

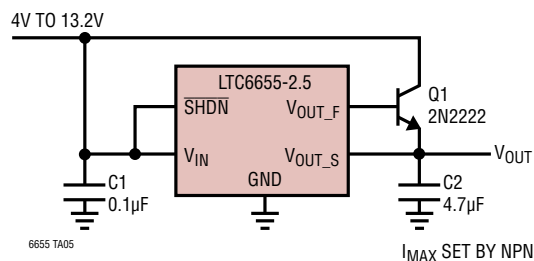

Boosted Output Current

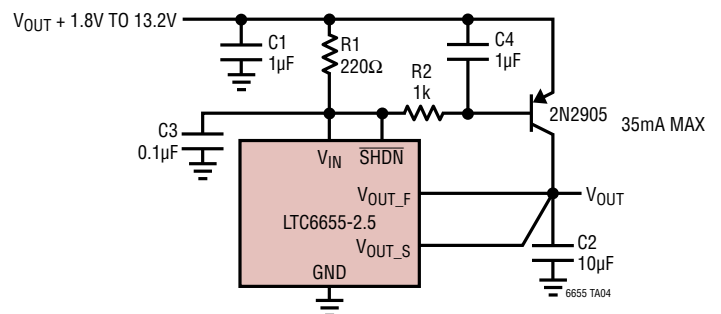


Output Voltage Boost

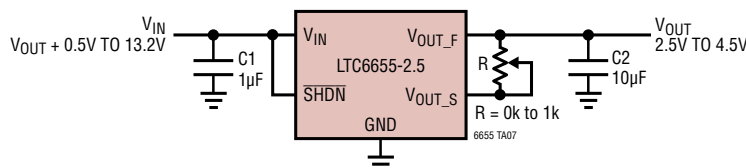

$V_{OUT} = \text{VOLTAGE OPTION} + 0.002 \cdot R$   
THIS EXAMPLE USES 2.5V AS THE VOLTAGE OPTION

FOR R USE A POTENTIOMETER THAT CAN HANDLE 2mA, IS LOW NOISE AND HAS A LOW TEMPERATURE COEFFICIENT

Low Noise Precision Voltage Boost Circuit

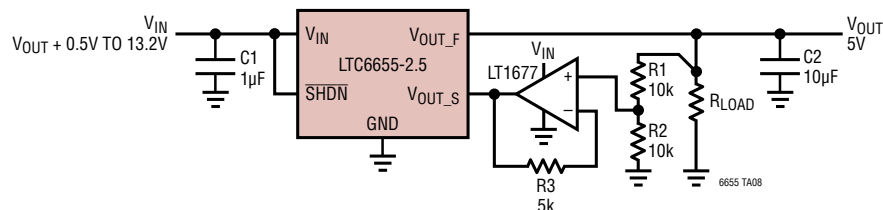


$V_{OUT} = \text{VOLTAGE OPTION} \cdot (1 + R1/R2)$   
THIS EXAMPLE USES 2.5V AS THE VOLTAGE OPTION


FOR R1 AND R2 USE VISHAY TRIMMED RESISTOR ARRAY (VSR144 OR MPM). WITH A PRECISION ARRAY THE MATCHING AND LOW TC WILL HELP PRESERVE LOW DRIFT.  $R3 = R1 || R2$

TYPICAL APPLICATIONS

Low Noise Statistical Averaging Reference  
 $e'_N = e_N/\sqrt{N}$ ; Where N is the Number of LTC6655s in Parallel

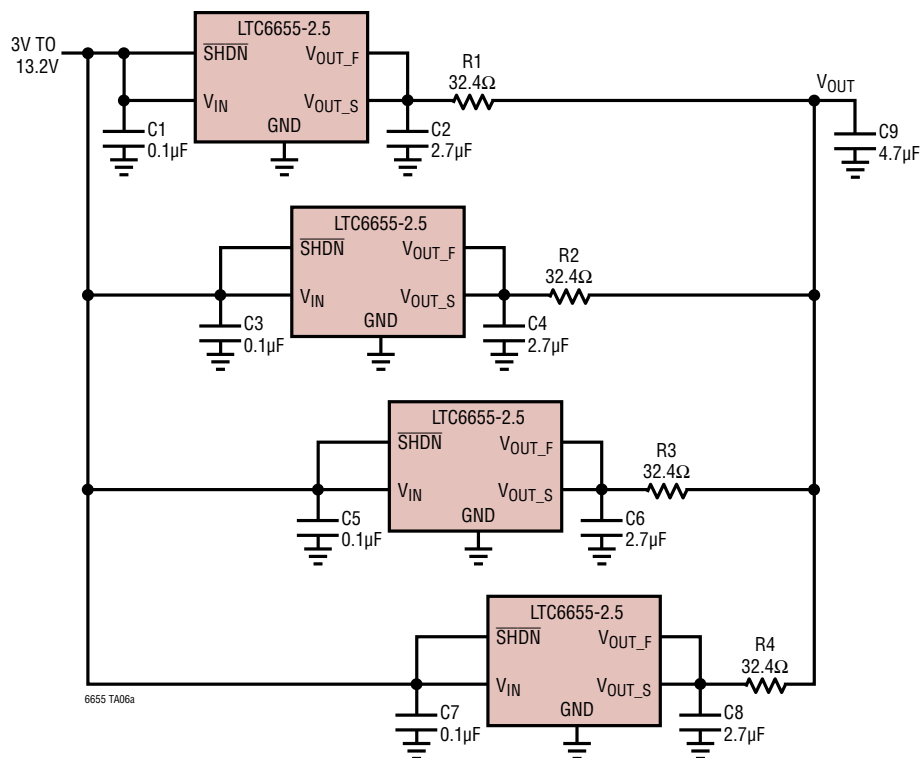

Low Frequency Noise (0.1Hz to 10Hz)  
with Four LTC6655-2.5 in Parallel

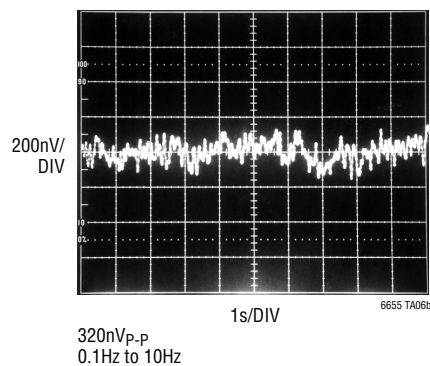


## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

### MS8 Package 8-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1660 Rev F)

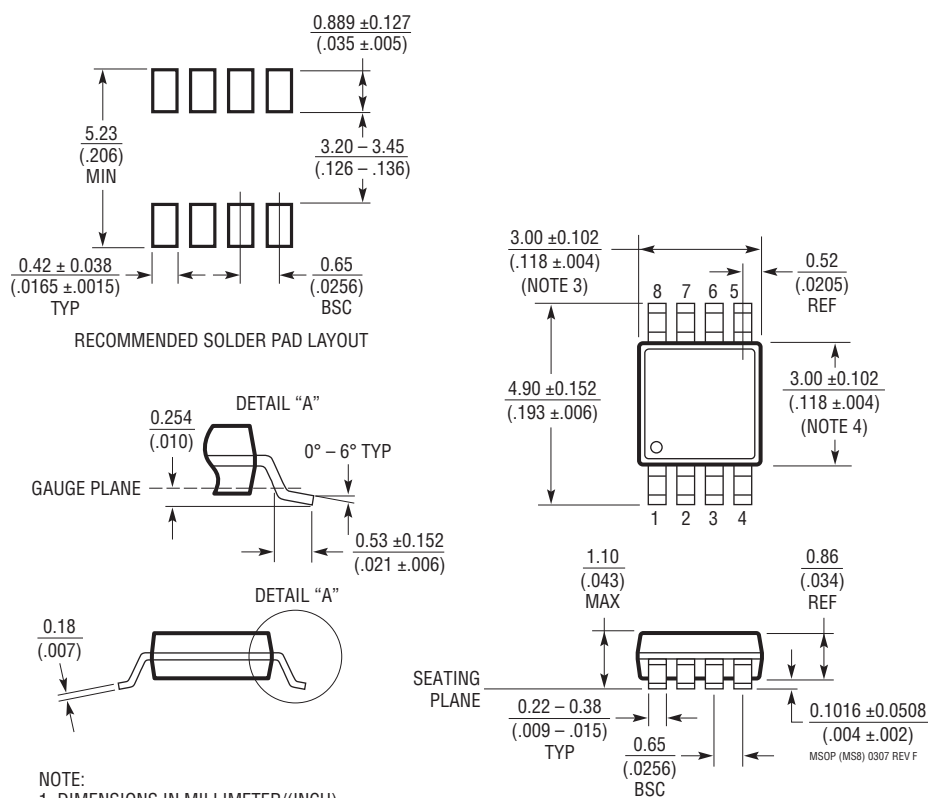

#### NOTE:

1. DIMENSIONS IN MILLIMETER/(INCH)
2. DRAWING NOT TO SCALE
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED  $0.152\text{mm}$  ( $.006$ ) PER SIDE
4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED  $0.152\text{mm}$  ( $.006$ ) PER SIDE
5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE  $0.102\text{mm}$  ( $.004$ ) MAX



## REVISION HISTORY

| REV | DATE  | DESCRIPTION                                                                                           | PAGE NUMBER     |
|-----|-------|-------------------------------------------------------------------------------------------------------|-----------------|
| A   | 02/10 | Voltage Options Added (1.250, 2.048, 3.000, 3.300, 4.096, 5.000), Reflected Throughout the Data Sheet | 1 to 22         |
| B   | 12/12 | Addition of 5mm x 5mm hermetic LS8 package                                                            | 1, 2, 3, 12, 22 |
|     |       | Update to Electrical Characteristics to include LS8 package                                           | 3, 4            |
|     |       | Addition of long-term drift and hysteresis plots for LS8 package                                      | 13              |
|     |       | Addition of Humidity Sensitivity information                                                          | 13              |
|     |       | Addition of Related Parts                                                                             | 22              |

