

High Frequency Inductive Proximity Sensor

E2EL

*Increased response
frequency for high speed
applications*

- Max 5 kHz, switching frequency
- M8 or dia
- 6.5 mm housing
- Brass or stainless steel housing



Ordering Information

Cable types

Brass housing

Diameter	Length	Mounting	Sensing Distance	Output			
				NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø 6,5	30 mm	Shielded	1,5 mm	E2EL-C1R5E1 2M	E2EL-C1R5E2 2M	E2EL-C1R5F1 2M	E2EL-C1R5F2 2M
	32 mm	Non-shielded	2,0 mm	E2EL-C2ME1 2M	E2EL-C2ME2 2M	E2EL-C2MF1 2M	E2EL-C2MF2 2M
	45 mm	Shielded	1,5 mm	E2EL-C1R5E1-L 2M	E2EL-C1R5E2-L 2M	E2EL-C1R5F1-L 2M	E2EL-C1R5F2-L 2M
	47 mm	Non-shielded	2,0 mm	E2EL-C2ME1-L 2M	E2EL-C2ME2-L 2M	E2EL-C2MF1-L 2M	E2EL-C2MF2-L 2M
M8	30 mm	Shielded	1,5 mm	E2EL-X1R5E1 2M	E2EL-X1R5E2 2M	E2EL-X1R5F1 2M	E2EL-X1R5F2 2M
	32 mm	Non-shielded	2,0 mm	E2EL-X2ME1 2M	E2EL-X2ME2 2M	E2EL-X2MF1 2M	E2EL-X2MF2 2M
	45 mm	Shielded	1,5 mm	E2EL-X1R5E1-L 2M	E2EL-X1R5E2-L 2M	E2EL-X1R5F1-L 2M	E2EL-X1R5F2-L 2M
	47 mm	Non-shielded	2,0 mm	E2EL-X2ME1-L 2M	E2EL-X2ME2-L 2M	E2EL-X2MF1-L 2M	E2EL-X2MF2-L 2M

Stainless steel housing

Diameter	Length	Mounting	Sensing Distance	Output			
				NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø 6,5	30 mm	Shielded	2,0 mm	E2EL-C2E1-DS 2M	E2EL-C2E2-DS 2M	E2EL-C2F1-DS 2M	E2EL-C2F2-DS 2M
	45 mm	Shielded	2,0 mm	E2EL-C2E1-DSL 2M	E2EL-C2E2-DSL 2M	E2EL-C2F1-DSL 2M	E2EL-C2F2-DSL 2M
M8	30 mm	Shielded	2,0 mm	E2EL-X2E1-DS 2M	E2EL-X2E2-DS 2M	E2EL-X2F1-DS 2M	E2EL-X2F2-DS 2M
	45 mm	Shielded	2,0 mm	E2EL-X2E1-DSL 2M	E2EL-X2E2-DSL 2M	E2EL-X2F1-DSL 2M	E2EL-X2F2-DSL 2M

Plug types

Brass housing

Diameter	Length	Mounting	Sensing Distance	Output			
				NPN / NO	NPN / NC	PNP / NO	PNP / NC
Ø 6,5 / Plug M8	45 mm	Shielded	1,5 mm	E2EL-C1R5E1-M3	E2EL-C1R5E2-M3	E2EL-C1R5F1-M3	E2EL-C1R5F2-M3
	47 mm	Non-shielded	2,0 mm	E2EL-C2ME1-M3	E2EL-C2ME2-M3	E2EL-C2MF1-M3	E2EL-C2MF2-M3
	54 mm	Shielded	1,5 mm	E2EL-C1R5E1-M3L	E2EL-C1R5E2-M3L	E2EL-C1R5F1-M3L	E2EL-C1R5F2-M3L
	56 mm	Non-shielded	2,0 mm	E2EL-C2ME1-M3L	E2EL-C2ME2-M3L	E2EL-C2MF1-M3L	E2EL-C2MF2-M3L
M8 / Plug M8	45 mm	Shielded	1,5 mm	E2EL-X1R5E1-M3	E2EL-X1R5E2-M3	E2EL-X1R5F1-M3	E2EL-X1R5F2-M3
	47 mm	Non-shielded	2,0 mm	E2EL-X2ME1-M3	E2EL-X2ME2-M3	E2EL-X2MF1-M3	E2EL-X2MF2-M3
	54 mm	Shielded	1,5 mm	E2EL-X1R5E1-M3L	E2EL-X1R5E2-M3L	E2EL-X1R5F1-M3L	E2EL-X1R5F2-M3L
	56 mm	Non-shielded	2,0 mm	E2EL-X2ME1-M3L	E2EL-X2ME2-M3L	E2EL-X2MF1-M3L	E2EL-X2MF2-M3L
M8 / Plug M12	44 mm	Shielded	1,5 mm	E2EL-X1R5E1-M1	E2EL-X1R5E2-M1	E2EL-X1R5F1-M1	E2EL-X1R5F2-M1
	46 mm	Non-shielded	2,0 mm	E2EL-X2ME1-M1	E2EL-X2ME2-M1	E2EL-X2MF1-M1	E2EL-X2MF2-M1
	60 mm	Shielded	1,5 mm	E2EL-X1R5E1-M1L	E2EL-X1R5E2-M1L	E2EL-X1R5F1-M1L	E2EL-X1R5F2-M1L
	62 mm	Non-shielded	2,0 mm	E2EL-X2ME1-M1L	E2EL-X2ME2-M1L	E2EL-X2MF1-M1L	E2EL-X2MF2-M1L

Specifications

Brass type

Type			Ø 6,5		M8	
Operating voltage			10 to 35 VDC			
Rated supply voltage			24 VDC			
Current consumption			max. 15 mA at 24 VDC			
Sensing object			Ferrous metals			
Mounting ((s)hielded, (n)on-shielded) *1			s	n	s	n
Operating distance in mm			1,5	2,0	1,5	2,0
Tolerance of operating distance			±10%			
Standard target size in mm (L x W x H in mm, FE 37)			6,5x6,5x1			8x8x1
Differential travel			1 % ... 15 % of operating distance			
Max. response frequency in kHz			5,0			
Control output			Type		E2EL-... E1 type: NPN-NO	
					E2 type: NPN-NC	
					F1 type: PNP-NO	
					F2 type: PNP-NC	
			Max-Load		200 mA	
			Max-on-state Voltage drop		2,5 VDC (at 200mA load current and with 2 m cable)	
Circuit protection			Reverse polarity, output short-circuit			
Indicator			Operating indicator (yellow LED)			
Ambient temperature			Operating: -25° to 70°C			
Humidity			35 to 95 % RH			
Influence of temperature			± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C			
Dielectric strength			1.500 VAC, 50/60 Hz for 1 min. between current carry parts and case			
Electromagnetic compatibility EMC			EN 60947-5-2			
Vibration resistance			Destruction: 10 to 70 Hz, 1,5 mm double amplitude for 1 hour each in X, Y and Z directions			
Shock resistance			Destruction: 300 m/s² (approx. 30 G) for 6 times each in X, Y and Z directions			
Enclosure rating			IP 67 (EN 60947-1)			
Connection *2		Pre-wired	2 m PVC-cable, 3 x 0,14 mm²			
		Connector	M8 plug			
Weight in g	Pre-wired	long	45			50
		short	43			48
	Connector	long	10			15
		short	8			13
Material		Case	Brass			
		Sensing face	PBTP			

*1. For detailed mounting instruction please refer to page D-105

*2. PUR cable and different length on request.

Stainless steel type


Type		Ø 6,5		M8	
Operating voltage		10 to 35 VDC			
Rated supply voltage		24 VDC			
Current consumption		max. 15 mA at 24 VDC			
Sensing object		Ferrous metals			
Mounting *1		shielded			
Operating distance in mm		2,0			
Tolerance of operating distance		±10%			
Standard target size in mm (L x W x H in mm, FE 37)		6,5x6,5x1		8x8x1	
Differential travel		1 % ... 15 % of operating distance			
Max. response frequency in kHz		4,0			
Control output		Type	E2EL-... E1 type: NPN-NO E2 type: NPN-NC F1 type: PNP-NO F2 type: PNP-NC		
		Max-Load	200 mA		
		Max-on-state Voltage drop	2,5 VDC (at 200mA load current and with 2 m cable)		
Circuit protection		Reverse polarity, output short-circuit			
Indicator		Operating indicator (yellow LED)			
Ambient temperature		Operating: -25° to 70°C			
Humidity		35 to 95 % RH			
Influence of temperature		± 10 % max. of Sn at 23°C in temperature range of -25° to 70°C			
Dielectric strength		1.500 VAC, 50/60 Hz for 1 min. between current carry parts and case			
Electromagnetic compatibility EMC		EN 60947-5-2			
Vibration resistance		Destruction: 10 to 70 Hz, 1,5 mm double amplitude for 1 hour each in X, Y and Z directions			
Shock resistance		Destruction: 300 m/s² (approx. 30 G) for 6 times each in X, Y and Z directions			
Enclosure rating		IP 67 (EN 60947-1)			
Connection *2		Pre-wired	2 m PVC-cable, 3 x 0,14 mm²		
		Connector	-	M8 plug	
Weight in g	Pre-wired	long	45	50	
		short	43	48	
	Connector	long	-	10	
		short	-	-	
Material		Case	stainless steel 1.4305 / AISI 303		
		Sensing face	PBTP		

*1. For detailed mounting instruction please refer to page D-105

*2. PUR cable and different length on request.


Engineering data

Standardized characteristic for lateral approach

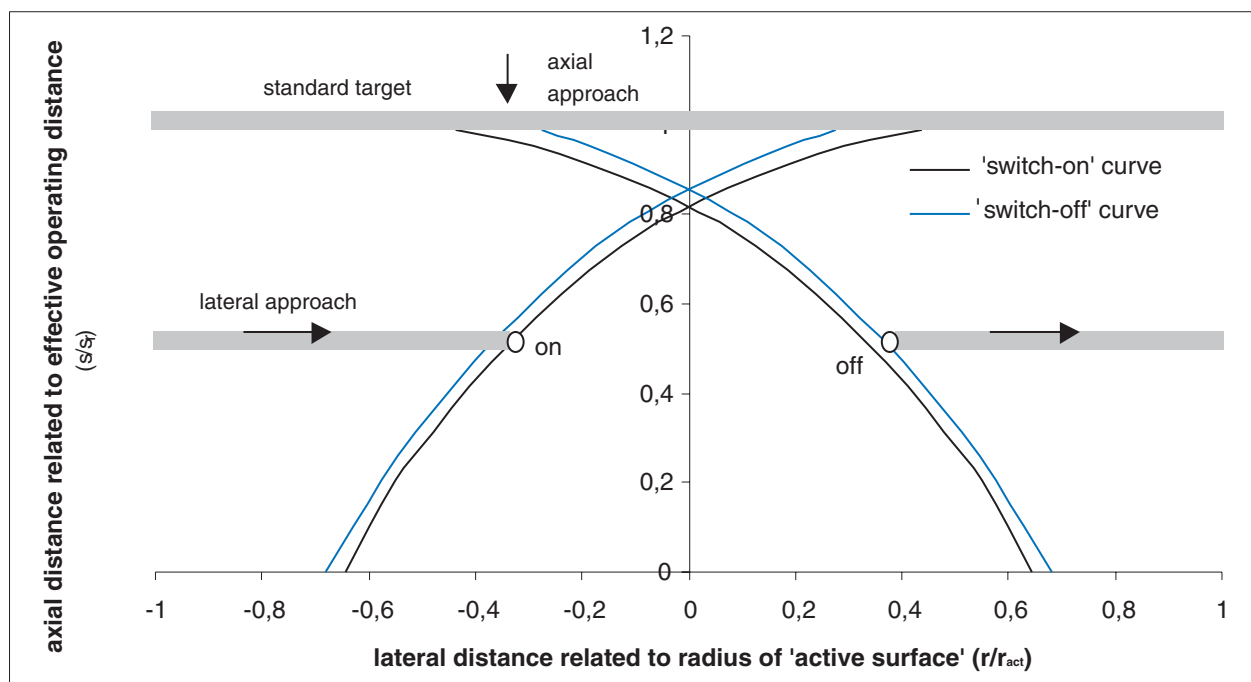


Output Circuit Diagram and Timing Chart

E2EL-□E□ NPN Output

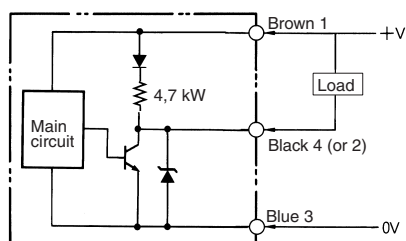

E2EL-□F□ PNP Output

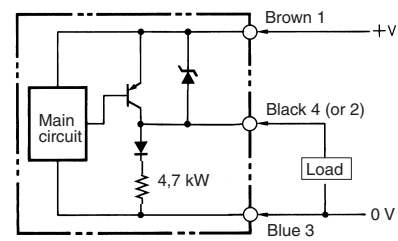

E2EL-□E□ NPN Output


	NO	NC
Sensing object	Yes	No
Yellow indicator	Lit	Not lit
Control output	ON	OFF

E2EL-□F□ PNP Output


	NO	NC
Sensing object	Yes	No
Yellow indicator	Lit	Not lit
Control output	ON	OFF

Pin Arrangement at Connector Types

1. Connector M8 (viewed to plug pins)




2. Connector M12 (viewed to plug pins)

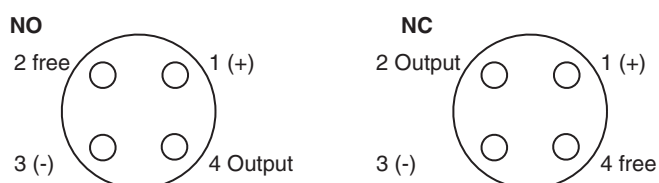


Dimensions

Cable types


E2EL-C1□R5 2M, E2EL-C2□-DS 2M

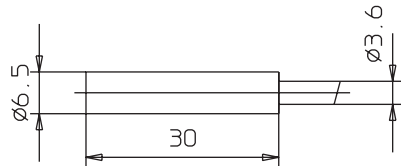


E2EL-C2M□ 2M

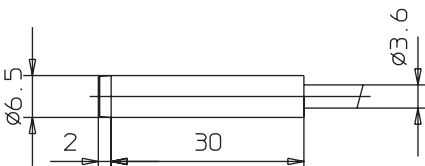


E2EL-C1R5□-L 2M, E2EL-C2□-DSL 2M

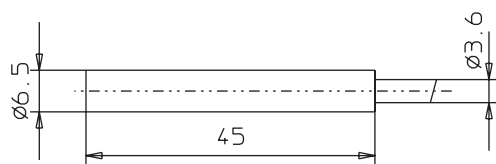


E2EL-C2M□-L 2M

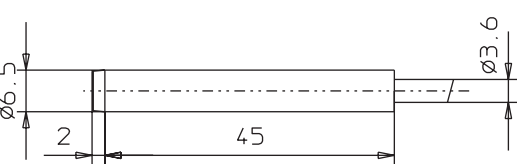


E2EL-X1R5□ 2M, E2EL-X2□-DS 2M

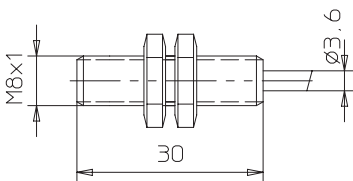


E2EL-X2M□ 2M

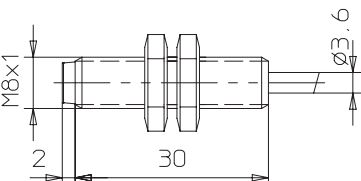

E2EL-X1R5□-L 2M, E2EL-X2□-DSL 2M

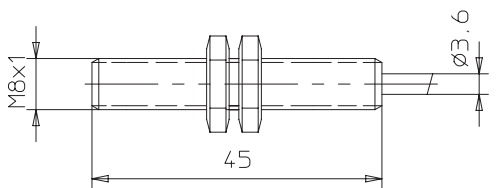


E2EL-X2M□-L 2M

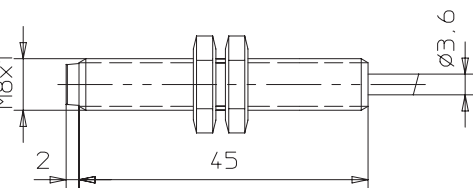


Plug types

E2EL-C1R5□-M3

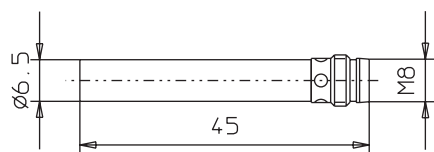


E2EL-C2M□-M3

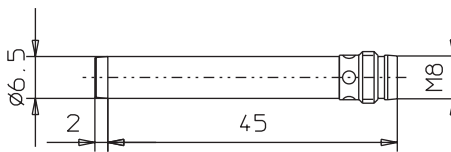


E2EL-C1R5□-M3L




E2EL-C2M□-M3L

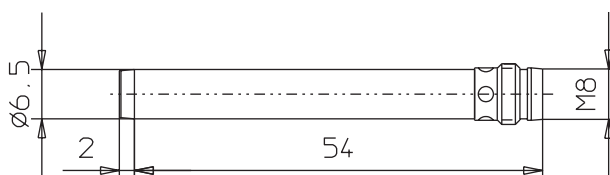


E2EL-X1R5□-M3

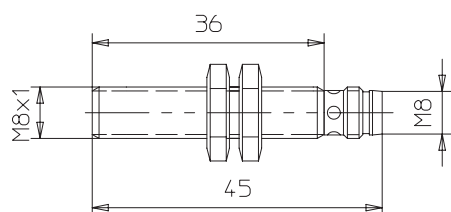


E2EL-X2M□-M3

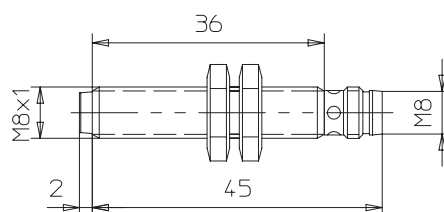


E2EL-X1R5□-M3L, E2EL-X2□DM3S

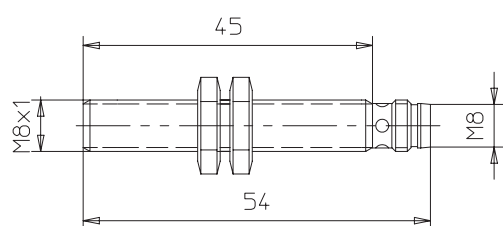


E2EL-X2M□-M3L

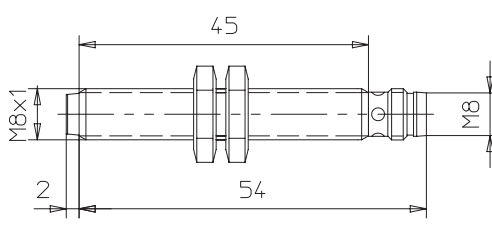


E2EL-X1R5□-M1

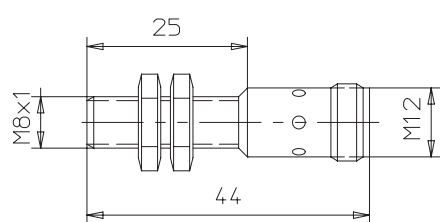


E2EL-X2M□-M1

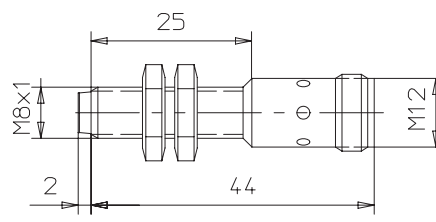

E2EL-X1R5□-M1L



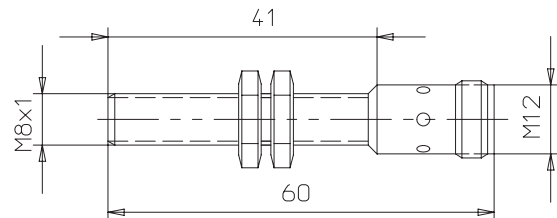


E2EL-X2M□-M1L

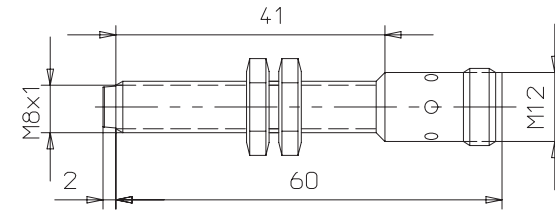

Installation

Caution

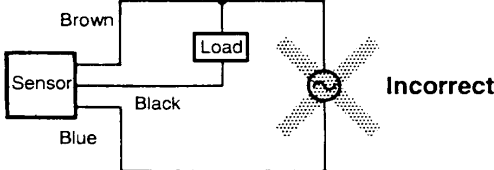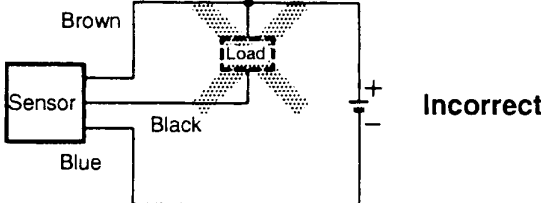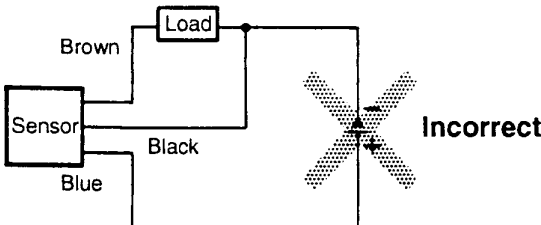Item	Examples
Power Supply Do not impose an excessive voltage on the E2EL, otherwise it may explode or burn. Do not impose 24 VAC on any E2EL model, otherwise it may explode or burn.	
Load short-circuit Do not short-circuit the load, or the E2EL may explode or burn. The E2EL's short-circuit protection function is valid, if the polarity of the supply voltage imposed is incorrect and within the rated voltage range.	
Wiring Be sure to wire the E2EL and load correctly, otherwise it may explode or burn.	

Correct Use

Installation

Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

Power OFF

The Proximity Sensor may output a pulse signal when it is turned off. Therefore, it is recommended to turn off the load before turning off the Proximity Sensor.

Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

Sensing Object

Metal Coating:

The sensing distance of the Proximity Sensor vary with the metal coating on sensing objects.

Wiring

High-tension Lines

Wiring through Metal Conduit

If there is a power or high-tension line near the cord of the Proximity Sensor, wire the cord through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

Core Tractive Force

Do not pull cords with the tractive force exceeding the following:
pull force (N) = 20 x cable diameter (mm)

Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose the water-resistivity.



Environment

Water-Resistivity

Do not use the Proximity Sensor underwater, outdoors or in the rain.

Operating Environment

Be sure to use the Proximity Sensor within operating ambient temperature range and do not use the Proximity Sensor outdoors so that its reliability and life expectancy can be maintained. Although the Proximity Sensor is water resistive, a cover to protect the Proximity Sensor from water or soluble machining oil is recommended so that its reliability and life expectancy can be maintained. Do not use the Proximity Sensor in an environment with chemical gas (e. G., strong alkaline or acid gases including nitric, chromic, and concentrated sulfuric acid gases).

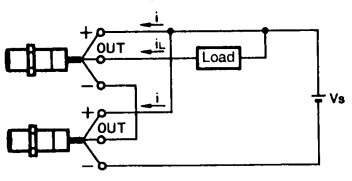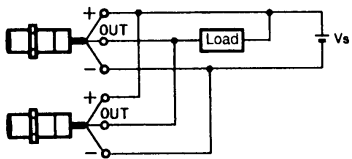Item	Examples	Item
AND (serial connection)	Correct 	The Sensors connected together must satisfy the following conditions: $iL + (N-1) \times i = \text{Upper-limit of control output of each Sensor}$ $VS - N \times VR = \text{Load operating voltage}$ N = No. of Sensors VR = Residual voltage of each Sensor VS = Supply voltage i = Current consumption of the Sensor iL = Load current If the MY Relay, which operate at 24 VDC, is used as a load for example, a maximum of two Proximity Sensors can be connected to the load.
OR (parallel connection)	Correct 	The number of Sensors connected in parallel varies with the Proximity Sensor model.

Effects of Surrounding Metal

Shielded types:

Shielded types allow direct installation on metal plates in an embedded manner without performance change. A minimum distance of $3s_n$ is required between the active surface and a metallic surface in front of the device. (Fig. 1).

For SUS shielded types the following minimum distances are required to avoid performance change (see Fig.2 and table below):

Shielded SUS Types	Free zone
E2EL-2□-DS	0,5 mm




Fig.1: Shielded type (except SUS)




Fig.2: Shielded SUS type

Non-shielded types:

Installation of non-shielded types in metal require the minimum distances according to Fig. 3.




Fig.3: Non-shielded type

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.