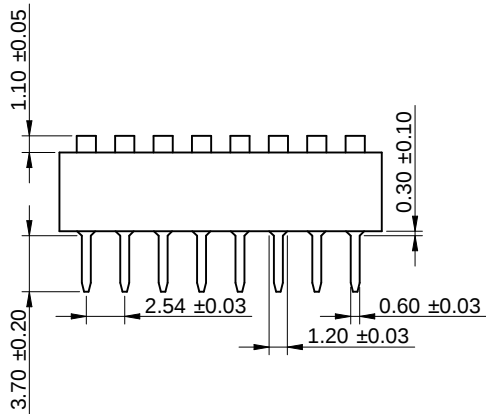


Wiring Diagram

TECHNICAL CHARACTERISTICS

SPECIFICATION

>Contact Rating:

Switching: 25mA, 24VDC
Non-Switching: 100mA, 50VDC

>Contact Resistance:

Initial: 50mOHM max.
After Life Test: 100mOHM max.

>Insulation Resistance:

min. 100MOHM at 500VDC

>Dielectric Strength:

500VAC for 1 minute

>Operating Force:

1000g max.

>Mechanical Life:

min. 5000 cycles

>Electrical Life:

2000 cycles / 25mA, 24VDC

>Raise Actuator Type

MATERIAL

>Cover: PBT UL 94V-0, color Red

>Base: PA 66 UL 94V-0, color Black

>Actuator: PA 66 UL 94V-0, color White

>Contact: Gold Plated

>Terminal: Tin Plated

SOLDERING INFORMATION

>Terminal in THT version

>Wave soldering 260°C 10sec. max

>Hand soldering with 30W or under at 350°C for 3 sec. max or at 270°C for 5 sec max

>Keep in "off" position during soldering

>Ultrasonic cleaning not re-commended

>Any inflow of Flux into the switch may influence the contact function

ENVIRONMENTAL

>Storage condition: -40°C ~ +85°C

>Operation condition: -40°C ~ +85°C

>Compliance: Lead Free, ROHS, Reach

PACKAGING INFORMATION

>Tube packaging only

>On delivery in "off" position

DIMENSION


No.Of Pole	1	2	3	4	5	6
Dim. A (mm)	3.54	6.08	8.62	11.16	13.70	16.24
No.Of Pole	7	8	9	10	12	
Dim. A (mm)	18.78	21.32	23.86	26.40	31.48	

Scale - 2:1

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Wurth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

				GENERAL TOLERANCE .x = +/- 0,2 .xx = +/- 0,15		Basic material				
					Date	Name	DESCRIPTION WS-DITV,THT version raise Actuator without top tape sealed			
				Drawn	09-02-24	Jelisarow				
				Checked	09-02-24	Hsu				
b	revised MatchCode	14-07-24	AL	 Würth Elektronik RDX		Scale	2:1	Position		SIZE
a	warning text	11-10-26	WJ			Drawing.- No. 4181172709xx				A4
REV	FILE	DATE	BY	EDV NO	4181172709xx.dft	System :Solid Edge V20				