

FEATURES

4 Matched Transimpedance Amplifiers
40 MHz Bandwidth
Selectable 40 k Ω /120 k Ω Transimpedance
Continuous or Sampled Servo Capability
Outputs:
 Quad Sum
 Track
 Normalized Track
 Focus
 Normalized Focus
10 MHz Normalization Dividers
10 ns Write Recovery with Sampling
Low Output Noise

PRODUCT DESCRIPTION


The AD880 is a monolithic integrated circuit intended for applications in the servo/read systems of an optical disk drive product.

The AD880 consists of four matched transimpedance amplifiers (A, B, C, D) with selectable 40 k Ω or 120 k Ω transimpedance. The basic transimpedance stage consists of a 10 k Ω transimpedance front end that drives a programmable $\times 1$ or $\times 3$ buffer. Each stage has been configured to minimize noise and noise peaking. To further enhance overall signal to noise performance, an external capacitor may be added between the transimpedance amplifier and the programmable buffer to implement a first order low-pass filter.

The AD880 is stable over the full range of input source capacitances. To ensure stability and maximize available bandwidth in both transimpedance modes, the internal compensation capacitor in the programmable buffer is appropriately modified for each mode.

Fast read after write recovery is implemented through the transimpedance sample function. Use of the sample function allows for a read-after-write recovery in approximately 10 ns. The "sample capacitor" also serves the dual purpose of providing the low-pass filter.

AD880 FUNCTIONAL BLOCK DIAGRAM

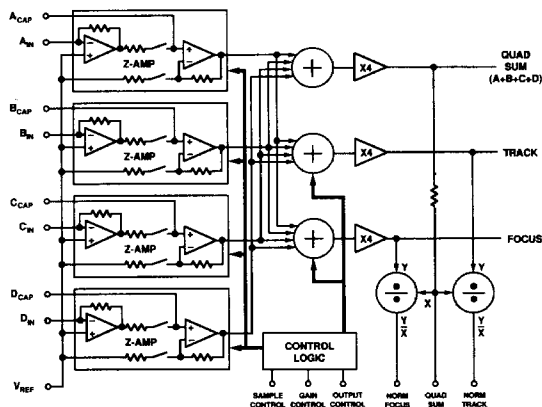

In addition, the part contains three offset trimmed summing amplifiers with 40 MHz bandwidth. One amplifier provides the quad sum output. This output can be low pass filtered prior to driving the normalization dividers. Two other summing amplifiers generate the track and focus outputs.

- Quad Sum : $(A+B+C+D)$
- Track : $(A+D) - (B+C)$ or $(A-B)$
- Focus : $(A+C) - (B+D)$ or $(C-D)$

The selectable outputs are programmed through a CMOS compatible control line.

Finally, a pair of two quadrant dividers are provided. These generate the normalized focus and track signals with an accuracy of 10%, and have bandwidths in excess of 10 MHz.

The AD880 is available in a 20-pin SOIC package and is specified to operate over the 0 to +70°C commercial temperature range.

SPECIFICATIONS

(@ + 25°C and +12 V dc, unless otherwise noted)

Parameter	Conditions	AD880J			Units
		Min	Typ	Max	
TRANSIMPEDANCE AMPLIFIER					
Transimpedance	Channel to Channel @ 30 MHz Input Signal AV ₀		10		kΩ
Transimpedance Matching				±1	%
Channel to Channel Crosstalk				-40	dB
Open-Loop Gain			20		V/V
Open-Loop Bandwidth			40		MHz
Input Capacitance			2		pF
Input Offset Current			TBD		nA
Input Offset Voltage			TBD		mV
Input Current Noise			1		pA/√Hz
Input Voltage Noise			1.5		nV/√Hz
Feedback Resistor Noise			13		nV/√Hz
Output Impedance	@ Filter Capacitor Pin (Active)	1		kΩ	
Output Impedance	@ Filter Capacitor Pin (Sampled)	250		MΩ	
Max Output Voltage Swing		±0.7		V	
Max Output Current			TBD	mA	
V _{REF} Range		+4.5		+5.5	V
V _{REF} Input Current		-5		5	mA
PROGRAMMABLE BUFFER					
Gain	Gain Control = 0		10		dB
Gain Matching	Gain Control = 0, Channel to Channel		TBD		dB
3 dB Bandwidth	Gain Control = 0		40		MHz
Gain	Gain Control = 1		0		dB
Gain Matching	Gain Control = 1, Channel to Channel		TBD		dB
3 dB Bandwidth	Gain Control = 1		60		MHz
Input Bias Current				0.1	pA
Input Offset Voltage			TBD		μV
Input Current Noise			1		pA/√Hz
Input Voltage Noise			13		nV/√Hz
Max Output Voltage Swing	Relative to V _{REF}	±1			V
SUMMING AMPLIFIER					
Gain	Input to Input		12		dB
Gain Matching			TBD		%
3 dB Bandwidth	Relative to V _{REF}		40		MHz
Output DC Voltage			0		V
Output Voltage Offset	Relative to V _{REF}		TBD		V
Output Impedance			TBD		Ω
Max Output Voltage	Relative to V _{REF}	±2.5			V
Max Output Current		20			mA
NORMALIZATION DIVIDERS					
Division Error	0.5 ≤ Y ≤ X ≤ 1.5			±10	%
3 dB Bandwidth	Relative to V _{REF} Division Ratio = 1		10		MHz
Output Voltage Range			2		V
Output Current			200		μA
QUAD SUM FILTER					
Resistance	Quad Sum to Quad Sum Filter	8	10	12	kΩ
MODE CONTROL SECTION					
V _{IH}	(CMOS Compatible)	4.0		V _{CC}	V
V _{IL}		0		1	V
I _{IH}				0.1	pA
I _{IL}				0.1	pA
Mode Switching Times			10		ns
	Gain Control		10		ns
	Output Mode		10		ns
	Sample Mode		10		ns

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Analog Devices assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

Parameter	Conditions	AD880J			Units
		Min	Typ	Max	
POWER SUPPLY REQUIREMENTS					
Supply Voltage V_{CC}	T_{min} to T_{max}	10.8	12	13.2	V
Supply Voltage V_{EE}			0		V
Quiescent Current I_{CC}		50	60	70	mA
ABSOLUTE MAXIMUM RATINGS ¹					
Supply Voltage V_{CC}	Soldering 60 Sec			14.5	V
V_{REF} Input Voltage		-0.8		7.0	V
Storage Temperature Range		-65		130	°C
Operating Temperature Range ²		0		70	°C
Lead Temperature Range				+300	°C

NOTES

¹Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at these or any other condition above those indicated in the operational section of this specification is not implied. Exposure to absolute rating conditions for extended period may affect device reliability.

²20-pin wide body SO package: $\theta_{JA} = +65^{\circ}\text{C}/\text{watt}$.


Specifications subject to change without notice.

Logic Assignments	Sample Control	Gain Control	Output Control	Logic Assignments	Sample Control	Gain Control	Output Control
Transimpedance Amplifiers Active	0	X	X	Track Output = $(A+D) - (B+C)$	X	X	0
Transimpedance Amplifiers Sampled	X	X	X	and Focus Output = $(A+C) - (B+D)$			
Select 120 k Ω Transimpedance	X	0	X	Track Output = $(A-B)$	X	X	1
Select 40 k Ω Transimpedance	X	X	X	and Focus Output = $(C-D)$			

X = Do Not Care.

Table 1. AD880 Logic Assignments

PIN ASSIGNMENTS

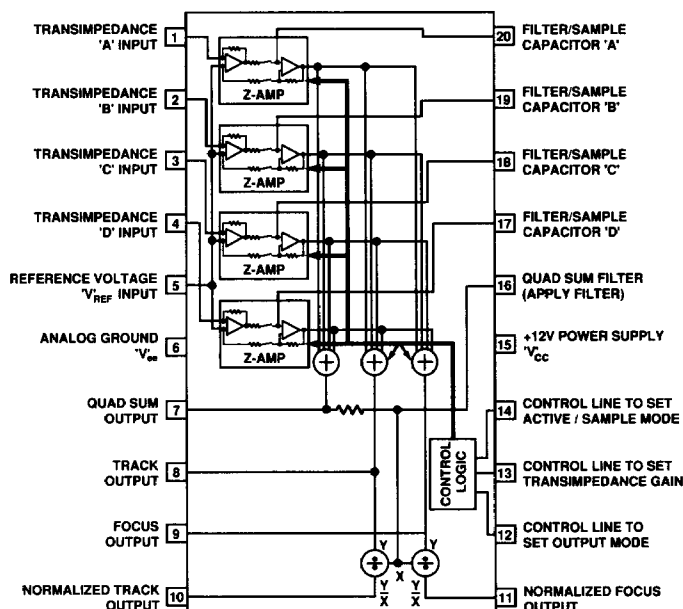

This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Analog Devices assumes no obligation regarding future manufacture unless otherwise agreed to in writing.

Transimpedance Stage

Figure 1.

By keeping the transimpedance of the first stage relatively low, 10 k Ω , and limiting the open-loop gain of amplifier "A" to 20, noise peaking is limited. To further limit noise and noise peaking, the output of the first stage may be low pass filtered by applying a capacitor, see Figure 1, at the appropriate pins (Pins 17, 18, 19 and 20). The capacitor forms a first order low-pass filter with a cut-off frequency $f = 1/(2\pi \bullet 1000 \bullet C_{\text{FILTER}})$. The complete noise model for the front-end transimpedance stage is shown in Figure 2.

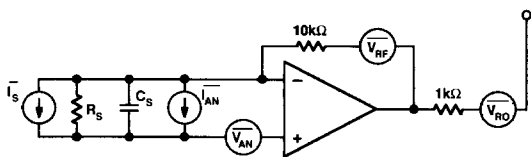


Figure 2.

Logic Assignments	Gain Control
Select 120 k Ω Transimpedance	0
Select 40 k Ω Transimpedance	1

Logic Assignments	Sample Control
Transimpedance Amplifier Active	0
Transimpedance Amplifier Sampled	1

Logic Assignments	Output Control
Track Output = $(A + D) - (B + C)$ and Focus Output = $(A + C) - (B + D)$	0
Track Output = $(A - B)$ and Focus Output = $(C - D)$	1

The normalization dividers provide current output of the Normalized Focus and Track signals. A low-pass filter capability is provided at the “Quad Sum Filter” pin (Pin 16). The Quad Sum Filter Resistance is 10 k Ω , and thereby offers the user the capability to implement a RC filter prior to the applying the Quad Sum signal to the normalization dividers.

Care must be taken to ensure good R_F practice in the PC layout to avoid oscillations. A parallel combination of $0.1\ \mu\text{F}$ and $0.01\ \mu\text{F}$ ceramic capacitors should be used as close to the V_{CC} (Pin 6) and V_{REF} (Pin 5) pins as possible. Also, a current path to $V_{REFERENCE}$ must be provided for the outputs of the normalization dividers.

Model	Description	Package Option*
AD880JR	20-Pin Small Outline	R-20

*See Section 20 for package outline information.

9-6 MASS STORAGE COMPONENTS