


# UL 489 and UL 1077 DIN rail miniature circuit breakers



*Powering Business Worldwide*

# Application guidelines for UL 489 circuit breakers and UL 1077 supplementary protectors

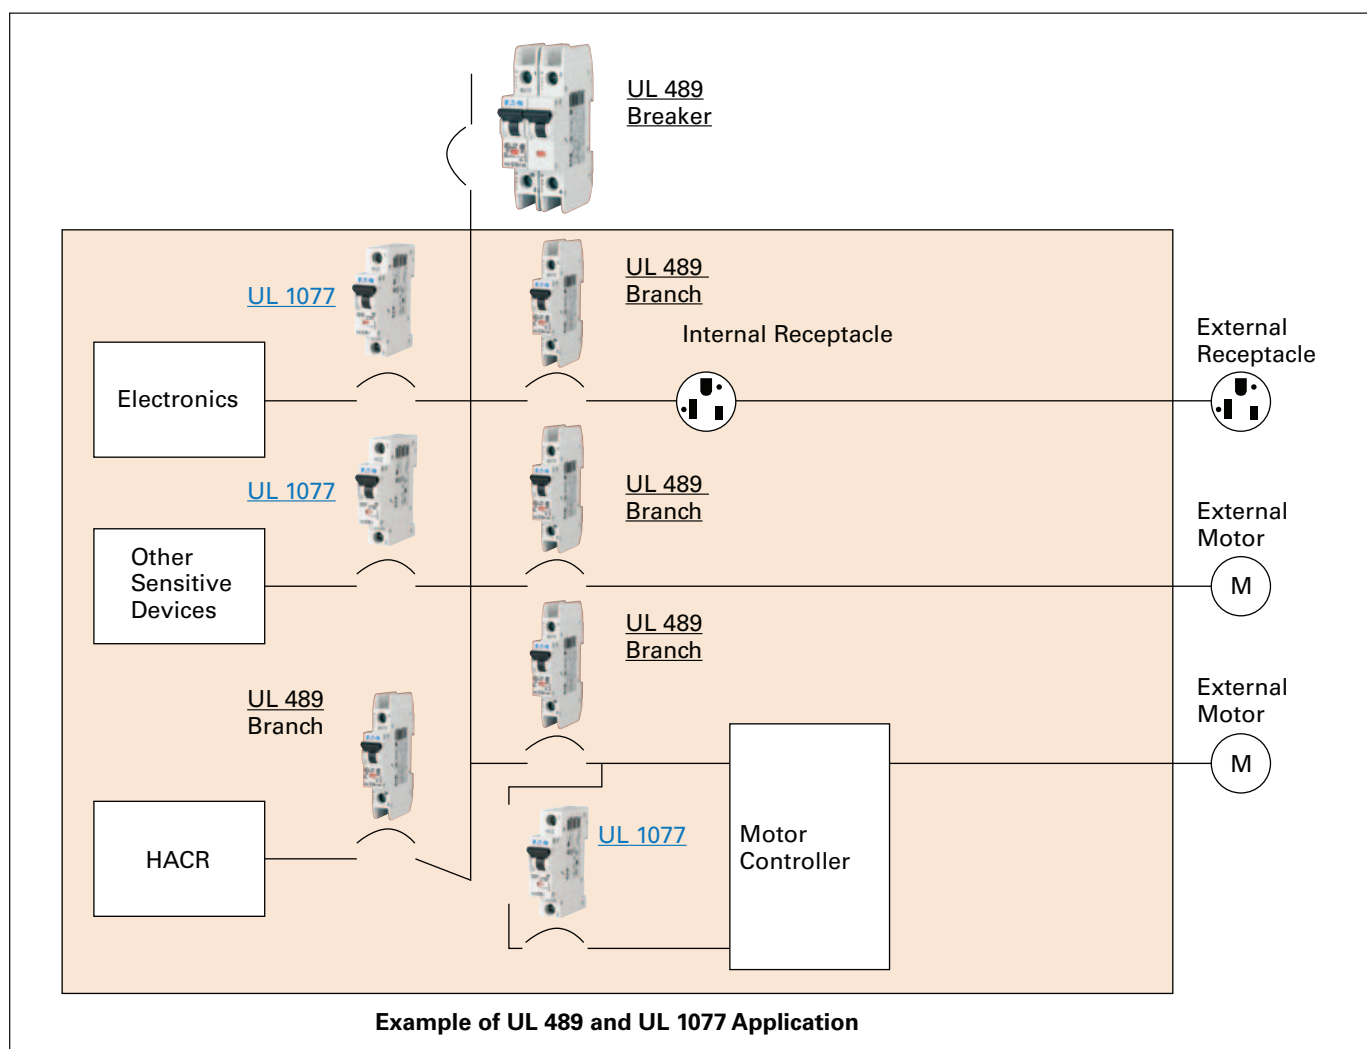

## UL 489 circuit breakers

Used for branch circuit protection, internal/external receptacles, external motors and HACR equipment (heating, air conditioning and refrigeration).

## UL 1077 supplementary protectors

Used for overcurrent protection within appliances or electrical equipment, where branch circuit protection is already provided or not required.

**Note:** UL 489 devices can be used in place of UL 1077; UL 1077 devices cannot be used in place of UL 489.

# UL 489 and UL 1077 DIN rail miniature circuit breakers

## UL 489 DIN rail branch circuit breakers

|                                                    |    |
|----------------------------------------------------|----|
| Product overview.....                              | 2  |
| Product selection                                  |    |
| FAZ-NA—B curve (3–5X $I_n$ current rating) .....   | 4  |
| FAZ-NA—C curve (5–10X $I_n$ current rating).....   | 5  |
| FAZ-NA—D curve (10–20X $I_n$ current rating) ..... | 6  |
| FAZ-NA-DC—10 kAIC at 125 Vdc per pole .....        | 7  |
| Accessories .....                                  | 8  |
| Technical data .....                               | 10 |
| Accessory technical data.....                      | 14 |

## UL 1077 DIN rail supplementary protectors

|                                                 |    |
|-------------------------------------------------|----|
| Product overview.....                           | 17 |
| Product selection                               |    |
| FAZ—B curve (3–5X $I_n$ current rating) .....   | 19 |
| FAZ—C curve (5–10X $I_n$ current rating).....   | 20 |
| FAZ—D curve (10–20X $I_n$ current rating) ..... | 21 |
| FAZ—K curve (8–12X $I_n$ current rating).....   | 22 |
| FAZ—S curve (13–17X $I_n$ current rating) ..... | 23 |
| FAZ—Z curve (2–3X $I_n$ current rating) .....   | 24 |
| Accessories .....                               | 27 |
| Technical data .....                            | 28 |
| Accessory technical data.....                   | 33 |

## Miniature circuit breaker application

|                           |    |
|---------------------------|----|
| FAZ circuit breakers..... | 37 |
|---------------------------|----|

# UL 489 DIN rail branch circuit breakers

## FAZ-NA circuit breakers

### PRODUCT OVERVIEW

#### Optimum and efficient protection



Optimum product quality, tested reliability and safety stand for best protection of personnel, installations and plant. Eaton's FAZ-NA DIN rail mountable circuit breaker is designed for use in branch service applications.

#### Powerful offering for machine and system builders

The FAZ-NA is available with B, C and D characteristics in accordance with UL® 489, CSA® C22.2 No.5; UL 1077, CSA C22.2 No.235 and IEC 60947-2. These devices are CE marked.

#### Typical applications

Feeder and branch circuit protection

- Convenience receptacle circuits (internal/external)
- Motor control circuits
- Load circuits leaving the equipment (external)
- HACR equipment (heating, air conditioning, refrigeration) (internal/external)
- PLC I/O points
- Computers
- Power supplies
- Control instrumentation
- Relays
- UPS
- Power conditioners

#### Features

- Complete range of UL 489 listed DIN rail mounted miniature circuit breakers up to 40A current rating
- Standard ratings of 10 kAIC up to 277/480 Vac
- Select amperages available at 14 kAIC up to 277/480 Vac and 10 kAIC up to 125 Vdc per pole
- Current limiting design provides fast short-circuit interruption that reduces the let-through energy, which can damage the circuit

- Suitable for branch circuit device protection
- Thermal-magnetic overcurrent protection
  - Three levels of short-circuit protection, categorized by B, C and D curves
- Trip-free design—breaker can not be defeated by holding the handle in the ON position
- Captive screws cannot be lost
- SWD (switching duty)—suitable for switching fluorescent lighting loads ( $I_n \leq 20A$ )
- Fulfill UL 489, CSA C22.2 No.5 and also IEC 60947-2 Standard
- For use in applications for which UL 1077 or CSA C22.2 No.235 are also allowed
- Field installable shunt trip and auxiliary switch subsequent mounting
- Separate version for ring-tongue connection (Type FAZ-RT), terminal screws can be removed (on both sides)
- Module width of only 17.7 mm (per pole)
- Contact Position Indicator (red/green)
- Easy installation on DIN rail
- Possibility for sealing the toggle in ON or OFF position

#### FAZ-NA complies with the latest national and international standards

##### Standards—Feeder and Branch Circuit Protection

###### UL 489

|                                                                                            |                                                                                       |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Standard for molded case circuit breakers (MCCB) for feeder and branch circuit protection. |  |
| Products meet the requirements of the National Electrical Code® (NEC®).                    |                                                                                       |

###### CSA C22.2 No.5

|                                                                                                                                     |                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Standard for molded case circuit breakers (MCCB) for feeder and branch circuit protection (corresponds closely to UL 489 Standard). |  |
| Products meet the requirements of the Canadian Electrical Code (CEC).                                                               |                                                                                       |

###### RoHS

|                                   |                                                                                       |
|-----------------------------------|---------------------------------------------------------------------------------------|
| These devices are RoHS compliant. |  |
|-----------------------------------|---------------------------------------------------------------------------------------|

###### VDE

|                                  |                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------|
| These devices are VDE compliant. |  |
|----------------------------------|---------------------------------------------------------------------------------------|

###### ABS

|                                  |                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------|
| These devices are ABS compliant. |  |
|----------------------------------|---------------------------------------------------------------------------------------|

# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers

## PRODUCT OVERVIEW

### Tripping curves to choose from

Eaton FAZ-NA branch circuit breakers are available with "B," "C" and "D" tripping characteristics. B-curve devices are suitable for applications where low levels of inrush current are expected.

C-curve devices are suitable for applications where medium levels of inrush current are expected. Applications include small transformers, lighting, pilot devices, control circuits and coils. C-curve devices provide a medium magnetic trip point.


D-curve devices are suitable for applications where high levels of inrush current are expected. The high magnetic trip point prevents nuisance tripping in high inductive applications such as motors, transformers and power supplies.

Eaton FAZ-NA devices are current limiting, which means they interrupt fault currents within one half cycle of the fault. Current limiting devices offer superior protection by reducing peak let-through current and energy.


### Device printing on front and side

Installation options

These branch circuit breakers are available in two terminal configurations: standard box terminals that accept multiple conductors and ring-tongue terminals, ideally suited to demanding requirements of the semi-conductor industry. All breakers mount on standard 35 mm DIN rail. Bus connectors and feeder terminal facilitate mounting and wiring of multiple miniature circuit breaker arrays in control panel assemblies. These circuit breakers can also be reverse feed.

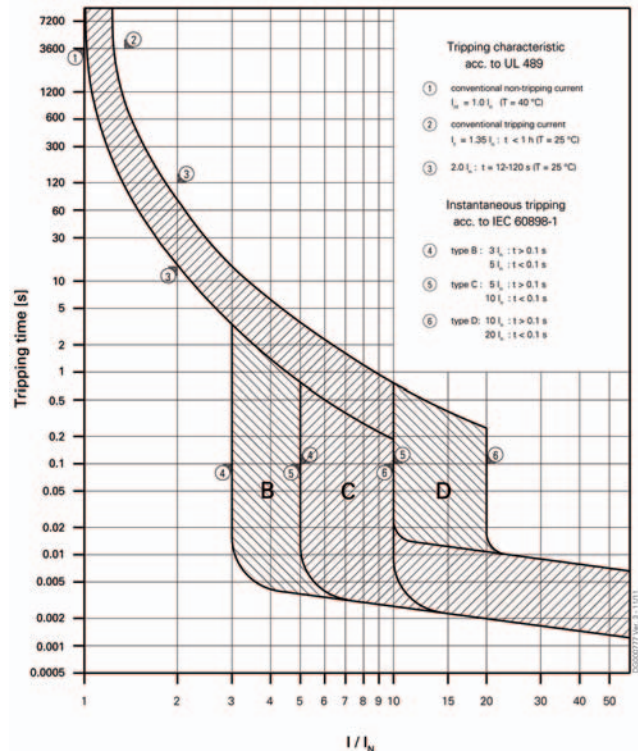

### Catalog Numbering System

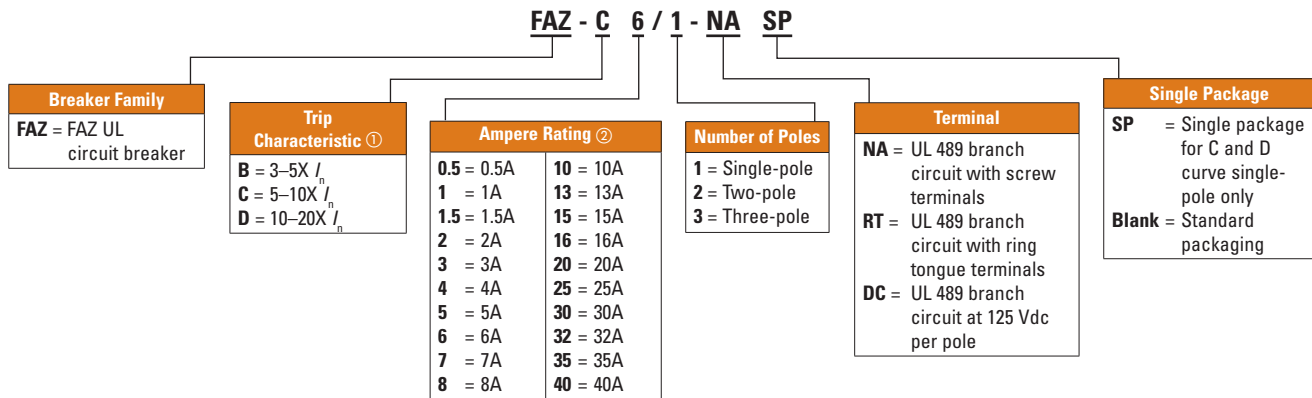

①  $I_n$  = Rated current for instantaneous trip characteristics.

② B curve starts at 1 ampere.


# UL 489 DIN rail branch circuit breakers

## FAZ-NA circuit breakers

### PRODUCT SELECTION

#### FAZ-NA product selection

- UL approved (UL 489) and CSA Certified (CSA C22.2 No.5-02) as branch circuit breakers
- Interrupting capacity: 10 kA UL/CSA; 15 kA IEC 60947-2
- Current limiting device
- UL file number E235139

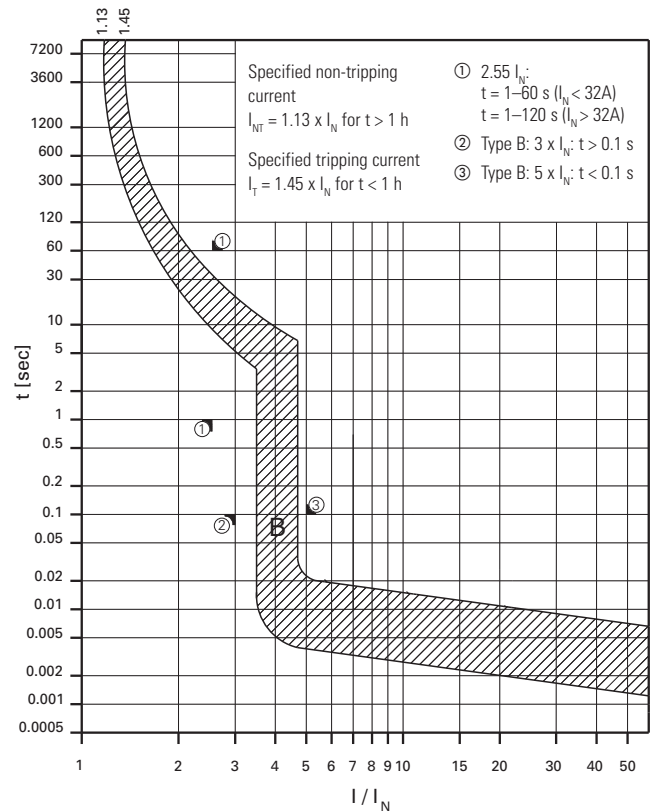

#### FAZ-NA UL 489 Circuit Breakers—10 kAIC, 14 kAIC B Curve (15–25A)



|                                                       | Single-pole ①  | Two-pole       | Three-pole     |
|-------------------------------------------------------|----------------|----------------|----------------|
| Amperes                                               | Catalog Number | Catalog Number | Catalog Number |
| <b>B Curve (3–5X <math>I_N</math> Current Rating)</b> |                |                |                |
| 1                                                     | FAZ-B1/1-NA    | FAZ-B1/2-NA    | FAZ-B1/3-NA    |
| 1.5                                                   | FAZ-B1.5/1-NA  | FAZ-B1.5/2-NA  | FAZ-B1.5/3-NA  |
| 2                                                     | FAZ-B2/1-NA    | FAZ-B2/2-NA    | FAZ-B2/3-NA    |
| 3                                                     | FAZ-B3/1-NA    | FAZ-B3/2-NA    | FAZ-B3/3-NA    |
| 4                                                     | FAZ-B4/1-NA    | FAZ-B4/2-NA    | FAZ-B4/3-NA    |
| 5                                                     | FAZ-B5/1-NA    | FAZ-B5/2-NA    | FAZ-B5/3-NA    |
| 6                                                     | FAZ-B6/1-NA    | FAZ-B6/2-NA    | FAZ-B6/3-NA    |
| 7                                                     | FAZ-B7/1-NA    | FAZ-B7/2-NA    | FAZ-B7/3-NA    |
| 8                                                     | FAZ-B8/1-NA    | FAZ-B8/2-NA    | FAZ-B8/3-NA    |
| 10                                                    | FAZ-B10/1-NA   | FAZ-B10/2-NA   | FAZ-B10/3-NA   |
| 13                                                    | FAZ-B13/1-NA   | FAZ-B13/2-NA   | FAZ-B13/3-NA   |
| 15                                                    | FAZ-B15/1-NA   | FAZ-B15/2-NA   | FAZ-B15/3-NA   |
| 16                                                    | FAZ-B16/1-NA   | FAZ-B16/2-NA   | FAZ-B16/3-NA   |
| 20                                                    | FAZ-B20/1-NA   | FAZ-B20/2-NA   | FAZ-B20/3-NA   |
| 25                                                    | FAZ-B25/1-NA   | FAZ-B25/2-NA   | FAZ-B25/3-NA   |
| 30                                                    | FAZ-B30/1-NA   | FAZ-B30/2-NA   | FAZ-B30/3-NA   |
| 32                                                    | FAZ-B32/1-NA   | FAZ-B32/2-NA   | FAZ-B32/3-NA   |
| 35 ②                                                  | FAZ-B35/1-NA   | FAZ-B35/2-NA   | FAZ-B35/3-NA   |
| 40 ②                                                  | FAZ-B40/1-NA   | FAZ-B40/2-NA   | FAZ-B40/3-NA   |

① Two-piece order. Quantities of two per box.

② 240 Vac rated only.

#### FAZ-RT UL 489 Circuit Breakers with Ring-Tongue Terminals—10 kAIC, 14 kAIC B Curve (15–25A)



|                                                                                  | Single-pole ①  | Two-pole       | Three-pole     |
|----------------------------------------------------------------------------------|----------------|----------------|----------------|
| Amperes                                                                          | Catalog Number | Catalog Number | Catalog Number |
| <b>B Curve with Ring-Tongue Terminals (3–5X <math>I_N</math> Current Rating)</b> |                |                |                |
| 1                                                                                | FAZ-B1/1-RT    | FAZ-B1/2-RT    | FAZ-B1/3-RT    |
| 1.5                                                                              | FAZ-B1.5/1-RT  | FAZ-B1.5/2-RT  | FAZ-B1.5/3-RT  |
| 2                                                                                | FAZ-B2/1-RT    | FAZ-B2/2-RT    | FAZ-B2/3-RT    |
| 3                                                                                | FAZ-B3/1-RT    | FAZ-B3/2-RT    | FAZ-B3/3-RT    |
| 4                                                                                | FAZ-B4/1-RT    | FAZ-B4/2-RT    | FAZ-B4/3-RT    |
| 5                                                                                | FAZ-B5/1-RT    | FAZ-B5/2-RT    | FAZ-B5/3-RT    |
| 6                                                                                | FAZ-B6/1-RT    | FAZ-B6/2-RT    | FAZ-B6/3-RT    |
| 7                                                                                | FAZ-B7/1-RT    | FAZ-B7/2-RT    | FAZ-B7/3-RT    |
| 8                                                                                | FAZ-B8/1-RT    | FAZ-B8/2-RT    | FAZ-B8/3-RT    |
| 10                                                                               | FAZ-B10/1-RT   | FAZ-B10/2-RT   | FAZ-B10/3-RT   |
| 13                                                                               | FAZ-B13/1-RT   | FAZ-B13/2-RT   | FAZ-B13/3-RT   |
| 15                                                                               | FAZ-B15/1-RT   | FAZ-B15/2-RT   | FAZ-B15/3-RT   |
| 16                                                                               | FAZ-B16/1-RT   | FAZ-B16/2-RT   | FAZ-B16/3-RT   |
| 20                                                                               | FAZ-B20/1-RT   | FAZ-B20/2-RT   | FAZ-B20/3-RT   |
| 25                                                                               | FAZ-B25/1-RT   | FAZ-B25/2-RT   | FAZ-B25/3-RT   |
| 30                                                                               | FAZ-B30/1-RT   | FAZ-B30/2-RT   | FAZ-B30/3-RT   |
| 32                                                                               | FAZ-B32/1-RT   | FAZ-B32/2-RT   | FAZ-B32/3-RT   |
| 35 ②                                                                             | FAZ-B35/1-RT   | FAZ-B35/2-RT   | FAZ-B35/3-RT   |
| 40 ②                                                                             | FAZ-B40/1-RT   | FAZ-B40/2-RT   | FAZ-B40/3-RT   |




# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers

PRODUCT SELECTION

## FAZ-NA product selection

- UL approved (UL 489) and CSA Certified (CSA C22.2 No.5-02) as branch circuit breakers
- Interrupting capacity: 10 kA UL/CSA; 15 kA IEC 60947-2
- Current limiting device
- UL file number E235139

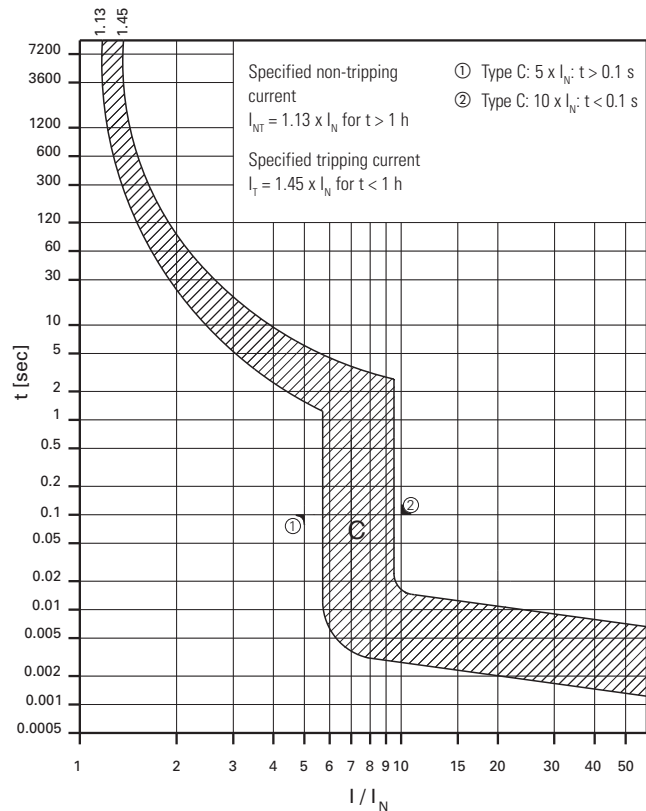

## FAZ-NA UL 489 Circuit Breakers—10 kAIC, 14 kAIC C Curve (15–25A)



|                                                        | Single-pole ①    | Two-pole       | Three-pole     |
|--------------------------------------------------------|------------------|----------------|----------------|
| Amperes                                                | Catalog Number   | Catalog Number | Catalog Number |
| <b>C Curve (5–10X <math>I_N</math> Current Rating)</b> |                  |                |                |
| 0.5                                                    | FAZ-C0.5/1-NA-SP | FAZ-C0.5/2-NA  | FAZ-C0.5/3-NA  |
| 1                                                      | FAZ-C1/1-NA-SP   | FAZ-C1/2-NA    | FAZ-C1/3-NA    |
| 1.5                                                    | FAZ-C1.5/1-NA-SP | FAZ-C1.5/2-NA  | FAZ-C1.5/3-NA  |
| 2                                                      | FAZ-C2/1-NA-SP   | FAZ-C2/2-NA    | FAZ-C2/3-NA    |
| 3                                                      | FAZ-C3/1-NA-SP   | FAZ-C3/2-NA    | FAZ-C3/3-NA    |
| 4                                                      | FAZ-C4/1-NA-SP   | FAZ-C4/2-NA    | FAZ-C4/3-NA    |
| 5                                                      | FAZ-C5/1-NA-SP   | FAZ-C5/2-NA    | FAZ-C5/3-NA    |
| 6                                                      | FAZ-C6/1-NA-SP   | FAZ-C6/2-NA    | FAZ-C6/3-NA    |
| 7                                                      | FAZ-C7/1-NA-SP   | FAZ-C7/2-NA    | FAZ-C7/3-NA    |
| 8                                                      | FAZ-C8/1-NA-SP   | FAZ-C8/2-NA    | FAZ-C8/3-NA    |
| 10                                                     | FAZ-C10/1-NA-SP  | FAZ-C10/2-NA   | FAZ-C10/3-NA   |
| 13                                                     | FAZ-C13/1-NA-SP  | FAZ-C13/2-NA   | FAZ-C13/3-NA   |
| 15                                                     | FAZ-C15/1-NA-SP  | FAZ-C15/2-NA   | FAZ-C15/3-NA   |
| 16                                                     | FAZ-C16/1-NA-SP  | FAZ-C16/2-NA   | FAZ-C16/3-NA   |
| 20                                                     | FAZ-C20/1-NA-SP  | FAZ-C20/2-NA   | FAZ-C20/3-NA   |
| 25                                                     | FAZ-C25/1-NA-SP  | FAZ-C25/2-NA   | FAZ-C25/3-NA   |
| 30                                                     | FAZ-C30/1-NA-SP  | FAZ-C30/2-NA   | FAZ-C30/3-NA   |
| 32                                                     | FAZ-C32/1-NA-SP  | FAZ-C32/2-NA   | FAZ-C32/3-NA   |
| 35 ②                                                   | FAZ-C35/1-NA-SP  | FAZ-C35/2-NA   | FAZ-C35/3-NA   |
| 40 ②                                                   | FAZ-C40/1-NA-SP  | FAZ-C40/2-NA   | FAZ-C40/3-NA   |

① Option for single packaging on single-pole C and D curves only; add suffix SP when ordering.

② 240 Vac rated only.

## FAZ-RT UL 489 Circuit Breakers with Ring-Tongue Terminals—10 kAIC, 14 kAIC C Curve (15–25A)



|                                                                                   | Single-pole      | Two-pole       | Three-pole     |
|-----------------------------------------------------------------------------------|------------------|----------------|----------------|
| Amperes                                                                           | Catalog Number   | Catalog Number | Catalog Number |
| <b>C Curve with Ring-Tongue Terminals (5–10X <math>I_N</math> Current Rating)</b> |                  |                |                |
| 0.5                                                                               | FAZ-C0.5/1-RT-SP | FAZ-C0.5/2-RT  | FAZ-C0.5/3-RT  |
| 1                                                                                 | FAZ-C1/1-RT-SP   | FAZ-C1/2-RT    | FAZ-C1/3-RT    |
| 1.5                                                                               | FAZ-C1.5/1-RT-SP | FAZ-C1.5/2-RT  | FAZ-C1.5/3-RT  |
| 2                                                                                 | FAZ-C2/1-RT-SP   | FAZ-C2/2-RT    | FAZ-C2/3-RT    |
| 3                                                                                 | FAZ-C3/1-RT-SP   | FAZ-C3/2-RT    | FAZ-C3/3-RT    |
| 4                                                                                 | FAZ-C4/1-RT-SP   | FAZ-C4/2-RT    | FAZ-C4/3-RT    |
| 5                                                                                 | FAZ-C5/1-RT-SP   | FAZ-C5/2-RT    | FAZ-C5/3-RT    |
| 6                                                                                 | FAZ-C6/1-RT-SP   | FAZ-C6/2-RT    | FAZ-C6/3-RT    |
| 7                                                                                 | FAZ-C7/1-RT-SP   | FAZ-C7/2-RT    | FAZ-C7/3-RT    |
| 8                                                                                 | FAZ-C8/1-RT-SP   | FAZ-C8/2-RT    | FAZ-C8/3-RT    |
| 10                                                                                | FAZ-C10/1-RT-SP  | FAZ-C10/2-RT   | FAZ-C10/3-RT   |
| 13                                                                                | FAZ-C13/1-RT-SP  | FAZ-C13/2-RT   | FAZ-C13/3-RT   |
| 15                                                                                | FAZ-C15/1-RT-SP  | FAZ-C15/2-RT   | FAZ-C15/3-RT   |
| 16                                                                                | FAZ-C16/1-RT-SP  | FAZ-C16/2-RT   | FAZ-C16/3-RT   |
| 20                                                                                | FAZ-C20/1-RT-SP  | FAZ-C20/2-RT   | FAZ-C20/3-RT   |
| 25                                                                                | FAZ-C25/1-RT-SP  | FAZ-C25/2-RT   | FAZ-C25/3-RT   |
| 30                                                                                | FAZ-C30/1-RT-SP  | FAZ-C30/2-RT   | FAZ-C30/3-RT   |
| 32                                                                                | FAZ-C32/1-RT-SP  | FAZ-C32/2-RT   | FAZ-C32/3-RT   |
| 35 ②                                                                              | FAZ-C35/1-RT-SP  | FAZ-C35/2-RT   | FAZ-C35/3-RT   |
| 40 ②                                                                              | FAZ-C40/1-RT-SP  | FAZ-C40/2-RT   | FAZ-C40/3-RT   |


# UL 489 DIN rail branch circuit breakers

## FAZ-NA circuit breakers

### PRODUCT SELECTION

#### FAZ-NA product selection

- UL approved (UL 489) and CSA Certified (CSA C22.2 No.5-02) as branch circuit breakers
- Interrupting capacity: 10 kA UL/CSA; 15 kA IEC 60947-2
- Current limiting device
- UL file number E235139

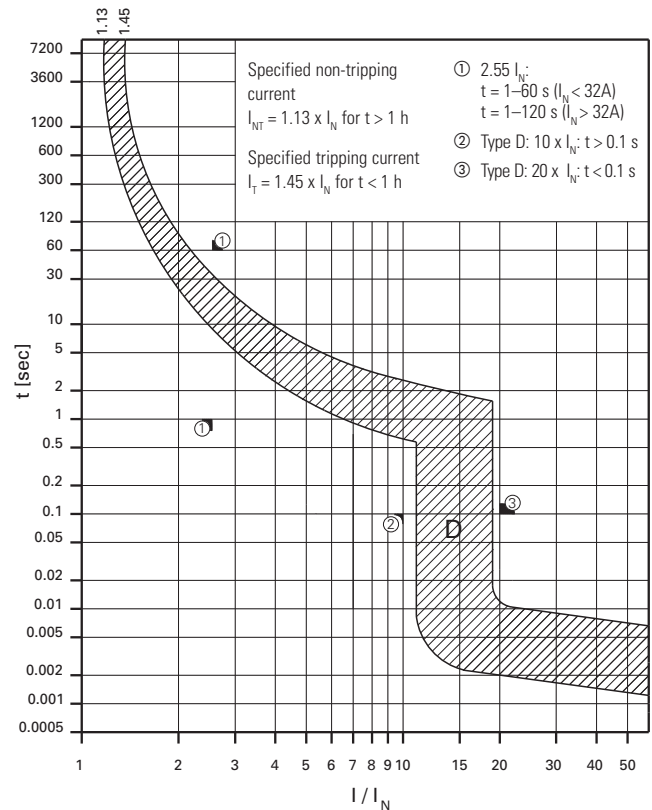

#### FAZ-NA UL 489 Circuit Breakers—10 kAIC, 14 kAIC D Curve (13–20A)



|                                                         | Single-pole ①    | Two-pole       | Three-pole     |
|---------------------------------------------------------|------------------|----------------|----------------|
| Amperes                                                 | Catalog Number   | Catalog Number | Catalog Number |
| <b>D Curve (10–20X <math>I_N</math> Current Rating)</b> |                  |                |                |
| 0.5                                                     | FAZ-D0.5/1-NA-SP | FAZ-D0.5/2-NA  | FAZ-D0.5/3-NA  |
| 1                                                       | FAZ-D1/1-NA-SP   | FAZ-D1/2-NA    | FAZ-D1/3-NA    |
| 1.5                                                     | FAZ-D1.5/1-NA-SP | FAZ-D1.5/2-NA  | FAZ-D1.5/3-NA  |
| 2                                                       | FAZ-D2/1-NA-SP   | FAZ-D2/2-NA    | FAZ-D2/3-NA    |
| 3                                                       | FAZ-D3/1-NA-SP   | FAZ-D3/2-NA    | FAZ-D3/3-NA    |
| 4                                                       | FAZ-D4/1-NA-SP   | FAZ-D4/2-NA    | FAZ-D4/3-NA    |
| 5                                                       | FAZ-D5/1-NA-SP   | FAZ-D5/2-NA    | FAZ-D5/3-NA    |
| 6                                                       | FAZ-D6/1-NA-SP   | FAZ-D6/2-NA    | FAZ-D6/3-NA    |
| 7                                                       | FAZ-D7/1-NA-SP   | FAZ-D7/2-NA    | FAZ-D7/3-NA    |
| 8                                                       | FAZ-D8/1-NA-SP   | FAZ-D8/2-NA    | FAZ-D8/3-NA    |
| 10                                                      | FAZ-D10/1-NA-SP  | FAZ-D10/2-NA   | FAZ-D10/3-NA   |
| 13                                                      | FAZ-D13/1-NA-SP  | FAZ-D13/2-NA   | FAZ-D13/3-NA   |
| 15                                                      | FAZ-D15/1-NA-SP  | FAZ-D15/2-NA   | FAZ-D15/3-NA   |
| 16                                                      | FAZ-D16/1-NA-SP  | FAZ-D16/2-NA   | FAZ-D16/3-NA   |
| 20                                                      | FAZ-D20/1-NA-SP  | FAZ-D20/2-NA   | FAZ-D20/3-NA   |
| 25                                                      | FAZ-D25/1-NA-SP  | FAZ-D25/2-NA   | FAZ-D25/3-NA   |
| 30                                                      | FAZ-D30/1-NA-SP  | FAZ-D30/2-NA   | FAZ-D30/3-NA   |
| 32                                                      | FAZ-D32/1-NA-SP  | FAZ-D32/2-NA   | FAZ-D32/3-NA   |
| 35 ②                                                    | FAZ-D35/1-NA-SP  | FAZ-D35/2-NA   | FAZ-D35/3-NA   |
| 40 ②                                                    | FAZ-D40/1-NA-SP  | FAZ-D40/2-NA   | FAZ-D40/3-NA   |

① Option for single packaging on single-pole C and D curves only; add suffix SP when ordering.

② 240 Vac rated only.

#### FAZ-RT UL 489 Circuit Breakers with Ring-Tongue Terminals—10 kAIC, 14 kAIC D Curve (13–20A)



|                                                                                    | Single-pole      | Two-pole       | Three-pole     |
|------------------------------------------------------------------------------------|------------------|----------------|----------------|
| Amperes                                                                            | Catalog Number   | Catalog Number | Catalog Number |
| <b>D Curve with Ring-Tongue Terminals (10–20X <math>I_N</math> Current Rating)</b> |                  |                |                |
| 0.5                                                                                | FAZ-D0.5/1-RT-SP | FAZ-D0.5/2-RT  | FAZ-D0.5/3-RT  |
| 1                                                                                  | FAZ-D1/1-RT-SP   | FAZ-D1/2-RT    | FAZ-D1/3-RT    |
| 1.5                                                                                | FAZ-D1.5/1-RT-SP | FAZ-D1.5/2-RT  | FAZ-D1.5/3-RT  |
| 2                                                                                  | FAZ-D2/1-RT-SP   | FAZ-D2/2-RT    | FAZ-D2/3-RT    |
| 3                                                                                  | FAZ-D3/1-RT-SP   | FAZ-D3/2-RT    | FAZ-D3/3-RT    |
| 4                                                                                  | FAZ-D4/1-RT-SP   | FAZ-D4/2-RT    | FAZ-D4/3-RT    |
| 5                                                                                  | FAZ-D5/1-RT-SP   | FAZ-D5/2-RT    | FAZ-D5/3-RT    |
| 6                                                                                  | FAZ-D6/1-RT-SP   | FAZ-D6/2-RT    | FAZ-D6/3-RT    |
| 7                                                                                  | FAZ-D7/1-RT-SP   | FAZ-D7/2-RT    | FAZ-D7/3-RT    |
| 8                                                                                  | FAZ-D8/1-RT-SP   | FAZ-D8/2-RT    | FAZ-D8/3-RT    |
| 10                                                                                 | FAZ-D10/1-RT-SP  | FAZ-D10/2-RT   | FAZ-D10/3-RT   |
| 13                                                                                 | FAZ-D13/1-RT-SP  | FAZ-D13/2-RT   | FAZ-D13/3-RT   |
| 15                                                                                 | FAZ-D15/1-RT-SP  | FAZ-D15/2-RT   | FAZ-D15/3-RT   |
| 16                                                                                 | FAZ-D16/1-RT-SP  | FAZ-D16/2-RT   | FAZ-D16/3-RT   |
| 20                                                                                 | FAZ-D20/1-RT-SP  | FAZ-D20/2-RT   | FAZ-D20/3-RT   |
| 25                                                                                 | FAZ-D25/1-RT-SP  | FAZ-D25/2-RT   | FAZ-D25/3-RT   |
| 30                                                                                 | FAZ-D30/1-RT-SP  | FAZ-D30/2-RT   | FAZ-D30/3-RT   |
| 32                                                                                 | FAZ-D32/1-RT-SP  | FAZ-D32/2-RT   | FAZ-D32/3-RT   |
| 35 ②                                                                               | FAZ-D35/1-RT-SP  | FAZ-D35/2-RT   | FAZ-D35/3-RT   |
| 40 ②                                                                               | FAZ-D40/1-RT-SP  | FAZ-D40/2-RT   | FAZ-D40/3-RT   |




# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers

## PRODUCT SELECTION

### FAZ-NA-DC product selection

- UL approved (UL 489) and CSA Certified (CSA C22.2 No.5-02) as Branch Circuit Breakers
- Interrupting capacity: 10 kA at 125 Vdc UL/CSA, 10 kA at 250 Vdc
- 125 Vdc for one-pole, 250 Vdc for two-pole in series
- Current limiting device
- Polarity (+/-) sensitive and not for use on photovoltaic string application
- UL file number E235139

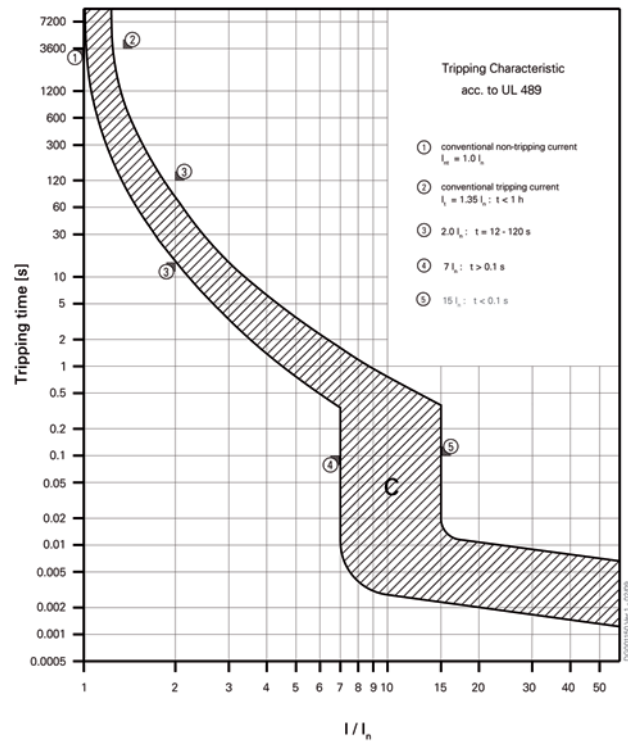

### FAZ-NA-DC UL 489 Circuit Breakers— 10 kAIC at 125 Vdc per pole



| Single-pole ①                                          |                    | Two-pole        |
|--------------------------------------------------------|--------------------|-----------------|
| Amperes                                                | Catalog Number     | Catalog Number  |
| <b>C Curve (5–10X <math>I_n</math> Current Rating)</b> |                    |                 |
| 2                                                      | FAZ-C2/1-NA-DC-SP  | FAZ-C2/2-NA-DC  |
| 3                                                      | FAZ-C3/1-NA-DC-SP  | FAZ-C3/2-NA-DC  |
| 4                                                      | FAZ-C4/1-NA-DC-SP  | FAZ-C4/2-NA-DC  |
| 5                                                      | FAZ-C5/1-NA-DC-SP  | FAZ-C5/2-NA-DC  |
| 6                                                      | FAZ-C6/1-NA-DC-SP  | FAZ-C6/2-NA-DC  |
| 7                                                      | FAZ-C7/1-NA-DC-SP  | FAZ-C7/2-NA-DC  |
| 8                                                      | FAZ-C8/1-NA-DC-SP  | FAZ-C8/2-NA-DC  |
| 10                                                     | FAZ-C10/1-NA-DC-SP | FAZ-C10/2-NA-DC |
| 13                                                     | FAZ-C13/1-NA-DC-SP | FAZ-C13/2-NA-DC |
| 15                                                     | FAZ-C15/1-NA-DC-SP | FAZ-C15/2-NA-DC |
| 16                                                     | FAZ-C16/1-NA-DC-SP | FAZ-C16/2-NA-DC |
| 20                                                     | FAZ-C20/1-NA-DC-SP | FAZ-C20/2-NA-DC |
| 25                                                     | FAZ-C25/1-NA-DC-SP | FAZ-C25/2-NA-DC |
| 30                                                     | FAZ-C30/1-NA-DC-SP | FAZ-C30/2-NA-DC |
| 32                                                     | FAZ-C32/1-NA-DC-SP | FAZ-C32/2-NA-DC |
| 35                                                     | FAZ-C35/1-NA-DC-SP | FAZ-C35/2-NA-DC |
| 40                                                     | FAZ-C40/1-NA-DC-SP | FAZ-C40/2-NA-DC |

① Option for single packaging on single-pole C curves only; add suffix SP when ordering.

# UL 489 DIN rail branch circuit breakers




## FAZ-NA circuit breakers

### ACCESSORIES

#### Tripping signal switch Z-NHK, Z-IHK-NA

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Z-NHK: the function of one of the two change-over contacts can be switched from “auxiliary switch” to “tripping signal switch”
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Z-IHK-NA: will allow for > 480Y/277 Vac rating

#### FAZ-NA UL 489 Breakers

| Accessory                                                                           | Circuit Diagram                                                                     | Description                                        | Catalog Number              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------|
|   |   | Two-pole auxiliary contact/trip indicating contact | <b>Z-NHK</b> ①              |
|  |  | Auxiliary contact                                  | <b>Z-IHK-NA</b>             |
|  |                                                                                     | Shunt trip 110–415 Vac                             | <b>FAZ-XAA-NA110-415VAC</b> |
|                                                                                     |                                                                                     | Shunt trip 12–110 Vac                              | <b>FAZ-XAA-NA12-110VAC</b>  |
|  |                                                                                     | Padlock hasp                                       | <b>IS/SPE-1TE</b>           |



① Voltage of FAZ-NA circuit breaker is limited to 300V with this auxiliary contact installed.

# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers


ACCESSORIES

## FAZ-NA UL 489 Breakers, continued

| Accessory                                                                          | Circuit Diagram | Description                                                      | Catalog Number       |
|------------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------|----------------------|
|    |                 | Busbar—one-pole, 6 terminals ②③④⑤                                | Z-SV/UL-16/1P-1TE/6  |
|                                                                                    |                 | Busbar—one-pole, 12 terminals ②③④⑤                               | Z-SV/UL-16/1P-1TE/12 |
|                                                                                    |                 | Busbar—one-pole, 18 terminals ②③④⑤                               | Z-SV/UL-16/1P-1TE/1  |
|                                                                                    |                 | Busbar—two-pole, 6 terminals ②③④⑤                                | Z-SV/UL-16/2P-2TE/6  |
|                                                                                    |                 | Busbar—two-pole, 12 terminals ②③④⑤                               | Z-SV/UL-16/2P-2TE/12 |
|                                                                                    |                 | Busbar—two-pole, 18 terminals ②③④⑤                               | Z-SV/UL-16/2P-2TE/18 |
|                                                                                    |                 | Busbar—three-pole, 6 terminals ②③④⑤                              | Z-SV/UL-16/3P-3TE/6  |
|                                                                                    |                 | Busbar—three-pole, 12 terminals ②③④⑤                             | Z-SV/UL-16/3P-3TE/12 |
|                                                                                    |                 | Busbar—three-pole, 18 terminals ②③④⑤                             | Z-SV/UL-16/3P-3TE/18 |
|   |                 | Three-pole busbar shroud                                         | ZV-BS-UL             |
|   |                 | Extension terminal—25 mm <sup>2</sup> (2–14 AWG)                 | Z-EK/35/UL           |
|  |                 | Bus connector—<br>conductors up to 50 mm <sup>2</sup> (~1/0 AWG) | Z-EB/50/UL           |

- ② Do not cut commoning link.
- ③ A maximum of three commoning links may be used in conjunction. Each breaker connected to the commoning link must have the same number of poles for proper use.
- ④ Not for use with ring-tongue circuit breakers.
- ⑤ Bus may be center fed for high current capacity.

## Busbar Connection Example

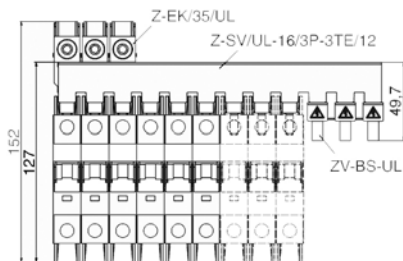


# UL 489 DIN rail branch circuit breakers

## FAZ-NA circuit breakers

### TECHNICAL DATA

#### Miniature circuit breakers FAZ-NA

##### Connection Diagrams

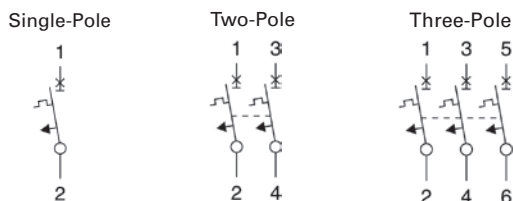


#### Miniature Circuit Breakers FAZ-NA

| Description                                                      |                                                                                                                  |                       |
|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|-----------------------|
| Electrical                                                       |                                                                                                                  |                       |
| Design according to                                              | UL 489, CSA C22.2 No.5, IEC 60947-2                                                                              |                       |
| Rated voltage FAZ-NA<br>UL/CSA                                   | 10 kAIC at 277/480V from 0.5A to 32A<br>14 kAIC at select amperages<br>B and C Curves (15–25A), D Curve (13–20A) |                       |
| UL/CSA                                                           | 10 kAIC at 240 Vac for 35A and 40A                                                                               |                       |
| UL/CSA                                                           | 10 kAIC at 48 Vdc per pole                                                                                       |                       |
| IEC 947-2                                                        | 15 kAIC at 240/415 Vac                                                                                           |                       |
| Rated voltage FAZ-NA-DC<br>UL/CSA                                | 10 kAIC at 125 Vdc per pole<br>(two poles maximum)<br>10 kAIC at 250 Vdc with two poles connected<br>in series   |                       |
| Rated frequency                                                  | 50/60 Hz                                                                                                         |                       |
| Characteristic                                                   | B, C, D                                                                                                          |                       |
| Endurance                                                        | ≥ 20,000 Operations                                                                                              |                       |
| Line voltage connection                                          | Suitable for reverse feed                                                                                        |                       |
| Mechanical                                                       |                                                                                                                  |                       |
| Frame size                                                       | 45 mm                                                                                                            |                       |
| Device height                                                    | 105 mm                                                                                                           |                       |
| Device width                                                     | 17.7 mm per pole                                                                                                 |                       |
| Terminal protection                                              | Finger and hand touch safe according to<br>BGV A3, OVE-EN 6                                                      |                       |
| Mounting                                                         | Quick fastening with two lock-in positions on<br>IEC/EN 60715                                                    |                       |
| Upper and lower terminals                                        | Open mouth/lift terminals                                                                                        |                       |
| Terminal capacity                                                | One wire<br>Two wires                                                                                            | AWG 18–6<br>AWG 18–10 |
| Terminal fastening torque                                        | AWG 18-21: 21 lb-in<br>AWG 10-8: 25 lb-in<br>AWG 6: 36 lb-in                                                     |                       |
| Mounting                                                         | Independent of position                                                                                          |                       |
| Calibration temperature<br>UL 489, CSA C22.2 No.5<br>IEC 60947-2 | 40°C<br>30°C                                                                                                     |                       |

### Dimensions

#### Miniature Circuit Breakers

##### FAZ-NA

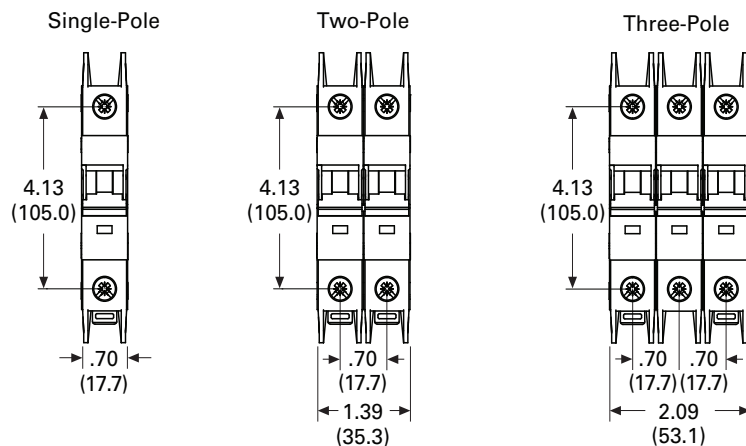


# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers


TECHNICAL DATA

## Let-through energy


Characteristic B (1–32A), 277V

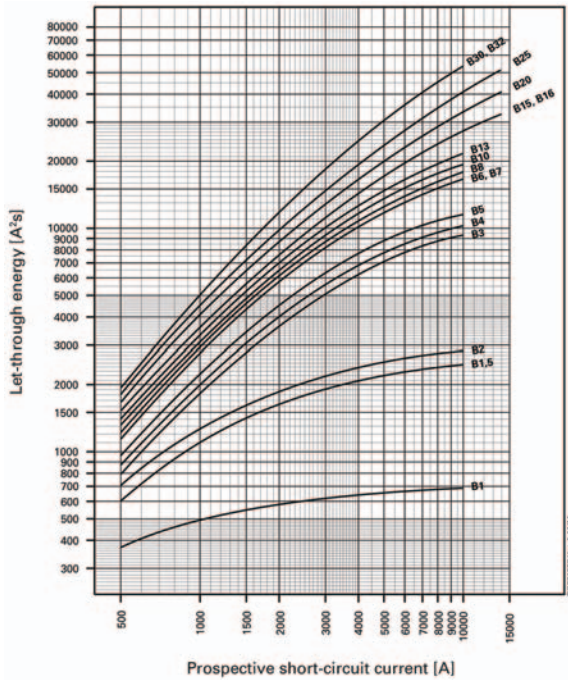


Characteristic B (35–40A), 240V

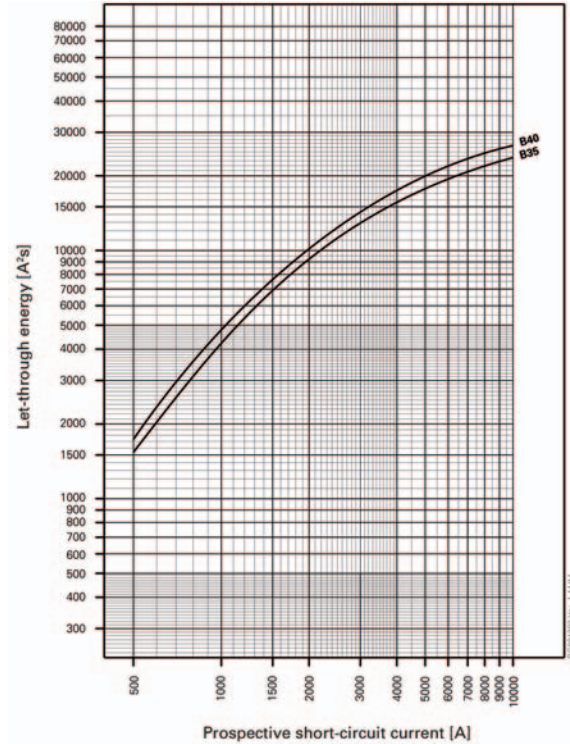

Characteristic C (0.5–32A), 277V

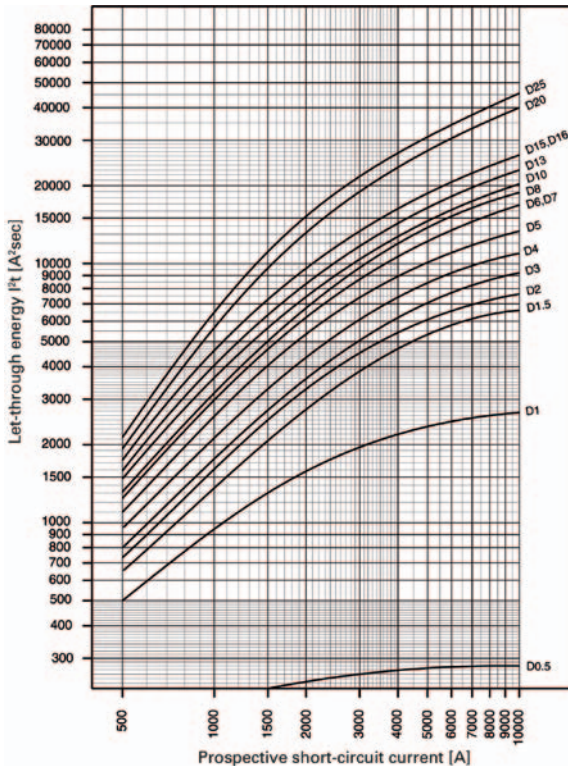

Characteristic C (40A), 240V

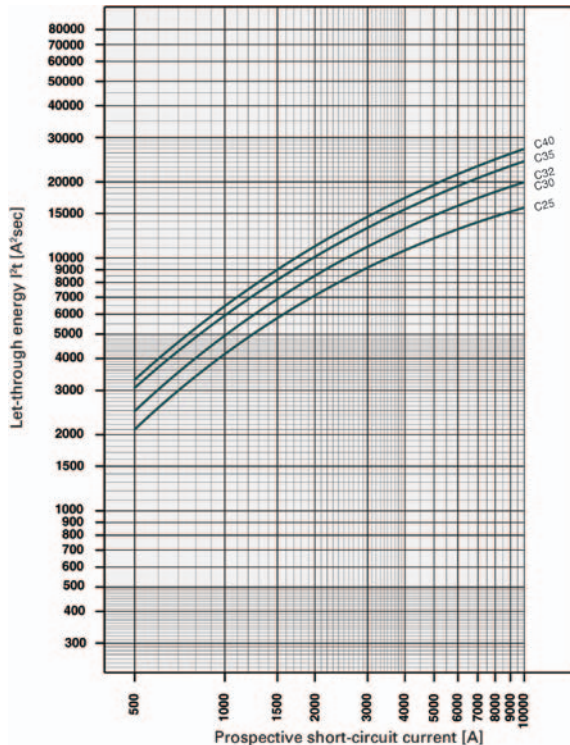




# UL 489 DIN rail branch circuit breakers


FAZ-NA circuit breakers

## TECHNICAL DATA

Characteristic D (0.5–32A), 277V

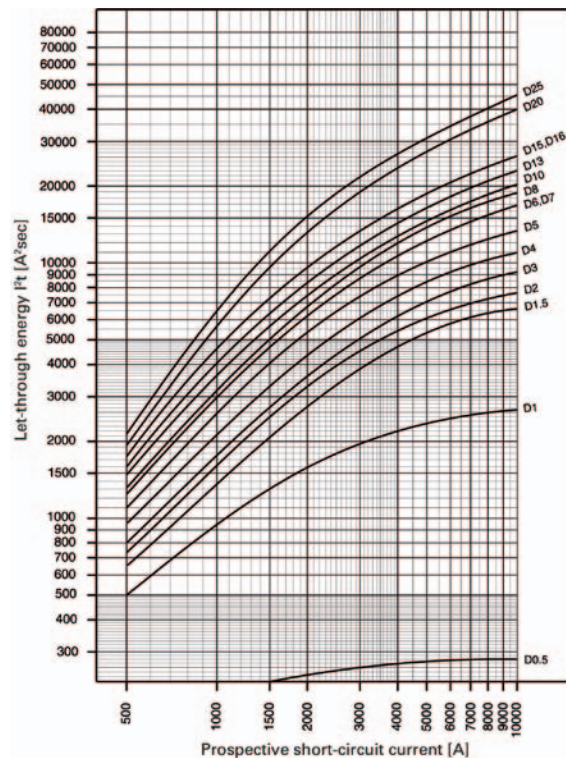

Characteristic D (40A), 240V

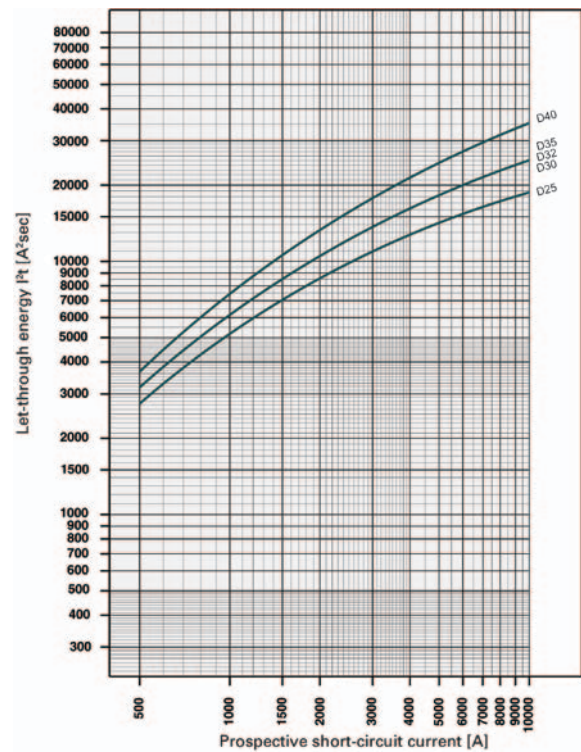




# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers


TECHNICAL DATA

## Influence of Ambient Temperature T on Load Carrying Capacity

| Device Market Current Rating<br>$I_n$ (A) at 40°C | $I_n$ (A) at Higher Ambient Temperature |      |      |      |      |      |      |      |
|---------------------------------------------------|-----------------------------------------|------|------|------|------|------|------|------|
|                                                   | 15°C                                    | 20°C | 25°C | 30°C | 40°C | 50°C | 55°C | 60°C |
| 0.5                                               | 0.6                                     | 0.5  | 0.5  | 0.5  | 0.5  | 0.5  | 0.5  | 0.5  |
| 1.0                                               | 1.1                                     | 1.1  | 1.1  | 1.0  | 1.0  | 1.0  | 0.9  | 0.9  |
| 1.5                                               | 1.7                                     | 1.6  | 1.6  | 1.6  | 1.5  | 1.4  | 1.4  | 1.4  |
| 2.0                                               | 2.2                                     | 2.2  | 2.1  | 2.1  | 2.0  | 1.9  | 1.9  | 1.8  |
| 3.0                                               | 3.3                                     | 3.2  | 3.2  | 3.1  | 3.0  | 2.9  | 2.9  | 2.8  |
| 4.0                                               | 4.4                                     | 4.3  | 4.2  | 4.2  | 4.0  | 3.8  | 3.8  | 3.7  |
| 5.0                                               | 5.5                                     | 5.4  | 5.3  | 5.2  | 5.0  | 4.8  | 4.7  | 4.6  |
| 6.0                                               | 6.6                                     | 6.5  | 6.4  | 6.2  | 6.0  | 5.8  | 5.6  | 5.5  |
| 7.0                                               | 7.7                                     | 7.6  | 7.4  | 7.3  | 7.0  | 6.7  | 6.6  | 6.4  |
| 8.0                                               | 8.8                                     | 8.6  | 8.5  | 8.3  | 8.0  | 7.7  | 7.5  | 7.4  |
| 10.0                                              | 11.0                                    | 10.8 | 10.6 | 10.4 | 10.0 | 9.6  | 9.4  | 9.2  |
| 13.0                                              | 14.3                                    | 14.0 | 13.8 | 13.5 | 13.0 | 12.5 | 12.5 | 12.0 |
| 15.0                                              | 16.5                                    | 16.2 | 15.9 | 15.6 | 15.0 | 14.4 | 14.1 | 13.8 |
| 16.0                                              | 17.6                                    | 17.3 | 17.0 | 16.6 | 16.0 | 15.4 | 15.0 | 14.7 |
| 20.0                                              | 22.0                                    | 21.6 | 21.2 | 20.8 | 20.0 | 19.2 | 18.8 | 18.4 |
| 25.0                                              | 27.5                                    | 27.0 | 26.5 | 26.0 | 25.0 | 24.0 | 23.3 | 23.0 |
| 30.0                                              | 33.0                                    | 32.4 | 31.8 | 31.2 | 30.0 | 28.8 | 28.2 | 27.6 |
| 32.0                                              | 35.2                                    | 34.6 | 33.9 | 33.3 | 32.0 | 30.7 | 30.1 | 29.4 |
| 40.0                                              | 44.0                                    | 43.2 | 42.4 | 41.6 | 40.0 | 38.4 | 37.6 | 36.8 |

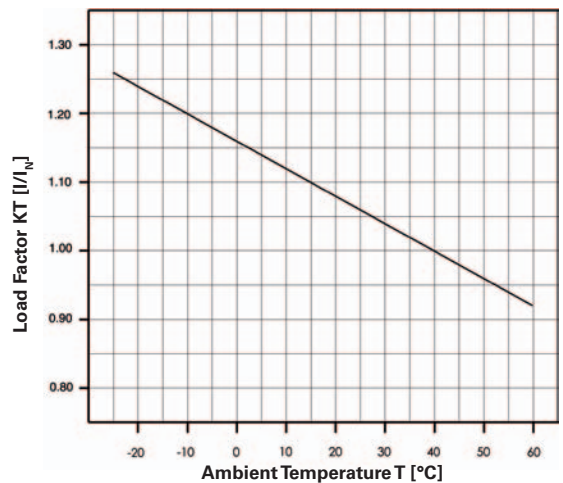

## Load Carrying Capacity of Adjoining Miniature Circuit Breakers

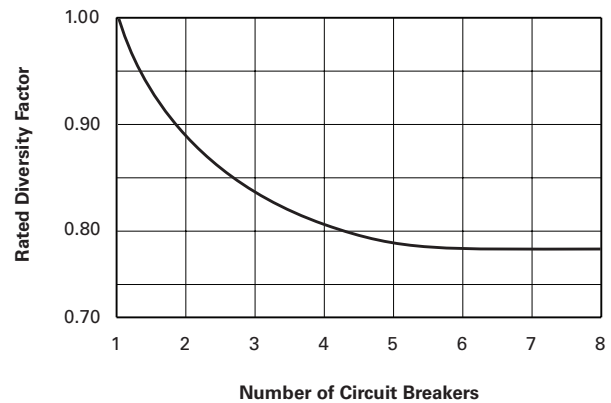

## Power Loss at $I_n$

| $I_n$ [A] | Characteristic B     |                   |                     | Characteristic C     |                   |                     | Characteristic D     |                   |                     |
|-----------|----------------------|-------------------|---------------------|----------------------|-------------------|---------------------|----------------------|-------------------|---------------------|
|           | Single-pole<br>P [W] | Two-pole<br>P [W] | Three-pole<br>P [W] | Single-pole<br>P [W] | Two-pole<br>P [W] | Three-pole<br>P [W] | Single-pole<br>P [W] | Two-pole<br>P [W] | Three-pole<br>P [W] |
| 0.5       | —                    | —                 | —                   | 1.6                  | 3.2               | 4.7                 | 1.6                  | 3.2               | 4.8                 |
| 1         | 1.1                  | 2.2               | 3.4                 | 1.1                  | 2.2               | 3.4                 | 0.8                  | 1.5               | 2.3                 |
| 1.5       | 2.2                  | 4.4               | 6.6                 | 1.3                  | 2.6               | 3.9                 | 1.0                  | 2.1               | 3.1                 |
| 2         | 1.4                  | 2.8               | 4.3                 | 1.4                  | 2.8               | 4.3                 | 1.0                  | 2.1               | 3.1                 |
| 3         | 2.1                  | 4.2               | 6.4                 | 1.2                  | 2.4               | 3.6                 | 1.2                  | 2.4               | 3.6                 |
| 4         | 1.4                  | 2.9               | 4.3                 | 1.4                  | 2.9               | 4.3                 | 1.4                  | 2.9               | 4.3                 |
| 5         | 1.8                  | 3.7               | 5.5                 | 1.9                  | 3.7               | 5.6                 | 1.5                  | 2.9               | 4.4                 |
| 6         | 1.7                  | 3.5               | 5.2                 | 1.2                  | 2.3               | 3.5                 | 1.2                  | 2.3               | 3.5                 |
| 7         | 2.0                  | 4.0               | 6.0                 | 1.4                  | 2.8               | 4.3                 | 1.4                  | 2.8               | 4.3                 |
| 8         | 2.0                  | 3.9               | 5.9                 | 1.4                  | 2.8               | 4.2                 | 1.2                  | 2.4               | 3.7                 |
| 10        | 1.8                  | 3.6               | 5.3                 | 1.8                  | 3.6               | 5.3                 | 1.5                  | 3.0               | 4.5                 |
| 13        | 2.4                  | 4.7               | 7.1                 | 2.4                  | 4.7               | 7.1                 | 2.0                  | 4.1               | 6.1                 |
| 15        | 1.9                  | 3.8               | 5.6                 | 1.9                  | 3.8               | 5.6                 | 1.5                  | 3.1               | 4.6                 |
| 16        | 2.1                  | 4.3               | 6.4                 | 2.1                  | 4.3               | 6.4                 | 1.7                  | 3.5               | 5.2                 |
| 20        | 2.9                  | 5.8               | 8.7                 | 2.9                  | 5.8               | 8.7                 | 1.8                  | 3.7               | 5.5                 |
| 25        | 3.1                  | 6.2               | 9.3                 | 3.1                  | 6.2               | 9.3                 | 2.6                  | 5.1               | 7.7                 |
| 30        | 3.0                  | 6.0               | 9.0                 | 3.0                  | 6.0               | 9.0                 | 2.7                  | 5.4               | 8.1                 |
| 32        | 3.4                  | 6.8               | 10.2                | 3.4                  | 6.8               | 10.2                | 3.1                  | 6.2               | 9.3                 |
| 35        | 4.0                  | 8.1               | 12.1                | 3.7                  | 7.4               | 11.0                | 3.8                  | 7.6               | 11.3                |
| 40        | 4.0                  | 8.1               | 12.1                | 4.0                  | 8.1               | 12.1                | 3.9                  | 7.8               | 11.6                |


# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers


## ACCESSORY TECHNICAL DATA

### Dimensions (mm)


Z-SV/UL-16/6




Z-SV/UL-18...12

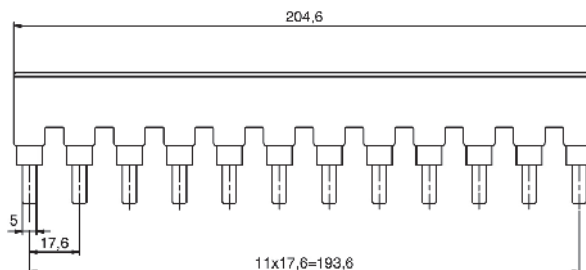


ZV-BS-UL

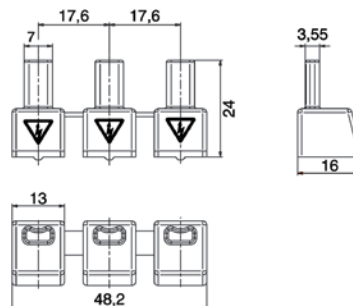

Z-SV/UL-16.../18

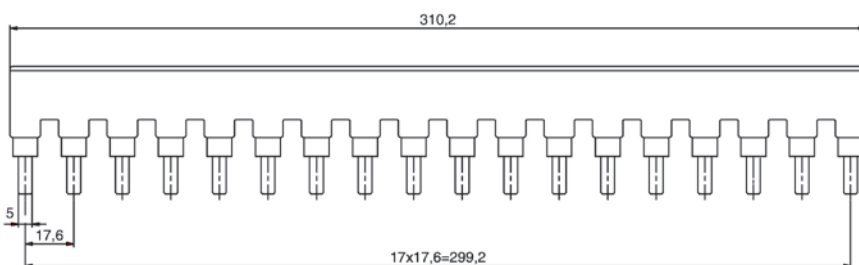

Z-EK/35/UL

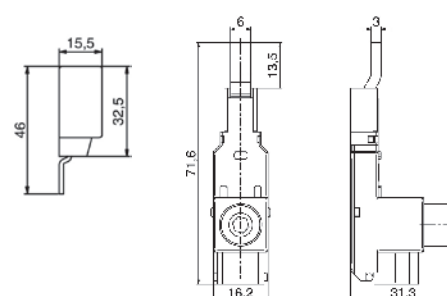


Z-EK/35/UL

| Description                                                                         | UL 489               | IEC/EN 60947-2 |
|-------------------------------------------------------------------------------------|----------------------|----------------|
| $U_e$                                                                               | 480 Vac/96 Vdc       | 240/415 Vac    |
| $f$                                                                                 | 50/60 Hz             | 50/60 Hz       |
| $U_{imp}$                                                                           | —                    | 9.5 kV         |
| $I_e$                                                                               | 80A at 40°C          | 80A at 30°C    |
|  | #2–14 AWG 60/75°C Cu | 2.5–35 mm² Cu  |
|  | 0.56 in              | 14 mm          |

Z-EB/50/UL

| Description                                                                         | UL 489               | IEC/EN 60947-2 |
|-------------------------------------------------------------------------------------|----------------------|----------------|
| $U_e$                                                                               | 480 Vac/96 Vdc       | 240/415 Vac    |
| $f$                                                                                 | 50/60 Hz             | 50/60 Hz       |
| $U_{imp}$                                                                           | —                    | 9.5 kV         |
| $I_e$                                                                               | 115A at 40°C         | 160A at 30°C   |
|  | #1–14 AWG 60/75°C Cu | 1.5–50 mm² Cu  |
|  | 0.56 in              | 14 mm          |

### Lockout attachment IS/SPE-ITE

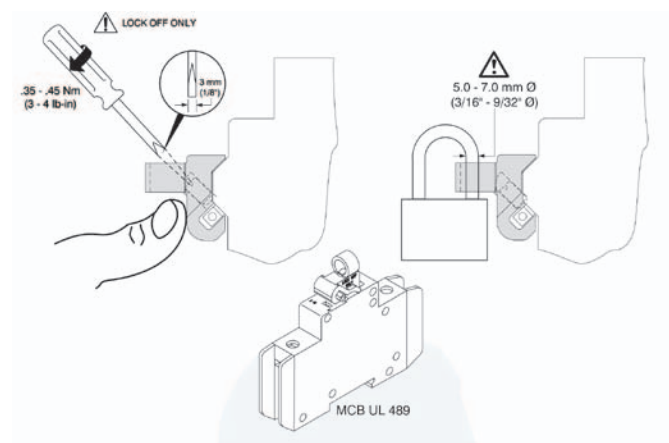



# UL 489 DIN rail branch circuit breakers

FAZ-NA circuit breakers  
ACCESSORY TECHNICAL DATA

## Accessories



| Description                                                  | Z-NHK                                                       | Z-IHK-NA                                                    |
|--------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------|
| <b>Electrical</b>                                            |                                                             |                                                             |
| Contact function                                             | 2CO                                                         | 1NO + 1NC                                                   |
| Rated voltage                                                | 230V                                                        | 250V                                                        |
| Frequency                                                    | 50/60 Hz                                                    | 50/60 Hz                                                    |
| Rated current                                                | 2A                                                          | 6A                                                          |
| Rated thermal current $I_{th}$                               | 2A                                                          | 6A                                                          |
| Utilization category AC13<br>Rated operational current $I_e$ | 3A/250 Vac                                                  | 3A/250 Vac                                                  |
| Utilization category AC15<br>Rated operational current $I_e$ | 2A/250 Vac                                                  | 2A/250 Vac                                                  |
| Utilization category DC12<br>Rated operational current $I_e$ | 0.5A/110 Vdc                                                | 0.5A/110 Vdc<br>0.25A/220 Vdc                               |
| Rated insulation voltage $U_i$                               | 250 Vac                                                     | 250 Vac                                                     |
| Minimum operational voltage per contact $U_{min}$            | 5 Vdc                                                       | 5 Vdc                                                       |
| Minimum operational current $I_{min}$                        | 10 mA DC                                                    | 10 mA AC/DC                                                 |
| Rated peak withstand voltage $U_{imp}$ (1.2/50μ)             | 2.5 kV                                                      | 4 kV                                                        |
| Conditional short-circuit current $I_k$ with backup fuse 6A  | 1 kA                                                        | 1 kA                                                        |
| Max. backup fuse, overload and short circuit                 | 6A gL                                                       | —                                                           |
| <b>Mechanical</b>                                            |                                                             |                                                             |
| Tripping indicator “electrical tripping”                     | Blue/white                                                  | —                                                           |
| Frame size                                                   | 45 mm                                                       | 45 mm                                                       |
| Device height                                                | 80 mm                                                       | 80 mm                                                       |
| Device width                                                 | 8.8 mm (0.5MU)                                              | 8.8 mm (0.5MU)                                              |
| Mounting                                                     | Onto switching device                                       | —                                                           |
| Degree of protection, built-in                               | IP40                                                        | IP40                                                        |
| Terminal protection                                          | Finger and hand touch safe<br>According to BGV A3, ÖVE-EN 6 | Finger and hand touch safe<br>According to BGV A3, ÖVE-EN 6 |
| Terminals                                                    | Lift terminals                                              | Lift terminals                                              |
| Terminal capacity                                            | 20–14 AWG                                                   | 0.5–2.5 mm <sup>2</sup>                                     |
| Terminal screws                                              | M3 (Posidrive Z0)                                           | M3 (Posidrive Z0)                                           |
| Fastening torque of terminal screws                          | 7 lb-in                                                     | Max. 1.2 Nm                                                 |

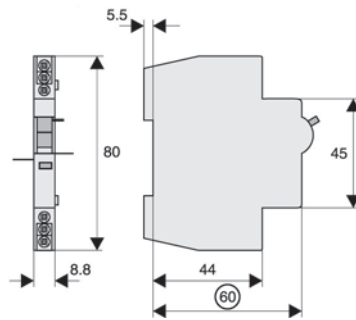

# UL 489 DIN rail branch circuit breakers


## FAZ-NA circuit breakers

### ACCESSORY TECHNICAL DATA

#### Shunt trip release FAZ-XAA-NA

- Remote release for subsequent mounting onto FAZ-NA/RT
- Additional installation of standard auxiliary switch is possible
- Position indicator red-green

#### Connection Diagram




#### Shunt Trip Release FAZ-XAA-NA

| Description                            | FAZ-XAA-NA12-110VAC                                      | FAZ-XAA-NA110-415VAC        |
|----------------------------------------|----------------------------------------------------------|-----------------------------|
| <b>Electrical</b>                      |                                                          |                             |
| Can be mounted onto                    | FAZ-NA / FAZ-NA-DC / FAZ-RT                              | FAZ-NA / FAZ-NA-DC / FAZ-RT |
| Operational voltage range              | 12–110 Vac<br>12–60 Vdc                                  | 110–415 Vac<br>110–230 Vdc  |
| Frequency                              | 50/60 Hz                                                 | 50/60 Hz                    |
| <b>Mechanical</b>                      |                                                          |                             |
| Frame size                             | 45 mm                                                    | 45 mm                       |
| Device height                          | 105 mm                                                   | 105 mm                      |
| Device width                           | 17.5 mm                                                  | 17.5 mm                     |
| Mounting                               | Quick fastening with two lock-in positions on EN 50022   |                             |
| Degree of protection, built-in         | IP40                                                     | IP40                        |
| Terminal protection                    | Finger and hand touch safe according to BGV A3, ÖVE-EN 6 |                             |
| Terminals                              | Open mouthed/lift                                        | Open mouthed/lift           |
| Terminal capacity<br>One and two wires | 18–10 AWG                                                | 18–10 AWG                   |

#### Busbar block UL 489 (pin)

- Tested according to UL 489
- Do not cut
- Extension terminal 35 mm<sup>2</sup> Z-EK/35/UL for copper conductors
- Incoming terminal 50 mm<sup>2</sup> Z-EB/50/UL
- For covering of not used pins, use busbar tag shrouds ZV-BS-UL

#### Connection Diagram

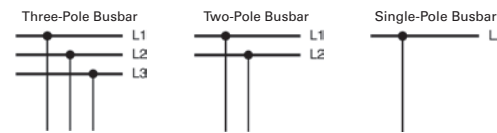

#### Busbar Block UL 489 (Pin)

| Description                                             | UL 489                | IEC/EN 60947-2            |
|---------------------------------------------------------|-----------------------|---------------------------|
| <b>Electrical</b>                                       |                       |                           |
| Rated operational voltage                               | 480/277 Vac<br>96 Vdc | —                         |
| Rated frequency                                         | 50/60 Hz              | —                         |
| Rated voltage                                           | 480 Vac               | 690 Vac                   |
| Overvoltage category                                    | —                     | III                       |
| Rated impulse withstand voltage U <sub>imp</sub>        | —                     | 9.5 kV                    |
| Rated current                                           | 80A at 40°C           | 80A at 30°C               |
| Rated conditional short-circuit current AC with 350A gG | —                     | 15 kA                     |
| Short-circuit current                                   | 10 kA                 | —                         |
| <b>Mechanical</b>                                       |                       |                           |
| Busbar cross section                                    | —                     | 16 mm <sup>2</sup> Cu     |
| Flame class according to UL 94                          | V0                    | —                         |
| Pollution degree                                        | —                     | 2                         |
| Comparative tracking index                              | —                     | CTI 600                   |
| Minimum clearance (internal/external)                   | —                     | > 9.5/25.4 mm             |
| Minimum creepage distance (internal/external)           | —                     | > 12.7/50.8 mm            |
| Resistance to climatic conditions                       | —                     | According to DIN/EN 60068 |

# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

## PRODUCT OVERVIEW

### Optimum and efficient protection



Optimum product quality, tested reliability and safety stand for best protection of personnel, installations and plant. Eaton's FAZ DIN rail mountable circuit breaker is designed for use in control panel applications.

### Powerful offering for machine and system builders

The FAZ is available with B, C, D, K, S, and Z characteristics in accordance with UL 1077, CSA C22.2 No.235 and IEC 60947-2. These devices are CE marked.

### Typical applications

Supplementary protection

- Control circuits
- Lighting
- Business equipment
- Appliances

### Features

- Complete range of UL 1077 recognized DIN rail mounted miniature circuit breakers up to 63A current rating
- Standard ratings of 10 kAIC up to 277/480 Vac
- Current limiting design provides fast short-circuit interruption that reduces the let-through energy, which can damage the circuit
- Suitable for supplementary protection
- Thermal-magnetic overcurrent protection
  - Six levels of short-circuit protection, categorized by B, C, D, K, S, and Z curves
- Trip-free design—breaker can not be defeated by holding the handle in the ON position
- Captive screws cannot be lost
- Fulfill UL 1077, CSA C22.2 No.235 and also IEC 60947-2 Standard
- Field-installable shunt trip and auxiliary switch subsequent mounting
- Module width of only 17.7 mm (per pole)
- Contact position indicator (red/green)
- Easy installation on DIN rail
- Possibility for sealing the toggle in ON or OFF position

### FAZ complies with the latest national and international standards

#### Standards—Supplementary Protection

##### UL 1077, CSA C22.2 No. 235

Apply to supplementary protectors intended for use as overcurrent, or overvoltage or undervoltage protection within an appliance or other electrical equipment where branch circuit protection is already provided, or is not required.



##### RoHS

These devices are RoHS compliant.



##### VDE

Devices with B, C, and D curves are VDE compliant.



##### CCC

Devices with B, C, and D curves are CCC compliant.



##### ABS

These devices are ABS compliant.





# UL 1077 DIN rail supplementary protectors

## FAZ circuit breakers

### PRODUCT OVERVIEW

#### Discover these advanced features

Breakers install on standard DIN rail

Available in one-, two-, three-, four-pole, 1+N and 3+N models

Color-coded indicator provides breaker status for easy troubleshooting



Captive Posidrive terminal screws with finger and back-of-hand protection (IP20)


Trip-free design; breaker cannot be defeated by holding the handle in the ON position

Breaker information printed on the front of the device for quick identification


#### Six tripping curves to choose from

Eaton FAZ supplementary protectors are available with six different tripping characteristics, including Type B, C, D, K, S, and Z. Definitions for each trip curve are contained on the ordering pages and can be used to determine the optimal characteristic for your application. For example, low-level short-circuit faults in control wiring, such as PLCs, are best protected by devices with Type B trip characteristics (3–5X continuous rating of the device ( $I_n$ )).

Even though not required by NEC or CEC for supplementary protectors, Eaton's FAZ devices are current limiting, which means that they interrupt fault currents within one half cycle. Current limiting devices offer superior protection by reducing peak let-through current and energy.

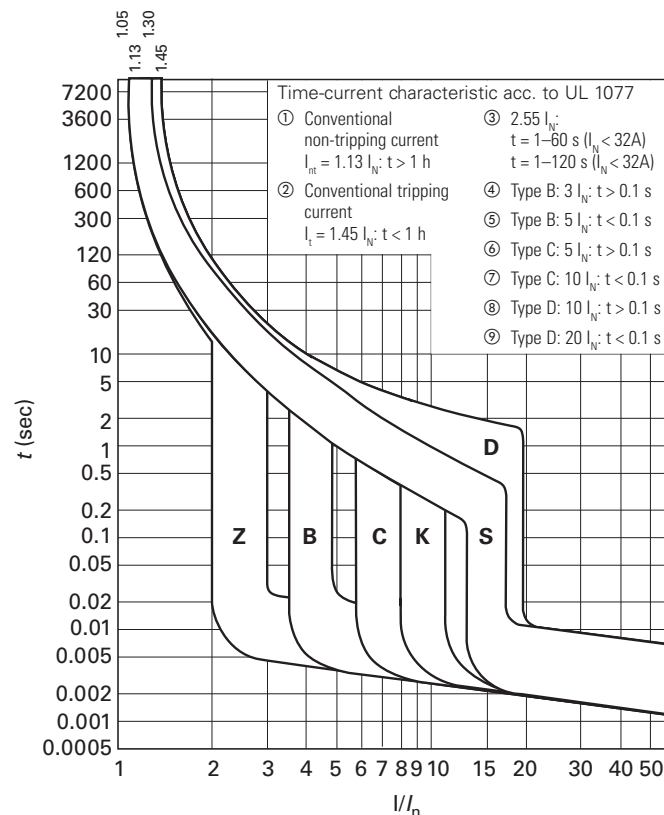

#### Catalog Numbering System

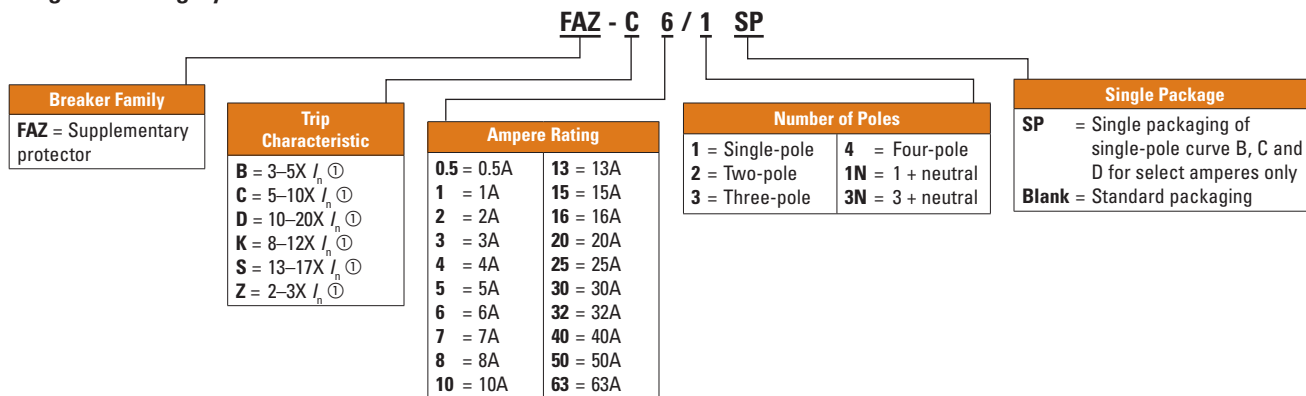

①  $I_n$  = Rated current for instantaneous trip characteristics.

# UL 1077 DIN rail supplementary protectors


FAZ circuit breakers

PRODUCT SELECTION

## FAZ product selection—B curve (3–5X $I_n$ current rating)

- Designed for resistive or slightly inductive loads
- Response time of instantaneous trip: 3–5X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where protection against low-level short-circuit faults in control wiring is desired. Instantaneous trip is 3–5X continuous rating of device ( $I_n$ ). Applications include PLC wiring, business equipment, lighting, appliances and some motors. Low magnetic trip point.

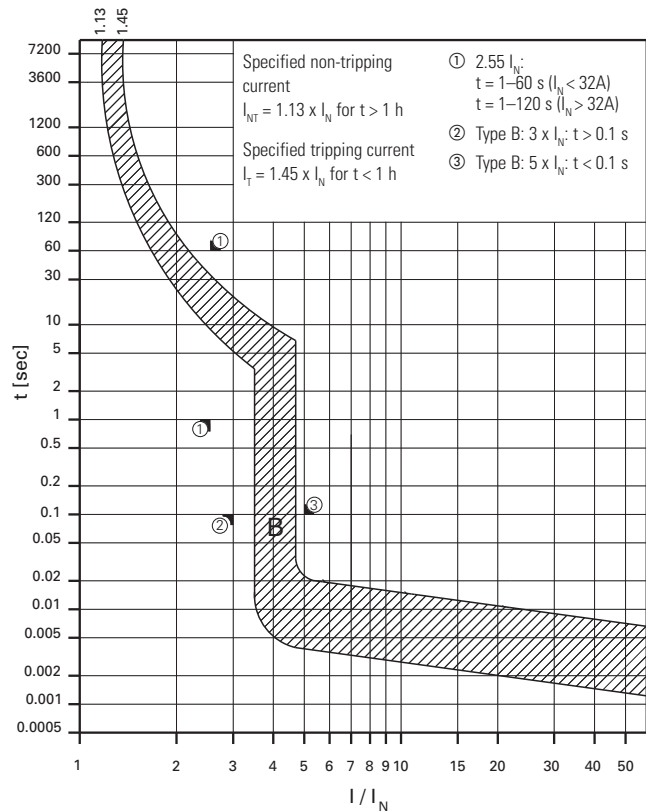

## B Curve (3–5X $I_n$ Current Rating)—designed for resistive or slightly inductive loads ①



|         | Single-pole ②  | Two-pole       | Three-pole     | Four-pole      | Single-pole + Neutral | Three-pole + Neutral |
|---------|----------------|----------------|----------------|----------------|-----------------------|----------------------|
| Amperes | Catalog Number | Catalog Number | Catalog Number | Catalog Number | Catalog Number        | Catalog Number       |
| 1       | FAZ-B1/1-SP    | FAZ-B1/2       | FAZ-B1/3       | FAZ-B1/4       | FAZ-B1/1N             | FAZ-B1/3N            |
| 2       | FAZ-B2/1-SP    | FAZ-B2/2       | FAZ-B2/3       | FAZ-B2/4       | FAZ-B2/1N             | FAZ-B2/3N            |
| 3       | FAZ-B3/1-SP    | FAZ-B3/2       | FAZ-B3/3       | FAZ-B3/4       | FAZ-B3/1N             | FAZ-B3/3N            |
| 4       | FAZ-B4/1-SP    | FAZ-B4/2       | FAZ-B4/3       | FAZ-B4/4       | FAZ-B4/1N             | FAZ-B4/3N            |
| 5       | FAZ-B5/1-SP    | FAZ-B5/2       | FAZ-B5/3       | FAZ-B5/4       | FAZ-B5/1N             | FAZ-B5/3N            |
| 6       | FAZ-B6/1-SP    | FAZ-B6/2       | FAZ-B6/3       | FAZ-B6/4       | FAZ-B6/1N             | FAZ-B6/3N            |
| 7       | FAZ-B7/1-SP    | FAZ-B7/2       | FAZ-B7/3       | FAZ-B7/4       | FAZ-B7/1N             | FAZ-B7/3N            |
| 8       | FAZ-B8/1-SP    | FAZ-B8/2       | FAZ-B8/3       | FAZ-B8/4       | FAZ-B8/1N             | FAZ-B8/3N            |
| 10      | FAZ-B10/1-SP   | FAZ-B10/2      | FAZ-B10/3      | FAZ-B10/4      | FAZ-B10/1N            | FAZ-B10/3N           |
| 12      | FAZ-B12/1-SP   | FAZ-B12/2      | FAZ-B12/3      | FAZ-B12/4      | FAZ-B12/1N            | FAZ-B12/3N           |
| 13      | FAZ-B13/1-SP   | FAZ-B13/2      | FAZ-B13/3      | FAZ-B13/4      | FAZ-B13/1N            | FAZ-B13/3N           |
| 15      | FAZ-B15/1-SP   | FAZ-B15/2      | FAZ-B15/3      | FAZ-B15/4      | FAZ-B15/1N            | FAZ-B15/3N           |
| 16      | FAZ-B16/1-SP   | FAZ-B16/2      | FAZ-B16/3      | FAZ-B16/4      | FAZ-B16/1N            | FAZ-B16/3N           |
| 20      | FAZ-B20/1-SP   | FAZ-B20/2      | FAZ-B20/3      | FAZ-B20/4      | FAZ-B20/1N            | FAZ-B20/3N           |
| 25      | FAZ-B25/1-SP   | FAZ-B25/2      | FAZ-B25/3      | FAZ-B25/4      | FAZ-B25/1N            | FAZ-B25/3N           |
| 30      | FAZ-B30/1-SP   | FAZ-B30/2      | FAZ-B30/3      | FAZ-B30/4      | FAZ-B30/1N            | FAZ-B30/3N           |
| 32      | FAZ-B32/1-SP   | FAZ-B32/2      | FAZ-B32/3      | FAZ-B32/4      | FAZ-B32/1N            | FAZ-B32/3N           |
| 40      | FAZ-B40/1-SP   | FAZ-B40/2      | FAZ-B40/3      | FAZ-B40/4      | FAZ-B40/1N            | FAZ-B40/3N           |
| 50      | FAZ-B50/1-SP   | FAZ-B50/2      | FAZ-B50/3      | FAZ-B50/4      | FAZ-B50/1N            | FAZ-B50/3N           |
| 63      | FAZ-B63/1-SP   | FAZ-B63/2      | FAZ-B63/3      | FAZ-B63/4      | FAZ-B63/1N            | FAZ-B63/3N           |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② Option for single packaging on single-pole B, C and D curves only; add suffix SP when ordering.

# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### PRODUCT SELECTION

#### FAZ product selection—C curve (5–10X $I_n$ current rating)

- Designed for inductive loads
- Response time of instantaneous trip: 5–10X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where medium levels of inrush current are expected. Instantaneous trip is 5–10X rating of device ( $I_n$ ). Applications include small transformers, lighting, pilot devices, control circuits, and coils. Medium magnetic trip point.

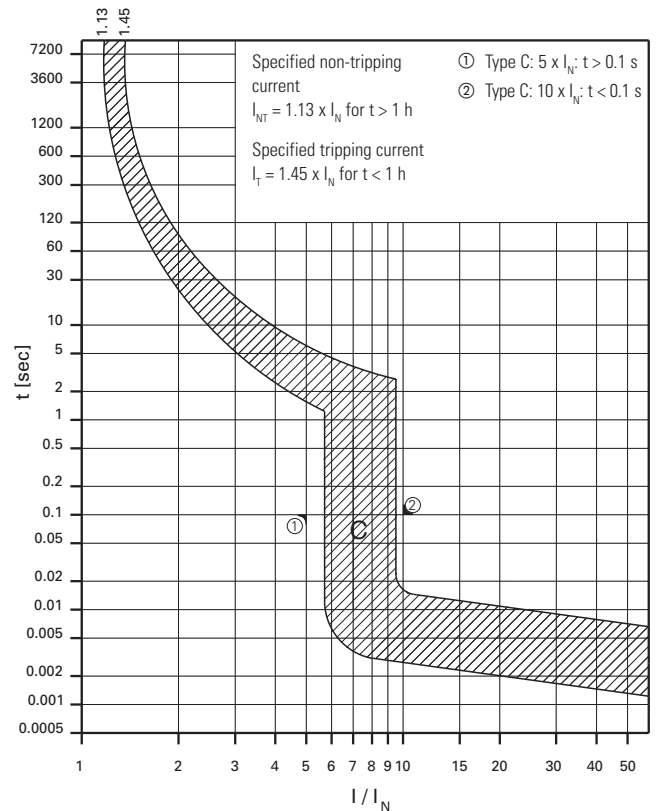

#### C Curve (5–10X $I_n$ current rating)—designed for inductive loads ①



|         | Single-pole ②  | Two-pole       | Three-pole     | Four-pole      | Single-pole + Neutral | Three-pole + Neutral |
|---------|----------------|----------------|----------------|----------------|-----------------------|----------------------|
| Amperes | Catalog Number | Catalog Number | Catalog Number | Catalog Number | Catalog Number        | Catalog Number       |
| 0.5     | FAZ-C0.5/1-SP  | FAZ-C0.5/2     | FAZ-C0.5/3     | FAZ-C0.5/4     | FAZ-C0.5/1N           | FAZ-C0.5/3N          |
| 1       | FAZ-C1/1-SP    | FAZ-C1/2       | FAZ-C1/3       | FAZ-C1/4       | FAZ-C1/1N             | FAZ-C1/3N            |
| 1.6     | FAZ-C1.6/1-SP  | FAZ-C1.6/2     | FAZ-C1.6/3     | FAZ-C1.6/4     | FAZ-C1.6/1N           | FAZ-C1.6/3N          |
| 2       | FAZ-C2/1-SP    | FAZ-C2/2       | FAZ-C2/3       | FAZ-C2/4       | FAZ-C2/1N             | FAZ-C2/3N            |
| 3       | FAZ-C3/1-SP    | FAZ-C3/2       | FAZ-C3/3       | FAZ-C3/4       | FAZ-C3/1N             | FAZ-C3/3N            |
| 4       | FAZ-C4/1-SP    | FAZ-C4/2       | FAZ-C4/3       | FAZ-C4/4       | FAZ-C4/1N             | FAZ-C4/3N            |
| 5       | FAZ-C5/1-SP    | FAZ-C5/2       | FAZ-C5/3       | FAZ-C5/4       | FAZ-C5/1N             | FAZ-C5/3N            |
| 6       | FAZ-C6/1-SP    | FAZ-C6/2       | FAZ-C6/3       | FAZ-C6/4       | FAZ-C6/1N             | FAZ-C6/3N            |
| 7       | FAZ-C7/1-SP    | FAZ-C7/2       | FAZ-C7/3       | FAZ-C7/4       | FAZ-C7/1N             | FAZ-C7/3N            |
| 8       | FAZ-C8/1-SP    | FAZ-C8/2       | FAZ-C8/3       | FAZ-C8/4       | FAZ-C8/1N             | FAZ-C8/3N            |
| 10      | FAZ-C10/1-SP   | FAZ-C10/2      | FAZ-C10/3      | FAZ-C10/4      | FAZ-C10/1N            | FAZ-C10/3N           |
| 13      | FAZ-C13/1-SP   | FAZ-C13/2      | FAZ-C13/3      | FAZ-C13/4      | FAZ-C13/1N            | FAZ-C13/3N           |
| 15      | FAZ-C15/1-SP   | FAZ-C15/2      | FAZ-C15/3      | FAZ-C15/4      | FAZ-C15/1N            | FAZ-C15/3N           |
| 16      | FAZ-C16/1-SP   | FAZ-C16/2      | FAZ-C16/3      | FAZ-C16/4      | FAZ-C16/1N            | FAZ-C16/3N           |
| 20      | FAZ-C20/1-SP   | FAZ-C20/2      | FAZ-C20/3      | FAZ-C20/4      | FAZ-C20/1N            | FAZ-C20/3N           |
| 25      | FAZ-C25/1-SP   | FAZ-C25/2      | FAZ-C25/3      | FAZ-C25/4      | FAZ-C25/1N            | FAZ-C25/3N           |
| 30      | FAZ-C30/1-SP   | FAZ-C30/2      | FAZ-C30/3      | FAZ-C30/4      | FAZ-C30/1N            | FAZ-C30/3N           |
| 32      | FAZ-C32/1-SP   | FAZ-C32/2      | FAZ-C32/3      | FAZ-C32/4      | FAZ-C32/1N            | FAZ-C32/3N           |
| 40      | FAZ-C40/1-SP   | FAZ-C40/2      | FAZ-C40/3      | FAZ-C40/4      | FAZ-C40/1N            | FAZ-C40/3N           |
| 50      | FAZ-C50/1-SP   | FAZ-C50/2      | FAZ-C50/3      | FAZ-C50/4      | FAZ-C50/1N            | FAZ-C50/3N           |
| 63      | FAZ-C63/1-SP   | FAZ-C63/2      | FAZ-C63/3      | FAZ-C63/4      | FAZ-C63/1N            | FAZ-C63/3N           |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② Option for single packaging on single-pole B, C and D curves only; add suffix SP when ordering.

# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### PRODUCT SELECTION

#### FAZ product selection—D curve (10–20X $I_n$ current rating)

- Designed for highly inductive loads
- Response time of instantaneous trip: 10–20X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where high levels of inrush current are expected. Instantaneous trip is 10–20X rating of device ( $I_n$ ). The high magnetic trip point prevents nuisance tripping in high inductive applications such as motors, transformers and power supplies.

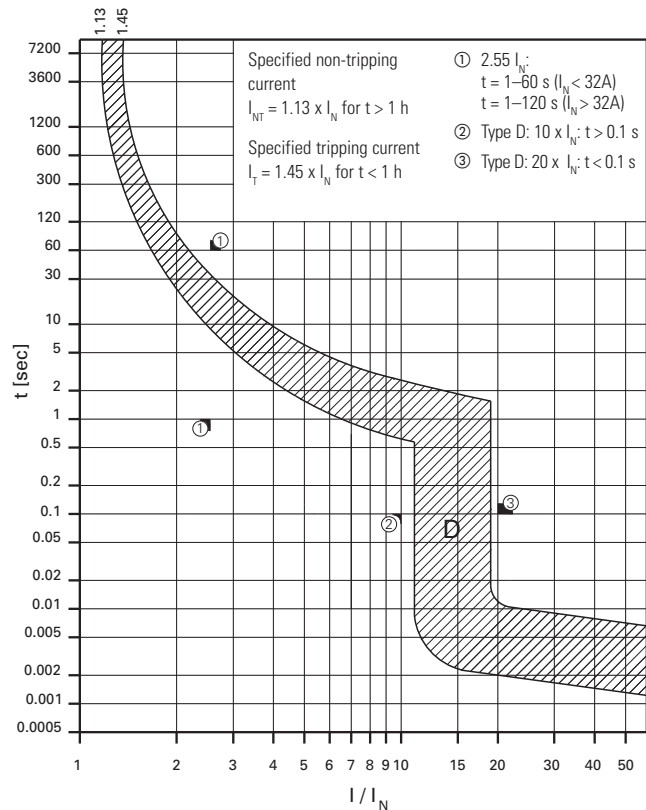

#### D Curve (10–20X $I_n$ current rating)—designed for inductive loads ①



|         | Single-pole ②  | Two-pole       | Three-pole     | Four-pole      | Single-pole + Neutral | Three-pole + Neutral |
|---------|----------------|----------------|----------------|----------------|-----------------------|----------------------|
| Amperes | Catalog Number | Catalog Number | Catalog Number | Catalog Number | Catalog Number        | Catalog Number       |
| 0.5     | FAZ-D0.5/1-SP  | FAZ-D0.5/2     | FAZ-D0.5/3     | FAZ-D0.5/4     | FAZ-D0.5/1N           | FAZ-D0.5/3N          |
| 1       | FAZ-D1/1-SP    | FAZ-D1/2       | FAZ-D1/3       | FAZ-D1/4       | FAZ-D1/1N             | FAZ-D1/3N            |
| 2       | FAZ-D2/1-SP    | FAZ-D2/2       | FAZ-D2/3       | FAZ-D2/4       | FAZ-D2/1N             | FAZ-D2/3N            |
| 3       | FAZ-D3/1-SP    | FAZ-D3/2       | FAZ-D3/3       | FAZ-D3/4       | FAZ-D3/1N             | FAZ-D3/3N            |
| 4       | FAZ-D4/1-SP    | FAZ-D4/2       | FAZ-D4/3       | FAZ-D4/4       | FAZ-D4/1N             | FAZ-D4/3N            |
| 5       | FAZ-D5/1-SP    | FAZ-D5/2       | FAZ-D5/3       | FAZ-D5/4       | FAZ-D5/1N             | FAZ-D5/3N            |
| 6       | FAZ-D6/1-SP    | FAZ-D6/2       | FAZ-D6/3       | FAZ-D6/4       | FAZ-D6/1N             | FAZ-D6/3N            |
| 7       | FAZ-D7/1-SP    | FAZ-D7/2       | FAZ-D7/3       | FAZ-D7/4       | FAZ-D7/1N             | FAZ-D7/3N            |
| 8       | FAZ-D8/1-SP    | FAZ-D8/2       | FAZ-D8/3       | FAZ-D8/4       | FAZ-D8/1N             | FAZ-D8/3N            |
| 10      | FAZ-D10/1-SP   | FAZ-D10/2      | FAZ-D10/3      | FAZ-D10/4      | FAZ-D10/1N            | FAZ-D10/3N           |
| 13      | FAZ-D13/1-SP   | FAZ-D13/2      | FAZ-D13/3      | FAZ-D13/4      | FAZ-D13/1N            | FAZ-D13/3N           |
| 15      | FAZ-D15/1-SP   | FAZ-D15/2      | FAZ-D15/3      | FAZ-D15/4      | FAZ-D15/1N            | FAZ-D15/3N           |
| 16      | FAZ-D16/1-SP   | FAZ-D16/2      | FAZ-D16/3      | FAZ-D16/4      | FAZ-D16/1N            | FAZ-D16/3N           |
| 20      | FAZ-D20/1-SP   | FAZ-D20/2      | FAZ-D20/3      | FAZ-D20/4      | FAZ-D20/1N            | FAZ-D20/3N           |
| 25      | FAZ-D25/1-SP   | FAZ-D25/2      | FAZ-D25/3      | FAZ-D25/4      | FAZ-D25/1N            | FAZ-D25/3N           |
| 30      | FAZ-D30/1-SP   | FAZ-D30/2      | FAZ-D30/3      | FAZ-D30/4      | FAZ-D30/1N            | FAZ-D30/3N           |
| 32      | FAZ-D32/1-SP   | FAZ-D32/2      | FAZ-D32/3      | FAZ-D32/4      | FAZ-D32/1N            | FAZ-D32/3N           |
| 40      | FAZ-D40/1-SP   | FAZ-D40/2      | FAZ-D40/3      | FAZ-D40/4      | FAZ-D40/1N            | FAZ-D40/3N           |
| 50 ③    | FAZ-D50/1-SP   | FAZ-D50/2      | FAZ-D50/3      | FAZ-D50/4      | FAZ-D50/1N            | FAZ-D50/3N           |
| 63 ③    | FAZ-D63/1-SP   | FAZ-D63/2      | FAZ-D63/3      | FAZ-D63/4      | FAZ-D63/1N            | FAZ-D63/3N           |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② Option for single packaging on single-pole B, C and D curves only; add suffix SP when ordering.

③ IEC 60947-2 only.

# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### PRODUCT SELECTION

#### FAZ product selection—K curve (8–12X $I_n$ current rating)

- Designed for motors, transformers, and upstream electronics
- Response time of instantaneous trip: 8–12X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where medium levels of inrush current are expected. Instantaneous trip is 8–12X rating of device ( $I_n$ ). Applications include small transformers, lighting, pilot devices, control circuits, and coils. Medium magnetic trip point.

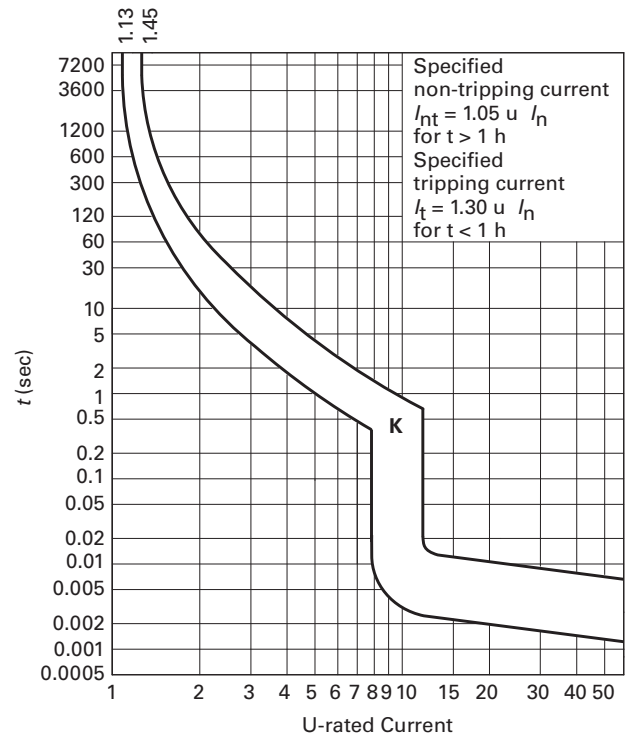

#### K Curve (8–12X $I_n$ current rating)— designed for inductive loads ①②



|         | Single-pole ③  | Two-pole       | Three-pole     | Four-pole      | Single-pole + Neutral | Three-pole + Neutral |
|---------|----------------|----------------|----------------|----------------|-----------------------|----------------------|
| Amperes | Catalog Number | Catalog Number | Catalog Number | Catalog Number | Catalog Number        | Catalog Number       |
| 0.5     | FAZ-K0.5/1     | FAZ-K0.5/2     | FAZ-K0.5/3     | FAZ-K0.5/4     | FAZ-K0.5/1N           | FAZ-K0.5/3N          |
| 1       | FAZ-K1/1       | FAZ-K1/2       | FAZ-K1/3       | FAZ-K1/4       | FAZ-K1/1N             | FAZ-K1/3N            |
| 1.6     | FAZ-K1.6/1     | FAZ-K1.6/2     | FAZ-K1.6/3     | FAZ-K1.6/4     | FAZ-K1.6/1N           | FAZ-K1.6/3N          |
| 2       | FAZ-K2/1       | FAZ-K2/2       | FAZ-K2/3       | FAZ-K2/4       | FAZ-K2/1N             | FAZ-K2/3N            |
| 3       | FAZ-K3/1       | FAZ-K3/2       | FAZ-K3/3       | FAZ-K3/4       | FAZ-K3/1N             | FAZ-K3/3N            |
| 4       | FAZ-K4/1       | FAZ-K4/2       | FAZ-K4/3       | FAZ-K4/4       | FAZ-K4/1N             | FAZ-K4/3N            |
| 6       | FAZ-K6/1       | FAZ-K6/2       | FAZ-K6/3       | FAZ-K6/4       | FAZ-K6/1N             | FAZ-K6/3N            |
| 8       | FAZ-K8/1       | FAZ-K8/2       | FAZ-K8/3       | FAZ-K8/4       | FAZ-K8/1N             | FAZ-K8/3N            |
| 10      | FAZ-K10/1      | FAZ-K10/2      | FAZ-K10/3      | FAZ-K10/4      | FAZ-K10/1N            | FAZ-K10/3N           |
| 13      | FAZ-K13/1      | FAZ-K13/2      | FAZ-K13/3      | FAZ-K13/4      | FAZ-K13/1N            | FAZ-K13/3N           |
| 16      | FAZ-K16/1      | FAZ-K16/2      | FAZ-K16/3      | FAZ-K16/4      | FAZ-K16/1N            | FAZ-K16/3N           |
| 20      | FAZ-K20/1      | FAZ-K20/2      | FAZ-K20/3      | FAZ-K20/4      | FAZ-K20/1N            | FAZ-K20/3N           |
| 25      | FAZ-K25/1      | FAZ-K25/2      | FAZ-K25/3      | FAZ-K25/4      | FAZ-K25/1N            | FAZ-K25/3N           |
| 32      | FAZ-K32/1      | FAZ-K32/2      | FAZ-K32/3      | FAZ-K32/4      | FAZ-K32/1N            | FAZ-K32/3N           |
| 40      | FAZ-K40/1      | FAZ-K40/2      | FAZ-K40/3      | FAZ-K40/4      | FAZ-K40/1N            | FAZ-K40/3N           |
| 50      | FAZ-K50/1      | FAZ-K50/2      | FAZ-K50/3      | FAZ-K50/4      | FAZ-K50/1N            | FAZ-K50/3N           |
| 63      | FAZ-K63/1      | FAZ-K63/2      | FAZ-K63/3      | FAZ-K63/4      | FAZ-K63/1N            | FAZ-K63/3N           |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② These breakers are available by special order and may result in additional delivery time.

③ Two-piece box order, quantities of 2.

# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

PRODUCT SELECTION

## FAZ product selection—S curve (13–17X $I_n$ current rating)

- Designed for control circuits with high inrush
- Response time of instantaneous trip: 13–17X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)
- UL file number 177451

Suitable for applications where high levels of inrush current are expected. Instantaneous trip is 13–17X rating of device ( $I_n$ ). The high magnetic trip point prevents nuisance tripping in high inductive applications such as motors, transformers and power supplies.

## S Curve (13–17X $I_n$ current rating)— designed for inductive loads ①②




|         | Single-pole ③  | Two-pole       |
|---------|----------------|----------------|
| Amperes | Catalog Number | Catalog Number |
| 1       | FAZ-S1/1       | FAZ-S1/2       |
| 2       | FAZ-S2/1       | FAZ-S2/2       |
| 3       | FAZ-S3/1       | FAZ-S3/2       |
| 4       | FAZ-S4/1       | FAZ-S4/2       |
| 6       | FAZ-S6/1       | FAZ-S6/2       |
| 10      | FAZ-S10/1      | FAZ-S10/2      |
| 16      | FAZ-S16/1      | FAZ-S16/2      |
| 20      | FAZ-S20/1      | FAZ-S20/2      |
| 25      | FAZ-S25/1      | FAZ-S25/2      |
| 32      | FAZ-S32/1      | FAZ-S32/2      |
| 40      | FAZ-S40/1      | FAZ-S40/2      |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② These breakers are available by special order and may result in additional delivery time.

③ Two-piece box order, quantities of 2.

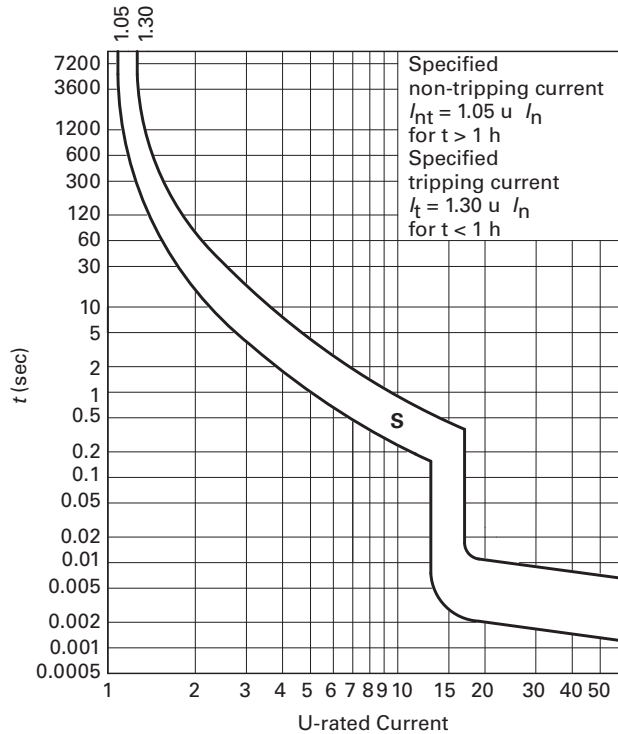



# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### PRODUCT SELECTION

#### FAZ product selection—Z curve (2–3X $I_n$ current rating)

- Designed for protection of electronic devices
- Response time of instantaneous trip: 2–3X  $I_n$  current rating
- UL recognized and CSA Certified as supplementary protectors
- For international and domestic use (conform to IEC 60947-2)

Suitable for applications where low levels of inrush current are expected. Instantaneous trip is 2–3X rating of device ( $I_n$ ). Applications include small transformers, lighting, pilot devices, control circuits, and coils. Medium magnetic trip point.

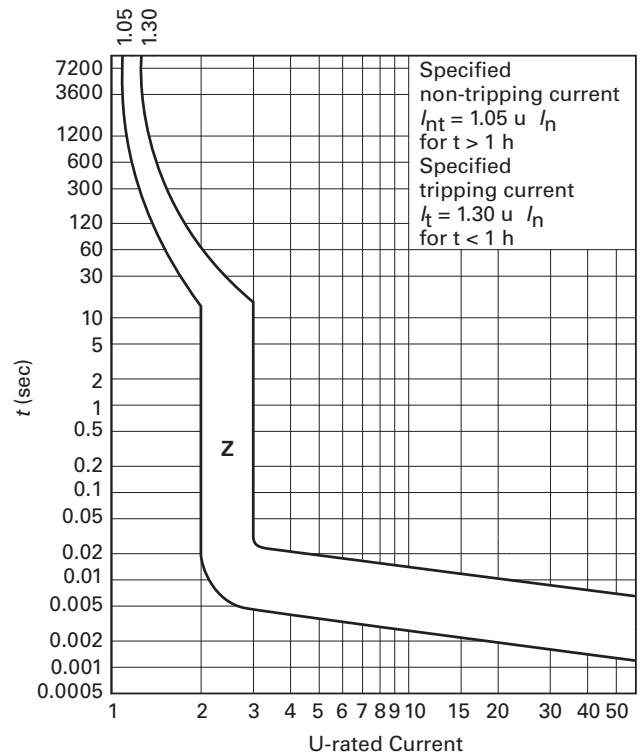

#### Z Curve (2–3X $I_n$ current rating)— designed for inductive loads ①②



|         | Single-pole ③  | Two-pole       | Three-pole     | Four-pole      |
|---------|----------------|----------------|----------------|----------------|
| Amperes | Catalog Number | Catalog Number | Catalog Number | Catalog Number |
| 0.5     | FAZ-Z0.5/1     | FAZ-Z0.5/2     | FAZ-Z0.5/3     | FAZ-Z0.5/4     |
| 1       | FAZ-Z1/1       | FAZ-Z1/2       | FAZ-Z1/3       | FAZ-Z1/4       |
| 1.6     | FAZ-Z1.6/1     | FAZ-Z1.6/2     | FAZ-Z1.6/3     | FAZ-Z1.6/4     |
| 2       | FAZ-Z2/1       | FAZ-Z2/2       | FAZ-Z2/3       | FAZ-Z2/4       |
| 3       | FAZ-Z3/1       | FAZ-Z3/2       | FAZ-Z3/3       | FAZ-Z3/4       |
| 4       | FAZ-Z4/1       | FAZ-Z4/2       | FAZ-Z4/3       | FAZ-Z4/4       |
| 6       | FAZ-Z6/1       | FAZ-Z6/2       | FAZ-Z6/3       | FAZ-Z6/4       |
| 8       | FAZ-Z8/1       | FAZ-Z8/2       | FAZ-Z8/3       | FAZ-Z8/4       |
| 10      | FAZ-Z10/1      | FAZ-Z10/2      | FAZ-Z10/3      | FAZ-Z10/4      |
| 13      | FAZ-Z13/1      | FAZ-Z13/2      | FAZ-Z13/3      | FAZ-Z13/4      |
| 16      | FAZ-Z16/1      | FAZ-Z16/2      | FAZ-Z16/3      | FAZ-Z16/4      |
| 20      | FAZ-Z20/1      | FAZ-Z20/2      | FAZ-Z20/3      | FAZ-Z20/4      |
| 25      | FAZ-Z25/1      | FAZ-Z25/2      | FAZ-Z25/3      | FAZ-Z25/4      |
| 32      | FAZ-Z32/1      | FAZ-Z32/2      | FAZ-Z32/3      | FAZ-Z32/4      |
| 40      | FAZ-Z40/1      | FAZ-Z40/2      | FAZ-Z40/3      | FAZ-Z40/4      |
| 50      | FAZ-Z50/1      | FAZ-Z50/2      | FAZ-Z50/3      | FAZ-Z50/4      |
| 63      | FAZ-Z63/1      | FAZ-Z63/2      | FAZ-Z63/3      | FAZ-Z63/4      |

① In North America, these switches are UL recognized and CSA Certified as supplementary protection devices. Per the intent of NEC (National Electrical Code), Article 240, and CEC (Canadian Electrical Code), Part 1 C22.1, supplementary breakers cannot be used as a substitute for the branch circuit protective device. They can be used to provide overcurrent protection within an appliance or other electrical equipment where branch circuit overcurrent protection is already provided, or is not required.

② These breakers are available by special order and may result in additional delivery time.




③ Two-piece box order, quantities of 2.

# UL 1077 DIN rail supplementary protectors


FAZ circuit breakers

ACCESSORIES

## Auxiliary Contacts and Voltage Trips

| Module                                                                              | Circuit Diagram                                                                     | Description                                                                                                                                                                                                                                                                                                                                           | Rated Operational Voltage  | Catalog Number              |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-----------------------------|
| Standard Auxiliary Contacts                                                         |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       |                            |                             |
|    |    | <ul style="list-style-type: none"><li>• 1NO/1NC</li><li>• Installs on left side of FAZ or shunt trip</li><li>• Max. one per FAZ (1077) device</li><li>• Switches when FAZ is tripped electrically or manually</li></ul>                                                                                                                               | 230 Vac                    | <b>FAZ-XHIN11</b>           |
|                                                                                     |    | <ul style="list-style-type: none"><li>• 1 changeover contact</li><li>• Installs on left side of FAZ or shunt trip</li><li>• Max. one per FAZ (1077) device</li><li>• Switches when FAZ is tripped electrically or manually</li></ul>                                                                                                                  | 230 Vac                    | <b>FAZ-XHINW1</b>           |
| Auxiliary/Trip Indicating Contact                                                   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       |                            |                             |
|    |    | <ul style="list-style-type: none"><li>• Small selector screw changes mode</li><li>• Two Form C (changeover) contacts</li><li>• Installs on left side of FAZ or shunt trip</li><li>• Auxiliary contacts switch when FAZ is tripped electrically or manually</li><li>• Trip indicating contact switches only when FAZ is tripped electrically</li></ul> | 230 Vac                    | <b>FAZ-XAM002</b>           |
|                                                                                     |   |                                                                                                                                                                                                                                                                                                                                                       |                            |                             |
| Undervoltage Trip                                                                   |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       |                            |                             |
|  |  | <ul style="list-style-type: none"><li>• Prevents FAZ from operating unless voltage is present</li><li>• Installs on left side of FAZ</li><li>• Includes test button</li></ul>                                                                                                                                                                         | 115 Vac                    | <b>FAZ-XUA(115VAC)</b>      |
|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       | 230 Vac                    | <b>FAZ-XUA(230VAC)</b>      |
|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       | 400 Vac                    | <b>FAZ-XUA(400VAC)</b>      |
| Shunt Trip                                                                          |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       |                            |                             |
|  |  | <ul style="list-style-type: none"><li>• Allows remote trip of FAZ</li><li>• Installs on left side of FAZ</li></ul>                                                                                                                                                                                                                                    | 12–110 Vac<br>12–60 Vdc    | <b>FAZ-XAA-C-12-110VAC</b>  |
|                                                                                     |                                                                                     |                                                                                                                                                                                                                                                                                                                                                       | 110–415 Vac<br>110–230 Vdc | <b>FAZ-XAA-C-110-415VAC</b> |

## Allowable Combinations of Accessories


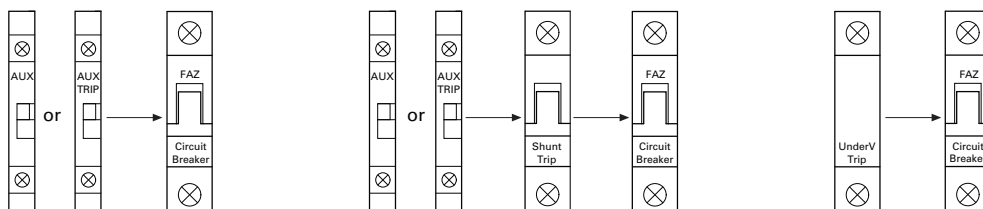


# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### ACCESSORIES

#### Busbar System
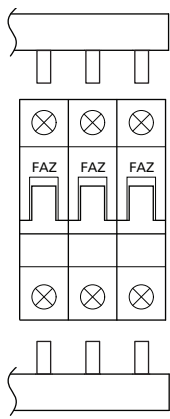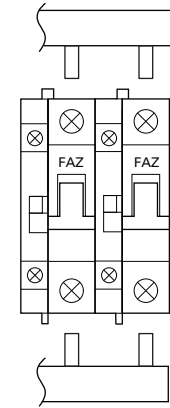
| Description                                                                                                                                                                                                                             | Rated Operational Current | Number of Poles per Device | Number of Terminals | Catalog Number ①              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------------------|---------------------|-------------------------------|
| <b>Without Auxiliary Contacts</b><br>For connecting FAZ supplementary protectors without auxiliary contacts. May be fed from line or load side.        | 80A                       | 1                          | 57                  | <b>BB-UL-18/1P-1M/57</b>      |
|                                                                                                                                                                                                                                         |                           | 2                          | 56                  | <b>BB-UL-18/2P-2M/56</b>      |
|                                                                                                                                                                                                                                         |                           | 3                          | 57                  | <b>BB-UL-18/3P-3M/57</b>      |
|                                                                                                                                                                                                                                         | 100A                      | 1                          | 57                  | <b>BB-UL-25/1P-1M/57</b>      |
|                                                                                                                                                                                                                                         |                           | 2                          | 56                  | <b>BB-UL-25/2P-2M/56</b>      |
|                                                                                                                                                                                                                                         |                           | 3                          | 57                  | <b>BB-UL-25/3P-3M/57</b>      |
| <b>Auxiliary/Trip Indicating Contact</b><br>For connecting FAZ supplementary protectors with auxiliary contacts. May be fed from line or load side.  | 80A                       | 1                          | 37                  | <b>BB-UL-18/1P-1,5M/37</b>    |
|                                                                                                                                                                                                                                         |                           | 2                          | 46                  | <b>BB-UL-18/2P+AS-2,5M/46</b> |
|                                                                                                                                                                                                                                         |                           | 3                          | 48                  | <b>BB-UL-18/3P+AS-3,5M/48</b> |
|                                                                                                                                                                                                                                         | 100A                      | 1                          | 37                  | <b>BB-UL-25/1P-1,5M/37</b>    |
|                                                                                                                                                                                                                                         |                           | 2                          | 46                  | <b>BB-UL-25/2P+AS-2,5M/46</b> |
|                                                                                                                                                                                                                                         |                           | 3                          | 48                  | <b>BB-UL-25/3P+AS-3,5M/48</b> |

① Bus may be center fed for high current capacity.

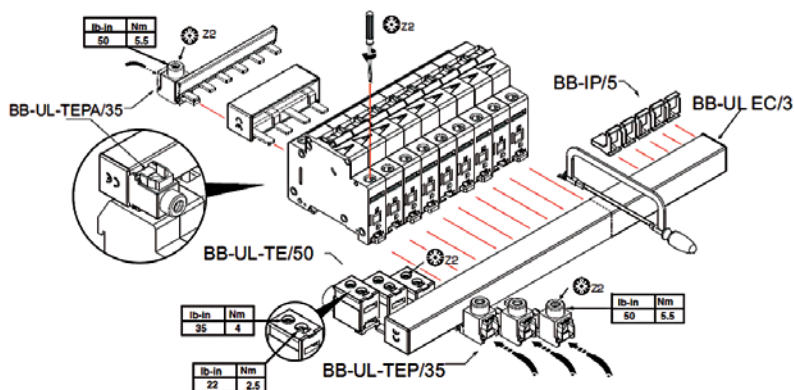

# UL 1077 DIN rail supplementary protectors


FAZ circuit breakers

ACCESSORIES

## Pin Type Incoming Supply Terminals

| Accessories | Description | Installation | Catalog Number |
|-------------|-------------|--------------|----------------|
|-------------|-------------|--------------|----------------|

### Incoming Terminal




- Accommodates conductors from 6–35 mm<sup>2</sup>/ #10–2 AWG
- 4–5.5 Nm/ 35–50 lb-in
- Two- and three-pole

BB-UL-TEP/35

## Pin Type Incoming Supply Terminals—Single-Phase Only

| Accessories | Description | Poles | Catalog Number |
|-------------|-------------|-------|----------------|
|-------------|-------------|-------|----------------|




- Accommodates conductors from 6–35 mm<sup>2</sup>/ #10–1/10 AWG
- 4–5.5 Nm/ 35–50 lb-in

BB-UL-TEPA/35

## Protective Accessories

| Accessories | Description | Catalog Number |
|-------------|-------------|----------------|
|-------------|-------------|----------------|


### Busbar Terminal Cover



For covering unused terminals

BB-IP/5

### Padlock Hasp




- Prevents reactivation of the device during maintenance
- Holds one padlock

IS/SPE-1TE

## Bus Incoming Supply Terminals

| Accessories | Description | Installation | Catalog Number |
|-------------|-------------|--------------|----------------|
|-------------|-------------|--------------|----------------|

### Incoming Terminal




- 50 mm<sup>2</sup>
- #14–1 AWG
- 75 Deg wire
- 115 A/Y, 480V UL
- 160 A/Y 690V IEC

BB-UL-TE/50

## Busbar End Cap

| Accessories | Description | Poles | Catalog Number |
|-------------|-------------|-------|----------------|
|-------------|-------------|-------|----------------|

### Fork Connector



- Install after cutting busbar
- Protects end of busbar

2 and 3

BB-UL-EC/3



1

BB-UL-EC/1

# UL 1077 DIN rail supplementary protectors

## FAZ circuit breakers

### TECHNICAL DATA

#### Technical Data

| Description                                          | B Curve                                                       | C Curve                                                       | D Curve                                                       |
|------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|
| <b>Electrical</b>                                    |                                                               |                                                               |                                                               |
| Approvals                                            | UR (UL 1077), CSA (CSA 22.2 No. 235), CE                      |                                                               |                                                               |
| Standards                                            | IEC/EN 60947-2                                                |                                                               |                                                               |
| Short-circuit trip response                          | 3–5 $I_n$                                                     | 5–10 $I_n$                                                    | 10–20 $I_n$                                                   |
| <b>Supplementary Protectors—UL/CSA</b>               |                                                               |                                                               |                                                               |
| Current range                                        | 1–63A                                                         | 0.5–63A                                                       | 0.5–40A                                                       |
| Maximum voltage ratings—UL/CSA                       |                                                               |                                                               |                                                               |
| Single-pole, single-pole + neutral                   | 277 Vac<br>48 Vdc                                             | 277 Vac<br>48 Vdc                                             | 277 Vac<br>48 Vdc                                             |
| Two-, three-pole, four-pole and three-pole + neutral | 480Y/277 Vac                                                  | 480Y/277 Vac                                                  | 480Y/277 Vac                                                  |
| Two poles in series                                  | 96 Vdc                                                        | 96 Vdc                                                        | 96 Vdc                                                        |
| Thermal tripping characteristics                     |                                                               |                                                               |                                                               |
| Single-pole                                          | 1.35 x $I_n$ @ 40°C                                           | 1.35 x $I_n$ @ 40°C                                           | 1.35 x $I_n$ @ 40°C                                           |
| Multi-pole                                           | 1.45 x $I_n$ @ 40°C                                           | 1.45 x $I_n$ @ 40°C                                           | 1.45 x $I_n$ @ 40°C                                           |
| Short-circuit ratings (at max. voltage)              |                                                               |                                                               |                                                               |
| Single-pole                                          | 10 kA (5 kA for 40–63A device)                                | 10 kA (5 kA for 40–63A device)                                | 5 kA                                                          |
| Two-, three-pole                                     | 10 kA (5 kA for 40–63A device)                                | 10 kA (5 kA for 40–63A device)                                | 5 kA                                                          |
| Single-pole                                          | 10 kA @ 48 Vdc                                                | 10 kA @ 48 Vdc                                                | 10 kA @ 48 Vdc                                                |
| Two poles in series                                  | 10 kA @ 96 Vdc                                                | 10 kA @ 96 Vdc                                                | 10 kA @ 96 Vdc                                                |
| <b>Miniature Circuit Breaker—IEC</b>                 |                                                               |                                                               |                                                               |
| Current range                                        | 1–63A                                                         | 0.5–63A                                                       | 0.5–63A                                                       |
| Maximum voltage ratings—IEC 68898-1                  |                                                               |                                                               |                                                               |
| Single-pole                                          | 230 Vac                                                       | 230 Vac                                                       | 230 Vac                                                       |
| Two-, three-pole                                     | 230/400 Vac                                                   | 230/400 Vac                                                   | 230/400 Vac                                                   |
| Maximum voltage ratings—IEC 60947-2                  |                                                               |                                                               |                                                               |
| Single-pole                                          | 240 Vac<br>48 Vdc                                             | 240 Vac<br>48 Vdc                                             | 240 Vac<br>48 Vdc                                             |
| Two-, three-pole                                     | 240/415 Vac                                                   | 240/415 Vac                                                   | 240/415 Vac                                                   |
| Two poles in series                                  | 96 Vdc                                                        | 96 Vdc                                                        | 96 Vdc                                                        |
| Thermal tripping characteristics                     |                                                               |                                                               |                                                               |
| Single-pole                                          | > 1 hour @ 1.05 x $I_n$                                       | > 1 hour @ 1.05 x $I_n$                                       | > 1 hour @ 1.05 x $I_n$                                       |
| Multi-pole                                           | < 1 hour @ 1.3 x $I_n$                                        | < 1 hour @ 1.3 x $I_n$                                        | < 1 hour @ 1.3 x $I_n$                                        |
| Interrupt ratings (at max. voltage)                  |                                                               |                                                               |                                                               |
| IEC 60947-2                                          | 15 kA                                                         | 15 kA                                                         | 15 kA (10 kA for 50 and 63A)                                  |
| IEC 60898                                            | 10 kA                                                         | 10 kA                                                         | 10 kA (50 and 63A not available)                              |
| Operational switching capacity                       | 7.5 kA                                                        | 7.5 kA                                                        | 7.5 kA                                                        |
| Max. backup fuse [g/gG]                              | 125A                                                          | 125A                                                          | 125A                                                          |
| Rated impulse withstand— $U_{imp}$                   | 4000 Vac                                                      | 4000 Vac                                                      | 4000 Vac                                                      |
| Rated insulation voltage— $U_i$                      | 440 Vac                                                       | 440 Vac                                                       | 440 Vac                                                       |
| <b>Environmental/General</b>                         |                                                               |                                                               |                                                               |
| Selectivity class                                    | 3                                                             | 3                                                             | 3                                                             |
| Lifespan (operations)                                | > 10,000 (1 operation = ON/OFF)                               | > 10,000 (1 operation = ON/OFF)                               | > 10,000 (1 operation = ON/OFF)                               |
| Shock (IEC 68-2-22)                                  | 10g–120 ms                                                    | 10g–120 ms                                                    | 10g–120 ms                                                    |
| Operating temperature range                          | –40 to +167°F (–40 to +75°C)                                  | –40 to +167°F (–40 to +75°C)                                  | –40 to +167°F (–40 to +75°C)                                  |
| Shipment and short-term storage                      | –40 to +185°F (–40 to +85°C)                                  | –40 to +185°F (–40 to +85°C)                                  | –40 to +185°F (–40 to +85°C)                                  |
| Housing material                                     | Nylon                                                         | Nylon                                                         | Nylon                                                         |
| <b>Mechanical</b>                                    |                                                               |                                                               |                                                               |
| Standard front dimension                             | 80 mm                                                         | 80 mm                                                         | 80 mm                                                         |
| Device height                                        | 80 mm                                                         | 80 mm                                                         | 80 mm                                                         |
| Terminal protection                                  | Finger and back-of-hand proof to IEC 536                      | Finger and back-of-hand proof to IEC 536                      | Finger and back-of-hand proof to IEC 536                      |
| Mounting width per pole                              | 17.5 mm                                                       | 17.5 mm                                                       | 17.5 mm                                                       |
| Mounting                                             | IEC/EN 60715 top-hat rail                                     | IEC/EN 60715 top-hat rail                                     | IEC/EN 60715 top-hat rail                                     |
| Degree of protection                                 | IP20                                                          | IP20                                                          | IP20                                                          |
| Terminals top and bottom                             | Twin-purpose terminals                                        | Twin-purpose terminals                                        | Twin-purpose terminals                                        |
| Supply connection                                    | Line or load side                                             | Line or load side                                             | Line or load side                                             |
| Terminal capacity [mm²]                              | 1 x 25 (AWG 4–18)/2 x 10 (AWG 8–18)                           | 1 x 25 (AWG 4–18)/2 x 10 (AWG 8–18)                           | 1 x 25 (AWG 4–18)/2 x 10 (AWG 8–18)                           |
| Torque                                               | 2.4 Nm                                                        | 2.4 Nm                                                        | 2.4 Nm                                                        |
| Imperial torque                                      | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) |
| Thickness of busbar material                         | 0.8–2 mm                                                      | 0.8–2 mm                                                      | 0.8–2 mm                                                      |
| Mounting position                                    | As required                                                   | As required                                                   | As required                                                   |

# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

TECHNICAL DATA

## Technical Data (continued)

| Description                                                             | K Curve                                                       | S Curve                                                       | Z Curve                                                       |
|-------------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------|
| <b>Electrical</b>                                                       |                                                               |                                                               |                                                               |
| Approvals                                                               | UR (UL 1077), CSA (CSA 22.2 No. 235), CE                      |                                                               |                                                               |
| Standards                                                               | IEC/EN 60947-2, E177451, 204453                               |                                                               |                                                               |
| Short-circuit trip response                                             | 8–12 $I_n$                                                    | 13–17 $I_n$                                                   | 2–3 $I_n$                                                     |
| <b>Supplementary Protectors—UL/CSA</b>                                  |                                                               |                                                               |                                                               |
| Current range                                                           | 0.5–63A                                                       | 0.5–40A                                                       | 1–63A                                                         |
| Maximum voltage ratings—UL/CSA                                          |                                                               |                                                               |                                                               |
| Single-pole, single-pole + neutral                                      | 277 Vac<br>48 Vdc                                             | 277 Vac<br>48 Vdc                                             | 277 Vac<br>48 Vdc                                             |
| Two-, three-, four-pole and three-pole + neutral<br>Two poles in series | 480Y/277 Vac<br>96 Vdc                                        | 480Y/277 Vac<br>96 Vdc                                        | 480Y/277 Vac<br>96 Vdc                                        |
| Thermal tripping characteristics                                        |                                                               |                                                               |                                                               |
| Single-pole                                                             | 1.35 x $I_n$ @ 40°C                                           | 1.35 x $I_n$ @ 40°C                                           | 1.35 x $I_n$ @ 40°C                                           |
| Multi-pole                                                              | 1.45 x $I_n$ @ 40°C                                           | 1.45 x $I_n$ @ 40°C                                           | 1.45 x $I_n$ @ 40°C                                           |
| Short-circuit ratings (at max. voltage)                                 |                                                               |                                                               |                                                               |
| Single-pole                                                             | 5 kA @ 277 Vac                                                | 5 kA @ 277 Vac                                                | 5 kA @ 277 Vac                                                |
| Single-pole + neutral                                                   | 5 kA @ 277 Vac                                                | 5 kA @ 277 Vac                                                | 5 kA @ 277 Vac                                                |
| Two-, three-, four-pole<br>Two poles in series                          | 5 kA @ 480Y/277 Vac                                           | 5 kA @ 480Y/277 Vac                                           | 5 kA @ 480Y/277 Vac                                           |
| <b>Miniature Circuit Breaker—IEC</b>                                    |                                                               |                                                               |                                                               |
| Current range                                                           | 0.5–63A                                                       | 0.5–40A                                                       | 1–63A                                                         |
| Maximum voltage ratings—IEC 60947-2                                     |                                                               |                                                               |                                                               |
| Single-pole, single-pole + neutral                                      | 240 Vac                                                       | 240 Vac                                                       | 240 Vac                                                       |
| Two-, three-, four-pole,<br>three-pole + neutral                        | 240/415 Vac                                                   | 240/415 Vac                                                   | 240/415 Vac                                                   |
| Thermal tripping characteristics                                        |                                                               |                                                               |                                                               |
| Single-pole                                                             | > 1 Hour @ 1.05 x $I_n$                                       | > 1 Hour @ 1.05 x $I_n$                                       | > 1 Hour @ 1.05 x $I_n$                                       |
| Multi-pole                                                              | < 1 Hour @ 1.3 x $I_n$                                        | < 1 Hour @ 1.3 x $I_n$                                        | < 1 Hour @ 1.3 x $I_n$                                        |
| Interrupt ratings (at max. voltage)                                     |                                                               |                                                               |                                                               |
| IEC 60947-2                                                             | 15 kA                                                         | 10 kA                                                         | 10 kA                                                         |
| Operational switching capacity                                          | 7.5 kA                                                        | 7.5 kA                                                        | 7.5 kA                                                        |
| Max. backup fuse [gL/gG]                                                | 125A                                                          | 125A                                                          | 125A                                                          |
| Rated impulse withstand— $U_{imp}$                                      | 4000 Vac                                                      | 4000 Vac                                                      | 4000 Vac                                                      |
| Rated insulation voltage— $U_i$                                         | 440 Vac                                                       | 440 Vac                                                       | 440 Vac                                                       |
| <b>Environmental/General</b>                                            |                                                               |                                                               |                                                               |
| Selectivity class                                                       | 3                                                             | 3                                                             | 3                                                             |
| Lifespan (operations)                                                   | > 10,000 (1 operation = ON/OFF)                               | > 10,000 (1 operation = ON/OFF)                               | > 10,000 (1 operation = ON/OFF)                               |
| Shock (IEC 68-2-22)                                                     | 10g–120 ms                                                    | 10g–120 ms                                                    | 10g–120 ms                                                    |
| Operating temperature range                                             | –40 to +167°F (–40 to +75°C)                                  | –40 to +167°F (–40 to +75°C)                                  | –40 to +167°F (–40 to +75°C)                                  |
| Shipment and short-term storage                                         | –40 to +185°F (–40 to +85°C)                                  | –40 to +185°F (–40 to +85°C)                                  | –40 to +185°F (–40 to +85°C)                                  |
| Housing material                                                        | Nylon                                                         | Nylon                                                         | Nylon                                                         |
| <b>Mechanical</b>                                                       |                                                               |                                                               |                                                               |
| Standard front dimension                                                |                                                               |                                                               |                                                               |
| Device height                                                           | 80 mm                                                         | 80 mm                                                         | 80 mm                                                         |
| Terminal protection                                                     | Finger and back-of-hand proof to IEC 536                      | Finger and back-of-hand proof to IEC 536                      | Finger and back-of-hand proof to IEC 536                      |
| Mounting width per pole                                                 | 17.7 mm                                                       | 17.7 mm                                                       | 17.7 mm                                                       |
| Mounting                                                                | IEC/EN 60715 top-hat rail                                     | IEC/EN 60715 top-hat rail                                     | IEC/EN 60715 top-hat rail                                     |
| Degree of protection                                                    | IP20                                                          | IP20                                                          | IP20                                                          |
| Terminals top and bottom                                                | Twin-purpose terminals                                        | Twin-purpose terminals                                        | Twin-purpose terminals                                        |
| Supply connection                                                       | Line or load side                                             | Line or load side                                             | Line or load side                                             |
| Terminal capacity [mm²]                                                 | 1 x 25 (AWG 4–18) / 2 x 10 (AWG 8–18)                         | 1 x 25 (AWG 4–18) / 2 x 10 (AWG 8–18)                         | 1 x 25 (AWG 4–18) / 2 x 10 (AWG 8–18)                         |
| Torque                                                                  | 2.4 Nm                                                        | 2.4 Nm                                                        | 2.4 Nm                                                        |
| Imperial torque                                                         | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) | 21 lb-in (AWG 18–12), 25 lb-in (AWG 10–8), 36 lb-in (AWG 6–4) |
| Thickness of busbar material                                            | 0.8–2 mm                                                      | 0.8–2 mm                                                      | 0.8–2 mm                                                      |
| Mounting position                                                       | As required                                                   | As required                                                   | As required                                                   |




# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

## TECHNICAL DATA


### Let-through energy $I^2t$

Characteristic B and C

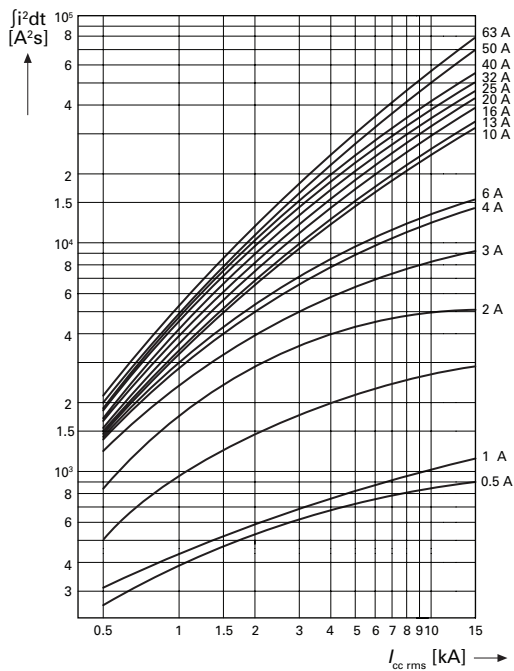


### Let-through current $I_D$


Characteristic B and C

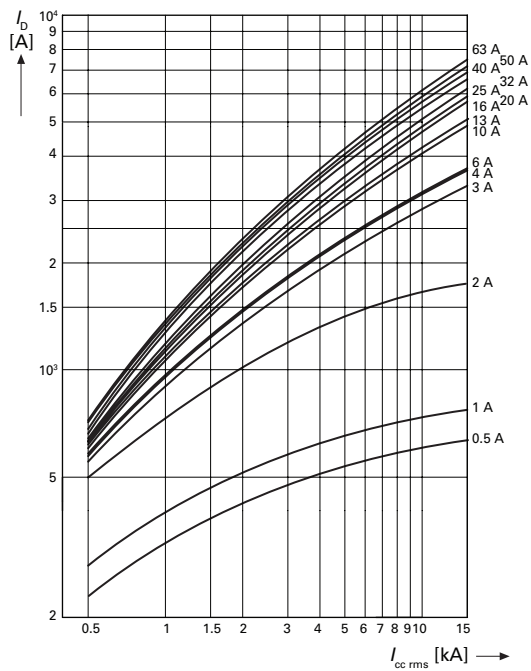

### Characteristic D

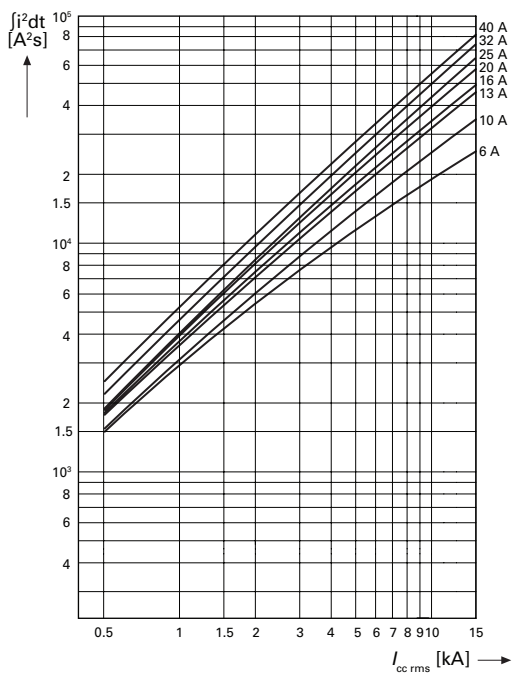

### Characteristic D

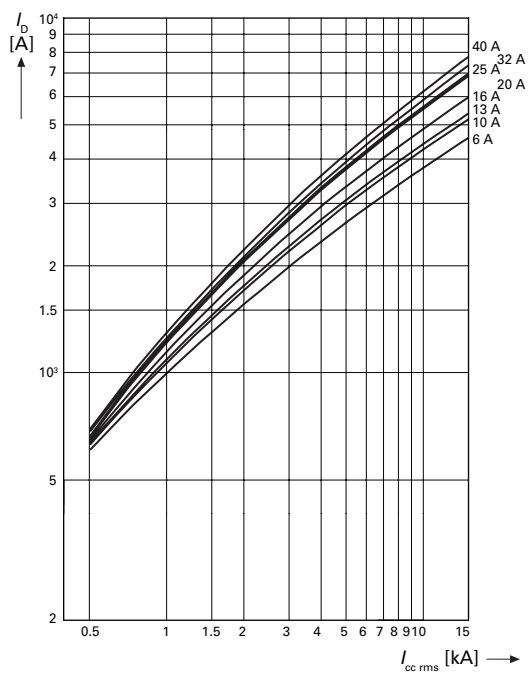


# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers


TECHNICAL DATA

## Let-through energy $I^2t$


### Characteristic K

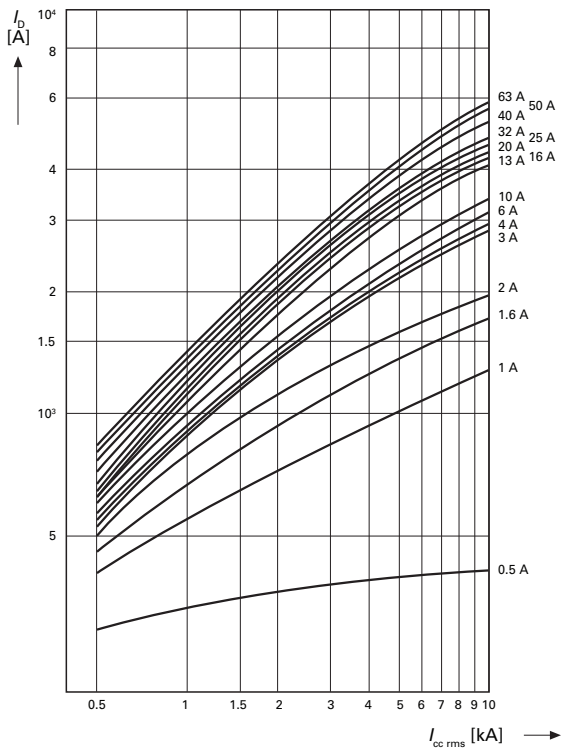

### Characteristic S

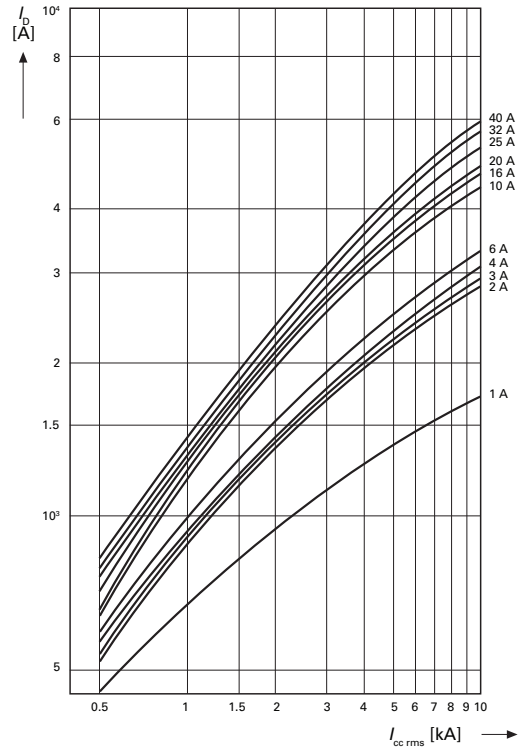

### Characteristic Z

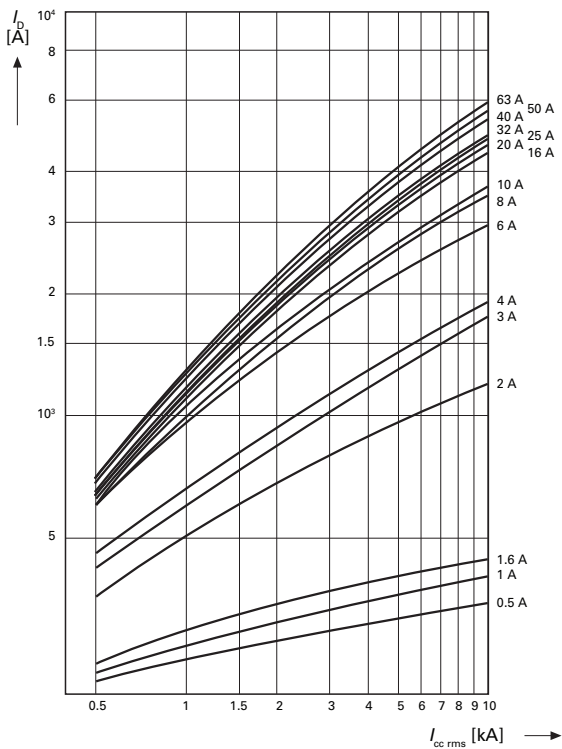

# UL 1077 DIN rail supplementary protectors

## FAZ circuit breakers

### TECHNICAL DATA

#### Influence of the Ambient Temperature on the Thermal Tripping Behavior

Corrected values of the rated current dependent on the ambient temperature


| Ambient Temperature T |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |
|-----------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| I <sub>n</sub> (A)    | -40°C | -30°C | -20°C | -10°C | 0°C   | 10°C  | 20°C  | 30°C  | 35°C  | 40°C  | 45°C  | 50°C  | 55°C  | 60°C  | 65°C  | 70°C  | 75°C  |
| 0.16                  | 0.20  | 0.20  | 0.19  | 0.19  | 0.18  | 0.17  | 0.17  | 0.16  | 0.16  | 0.15  | 0.15  | 0.15  | 0.14  | 0.14  | 0.14  | 0.14  | 0.13  |
| 0.25                  | 0.32  | 0.31  | 0.30  | 0.29  | 0.28  | 0.27  | 0.26  | 0.25  | 0.25  | 0.24  | 0.24  | 0.23  | 0.23  | 0.22  | 0.22  | 0.21  | 0.21  |
| 0.50                  | 0.64  | 0.62  | 0.60  | 0.58  | 0.56  | 0.54  | 0.52  | 0.50  | 0.49  | 0.48  | 0.47  | 0.46  | 0.45  | 0.44  | 0.43  | 0.42  | 0.41  |
| 0.75                  | 0.96  | 0.93  | 0.90  | 0.87  | 0.84  | 0.81  | 0.78  | 0.75  | 0.74  | 0.73  | 0.71  | 0.69  | 0.68  | 0.66  | 0.65  | 0.64  | 0.62  |
| 1.00                  | 1.30  | 1.20  | 1.20  | 1.20  | 1.10  | 1.10  | 1.00  | 1.00  | 0.99  | 0.97  | 0.95  | 0.93  | 0.90  | 0.89  | 0.87  | 0.85  | 0.83  |
| 1.50                  | 1.90  | 1.90  | 1.80  | 1.70  | 1.70  | 1.60  | 1.60  | 1.50  | 1.50  | 1.50  | 1.40  | 1.40  | 1.40  | 1.30  | 1.30  | 1.30  | 1.20  |
| 1.60                  | 2.00  | 2.00  | 1.90  | 1.90  | 1.80  | 1.70  | 1.70  | 1.60  | 1.60  | 1.50  | 1.50  | 1.50  | 1.40  | 1.40  | 1.40  | 1.40  | 1.30  |
| 2.00                  | 2.60  | 2.50  | 2.40  | 2.30  | 2.20  | 2.20  | 2.10  | 2.00  | 2.00  | 1.90  | 1.90  | 1.90  | 1.80  | 1.80  | 1.70  | 1.70  | 1.70  |
| 2.50                  | 3.20  | 3.10  | 3.00  | 2.90  | 2.80  | 2.70  | 2.60  | 2.50  | 2.50  | 2.40  | 2.40  | 2.30  | 2.30  | 2.20  | 2.20  | 2.10  | 2.10  |
| 3.00                  | 3.80  | 3.70  | 3.60  | 3.50  | 3.40  | 3.30  | 3.10  | 3.00  | 3.00  | 2.90  | 2.80  | 2.80  | 2.70  | 2.70  | 2.60  | 2.50  | 2.50  |
| 3.50                  | 4.50  | 4.40  | 4.20  | 4.10  | 3.90  | 3.80  | 3.70  | 3.50  | 3.40  | 3.40  | 3.30  | 3.20  | 3.20  | 3.10  | 3.00  | 3.00  | 2.90  |
| 4.00                  | 5.10  | 5.00  | 4.80  | 4.70  | 4.50  | 4.30  | 4.20  | 4.00  | 3.90  | 3.90  | 3.80  | 3.70  | 3.60  | 3.50  | 3.50  | 3.40  | 3.30  |
| 5.00                  | 6.40  | 6.20  | 6.00  | 5.80  | 5.60  | 5.40  | 5.20  | 5.00  | 4.90  | 4.80  | 4.70  | 4.60  | 4.50  | 4.40  | 4.30  | 4.20  | 4.10  |
| 6.00                  | 7.70  | 7.50  | 7.20  | 7.00  | 6.70  | 6.50  | 6.30  | 6.00  | 5.90  | 5.80  | 5.70  | 5.60  | 5.40  | 5.30  | 5.20  | 5.10  | 5.00  |
| 7.00                  | 9.00  | 8.70  | 8.40  | 8.20  | 7.80  | 7.60  | 7.40  | 7.00  | 6.90  | 6.80  | 6.70  | 6.50  | 6.30  | 6.20  | 6.10  | 6.00  | 5.80  |
| 8.00                  | 10.20 | 9.90  | 9.60  | 9.30  | 9.00  | 8.70  | 8.40  | 8.00  | 7.90  | 7.70  | 7.60  | 7.40  | 7.20  | 7.10  | 6.90  | 6.80  | 6.60  |
| 10.00                 | 13.00 | 12.00 | 12.00 | 12.00 | 11.00 | 11.00 | 10.00 | 10.00 | 9.90  | 9.70  | 9.50  | 9.30  | 9.00  | 8.90  | 8.70  | 8.50  | 8.30  |
| 12.00                 | 15.00 | 15.00 | 14.00 | 14.00 | 13.00 | 13.00 | 13.00 | 12.00 | 12.00 | 12.00 | 11.00 | 11.00 | 11.00 | 11.00 | 10.00 | 10.00 | 10.00 |
| 13.00                 | 17.00 | 16.00 | 16.00 | 15.00 | 15.00 | 14.00 | 14.00 | 13.00 | 13.00 | 13.00 | 12.00 | 12.00 | 12.00 | 12.00 | 11.00 | 11.00 | 11.00 |
| 15.00                 | 19.00 | 19.00 | 18.00 | 17.00 | 17.00 | 16.00 | 16.00 | 15.00 | 15.00 | 15.00 | 14.00 | 14.00 | 14.00 | 13.00 | 13.00 | 13.00 | 12.00 |
| 16.00                 | 20.00 | 20.00 | 19.00 | 19.00 | 18.00 | 17.00 | 17.00 | 16.00 | 16.00 | 15.00 | 15.00 | 15.00 | 14.00 | 14.00 | 14.00 | 14.00 | 13.00 |
| 20.00                 | 26.00 | 25.00 | 24.00 | 23.00 | 22.00 | 22.00 | 21.00 | 20.00 | 20.00 | 19.00 | 19.00 | 19.00 | 18.00 | 18.00 | 17.00 | 17.00 | 17.00 |
| 25.00                 | 32.00 | 31.00 | 30.00 | 29.00 | 28.00 | 27.00 | 26.00 | 25.00 | 25.00 | 24.00 | 24.00 | 23.00 | 23.00 | 22.00 | 22.00 | 21.00 | 21.00 |
| 32.00                 | 41.00 | 40.00 | 38.00 | 37.00 | 36.00 | 35.00 | 33.00 | 32.00 | 32.00 | 31.00 | 30.00 | 30.00 | 29.00 | 28.00 | 28.00 | 27.00 | 26.00 |
| 35.00                 | 45.00 | 43.00 | 41.00 | 41.00 | 38.00 | 38.00 | 36.00 | 35.00 | 35.00 | 34.00 | 33.00 | 32.00 | 32.00 | 32.00 | 30.00 | 29.00 | 29.00 |
| 40.00                 | 51.00 | 50.00 | 48.00 | 47.00 | 45.00 | 43.00 | 42.00 | 40.00 | 39.00 | 39.00 | 38.00 | 37.00 | 36.00 | 35.00 | 35.00 | 34.00 | 33.00 |
| 50.00                 | 64.00 | 62.00 | 60.00 | 58.00 | 56.00 | 54.00 | 52.00 | 50.00 | 49.00 | 48.00 | 47.00 | 46.00 | 45.00 | 44.00 | 43.00 | 42.00 | 41.00 |
| 63.00                 | 81.00 | 78.00 | 76.00 | 73.00 | 71.00 | 68.00 | 66.00 | 63.00 | 62.00 | 61.00 | 60.00 | 58.00 | 57.00 | 56.00 | 55.00 | 53.00 | 52.00 |

#### Influence of the Mains Frequency

Influence of the mains frequency on the tripping behavior  $I_{MA}$  of the instantaneous release

|                                       | Mains Frequency f [Hz] |     |     |     |     |     |     |
|---------------------------------------|------------------------|-----|-----|-----|-----|-----|-----|
|                                       | 16 2/3                 | 50  | 60  | 100 | 200 | 300 | 400 |
| $I_{MA}(f)/I_{MA}(50 \text{ Hz})$ [%] | 91                     | 100 | 101 | 106 | 115 | 134 | 141 |

#### Load Carrying Capacity of Adjoining Miniature Circuit Breakers

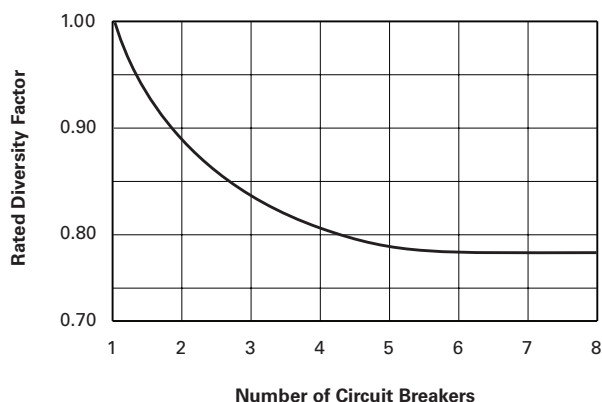

# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

ACCESSORY TECHNICAL DATA

## Technical Data

| Description                                                            | FAZ-XHIN<br>FAZ-XAM002                             | FAZ-XAA-C                                      | FAZ-XUA                                                    |
|------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------|------------------------------------------------------------|
| <b>Electrical</b>                                                      |                                                    |                                                |                                                            |
| Contact function                                                       | 1A + 1B<br>2 C/O                                   | —                                              | —                                                          |
| Rated operational voltage $U_n$                                        | 250 Vac                                            | —                                              | 115 Vac<br>230 Vac<br>400 Vac                              |
| Voltage range                                                          | —                                                  | 12–110 Vac<br>12–60 Vdc                        | —                                                          |
| Voltage range                                                          | —                                                  | 110–415 Vac<br>110–230 Vdc                     | —                                                          |
| Closing threshold [x $U_n$ ]                                           | —                                                  | —                                              | 0.8                                                        |
| Tripping threshold [x $U_n$ ]                                          | —                                                  | —                                              | 0.5                                                        |
| Rated frequency $f$                                                    | 50/60 Hz                                           | 50/60 Hz                                       | 50/60 Hz                                                   |
| General use (UL/CSA)<br>AC—230/240 Vac<br>DC—110/120 Vdc               | 2/2A<br>0.5/0.5A                                   | —<br>—                                         | —<br>—                                                     |
| Pilot duty                                                             | A600/Q600                                          | —                                              | —                                                          |
| Conventional free air thermal current $I_{th}$                         | 4A                                                 | —                                              | —                                                          |
| Rated operational current<br>AC-13 $I_p$<br>AC-15 $I_p$<br>DC-13 $I_p$ | 3A (250 Vac)<br>2A (250 Vac)<br>0.5A (110 Vdc)     | —<br>—<br>—                                    | —<br>—<br>—                                                |
| Rated insulation voltage $U_i$                                         | 250 Vac                                            | —                                              | —                                                          |
| Minimum operating voltage per contract $U_{min}$                       | 5 Vdc                                              | —                                              | —                                                          |
| Rated impulse withstand voltage (1.2/50 $\mu$ ) $U_{imp}$              | 2.5 kV                                             | —                                              | —                                                          |
| Rated conditional short-circuit current with 6A backup fuse $I_{SC}$   | 1 kA                                               | —                                              | —                                                          |
| Max. admissible backup fuse                                            | 4A gL                                              | —                                              | —                                                          |
| <b>Mechanical</b>                                                      |                                                    |                                                |                                                            |
| Standard front dimension                                               | 45 mm                                              | 45 mm                                          | 45 mm                                                      |
| Device height                                                          | 80 mm                                              | 80 mm                                          | 80 mm                                                      |
| Mounting width                                                         | 8.8 mm                                             | 17.6 mm                                        | 17.8 mm                                                    |
| Mounting                                                               | On MCB                                             | IEC/EN 60715 top-hat rail                      | IEC/EN 60715 top-hat rail                                  |
| Degree of protection enclosed                                          | IP40                                               | IP40                                           | IP40                                                       |
| Terminal protection                                                    | Protection against electric shock to IEC 536       | Protection against electric shock to IEC 536   | Protection against electric shock to IEC 536               |
| Terminals                                                              | Lift terminals                                     | Twin-purpose terminals                         | Twin-purpose terminals                                     |
| Terminal capacity<br>Solid<br>Flexible                                 | 0.5–2.5 mm <sup>2</sup><br>0.5–2.5 mm <sup>2</sup> | 1–2.5 mm <sup>2</sup><br>1–2.5 mm <sup>2</sup> | 2 x (1–2.5) mm <sup>2</sup><br>2 x (1–2.5) mm <sup>2</sup> |
| Tightening torque of terminal screws                                   | 0.8–1.0 Nm (7–9 lb-in)                             | 2.4 Nm (21 lb-in)                              | 0.8 Nm (7 lb-in)                                           |

# UL 1077 DIN rail supplementary protectors


## FAZ circuit breakers

### ACCESSORY TECHNICAL DATA

Dimensions are in millimeters, and not intended for manufacturing purposes.

#### Miniature circuit breakers



FAZ

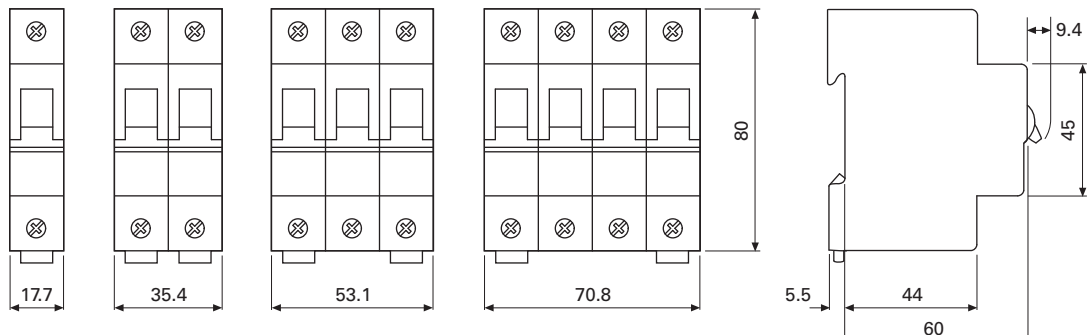

#### Auxiliary Contacts

FAZ-XHI11 and FAZ-XH1NW1

FAZ-XAM002

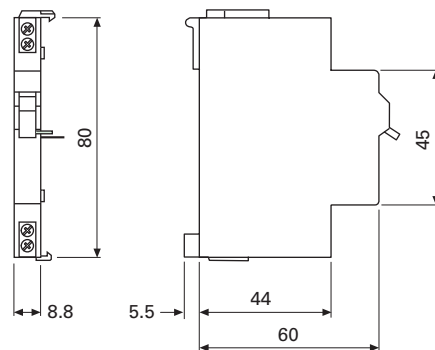
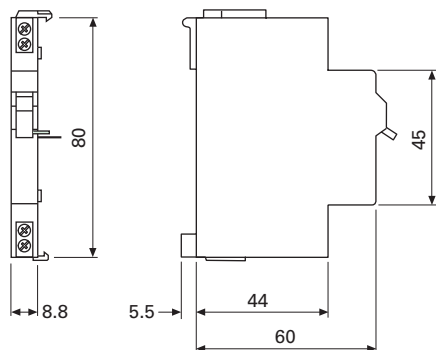


#### Shunt Releases

FAZ-XAA

#### Undervoltage Releases

FAZ-XUA

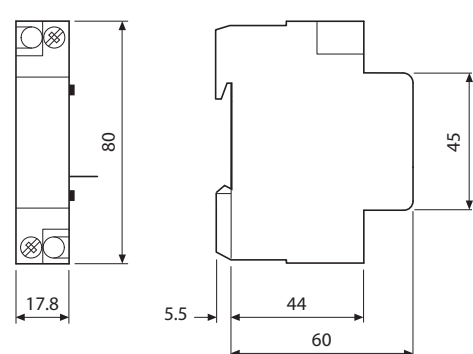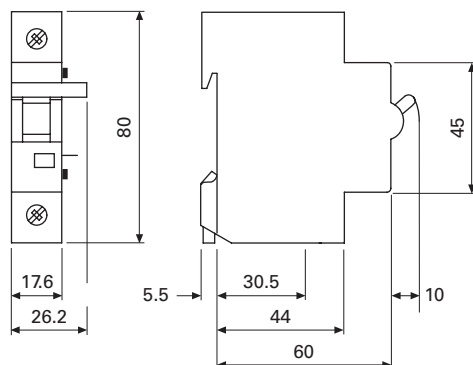



# UL 1077 DIN rail supplementary protectors

FAZ circuit breakers

ACCESSORY TECHNICAL DATA


## Busbar and Accessory Weights and Dimensions

| Catalog Number         | Unit Weight (kg) | Length (mm) | Width (mm) | Height (mm) |
|------------------------|------------------|-------------|------------|-------------|
| BB-UL-18/1P-1M/57      | 0.29             | 1009        | 15         | 15          |
| BB-UL-18/2P-2M/56      | 0.64             | 991         | 22         | 37          |
| BB-UL-18/3P-3M/57      | 0.83             | 1009        | 22         | 37          |
| BB-UL-18/1P-1.5M/37    | 0.26             | 985         | 15         | 15          |
| BB-UL-18/2P+AS-2.5M/46 | 0.63             | 1009        | 22         | 37          |
| BB-UL-18/3P+AS-3.5M/48 | 0.79             | 982         | 22         | 37          |
| BB-UL-25/1P-1M/57      | 0.36             | 1009        | 15         | 15          |
| BB-UL-25/2P-2M/56      | 0.79             | 991         | 22         | 37          |
| BB-UL-25/3P-3M/57      | 1.04             | 1009        | 22         | 37          |
| BB-UL-25/1P-1.5M/37    | 0.31             | 985         | 15         | 15          |
| BB-UL-25/2P+AS-2.5M/46 | 0.73             | 1009        | 22         | 37          |
| BB-UL-25/3P+AS-3.5M/48 | 0.97             | 982         | 22         | 37          |
| BB-UL-TEP/35           | 0.03             | 60          | 17         | 29          |
| BB-UL-TEPA/35          | 0.03             | 36          | 17         | 29          |
| BB-UL-TE/50            | 0.03             | 40          | 18         | 30          |
| BB-IP/5                | 0.003            | 85          | 12         | 24          |
| BB-UL-EC/3             | 0.001            | 14          | 5          | 10          |
| BB-UL-EC/1             | 0.001            | 24          | 22         | 10          |

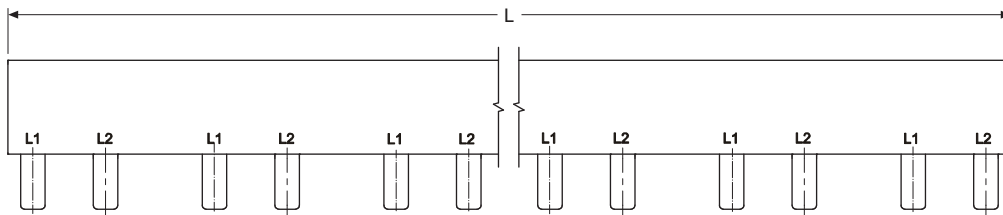



# Application guidelines for UL 489 circuit breakers and UL 1077 supplementary protectors

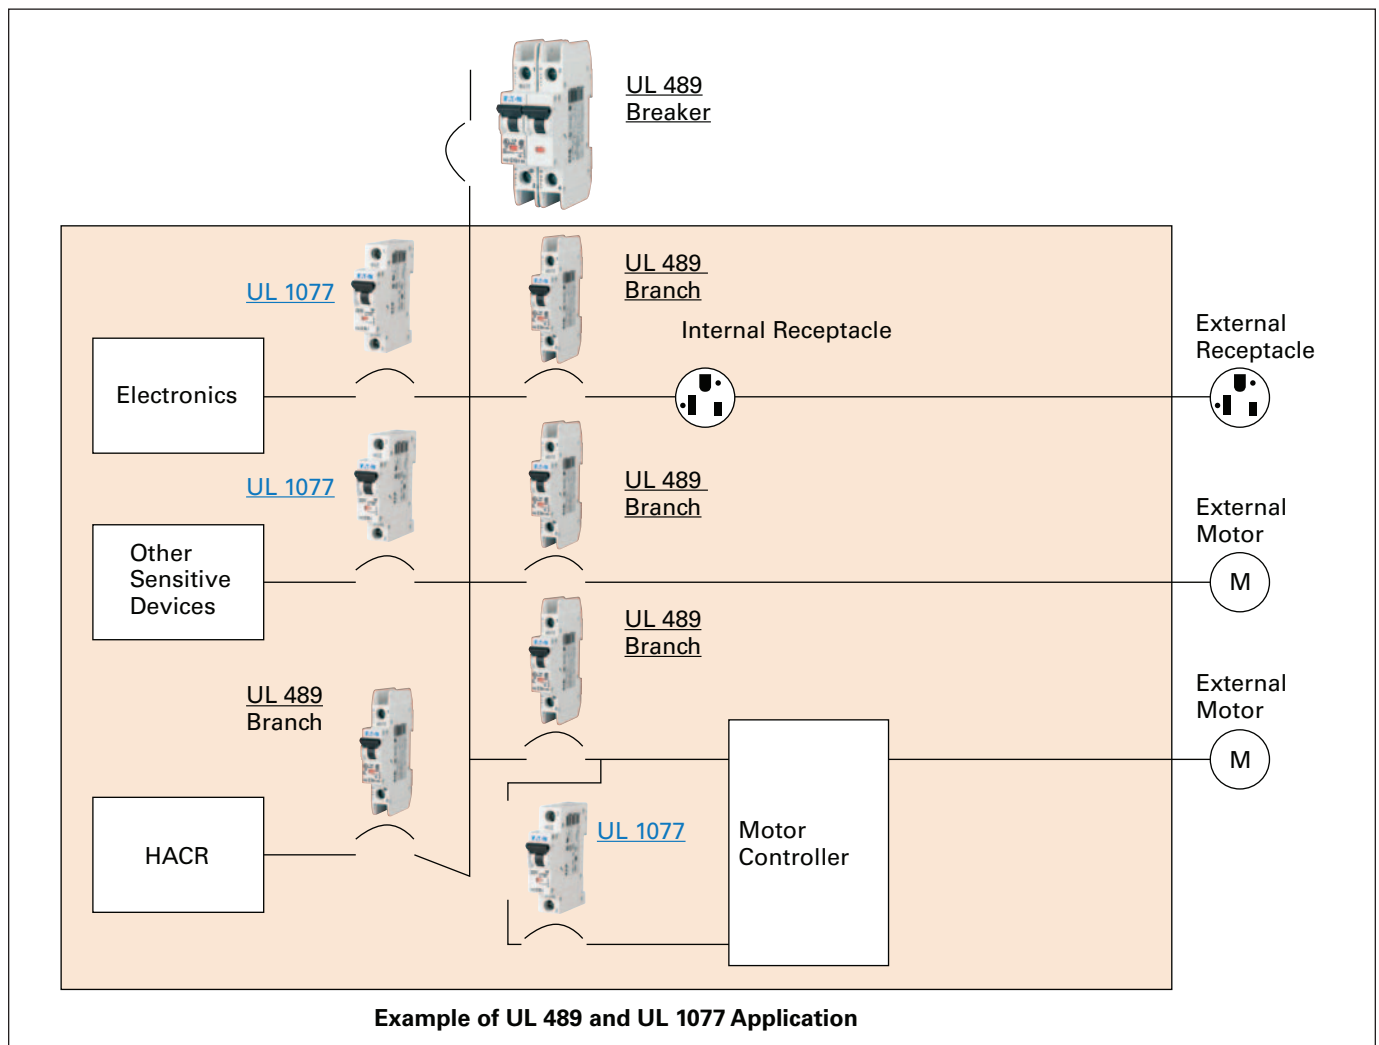

### UL 489 circuit breakers

Used for branch circuit protection, internal/external receptacles, external motors and HACR equipment (heating, air conditioning and refrigeration).

### UL 1077 supplementary protectors

Used for overcurrent protection within appliances or electrical equipment, where branch circuit protection is already provided or not required.

**Note:** UL 489 devices can be used in place of UL 1077; UL 1077 devices cannot be used in place of UL 489.

# Miniature circuit breaker application

## FAZ circuit breakers

### PRODUCT OVERVIEW

#### Applying branch circuit breakers and supplementary protectors in North America



The Eaton series offer two types of miniature circuit breakers for use in North America. The first version, FAZ-NA(RT), fully complies with the molded-case circuit breaker standard UL 489 and the Canadian equivalent CSA 22.2 No. 5-09, which states that devices within that range can be applied legitimately as feeder and branch circuit protective devices per the U.S. and Canadian electrical codes.

A second version, FAZ, is recognized per UL 1077 and certified per CSA C22.2 No. 235 as a supplementary protector and can be fully used per the NEC and CEC Codes in that capacity. For international purposes, the entire FAZ family is CE marked and in full conformity with the applicable IEC standards for miniature circuit breakers, EN/IEC 60898 and EN/IEC 60947-2.

Both FAZ and FAZ-NA(RT) are offered in various ampere ranges and tripping characteristics. This paper will focus on the main technical aspects of the entire line and should assist in the proper selection and application of all versions.

#### Characteristics of IEC-style miniature circuit breakers

Because FAZ miniature circuit breakers are IEC-style devices, it is important to understand their inherent characteristics before examining them in the context of UL/CSA requirements.

- IEC-style miniature circuit breakers are thermal-magnetic, inverse time protective devices, with both a fixed thermal and a fixed magnetic trip setting
- They are toggle operated, and like all modern circuit breakers, feature a "trip-free" mechanism; this means that the tripping action works independently of the handle position for safety purposes
- They all mount on a standard 35 mm DIN rail and share a common single pole width of 17.5 mm
- Most comply with EN/IEC 60898 and EN/IEC 60947-2, which are the relevant international performance and testing standards for low voltage (<1000V) circuit breakers in Europe and the rest of the IEC world
- Outside North America, they can be used in both residential and industrial applications as feeder and branch circuit protective devices
- In North America, most European miniature circuit breakers are only UL recognized and CSA certified as "supplementary protectors," meaning that they cannot be utilized as feeder or branch circuit protective devices per the local electrical codes. This commonly restricts their use to applications where "closer" protection is desired than that offered by a branch circuit protection device
- Some variations, like the FAZ-NA(RT) line have been specially designed to meet UL and CSA requirements for molded-case circuit breakers and are marked accordingly. This makes them suitable for feeder and branch circuit protection applications in North America

# Miniature circuit breaker application

## FAZ circuit breakers

### PRODUCT OVERVIEW

#### Supplementary protectors

As mentioned, the standard FAZ line fulfills all of the criteria per code of “supplementary overcurrent protective devices,” or “supplementary protectors,” as they are better known.

#### **What is the definition of a supplementary protector per North American standards?**

A supplementary protector is a manual reset device designed to open the circuit automatically on a predetermined value of time versus current or voltage within an appliance or other electrical equipment. It may also be provided with manual means for opening or closing the circuit. (Source: UL 1077)

In the United States (and similarly in Canada) the NEC 2005 further defines supplementary protectors as devices intended to provide limited overcurrent protection for specific applications, such as lighting fixtures and appliances. This limited protection is in addition to the protection provided in the required branch circuit by the branch circuit overcurrent protective device.

Clearly, the underlying message in those definitions is that supplementary protectors are not branch circuit overcurrent protective devices per code, and neither are they tested that way per UL and CSA standards. They cannot replace the primary protective role performed by listed and certified molded case circuit breakers and fuses.

That explains, in part, their status by UL as “recognized only” devices. Supplementary protectors will never bear a UL listing mark, simply because their suitability as protective devices is dependent on a number of acceptability conditions that can vary from make to make and ultimately define the manner in which they can be properly applied per code. The manufacturer should be consulted in all cases when evaluating the suitability of “recognized only” components such as UL 1077 supplementary protectors.

FAZ protectors are not subject to any specific restrictions in this respect, other than, like all supplementary protectors, they must never be used as a substitute for true listed and certified primary overcurrent protective devices.

#### **Where can supplementary protectors be used effectively per code standards?**

Eaton series FAZ supplementary protectors can be used in a number of significant areas. To more clearly illustrate potential applications, however, let's first present the NEC's definition of a branch circuit:

#### **The circuit conductors between the final overcurrent device protecting the circuit and the outlets. (Source: NEC)**

A branch circuit is that portion of the electrical distribution system that extends beyond the final branch circuit overcurrent protective device and is intended to serve lighting, appliance, motors, and/or other individual loads.

Typically, the branch circuit overcurrent protective device (BOPD) will be either a listed molded-case circuit breaker or a fuse. Supplementary protectors, such as FAZ devices from the Eaton series, can therefore be added to any of these branch circuits to “supplement” the branch circuit protection. Examples of applications ideally suited for these devices can include:

- Any type of OEM electrical equipment that is fed from a service panel board and that often requires additional protection for sensitive internal circuitry and components (test and medical equipment, copiers and printers, computers and power supplies, etc.)
- The need for manual reset devices with optional accessories such as auxiliary contacts and voltage trips to accomplish fuseless protective circuit designs and enhance operational diagnostics
- Isolation and protection of control cable, coils, contacts, and circuit elements of motor control circuits tapped from the load side of the branch circuit protective device (per NEC 430.72)
- Protection of control circuit transformers, especially in the secondary where the manual reset protector can be used to isolate, as well as protect, secondary circuit conductors and loads

IEC-based miniature circuit breakers, such as the entire FAZ line, are much more than just conventional supplementary protectors from an internal design point of view and can provide an ideal means to enhance the protective capabilities of any circuit.

- As mentioned, they are in full compliance with the pertinent EN/IEC standards (EN/IEC 60898, EN/IEC 60947-2) for miniature circuit breakers and can thus be applied, outside of North America, as full-fledged stand-alone overcurrent protective devices in both residential and industrial applications
- As this typical let-through current curve shows, they are highly current limiting devices that appreciably limit the amount of let-through current and destructive energy within their ratings to minimize damage levels to downstream loads and circuits

Circuit breakers that are classified as “current limiting” have the ability to clear damaging short-circuit currents within the first half-cycle of the fault, resulting in better overall protection for all circuit components.

- They come in a variety of tripping characteristics, which is ideal when customizing protection to match specific load requirements. FAZ supplementary protectors offer a total of six different protection characteristics for this purpose: B, C, D, K, S, and Z tripping characteristics
- They feature a number of electrical accessories to enhance the performance and diagnostic capabilities of control panels, as well as a means to facilitate panel mounting and wiring

# Miniature circuit breaker application

## FAZ circuit breakers

### PRODUCT OVERVIEW


#### Typical let-through curve profile of a current-limiting device

- The X axis shows the prospective short-circuit current levels
- The Y axis indicates the actual let-through values (let-through current in the example shown) at those prospective fault ratings for each FAZ device plotted

As can be interpreted from the bend in the plotted curves, each device acts to limit the damaging let-through energy (and current) at those values of short-circuit current.

By design, all Eaton series FAZ supplementary protectors and miniature molded-case circuit breakers are current-limiting protective devices.

#### Characteristic B and C

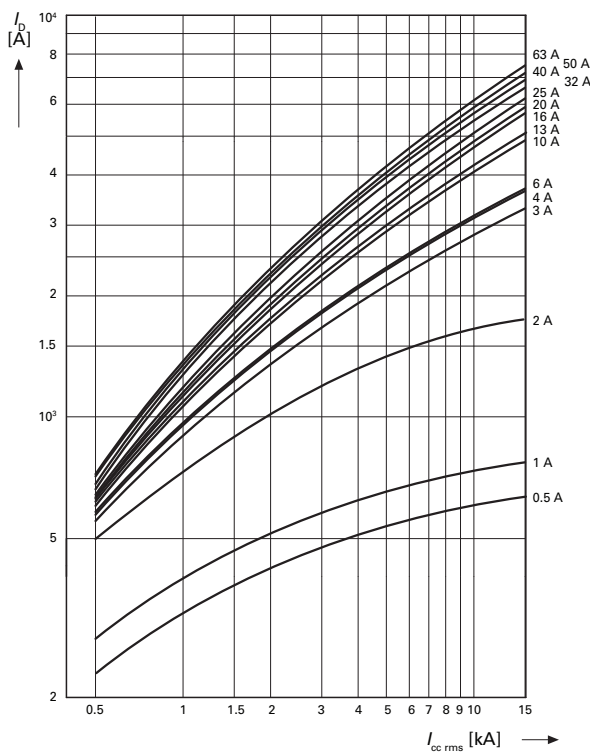

#### Tripping characteristics

Miniature circuit breakers are thermal-magnetic, inverse-time tripping devices. From a thermal point of view, all FAZ protectors are calibrated to trip at the same level, which is 135% of the device's fixed current rating for single-pole and 145% for multi-pole at an ambient reference temperature of 40°C.

**Note:** Higher ambient temperatures, as well as density of mounting groups, can all be accommodated but may be subject to de-rating factors. Please consult technical data for further information and appropriate curves.

It is the response time of the magnetic trip that differentiates each characteristic and for which an identifying letter is assigned. The IEC 898 standard only specifically covers the B, C, and D characteristics. The rest can vary from brand to brand, but essentially follow a uniform convention.

The following magnetic response times apply to each of the characteristic letters referenced in Eaton series FAZ part numbers:

- B: Instantaneous response of  $3-5 \times I_n$  ( $I_n$  = fixed current rating of each unit)—ideally suited for resistive loads, such as conductors or heaters
- C: Instantaneous response of  $5-10 \times I_n$ —ideally suited for inductive loads, such as motors and solenoids
- D: Instantaneous response of  $10-20 \times I_n$ —ideally suited for highly inductive loads, such as lighting and higher efficiency motors
- K: Instantaneous response of  $8-12 \times I_n$ —ideally suited for highly inductive loads, similar to D but with a narrower range
- S: Instantaneous response of  $13-17 \times I_n$ —ideally suited for highly inductive loads, especially in control circuits with coils and light filaments
- Z: Instantaneous response of  $2-3 \times I_n$ —very low instantaneous setting to provide tighter protection for loads that are more sensitive to the effects of overcurrents

#### Typical “inverse time” tripping characteristic of a miniature circuit breaker



- “Inverse time” refers to the device's tripping characteristic; as the curve shows, the higher the current, the lower the tripping time
- The trip response on the thermal portion is uniform throughout the line
- The instantaneous response differs, depending on the characteristic selected. (i.e., B, C, or D)
- Tripping is very quick (less than a half-cycle) in the upper range of overcurrents (bottom right) due to the current-limiting design of the Eaton series miniature circuit breakers

# Miniature circuit breaker application

## FAZ circuit breakers

### PRODUCT OVERVIEW

#### Typical FAZ miniature circuit breaker characteristic

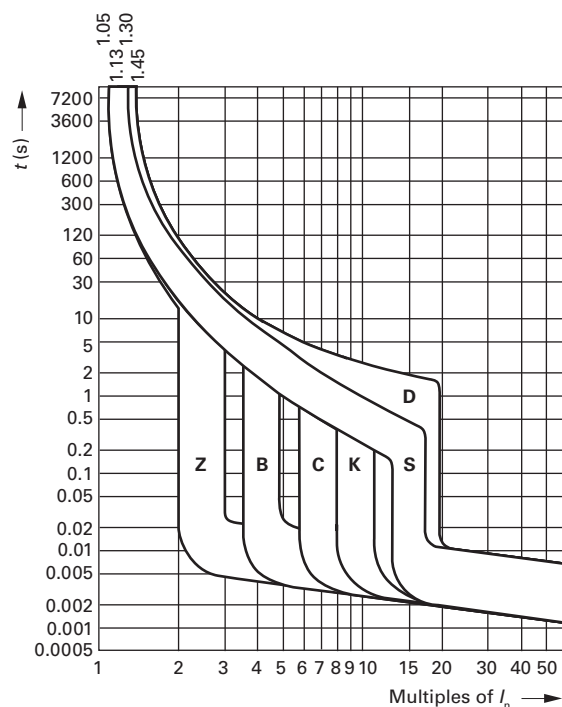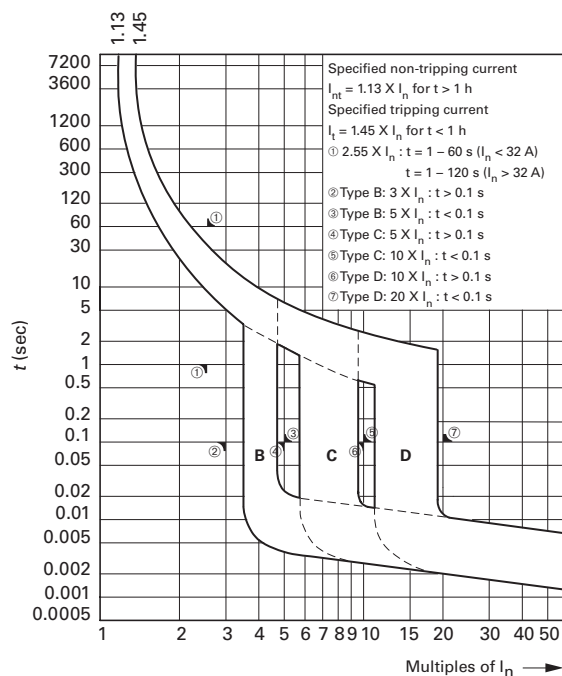

#### FAZ-NA(RT) miniature circuit breakers

As previously mentioned, we have expanded our FAZ line of miniature circuit breakers to include a version that is listed and certified as a molded-case circuit breaker (UL 489 and CSA No. 5).

This line is rated up to 40A and comes in single-, two-, and three-pole versions with instantaneous trip characteristics B, C and D. Of course, the line is also in conformity with the IEC standard for molded-case circuit breakers, IEC 60947-2, and can therefore be universally applied.

The NEC defines a circuit breaker as follows:

**A device designed to open and close a circuit by non-automatic means and to open the circuit automatically on a predetermined overcurrent *without damage to itself when properly applied within its rating.***

Note the text in italics. In the eyes of the code, that definition sets circuit breakers apart from any other protective device and establishes their role as primary overcurrent protective switches in all types of electrical circuits. UL listing (and CSA Certification) requires additionally that regular testing on circuit breakers be conducted by UL and CSA at the manufacturer's plant to monitor construction and verify their performance.

The Eaton series new miniature molded-case circuit breaker line includes two types: the FAZ-NA with traditional box terminals for multiple wires, and the FAZ-RT which accommodates ring-tongue terminals.

#### The advantages of a current-limiting device

As already mentioned, all Eaton series FAZ devices are current-limiting by design. In the case of the UL 489 devices, they are also classified by UL/CSA in that manner and are marked on the label.

A circuit breaker that is marked as a current-limiting device is one that does not use a fusible element and, when operating within its current-limiting range, limits the let-through energy ( $I^2t$ ) to less than the energy of a half-cycle wave of the available symmetrical current.

The label on FAZ-NA(RT) devices lists the actual let-through energy ( $I^2t = 60 \text{ kA}^2 \text{ s}$ ) and peak let-through current (6.2 kA) at the maximum interrupting rating of 10 kA.

Current-limiting circuit breakers substantially reduce the amount of damage sustained by downstream components in the event of a high short-circuit fault by clearing the fault in the shortest amount of time possible due to the quick separation of its contacts and ensuing extinction of the arc current.

#### HACR and SWD

FAZ-NA(RT) circuit breakers are also marked "HACR" for use in heating, air conditioning, and refrigeration applications. In addition, the abbreviation "SWD" on the label indicates that the devices are suitable for switching fluorescent lighting loads on a regular basis.

# Miniature circuit breaker application

## FAZ circuit breakers

### TECHNICAL DATA

#### Short-circuit markings on FAZ devices

Below is a tabulated summary of short-circuit rating values that apply to the FAZ line of supplementary protectors and molded-case circuit breakers.

It is important to keep in mind that short-circuit markings on FAZ supplementary protectors (UL 1077) and FAZ-NA(RT) molded-case circuit breakers (UL 489) must not be interpreted in the same manner.

Supplementary protectors have short-circuit markings in association with upstream primary overcurrent protective devices. Conversely, molded-case circuit breakers are primary overcurrent protective devices, and their ratings thus refer to their short-circuit interrupting capability.

#### Short-Circuit Rating Values for FAZ Supplementary Protectors and Branch Circuit Breakers

| Description                                  | Trip Characteristic | Maximum Amperes | Maximum Volts  | Short-Circuit Rating |
|----------------------------------------------|---------------------|-----------------|----------------|----------------------|
| FAZ Supplementary Protectors (UL 1077)       |                     |                 |                |                      |
| Single-pole, single-pole + neutral           | B and C             | 0.5–35A         | 277 Vac        | 10 kA                |
|                                              |                     | 40–63A          | 277 Vac        | 5 kA                 |
|                                              |                     | 0.5–63A         | 48 Vdc         | 10 kA                |
|                                              | D, K, S, and Z      | 0.5–40A         | 277 Vac        | 5 kA                 |
|                                              |                     |                 | 48 Vdc         | 10 kA                |
| Two-, three-, four-pole                      | B and C             | 0.5–35A         | 480Y/277 Vac ① | 10 kA                |
|                                              |                     | 40–63A          | 480Y/277 Vac ① | 5 kA                 |
| Two poles in series                          |                     | 6–25A           | 96 Vdc         | 10 kA                |
| Two-, three-, four-pole                      | D, K, S, and Z      | 0.5–40A         | 480Y/277 Vac ① | 5 kA                 |
| Two poles in series                          |                     |                 | 96 Vdc         | 10 kA                |
| FAZ-NA(RT) Branch Circuit Breakers (UL 489)  |                     |                 |                |                      |
| Single-pole                                  | B, C and D          | 0.5–32A         | 277 Vac        | 10 kA                |
|                                              |                     | 35–40A          | 240 Vac        | 10 kA                |
| Single-pole—(NA) only                        | B, C and D          | 0.5–40A         | 48 Vdc         | 10 kA                |
| Two-, three-pole                             | B, C and D          | 0.5–32A         | 480Y/277 Vac ① | 10 kA                |
|                                              |                     | 35–40A          | 240 Vac        | 10 kA                |
| Two-pole—(NA) only                           | C and D             | 0.5–40A         | 96 Vdc         | 10 kA                |
| FAZ-NA(RT) Branch Circuit Breakers (UL 489)  |                     |                 |                |                      |
| Single-pole                                  | B and C             | 15–25A          | 277 Vac        | 14 kA                |
| Two-, three-pole                             | B and C             | 15–25A          | 480Y/277 Vac ① | 14 kA                |
| Single-pole                                  | D                   | 13–20A          | 277 Vac        | 14 kA                |
| Two-, three-pole                             | D                   | 13–20A          | 480Y/277 Vac ① | 14 kA                |
| FAZ-(NA)-DC Branch Circuit Breakers (UL 489) |                     |                 |                |                      |
| Single-pole                                  | C                   | 2–40A           | 125 Vdc        | 10 kA                |
| Two poles in series                          | C                   | 2–40A           | 250 Vdc        | 10 kA                |

① A circuit breaker with a 480Y/277 Vac rating can be applied in a solidly grounded circuit where the nominal voltage of any conductor to ground does not exceed the lower value of the circuit breaker's rating (e.g., 277 Vac) and the nominal voltage between any two conductors does not exceed its higher value (480 Vac). These ratings typically can be found on protective devices such as molded-case circuit breakers and self-protected "Type E" combination motor controllers.

