


LEXIC™

Fuse carriers

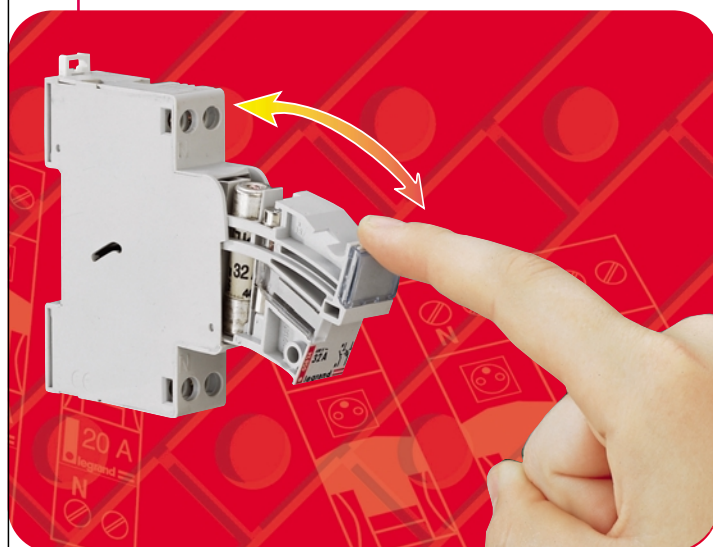

1 COMPLETE SAFETY

- Cartridge totally visible
- Class II insulation along the entire length of the carrier

1 PRACTICAL

Each fuse carrier is designed to take :

- a blow-out indicator
- a padlock

domestic cartridge fuses



Pack

Cat.Nos

Miniature type 5 × 20

New model type fast acting - Ceramic body
Conform to IEC 60127 - NF EN 60-127 -
VDE 0820-1

High rupture capacity (A)

For use with dimmers, Viking terminals and
emergency lighting units

Pack	Cat.Nos	Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)
10	102 02	0.2		
10	102 05	0.5		
10	102 06	0.63		
10	102 10	1		
10	102 12	1.25		
10	102 16	1.6		
10	102 20	2	250	1500
10	102 25	2.5		
10	102 30	3.15		
10	102 50	5		
10	102 63	6.3	250	500
10	102 96	10 ⁽¹⁾		

Cylindrical

	Without indicator	With indicator	Rating (Amps)	Voltage ~ (Volts)	Rupture capacity (Amps)	Protected section (mm²) copper	Colour identi- fication
10	103 02		6.3 × 23				
10	103 04		2	250	6000	1.5	
10	103 06		4				
			6				
10	113 02	114 02	8.5 × 23				
10	113 04	114 04	2	250	6000	1.5	
10	113 06	114 06	4				
10/100	113 10 ⁽²⁾	114 10 ⁽²⁾	6				
10	113 18		10				
			For old 16 A sockets				
10	116 06	117 06	10.3 × 25.8				
10	116 10	117 10	6	250	6000	2.5	
10	116 16	117 16	10				
			16				
10	123 94		8.5 × 31.5				
10	123 01		0.5				
10	123 02	124 02	1				
10	123 04	124 04	2				
10	123 06	124 06	4				
10	123 08	124 08	6	400	20000	2.5	
10/100	123 10		8				
10		124 10	10				
10	123 12	124 12	10				
10/100	123 16	124 16	12				
10/100	123 20 ⁽²⁾	124 20 ⁽²⁾	16				
			20				
10	126 16	127 16	10.3 × 31.5				
10	126 20	127 20	16	400	20000	4	
10	126 25 ⁽²⁾	127 25 ⁽²⁾	20				
			25				
10/100	133 32 ⁽²⁾		10.3 × 38				
10		134 32 ⁽²⁾	32	400	20000	6	
			32				
			Neutral links				
10	123 00		8.5 × 31.5				
10	133 00		10 × 38				

(1) Rating not described by standards
(2) Conform to NF C 61-203