



SAW Components

Data Sheet B9203

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components

B9203

Low-Loss Dual Band Filter for Mobile Communication

1960 / 881,5 MHz


Data Sheet




Chip sized SAW package **QCS10F**

Features


- Low-loss 2-in-1 RF filter for mobile telephone GSM850 and GSM1900 bands, receive path
- Usable passband:
Filter 1 (GSM1900): 60 MHz
Filter 2 (GSM850): 25 MHz
- Unbalanced to balanced operation of both filters
- Impedance transformation from 50 Ω to 150 Ω of both filters
- Suitable for GPRS class 1 to 12
- Package for **Surface Mounted Technology (SMT)**

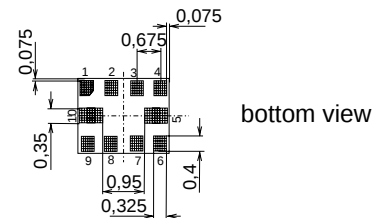

bottom view



side view



top view


Terminals

- Ni, gold-plated

Pin configuration

1	Input [Filter 1]
4	Input [Filter 2]
6, 7	Output, balanced [Filter 2]
8, 9	Output, balanced [Filter 1]
2, 3, 5, 10	Case ground

Dimensions in mm, approx weight tbd.



Type	Ordering code	Marking and Package according to	Packing according to
B9203	B39202-B9203-G810	C61157-A7-A133	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	− 40 / + 85	°C	Machine Model, 10 pulses
Storage temperature range	T_{stg}	− 40 / + 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}^*	50*	V	
Input power at GSM850, GSM900, GSM1800, GSM1900 Tx bands:				
Filter 1 (GSM1900-Rx)	P_{IN}	15	dBm	peak power of GSM signal, duty cycle 4:8
Filter 2 (GSM850-Rx)	P_{IN}	15	dBm	

* - acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9203

Low-Loss Dual Band Filter for Mobile Communication

1960 / 881,5 MHz

Data Sheet



Characteristics of Filter 1 (GSM1900)

Operating temperature range: $T = 25\text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50\text{ }\Omega$
 Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 12\text{ nH}$

		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	1,5	1,9	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,7	1,0	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	1,8	2,2	
1930,0 ... 1990,0 MHz					
Output VSWR		—	1,9	2,2	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	-3 / 1	10	degree
1930,0 ... 1990,0 MHz					
Output amplitude balance (S_{31}/S_{21})		-1,0	-0,5 / 0,2	1,0	dB
1930,0 ... 1990,0 MHz					
Attenuation	α				
0,0 ... 1000,0 MHz		40	54	—	dB
1000,0 ... 1810,0 MHz		28	35	—	dB
1810,0 ... 1890,0 MHz		23	29	—	dB
1890,0 ... 1910,0 MHz		12	18	—	dB
2010,0 ... 2070,0 MHz		12	14	—	dB
2070,0 ... 2400,0 MHz		22	29	—	dB
2400,0 ... 2500,0 MHz		35	45	—	dB
2500,0 ... 3860,0 MHz		30	36	—	dB
3860,0 ... 3980,0 MHz		45	62	—	dB
3980,0 ... 5790,0 MHz		30	52	—	dB
5790,0 ... 6000,0 MHz		40	50	—	dB



SAW Components

B9203

Low-Loss Dual Band Filter for Mobile Communication

1960 / 881,5 MHz

Data Sheet




Characteristics of Filter 1 (GSM1900)

Operating temperature range: $T = -20$ to $+75\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 12\text{ nH}$


		min.	typ.	max.	
Center frequency	f_C	—	1960,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$	—	1,5	2,2	dB
1930,0 ... 1990,0 MHz					
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,7	1,3	dB
1930,0 ... 1990,0 MHz					
Input VSWR		—	1,8	2,2	
1930,0 ... 1990,0 MHz					
Output VSWR		—	1,9	2,2	
1930,0 ... 1990,0 MHz					
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)		-10	-3 / 1	10	degree
1930,0 ... 1990,0 MHz					
Output amplitude balance ($ S_{31}/S_{21} $)		-1,0	-0,5 / 0,2	1,0	dB
1930,0 ... 1990,0 MHz					
Attenuation	α				
0,0 ... 1000,0 MHz		40	54	—	dB
1000,0 ... 1810,0 MHz		28	35	—	dB
1810,0 ... 1890,0 MHz		23	29	—	dB
1890,0 ... 1910,0 MHz		12	18	—	dB
2010,0 ... 2070,0 MHz		12	14	—	dB
2070,0 ... 2400,0 MHz		22	29	—	dB
2400,0 ... 2500,0 MHz		35	45	—	dB
2500,0 ... 3860,0 MHz		30	36	—	dB
3860,0 ... 3980,0 MHz		45	62	—	dB
3980,0 ... 5790,0 MHz		30	52	—	dB
5790,0 ... 6000,0 MHz		40	50	—	dB



Transfer function of filter 1 (measured at room temperature):

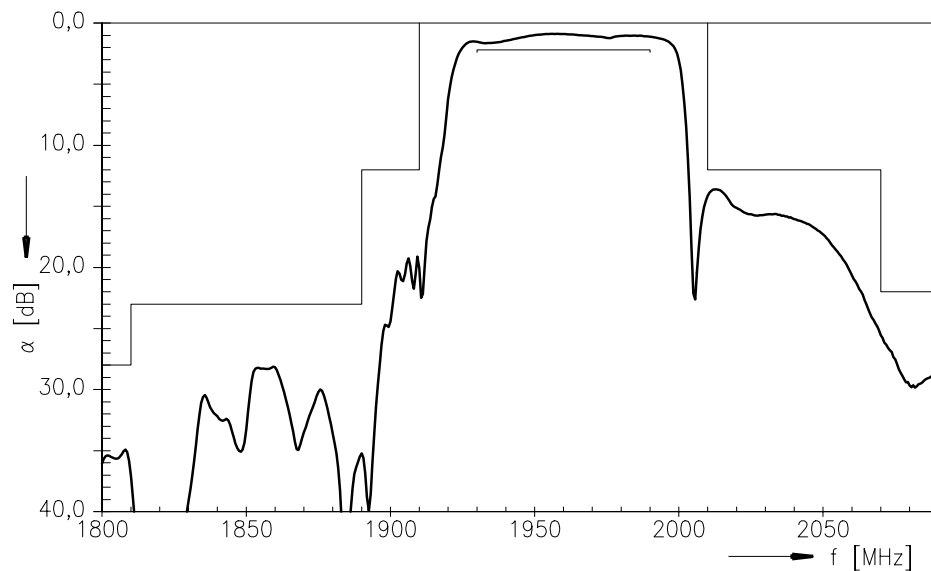

Transfer function of filter 1 (wideband, measured at room temperature):

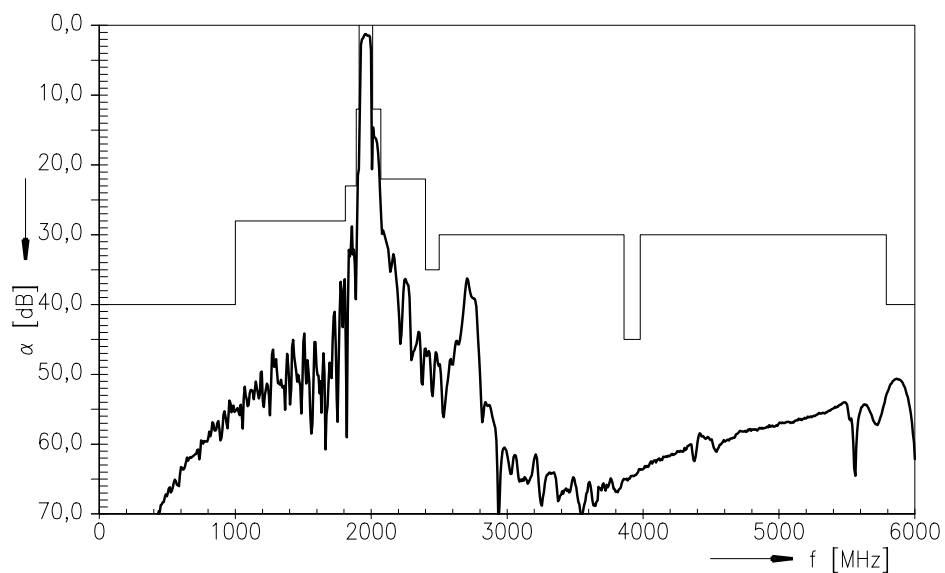



SAW Components		B9203
Low-Loss Dual Band Filter for Mobile Communication		1960 / 881,5 MHz
Data Sheet	SMD	

Characteristics of Filter 2 (GSM850)

Operating temperature range:	$T = 25\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\text{ }\Omega$
Terminating load impedance:	$Z_L = 150\text{ }\Omega \parallel 82\text{nH}$

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
869,0 ... 894,0 MHz		—	1,4	1,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,6	0,9	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
869,0 ... 894,0 MHz		-10	-3 / 2	10	degree
Output amplitude balance ($ S_{31} / S_{21} $)					
869,0 ... 894,0 MHz		-1,0	-0,5 / 0,1	1,0	dB
Attenuation					
0,0 ... 434,0 MHz		45	54	—	dB
434,0 ... 447,0 MHz		45	54	—	dB
447,0 ... 849,0 MHz		30	36	—	dB
914,0 ... 1000,0 MHz		24	27	—	dB
1000,0 ... 1300,0 MHz		32	37	—	dB
1300,0 ... 6000,0 MHz		40	45	—	dB



SAW Components

B9203

Low-Loss Dual Band Filter for Mobile Communication

1960 / 881,5 MHz

Data Sheet




Characteristics of Filter 2 (GSM850)

Operating temperature range: $T = -20$ to $+75\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 150\text{ }\Omega \parallel 82\text{nH}$


		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
869,0 ... 894,0 MHz		—	1,4	1,7	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,6	0,9	dB
Input VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output VSWR					
869,0 ... 894,0 MHz		—	1,8	2,1	
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}$)					
869,0 ... 894,0 MHz		-10	-3 / 2	10	degree
Output amplitude balance ($ S_{31} / S_{21} $)					
869,0 ... 894,0 MHz		-1,0	-0,5 / 0,1	1,0	dB
Attenuation					
0,0 ... 434,0 MHz		45	54	—	dB
434,0 ... 447,0 MHz		45	54	—	dB
447,0 ... 849,0 MHz		30	36	—	dB
914,0 ... 1000,0 MHz		24	27	—	dB
1000,0 ... 1300,0 MHz		32	37	—	dB
1300,0 ... 6000,0 MHz		40	45	—	dB



Transfer function of filter 2 (measured at room temperature):

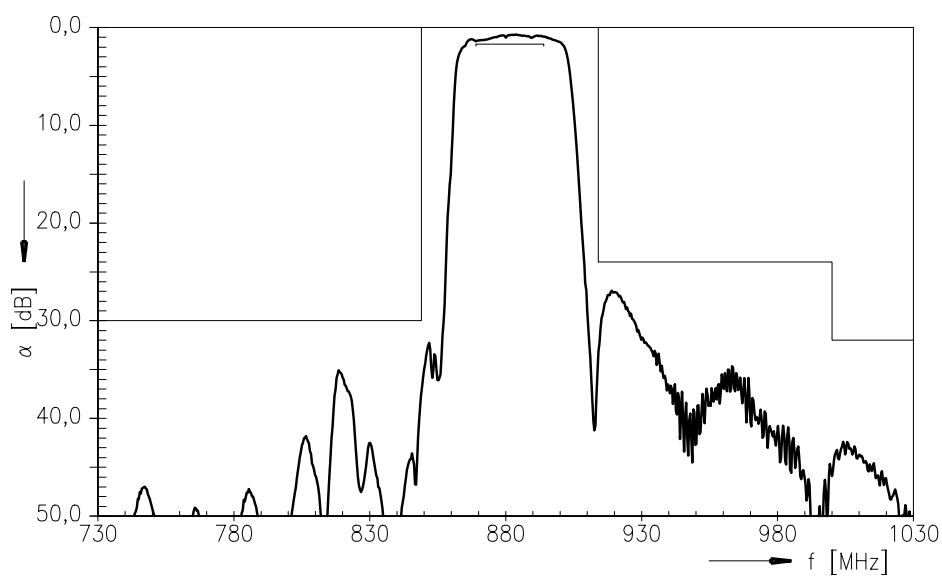

Transfer function of filter 2 (wideband, measured at room temperature):

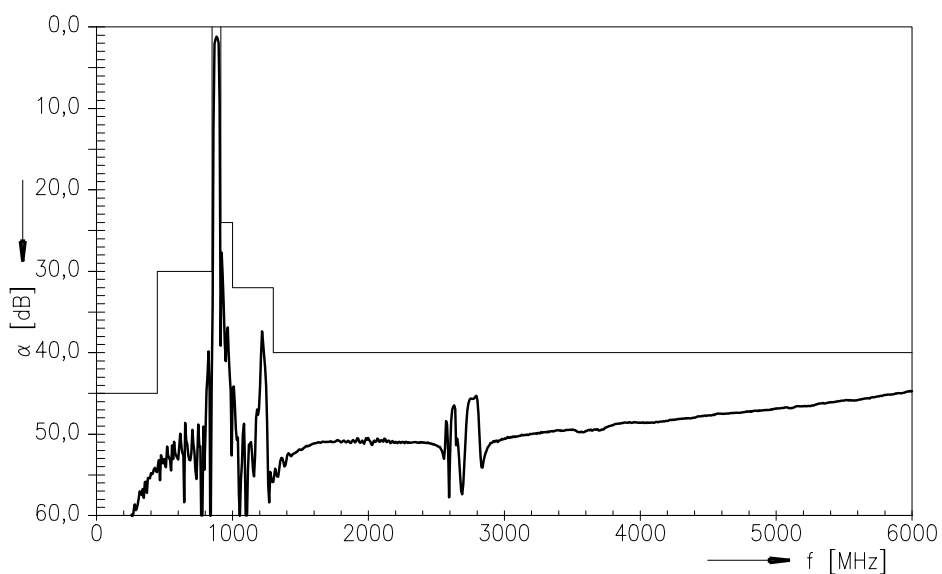



SAW Components		B9203
Low-Loss Dual Band Filter for Mobile Communication		1960 / 881,5 MHz
Data Sheet		

Published by EPCOS AG

SAW MC WT, P.O. Box 80 17 09, 81617 Munich, GERMANY

TEL +49 89 636 09, FAX +49 89 636 2 26 89

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.