

Distributed by:



**[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 1710725

## Fuseholders

For Micro™ Fuse or Pico® II Fuses

### “Push-On” Retaining Nut Chassis Mount Type

QPL

Fuseholder will accept Littelfuse MICRO™ fuses and PICO® II fuses (rated to 5 amperes) with .025" diameter leads.

#### SPECIFICATIONS:

**Electrical:** Rated at 5 amperes for any voltage up to 125 volts.

**Mounting:** Maximum panel thickness is .09".



**Molded Parts:** Black Thermoset.

**Terminals:** Beryllium Copper, Silver-plated.

**Ambient Temperature:** -40°C to +125°C.

**Hardware:** “Push-On” retaining nut.

\* Please refer to Fuseology section for information on proper fuseholder de-rating.



### FOR MICRO™ FUSE OR PICO® II FUSES

### Vertical/Horizontal

P.C. Board Mount Type



Fuseholder will accept Littelfuse MICRO™ fuses and PICO® II fuses (rated to 5 amperes) with .025" diameter leads.

#### SPECIFICATIONS:

**Electrical:** Rated at 5 amperes for any voltage up to 125 volts.

**Molded Parts:** White Thermoplastic.

**Terminals:** Copper Alloy.





**Ambient Temperature:** -40°C to +100°C.

#### ORDERING INFORMATION:

Catalog Number	Terminal Plating	Mounting
281 005	Silver <sup>1</sup>	Vertical
281 008	Tin	Vertical
281 007	Silver <sup>1</sup>	Horizontal
281 010	Tin	Horizontal

<sup>1</sup> UL Recognized.

\* Please refer to Fuseology section for information on proper fuseholder de-rating.

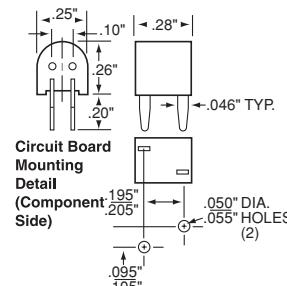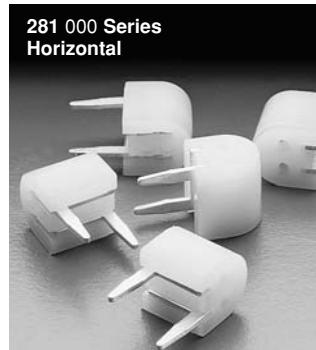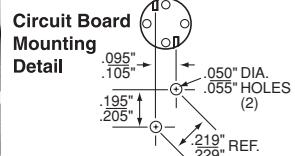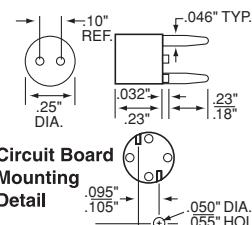

### For LT-5™ and TR5® Fuses



P.C. Board Mount Type

Fuse holder will accept Littelfuse LT-5™ and TR5® fuses up to 5 amperes.

#### SPECIFICATIONS:

**Electrical:** Rated at 5 amperes for any voltage up to 250 volts.

**Molded Parts:** Black Thermoplastic (UL94 V-O).

**Terminals:** Tin-plated brass, gold inside.

#### ORDERING INFORMATION:

Catalog Number: 02800050

\* Please refer to Fuseology section for information on proper fuseholder de-rating.

