

Picoamp Input Current, Microvolt Offset, Low Noise Op Amp

FEATURES

- Guaranteed Bias Current
 $T_A = 25^\circ\text{C}$: 100pA Max
 $T_A = -55^\circ\text{C}$ to 125°C : 600pA Max
- Guaranteed Offset Voltage: 120 μV Max
- Guaranteed Drift: 1.5 $\mu\text{V}/^\circ\text{C}$ Max
- Low Noise, 0.1Hz to 10Hz: 0.5 $\mu\text{V}_{\text{P-P}}$
- Guaranteed Low Supply Current: 600 μA Max
- Guaranteed CMRR: 114dB Min
- Guaranteed PSRR: 114dB Min
- Guaranteed Voltage Gain with 5mA Load Current
- Available in 8-Lead PDIP and SO Packages

APPLICATIONS

- Precision Instrumentation
- Charge Integrators
- Wide Dynamic Range Logarithmic Amplifiers
- Light Meters
- Low Frequency Active Filters
- Standard Cell Buffers
- Thermocouple Amplifiers

DESCRIPTION

The LT[®]1008 is a universal precision operational amplifier that can be used in practically all precision applications. The LT1008 combines for the first time, picoampere bias currents (which are maintained over the full -55°C to 125°C temperature range), microvolt offset voltage (and low drift with time and temperature), low voltage and current noise, and low power dissipation. Extremely high common mode and power supply rejection ratios, and the ability to deliver 5mA load current with high voltage gain round out the LT1008's superb precision specifications.


The all around excellence of the LT1008 eliminates the necessity of the time consuming error analysis procedure of precision system design in many applications; the LT1008 can be stocked as the universal precision op amp.

The LT1008 is externally compensated with a single capacitor for additional flexibility in shaping the frequency response of the amplifier. It plugs into and upgrades all standard LM108A/LM308A applications. For an internally compensated version with even lower offset voltage but otherwise similar performance see the LT1012.


LT, LT, LTC and LTM are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

Input Amplifier for 4.5 Digit Voltmeter

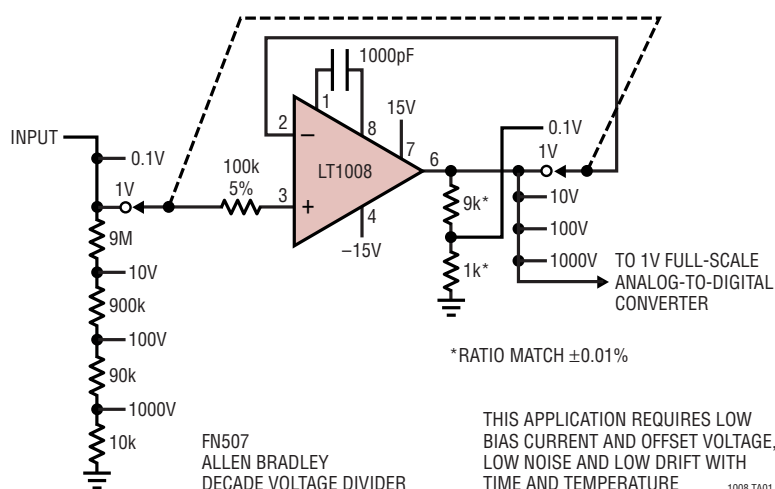

Input Bias Current vs Temperature

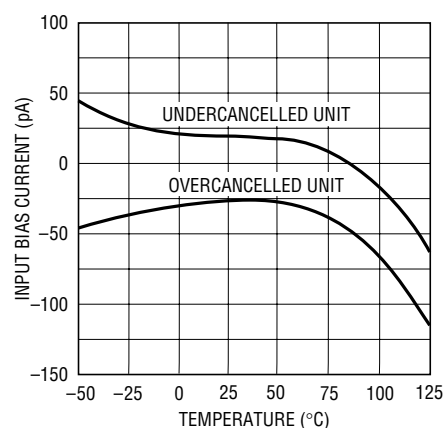

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage	$\pm 20\text{V}$	Operating Temperature Range	
Differential Input Current (Note 2)	$\pm 10\text{mA}$	LT1008M (OBSOLETE)	-55°C to 125°C
Input Voltage	$\pm 20\text{V}$	LT1008C	0°C to 70°C
Output Short-Circuit Duration	Indefinite	LT1008I	-40°C to 85°C
Storage Temperature Range	-65°C to 150°C	Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

TOP VIEW COMP2 COMP1 -IN +IN V⁻ (CASE) OUT V⁺ NC H PACKAGE 8-LEAD TO-5 METAL CAN $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$, $\theta_{JC} = 45^{\circ}\text{C/W}$	TOP VIEW COMP2 COMP1 -IN +IN V⁻ OUT V⁺ NC N8 PACKAGE 8-LEAD PDIP $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 130^{\circ}\text{C/W}$	TOP VIEW COMP2 COMP1 -IN +IN V⁻ OUT V⁺ NC S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 190^{\circ}\text{C/W}$		
ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER	S8 PART MARKING
LT1008MH LT1008CH	LT1008MJ8 LT1008CJ8	LT1008CN8 LT1008IN8	LT1008S8	1008
OBSOLETE PACKAGES Consider N8 or S8 Package for Alternate Source		Order Options Tape and Reel: Add #TR Lead Free: Add #PBF Lead Free Tape and Reel: Add #TRPBF Lead Free Part Marking: http://www.linear.com/leadfree/		

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS $V_S = \pm 15\text{V}$, $V_{CM} = 0\text{V}$, $T_A = 25^{\circ}\text{C}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1008M/I			LT1008C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	(Note 3)	30	120		30	120		μV
			40	180		40	180		μV
	Long-Term Input Offset Voltage Stability		0.3			0.3			$\mu\text{V}/\text{Month}$
I_{OS}	Input Offset Current	(Note 3)	30	100		30	100		pA
			40	150		40	150		pA
I_B	Input Bias Current	(Note 3)	± 30	± 100		± 30	± 100		pA
			± 40	± 150		± 40	± 150		pA
e_n	Input Noise Voltage	0.1Hz to 10Hz	0.5			0.5			μV_{p-p}
	Input Noise Voltage Density	$f_0 = 10\text{Hz}$ (Note 4)	17	30		17	30		$\text{nV}/\sqrt{\text{Hz}}$
		$f_0 = 1000\text{Hz}$ (Note 5)	14	22		14	22		$\text{nV}/\sqrt{\text{Hz}}$
i_n	Input Noise Current Density	$f_0 = 10\text{Hz}$	20			20			$\text{fA}/\sqrt{\text{Hz}}$
A_{VOL}	Large-Signal Voltage Gain	$V_{OUT} = \pm 12\text{V}$, $R_L \geq 10\text{k}$	200	2000		200	2000		V/mV
		$V_{OUT} = \pm 10\text{V}$, $R_L \geq 2\text{k}$	120	600		120	600		V/mV

1008fb

ELECTRICAL CHARACTERISTICS $V_S = \pm 15V$, $V_{CM} = 0V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1008M/I			LT1008C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5V$	114	132		114	132		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 2V$ to $\pm 20V$	114	132		114	132		dB
	Input Voltage Range		± 13.5	± 14		± 13.5	± 14		V
V_{OUT}	Output Voltage Swing	$R_L = 10k$	± 13	± 14		± 13	± 14		V
	Slew Rate	$C_F = 30pF$	0.1	0.2		0.1	0.2		V/ μs
I_S	Supply Current	(Note 3)		380	600		380	600	μA

The ● indicates specifications which apply over the full operating temperature range of $-55^\circ C \leq T_A \leq 125^\circ C$ for the LT1008M, $-40^\circ C \leq T_A \leq 85^\circ C$ for the LT1008I and $0^\circ C \leq T_A \leq 70^\circ C$ for the LT1008C. $V_S = \pm 15V$, $V_{CM} = 0V$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LT1008M/I			LT1008C			UNITS
				MIN	TYP	MAX	MIN	TYP	MAX	
V_{OS}	Input Offset Voltage	(Note 3)	●	50	250		40	180		μV
			●	60	320		50	250		μV
	Average Temperature Coefficient of Input Offset Voltage		●	0.2	1.5		0.2	1.5		$\mu V/^\circ C$
I_{OS}	Input Offset Current	(Note 3)	●	60	250		40	180		pA
			●	80	350		50	250		pA
	Average Temperature Coefficient of Input Offset Current		●	0.4	2.5		0.4	2.5		pA/ $^\circ C$
I_B	Input Bias Current	(Note 3)	●	± 80	± 600		± 40	± 180		pA
			●	± 150	± 800		± 50	± 250		pA
	Average Temperature Coefficient of Input Bias Current		●	0.6	6		0.4	2.5		pA/ $^\circ C$
A_{VOL}	Large-Signal Voltage Gain	$V_{OUT} = \pm 12V$, $R_L \geq 10k$	●	100	1000		150	1500		V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5V$	●	108	128		110	130		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 2.5V$ to $\pm 20V$	●	108	126		110	128		dB
	Input Voltage Range		●	± 13.5			± 13.5			V
V_{OUT}	Output Voltage Swing	$R_L = 10k$	●	± 13	± 14		± 13	± 14		V
I_S	Supply Current		●	400	800		400	800		μA

(LT1008S8 only) $V_S = \pm 15V$, $V_{CM} = 0V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 3)		30	200	μV
				40	250	μV
	Long-Term Input Offset Voltage Stability			0.3		$\mu V/\text{Month}$
I_{OS}	Input Offset Current	(Note 3)		100	280	pA
				120	380	pA
I_B	Input Bias Current	(Note 3)		± 100	± 300	pA
				± 120	± 400	pA
e_n	Input Noise Voltage	0.1Hz to 10Hz		0.5		μV_{P-P}
	Input Noise Voltage Density	$f_0 = 10\text{Hz}$ (Note 5) $f_0 = 1000\text{Hz}$ (Note 5)		17 14	30 22	nV/ $\sqrt{\text{Hz}}$ nV/ $\sqrt{\text{Hz}}$

ELECTRICAL CHARACTERISTICS(LT1008S8 only) $V_S = \pm 15V$, $V_{CM} = 0V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
i_n	Input Noise Current Density	$f_0 = 10Hz$		20		fA/ $\sqrt{Hz}$
A_{VOL}	Large-Signal Voltage Gain	$V_{OUT} = \pm 12V$, $R_L \geq 10k$ $V_{OUT} = \pm 10V$, $R_L \geq 2k$	200 120	2000 600		V/mV V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5V$	110	132		dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 2V$ to $\pm 20V$	110	132		dB
	Input Voltage Range		± 13.5	± 14		V
V_{OUT}	Output Voltage Swing	$R_L = 10k$	± 13	± 14		V
	Slew Rate	$C_F = 30pF$	0.1	0.2		V/ μs
I_S	Supply Current	(Note 3)		380	600	μA

(LT1008S8 only) The ● indicates specifications which apply over the full operating temperature range of $0^\circ C \leq T_A \leq 70^\circ C$.
 $V_S = \pm 15V$, $V_{CM} = 0V$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{OS}	Input Offset Voltage	(Note 3)	● ●	40 50	280 340	μV μV
	Average Temperature Coefficient of Input Offset Voltage		●	0.2	1.8	$\mu V/^\circ C$
I_{OS}	Input Offset Current	(Note 3)	● ●	120 140	380 500	pA pA
	Average Temperature Coefficient of Input Offset Current		●	0.4	4	pA/ $^\circ C$
I_B	Input Bias Current	(Note 3)	● ●	± 120 ± 140	± 420 ± 550	pA pA
	Average Temperature Coefficient of Input Bias Current		●	0.4	5	pA/ $^\circ C$
A_{VOL}	Large-Signal Voltage Gain	$V_{OUT} = \pm 12V$, $R_L \geq 10k$	●	150	1500	V/mV
CMRR	Common Mode Rejection Ratio	$V_{CM} = \pm 13.5V$	●	108	130	dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 2.5V$ to $\pm 20V$	●	108	128	dB
	Input Voltage Range		●	± 13.5		V
V_{OUT}	Output Voltage Swing	$R_L = 10k$	●	± 13	± 14	V
I_S	Supply Current		●	400	800	μA

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: Differential input voltages greater than 1V will cause excessive current to flow through the input protection diodes unless current limiting resistors are used.


Note 3: These specifications apply for $\pm 2V \leq V_S \leq \pm 20V$ ($\pm 2.5V \leq V_S \leq \pm 20V$ over the temperature range) and $-13.5V \leq V_{CM} \leq 13.5V$ (for $V_S = \pm 15V$).

Note 4: 10Hz noise voltage density is sample tested on every lot. Devices 100% tested at 10Hz are available on request.


Note 5: This parameter is tested on a sample basis only.

FREQUENCY COMPENSATION CIRCUITS

Standard Compensation Circuit

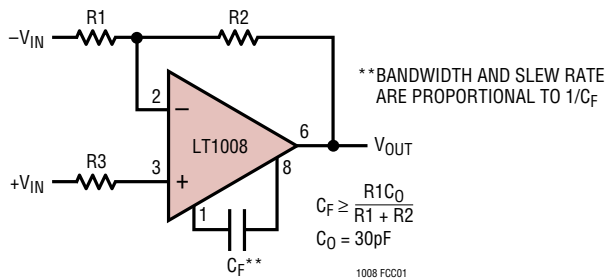


Alternate* Frequency Compensation

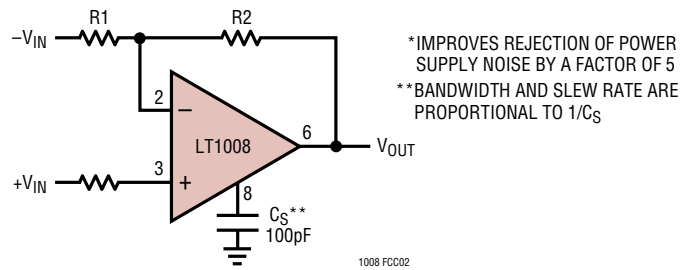


FOR $\frac{R2}{R1} > 200$, NO EXTERNAL FREQUENCY COMPENSATION IS NECESSARY

TYPICAL PERFORMANCE CHARACTERISTICS


Offset Voltage Drift vs Source Resistance (Balanced or Unbalanced)

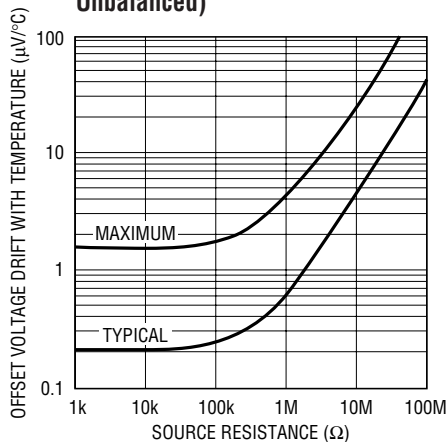


Offset Voltage vs Source Resistance (Balanced or Unbalanced)

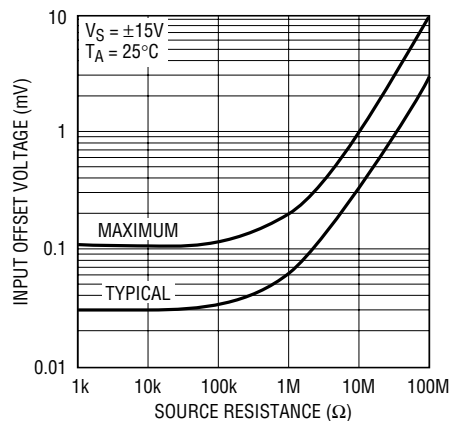


Input Bias Current vs Common Mode Range

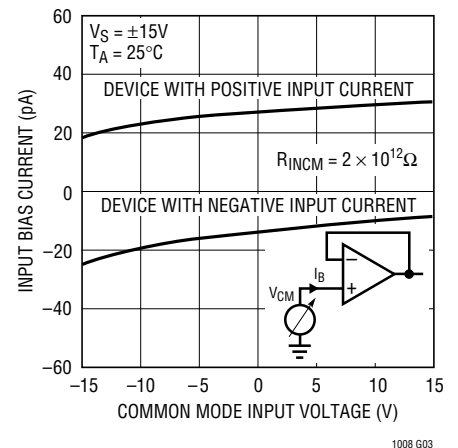


Warm-Up Drift

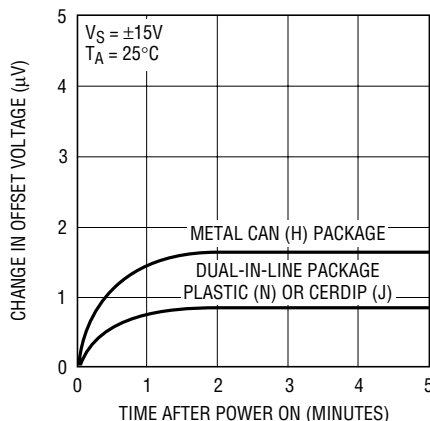

Long-Term Stability of Four Representative Units

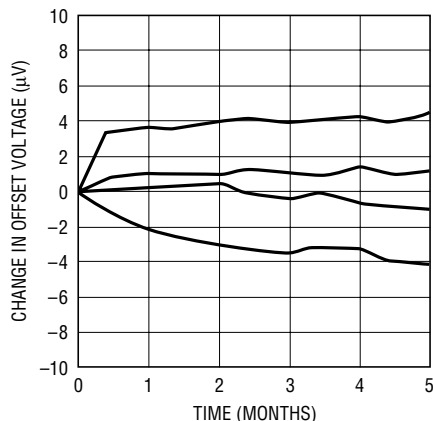


Offset Voltage Drift with Temperature of Four Representative Units

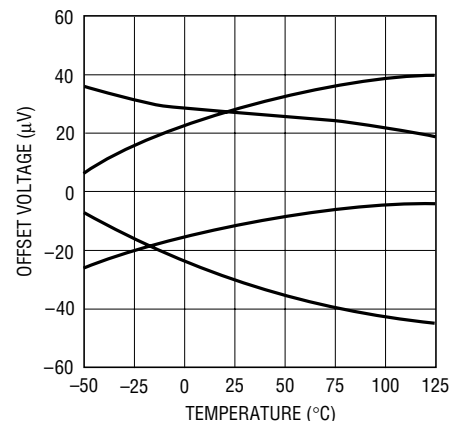


TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Supply Voltage

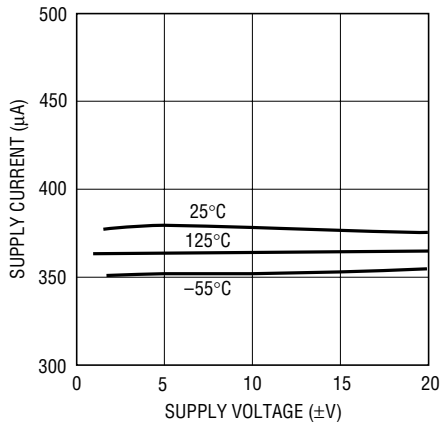


1008 G07

Output Short-Circuit Current vs Time

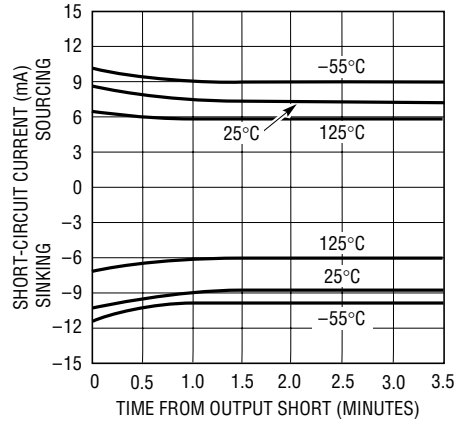


1008 G08

0.1Hz to 10Hz Noise

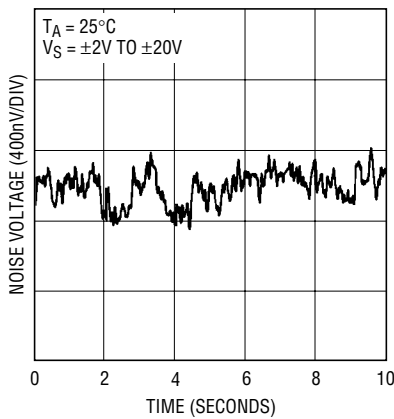


1008 G09

Noise Spectrum

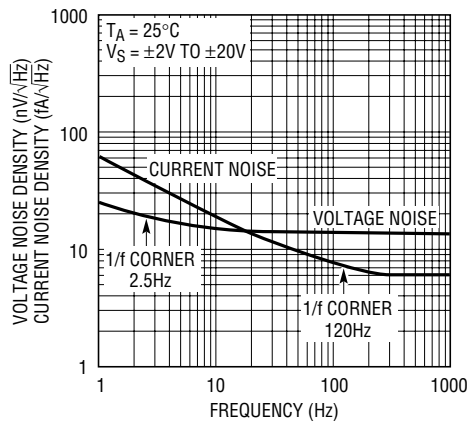


1008 G10

Total Noise vs Source Resistance

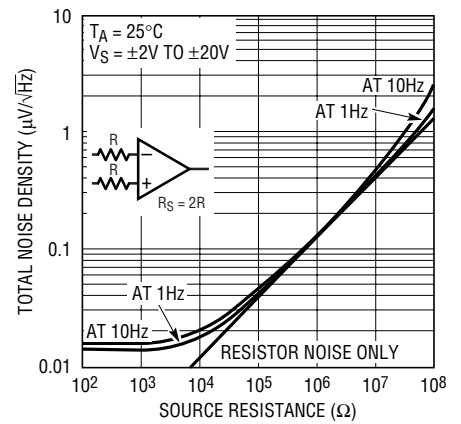


1008 G11

Voltage Gain vs Frequency

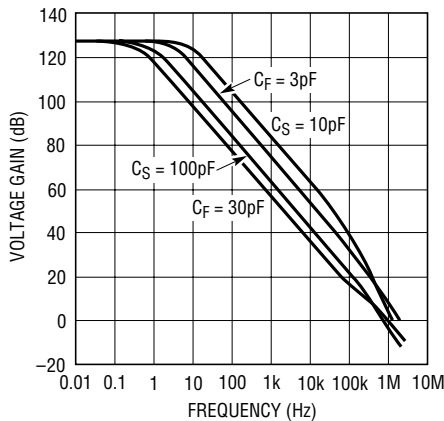


1008 G12

Gain, Phase Shift vs Frequency with Alternate Compensation

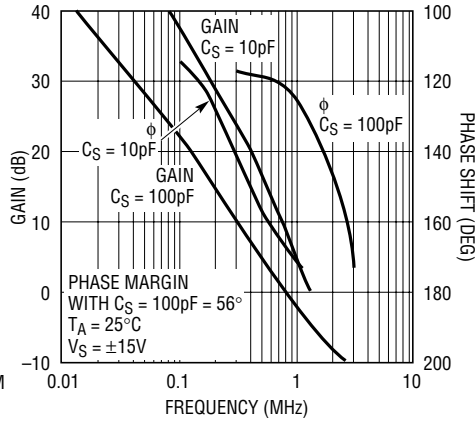

1008 G13


Gain, Phase Shift vs Frequency with Standard (Feedback) Compensation

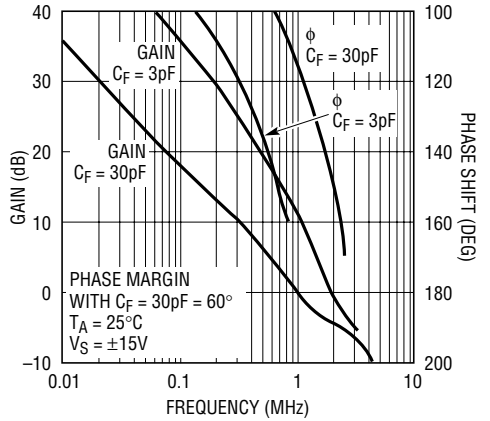


1008 G14

TYPICAL PERFORMANCE CHARACTERISTICS


Voltage Gain vs Load Resistance

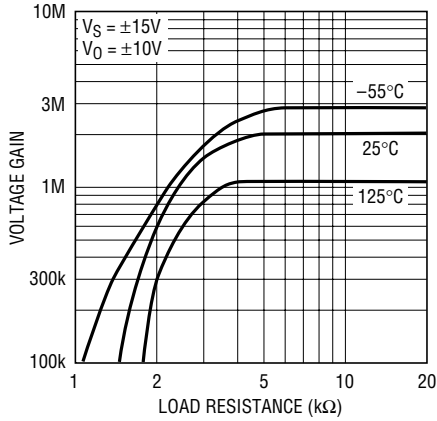


Common Mode Rejection vs Frequency

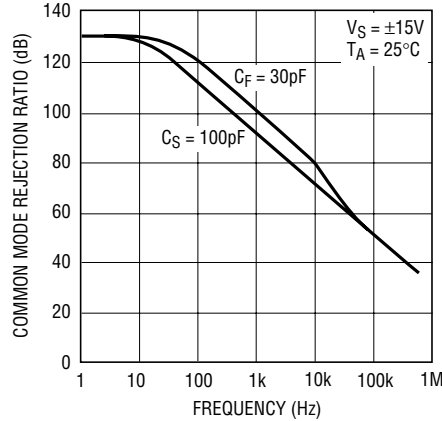


Power Supply Rejection vs Frequency

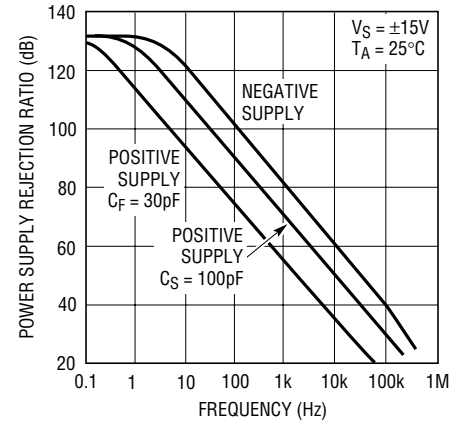


Large-Signal Transient Response

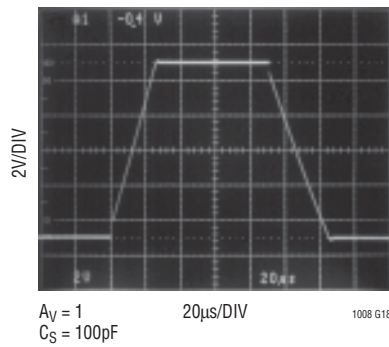


Slew Rate vs Compensation Capacitance

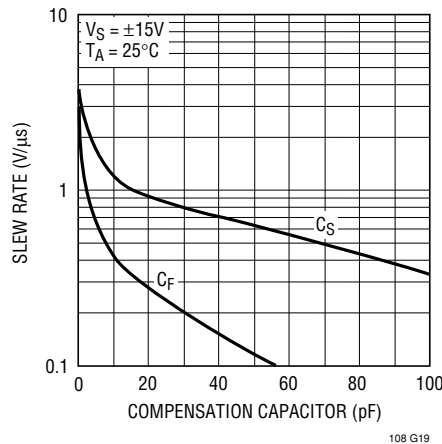


Large-Signal Transient Response

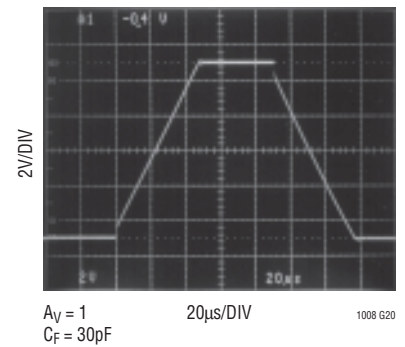


Small-Signal Transient Response

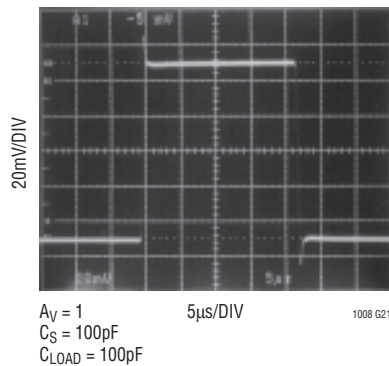

Small-Signal Transient Response

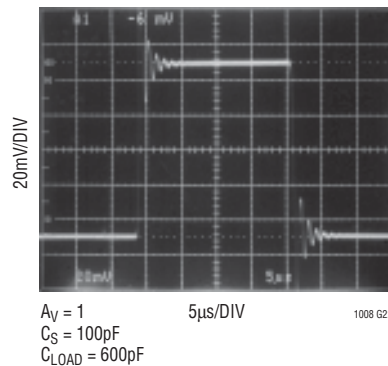

Small-Signal Transient Response

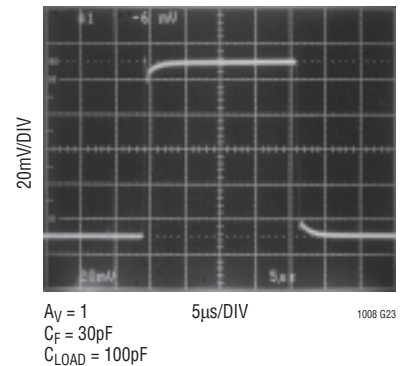


APPLICATIONS INFORMATION

Achieving Picoampere/Microvolt Performance

In order to realize the picoampere—microvolt level accuracy of the LT1008, proper care must be exercised. For example, leakage currents in circuitry external to the op amp can significantly degrade performance. High quality insulation should be used (e.g., Teflon™, Kel-F); cleaning of all insulating surfaces to remove fluxes and other residues will probably be required. Surface coating may be necessary to provide a moisture barrier in high humidity environments.


Board leakage can be minimized by encircling the input circuitry with a guard ring operated at a potential close to that of the inputs: in inverting configurations the guard ring should be tied to ground, in noninverting connections to the inverting input at Pin 2. Guarding both sides of the printed circuit board is required. Bulk leakage reduction depends on the guard ring width. Nanoampere level leakage into the compensation terminals can affect offset voltage and drift with temperature.

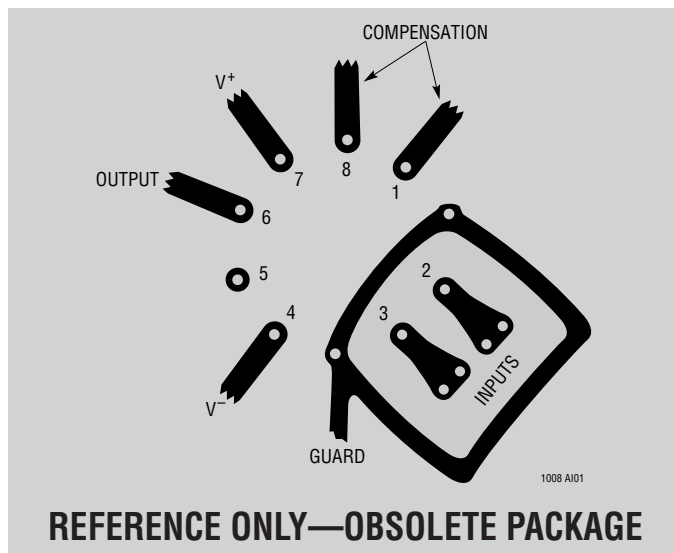

Microvolt level error voltages can also be generated in the external circuitry. Thermocouple effects caused by temperature gradients across dissimilar metals at the contacts to the input terminals can exceed the inherent drift of the amplifier. Air currents over device leads should be minimized, package leads should be short, and the two input leads should be as close together as possible and maintained at the same temperature.

The LT1008 is specified over a wide range of power supply voltages from $\pm 2\text{V}$ to $\pm 18\text{V}$. Operation with lower supplies is possible down to $\pm 1.2\text{V}$ (two Ni-Cad batteries).

Test Circuit for Offset Voltage and Its Drift with Temperature



* RESISTORS MUST HAVE LOW THERMOELECTRIC POTENTIAL
THIS CIRCUIT IS ALSO USED AS THE BURN-IN CONFIGURATION FOR THE LT1008 WITH SUPPLY VOLTAGES INCREASED TO $\pm 20\text{V}$
 $V_O = 1000\text{V}_{OS}$

1008 AI02


Noise Testing

The 0.1Hz to 10Hz peak-to-peak noise of the LT1008 is measured in the test circuit shown. The frequency response of this noise tester indicates that the 0.1Hz corner is defined by only one zero. The test time to measure 0.1Hz to 10Hz noise should not exceed 10 seconds, as this time limit acts as an additional zero to eliminate noise contributions from the frequency band below 0.1Hz.

A noise voltage density test is recommended when measuring noise on a large number of units. A 10Hz noise voltage density measurement will correlate well with a 0.1Hz to 10Hz peak-to-peak noise reading since both results are determined by the white noise and the location of the 1/f corner frequency.

Current noise is measured in the circuit shown and calculated by the following formula where the noise of the source resistors is subtracted.


$$i_n = \frac{[e_{no}^2 - (820\text{nV})^2]^{1/2}}{40\text{M}\Omega \times 100}$$

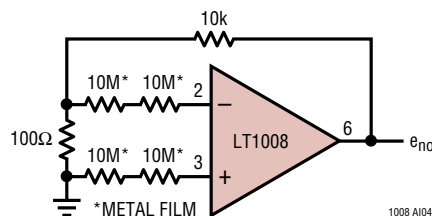

1008 AI04

APPLICATIONS INFORMATION

0.1Hz to 10Hz Noise Test Circuit

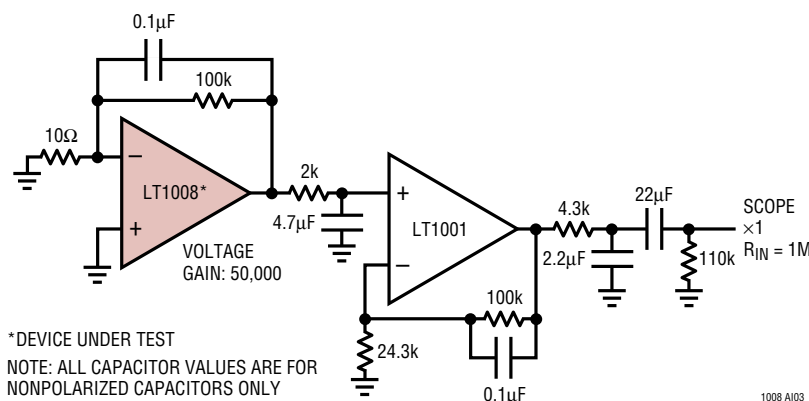

Frequency Compensation

The LT1008 is externally frequency compensated with a single capacitor. The two standard compensation circuits shown earlier are identical to the LM108A/LM308A frequency compensation schemes. Therefore, the LT1008 operational amplifiers can be inserted directly into LM108A/LM308A sockets, with similar AC and upgraded DC performance.

External frequency compensation provides the user with additional flexibility in shaping the frequency response of the amplifier. For example, for a voltage gain of ten and $C_F = 3\text{pF}$, a gain bandwidth product of 5MHz and slew rate of $1.2\text{V}/\mu\text{s}$ can be realized. For closed-loop gains in excess of 200, no external compensation is necessary, and slew rate increases to $4\text{V}/\mu\text{s}$. The LT1008 can also be overcompensated (i.e., $C_F > 30\text{pF}$ or $C_S > 100\text{pF}$) to improve capacitive load handling capability or to narrow noise bandwidth. In many applications, the feedback loop around the amplifier has gain (e.g., logarithmic amplifiers); overcompensation can stabilize these circuits with a single capacitor.



The availability of the compensation terminals permits the use of feedforward frequency compensation to enhance slew rate in low closed-loop gain configurations. The inverter slew rate is increased to $1.4\text{V}/\mu\text{s}$. The voltage follower feedforward scheme bypasses the amplifier's gain stages and slews at nearly $10\text{V}/\mu\text{s}$.

The inputs of the LT1008 are protected with back-to-back diodes. Current limiting resistors are not used, because the leakage of these resistors would prevent the realization of picoampere level bias currents at elevated temperatures.

In the voltage follower configuration, when the input is driven by a fast, large-signal pulse ($>1\text{V}$), the input protection diodes effectively short the output to the input during slewing, and a current, limited only by the output short-circuit protection, will flow through the diodes.


The use of a feedback resistor, as shown in the voltage follower feedforward diagram, is recommended because this resistor keeps the current below the short-circuit limit, resulting in faster recovery and settling of the output.

Inverter Feedforward Compensation

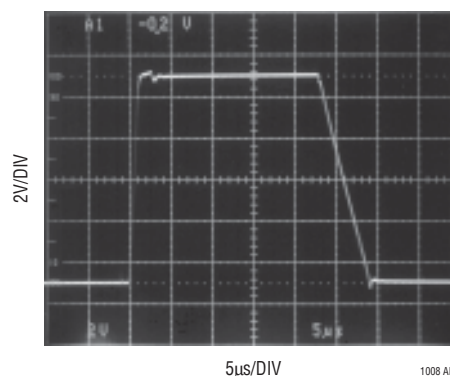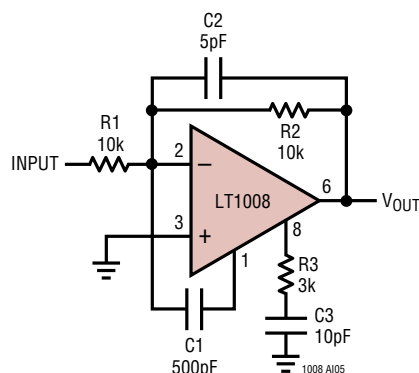


APPLICATIONS INFORMATION

Follower Feedforward Compensation

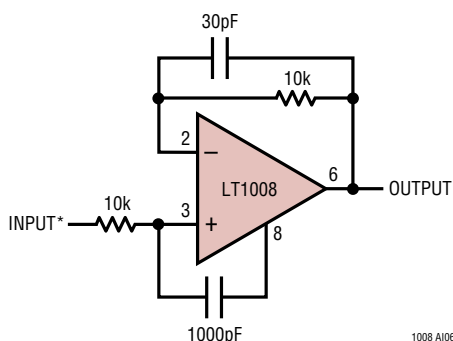

*SOURCE RESISTANCE $\leq 15k$ FOR STABILITY

1008 A106

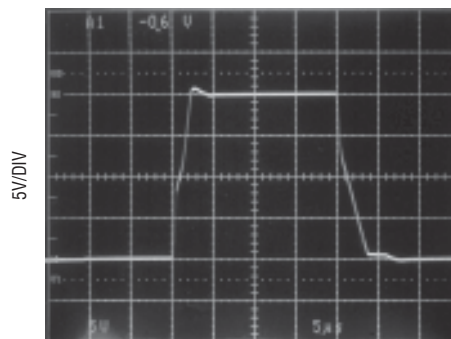


5μs/DIV

1008 A107

TYPICAL APPLICATIONS


Logarithmic Amplifier

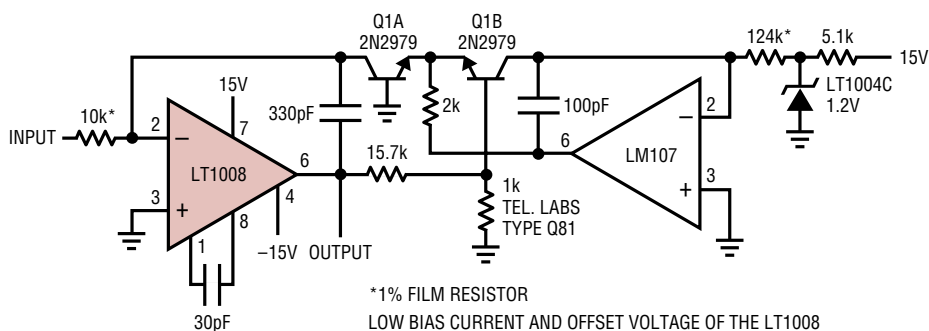

*1% FILM RESISTOR


LOW BIAS CURRENT AND OFFSET VOLTAGE OF THE LT1008
ALLOW 4.5 DECADES OF VOLTAGE INPUT LOGGING

Amplifier for Bridge Transducers

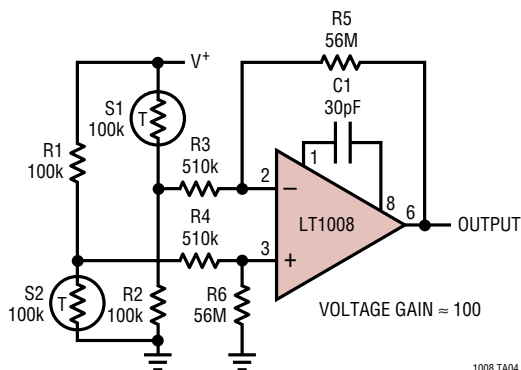

1008 TA04

Saturated Standard Cell Amplifier

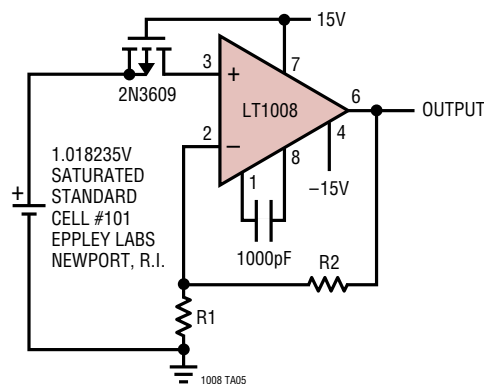


1008 TA05

THE TYPICAL 30pA BIAS CURRENT OF THE LT1008 WILL
DEGRADE THE STANDARD CELL BY ONLY 1ppm/YEAR.
NOISE IS A FRACTION OF A ppm. UNPROTECTED GATE
MOSFET ISOLATES STANDARD CELL ON POWER DOWN

1008fb

Five Decade Kelvin-Varley Divider Buffered by the LT1008



1008fb

The circuit diagram shows a precision active filter. The input signal is connected to a 2kΩ resistor, which is followed by an OPTO-MOS switch (type OFM1A) controlled by a 15V signal. The output of the switch is connected to the non-inverting input (+) of the LT1008 comparator. The LT1008 is configured with a 1.5MΩ feedback resistor from its output (pin 6) to its inverting input (pin 2), and a 10kΩ resistor from its inverting input to the output. The LT1008's inverting input is also connected to a 1μF capacitor to ground. The LT1008's output (pin 6) is connected to the output of the filter. The filter is composed of two LT311A comparators. The first LT311A (#1) has its non-inverting input (+) connected to the output of the LT1008, its inverting input (-) connected to the output of the second LT311A (#2), and its output (pin 2) connected to the output of the filter. The second LT311A (#2) has its non-inverting input (+) connected to the output of the first LT311A (#1), its inverting input (-) connected to the output of the first LT311A (#1), and its output (pin 2) connected to the output of the filter. The filter is also connected to a 10kΩ resistor to ground, labeled "FILTER CUT IN ADJUST". The circuit is powered by a 15V supply and a -15V supply. The LT1008 is powered by a 15V supply and a -15V supply. The LT311A comparators are powered by a 15V supply and a -15V supply. The LT1008 is labeled "LT1008" and the LT311A comparators are labeled "#1 LT311A" and "#2 LT311A". The OPTO-MOS switch is labeled "OPTO-MOS*" and "TYPE OFM1A THETA-J CORP".


The circuit settles to a final value three times as fast as a simple 1.5M-1 μ F filter with almost no DC error.

The schematic diagram illustrates a precision current source circuit. It consists of two operational amplifiers: an LT318A and an LT1008. The LT318A is configured as a differential amplifier with a 2N4393 JFET in the feedback path. The LT1008 is configured as a current source with a 10k resistor and a 30pF capacitor in its feedback path. The circuit is powered by a 15V supply and a -15V supply. The output of the LT318A is connected to the input of the LT1008. The circuit is designed to provide a precise current source for a 10k resistor.

1008 TA10

1008fb

SCHEMATIC DIAGRAM

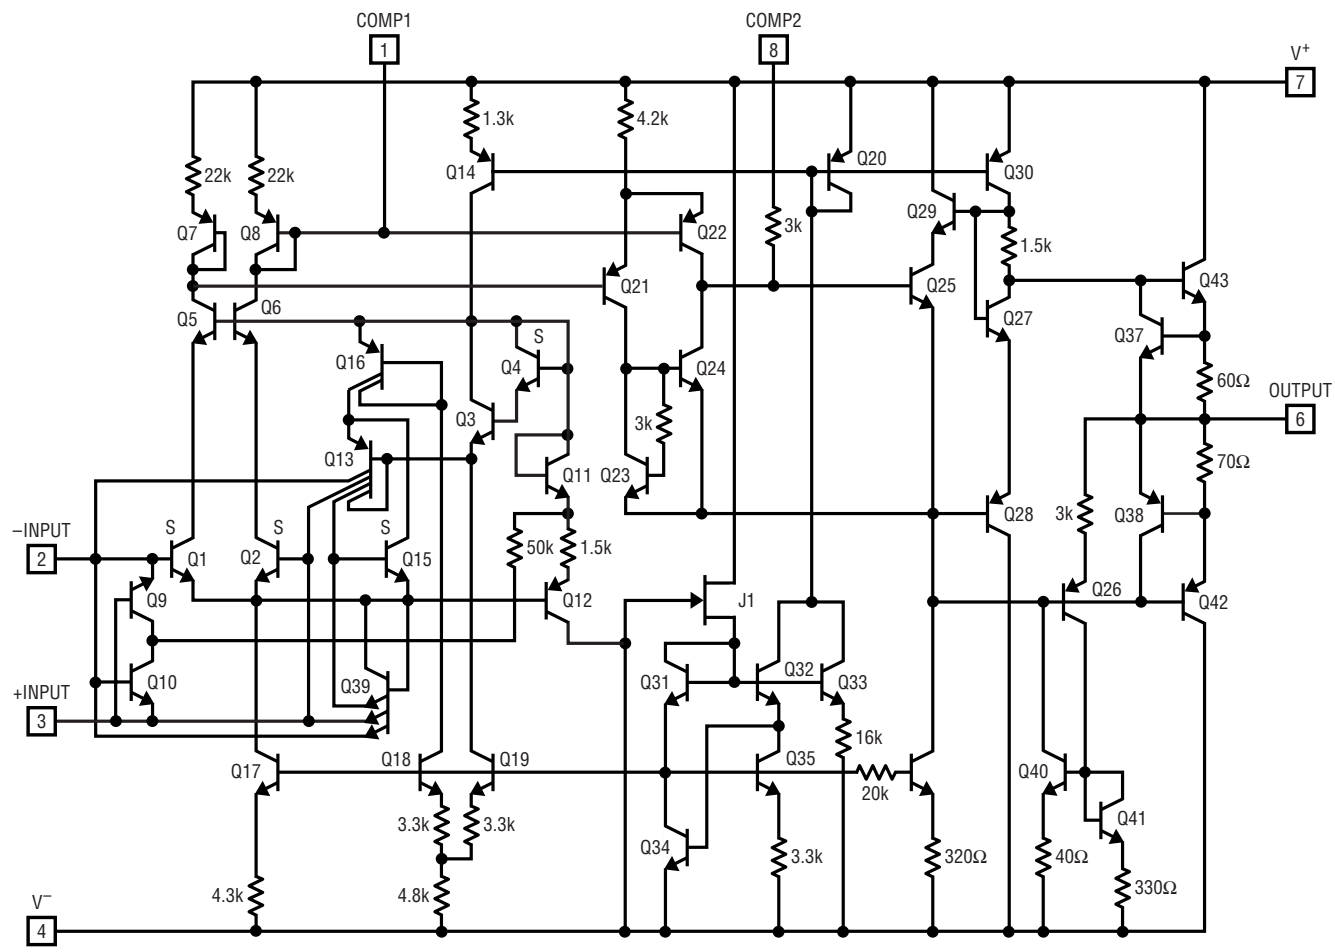

The image contains two mechanical drawings of a component, likely a connector or probe, with dimensions in inches and millimeters.

Top View (Left):

- Overall width: $0.335 - 0.370$ (8.509 - 9.398) DIA
- Inner width: $0.305 - 0.335$ (7.747 - 8.509)
- Top flange height: 0.040 (1.016) MAX
- Bottom flange height: 0.050 (1.270) MAX
- Distance from seating plane to top of component: $0.010 - 0.045^*$ (0.254 - 1.143)
- Distance from seating plane to bottom of component: $0.500 - 0.750$ (12.700 - 19.050)
- Distance from gauge plane to bottom of component: $0.165 - 0.185$ (4.191 - 4.699)
- Lead diameter: $0.016 - 0.021^{**}$ (0.406 - 0.533)

Side View (Right):

- Lead diameter: $0.016 - 0.021^{**}$ (0.406 - 0.533)
- Lead angle: 45° TYP
- Lead length: $0.028 - 0.034$ (0.711 - 0.864)
- Pin 1 diameter: $0.027 - 0.045$ (0.686 - 1.143)
- Pin 1 position: 0.200 (5.080) TYP
- Insulating standoff: $0.110 - 0.160$ (2.794 - 4.064)
- Standoff height: 0.200 (5.080) TYP
- Standoff material: HB(T0-S) 0.200 PCD 1197

Notes:

- *LEAD DIAMETER IS UNCONTROLLED BETWEEN THE REFERENCE PLANE AND 0.045^* BELOW THE REFERENCE PLANE
- **FOR SOLDER DIP LEAD FINISH, LEAD DIAMETER IS $0.016 - 0.024$ (0.406 - 0.610)

CORNER LEADS OPTION (4 PLCS)

HALF LEAD OPTION
 0.023 – 0.045
 (0.584 – 1.143)

FULL LEAD OPTION
 0.045 – 0.068
 (1.143 – 1.727)

Top View Dimensions:
 Pin 1 to Pin 8 pitch: 0.405 (10.287) MAX
 Pin 1 to Pin 4 pitch: 0.220 – 0.310 (5.588 – 7.874)
 Pin 1 to Pin 8 pitch: 0.005 (0.127) MIN
 Pin 1 to Pin 4 pitch: 0.025 (0.635) RAD TYP

Side View Dimensions:
 Pin 1 to Pin 8 pitch: 0.300 BSC (0.762 BSC)
 Pin 1 to Pin 4 pitch: 0.008 – 0.018 (0.203 – 0.457)
 Pin 1 to Pin 8 pitch: 0° – 15°


Bottom View Dimensions:
 Pin 1 to Pin 8 pitch: 0.045 – 0.065 (1.143 – 1.651)
 Pin 1 to Pin 4 pitch: 0.014 – 0.026 (0.360 – 0.660)
 Pin 1 to Pin 8 pitch: 0.100 (2.54) BSC
 Pin 1 to Pin 4 pitch: 0.015 – 0.060 (0.381 – 1.524)
 Pin 1 to Pin 8 pitch: 0.125 (3.175) MIN

NOTE: LEAD DIMENSIONS APPLY TO SOLDER DIP/PLATE OR TIN PLATE LEADS


OBSOLETE PACKAGES

PACKAGE DESCRIPTION

N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

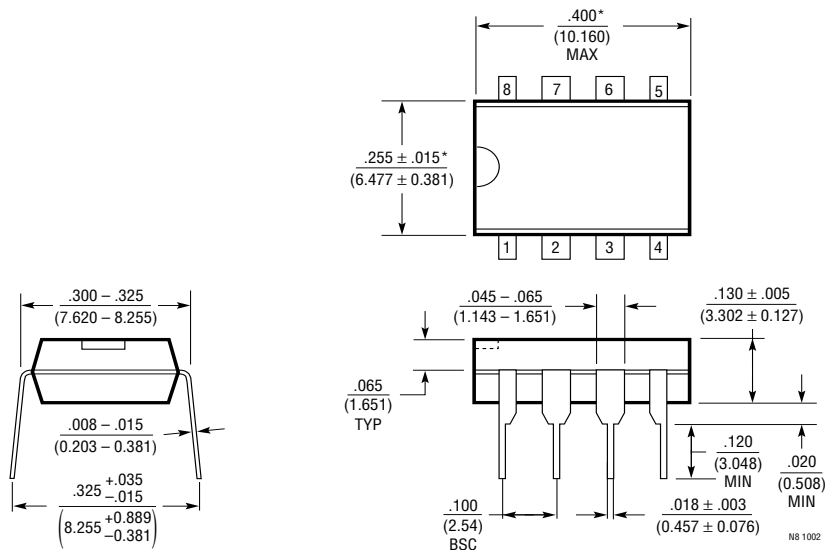

S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

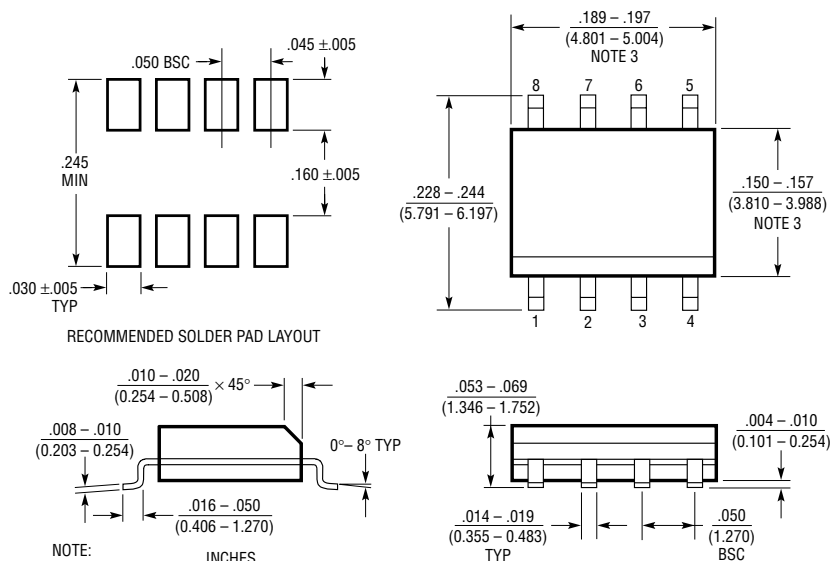


S08 0303

TYPICAL APPLICATION

Ammeter measures currents from 100pA to 100μA without the use of expensive high value resistors. Accuracy at

100 μ A is limited by the offset voltage between Q1 and Q2 and at 100pA by the inverting bias current of the LT1008.

Ammeter with Six Decade Range

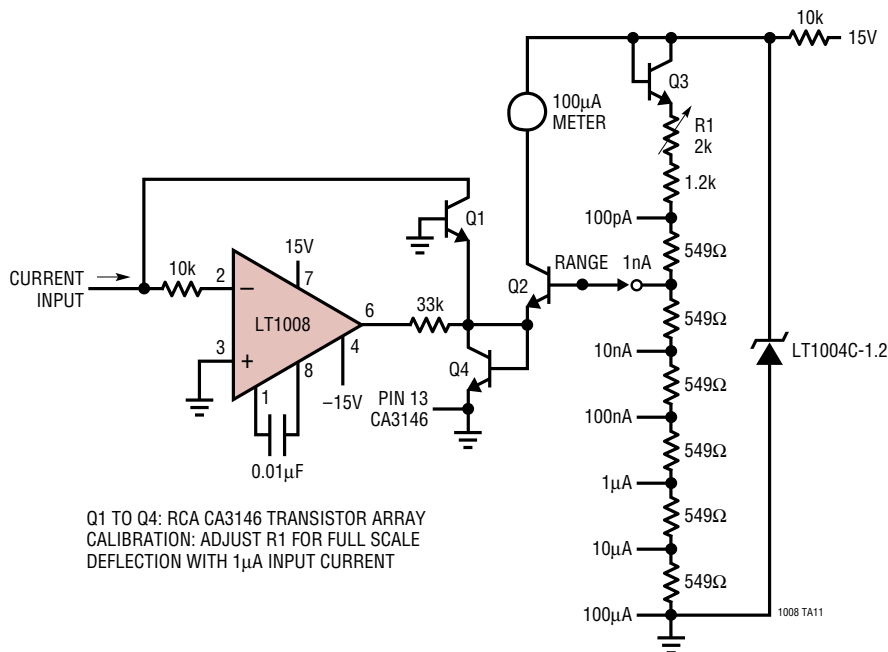

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1012	Picoamp Input Current, Microvolt Offset, Low Noise Op Amp	Internally Compensated LT1008
LT1112	Dual Low Power, Precision, Picoamp Input Op Amp	Dual LT1012
LT1880	SOT-23, Rail-to-Rail Output, Picoamp Input Current Precision Op Amp	Single SOT-23 Version of LT1884
LT1881/LT1882	Dual and Quad Rail-to-Rail Output, Picoamp Input Precision Op Amps	Dual/Quad C _{LOAD} Stable
LT1884/LT1885	Dual and Quad Rail-to-Rail Output, Picoamp Input Precision Op Amps	Dual/Quad Faster LT1881/LT1882