

HLMP-AD85, HLMP-AD87, HLMP-AM86, HLMP-AM87, HLMP-AB86, HLMP-AB87

Precision Optical Performance Red, Green and Blue 5mm Mini Oval LEDs



Data Sheet



Lead (Pb) Free
RoHS 6 fully
compliant



Description

These Precision Optical Performance Oval LEDs are specifically designed for full color/video and passenger information signs. The oval shaped radiation pattern and high luminous intensity ensure these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential. These lamps have very smooth, matched radiation patterns ensuring consistent color mixing in full color applications, message uniformity across the viewing angle of the sign. High efficiency LED material is used in these lamps: Aluminium Indium Gallium Phosphide (AlInGaP) for red and Indium Gallium Nitride (InGaN) for blue and green. Each lamp is made with an advance optical grade epoxy offering superior high temperature and high moisture resistance in outdoor applications.

The package epoxy contains both UV-A and UV-B inhibitors to reduce the effects of long term exposure to direct sunlight.

Features

- Well defined spatial radiation pattern
- High brightness material
- Available in red, green and blue color
 - Red AlInGaP 630nm
 - Green InGaN 525nm
 - Blue InGaN 470nm
- Superior resistance to moisture
- Tinted and diffused

Benefits



- Viewing angle designed for wide field of view applications
- Superior performance for outdoor environments.

Applications

- Full color signs
- Commercial outdoor advertising

Caution: InGaN devices are Class 1C HBM ESD sensitive per JEDEC standard. Please observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.

Package Dimensions

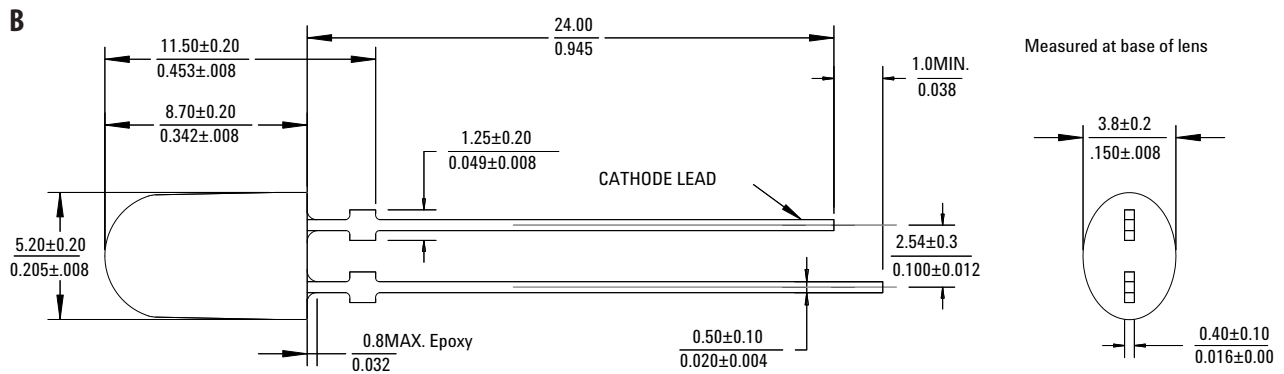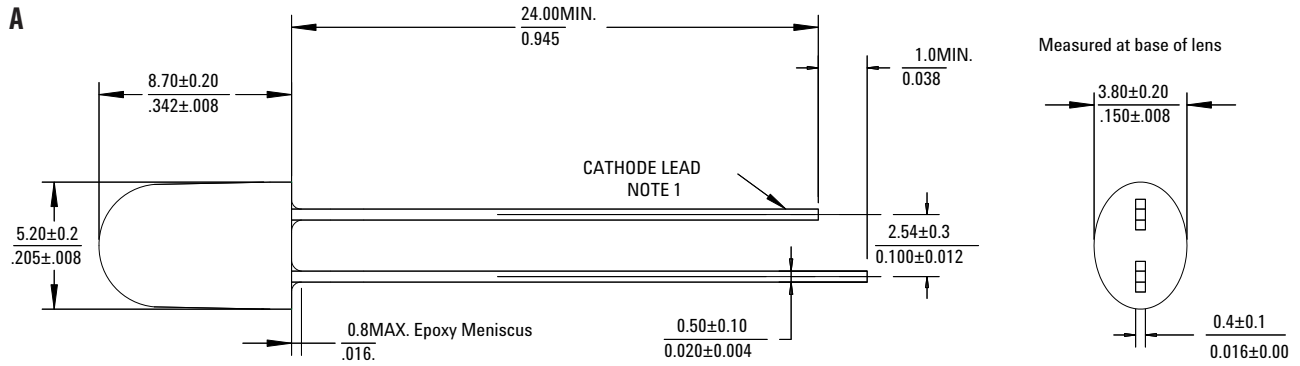

NOTES:

Dimensions in Millimeters (Inches)

For Blue and Green if heat-sinking application is required, the terminal for heat sink is anode.


Device Selection Guide

Part Number	Color	Typ. Dominant Wavelength λ_d (nm)	Luminous Intensity I_v (cd) at 20mA		Lens Type	Standoffs	Package Drawing
			Min.	Max.			
HLMP-AD85-RU0xx	Red	630	1.50	4.20	Tinted, diffused	No	A
HLMP-AD87-RU0xx	Red	630	1.50	4.20	Tinted, diffused	Yes	B
HLMP-AM86-TW0xx	Green	525	2.50	7.20	Tinted, diffused	No	A
HLMP-AM87-TW0xx	Green	525	2.50	7.20	Tinted, diffused	Yes	B
HLMP-AB86-MQ0xx	Blue	470	0.52	1.50	Tinted, diffused	No	A
HLMP-AB87-MQ0xx	Blue	470	0.52	1.50	Tinted, diffused	Yes	B

Notes:

1. Tolerance for luminous intensity measurement is $\pm 15\%$
2. The luminous intensity is measured on the mechanical axis of the lamp package.
3. The optical axis is closely aligned with the package mechanical axis.
4. The dominant wavelength λ_d is derived from the Chromaticity Diagram and represents the color of the lamp.
5. LED light output is bright enough to cause injuries to the eyes. Precautions must be taken to prevent looking directly at the LED without proper safety equipment.

Part Numbering System

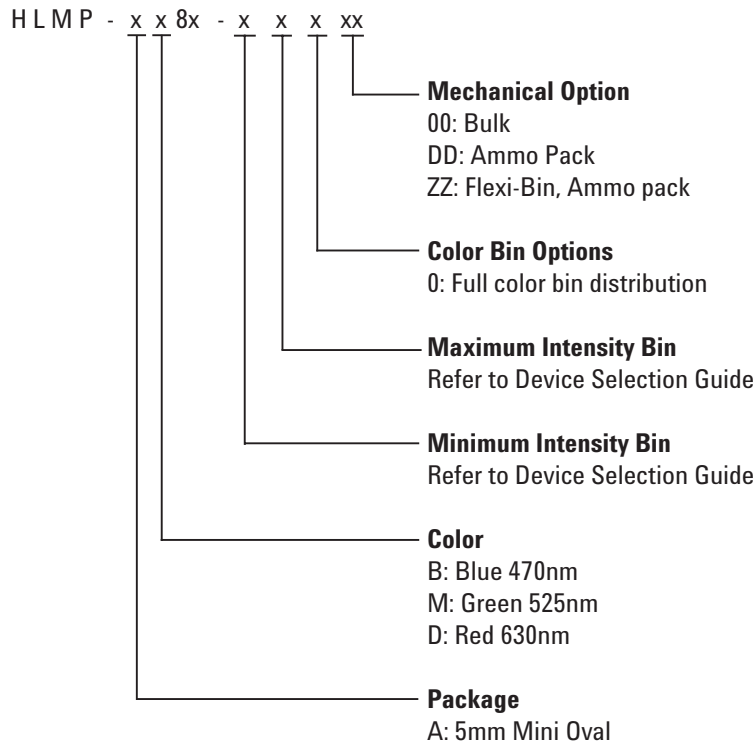

Absolute Maximum Rating at $T_A = 25^\circ\text{C}$

Parameters	Blue and Green	Red	Unit
DC forward current ^[1]	30	50	mA
Peak pulsed forward current	100 ^[2]	100 ^[3]	mA
Power dissipation	116	120	mW
LED junction temperature	130	130	$^\circ\text{C}$
Operating temperature range	-40 to +85	-40 to +100	$^\circ\text{C}$
Storage temperature range	-40 to +100	-40 to +120	$^\circ\text{C}$

Notes:

1. Derate linearly as shown in figure 3 and figure 7.
2. Duty factor 10%, frequency 1KHz.
3. Duty factor 30%, frequency 1KHz.

Electrical/Optical Characteristics $T_A = 25^\circ\text{C}$

Parameters	Symbol	Value			Units	Test Condition
		Min.	Typ.	Max.		
Forward voltage						
Red	V_F	2.0	2.20	2.40	V	$I_F = 20\text{ mA}$
Green		2.8	3.3	3.85		
Blue		2.8	3.2	3.85		
Reverse Voltage						
Red	V_R	5.0			V	$I_R = 100\text{ }\mu\text{A}$
Green		5.0				$I_R = 10\text{ }\mu\text{A}$
Blue		5.0				$I_R = 10\text{ }\mu\text{A}$
Thermal resistance ^[1]	$R_{\theta J-PIN}$		240		$^\circ\text{C/W}$	LED Junction-to-pin
Dominant wavelength ^[2, 3]						
Red	λ_d	622	630	634	nm	$I_F = 20\text{ mA}$
Green		520	525	540		
Blue		460	470	480		
Peak wavelength						
Red	λ_{PEAK}		639		nm	Peak of wavelength of spectral distribution at $I_F = 20\text{ mA}$
Green			516			
Blue			464			
Spectral half width						
Red	$\Delta\lambda_{1/2}$		17		nm	Wavelength width at spectral distribution $1/2$ power point at $I_F = 20\text{ mA}$
Green			32			
Blue			23			
Luminous Efficacy ^[4]						
Red	η_v		155		lm/W	Emitted luminous power/Emitted radiant power
Green			520			
Blue			75			
Luminous Flux						
Red	ϕ_v		1300		mlm	$I_F = 20\text{ mA}$
Green			3000			
Blue			600			
Luminous Efficiency ^[5]						
Red	η_e		30		lm/W	Luminous Flux/Electrical Power
Green			50			$I_F = 20\text{ mA}$
Blue			10			

Notes:

1. For AlInGaP Red, the thermal resistance applied to LED junction to cathode lead. For InGaN Blue and Green, the thermal resistance applied to LED junction to anode lead.
2. The dominant wavelength λ_d is derived from the Chromaticity Diagram and represents the color of the lamp.
3. Tolerance for each color bin limit is $\pm 0.5\text{ nm}$
4. The radiant intensity, I_e in watts/steradian, may be found from the equation $I_e = I_v/\eta_v$, where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.
5. $\eta_e = \phi_v / I_F \times V_F$, where ϕ_v is the emitted luminous flux, I_F is electrical forward current and V_F is the forward voltage.

AlInGaP Red

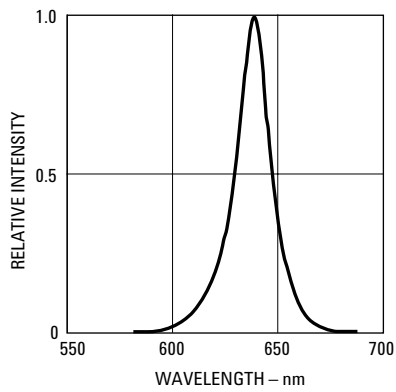


Figure 1. Relative intensity vs. wavelength

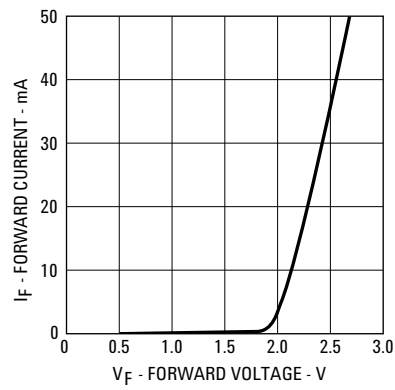


Figure 2. Forward current vs. forward voltage

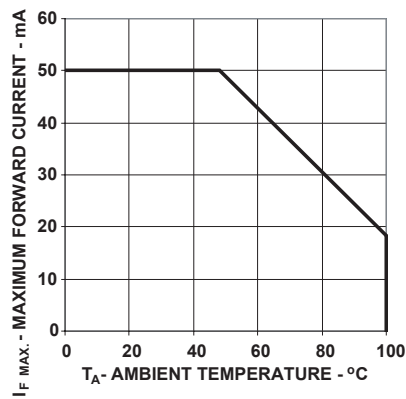


Figure 3. Forward current vs. ambient temperature

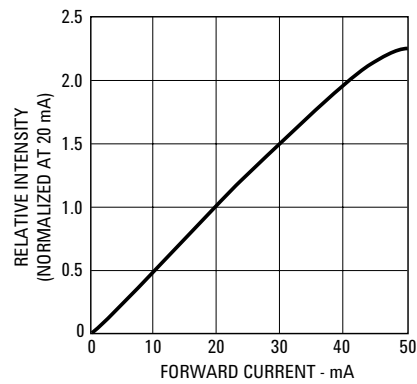


Figure 4. Relative luminous intensity vs. forward current

InGaN Blue and Green

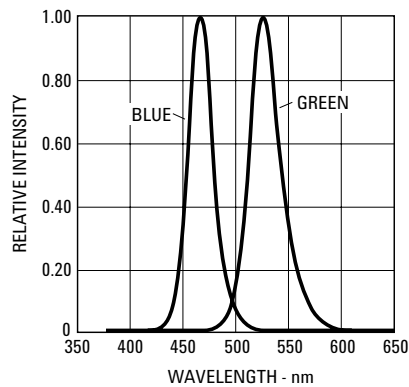


Figure 5. Relative Intensity vs. Wavelength

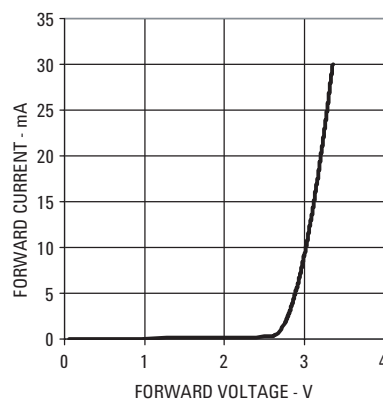


Figure 6. Forward current vs. forward voltage.

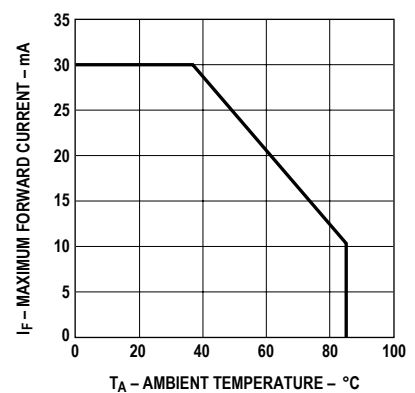


Figure 7. Forward Current vs. Ambient Temperature.

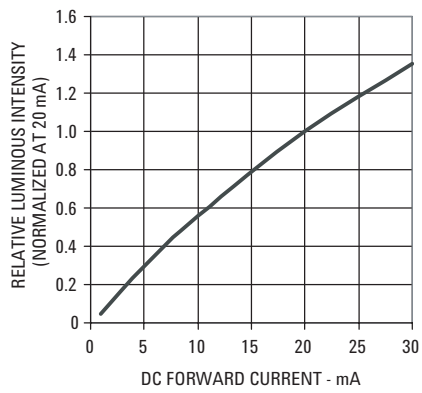


Figure 8. Relative intensity vs. forward current

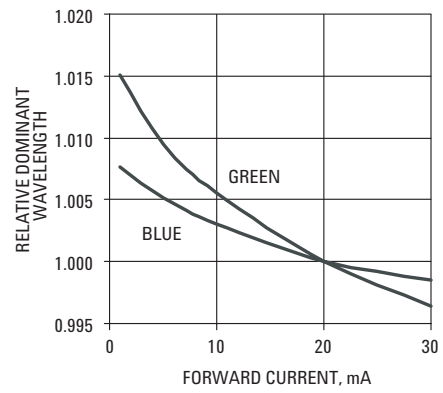


Figure 9. Relative dominant wavelength vs. DC forward current

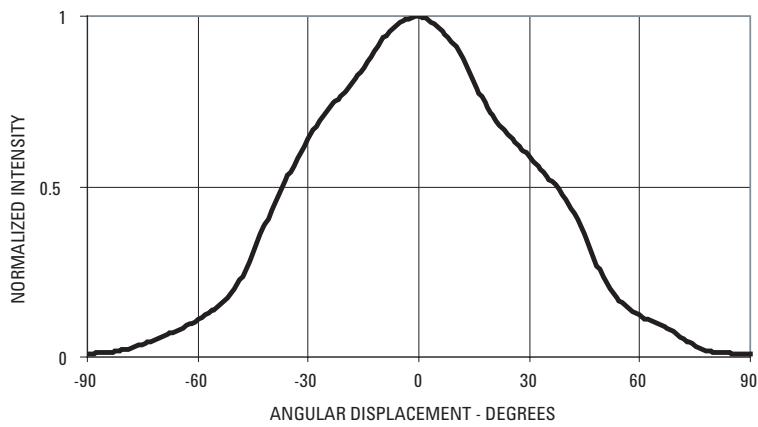


Figure 10. Spatial radiation pattern for RGB – major axis

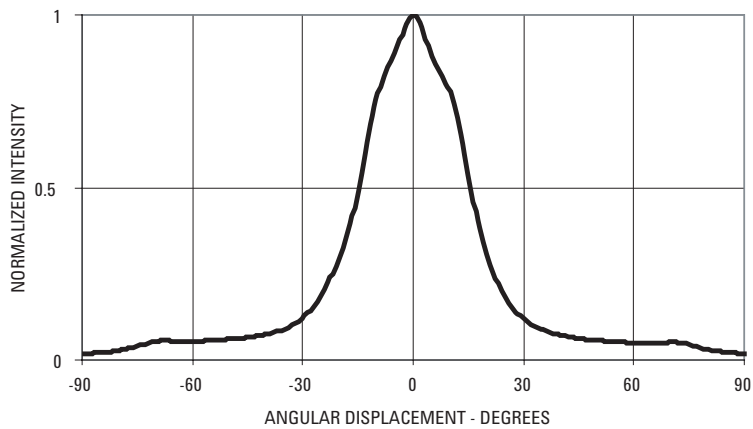


Figure 11. Spatial radiation pattern for RGB – minor axis

Intensity Bin Limit Table

Bin	Intensity (mcd) at 20 mA	
	Min	Max
M	520	680
N	680	880
P	880	1150
Q	1150	1500
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200
V	4200	5500
W	5500	7200

Tolerance for each bin limit is $\pm 15\%$

Blue Color Bin Table

Bin	Min Dom	Max Dom	Xmin	Ymin	Xmax	Ymax
1	460.0	464.0	0.1440	0.0297	0.1766	0.0966
			0.1818	0.0904	0.1374	0.0374
2	464.0	468.0	0.1374	0.0374	0.1699	0.1062
			0.1766	0.0966	0.1291	0.0495
3	468.0	472.0	0.1291	0.0495	0.1616	0.1209
			0.1699	0.1062	0.1187	0.0671
4	472.0	476.0	0.1187	0.0671	0.1517	0.1423
			0.1616	0.1209	0.1063	0.0945
5	476.0	480.0	0.1063	0.0945	0.1397	0.1728
			0.1517	0.1423	0.0913	0.1327

Tolerance for each bin limit is ± 0.5 nm

Green Color Bin Table

Bin	Min Dom	Max Dom	Xmin	Ymin	Xmax	Ymax
1	520.0	524.0	0.0743	0.8338	0.1856	0.6556
			0.1650	0.6586	0.1060	0.8292
2	524.0	528.0	0.1060	0.8292	0.2068	0.6463
			0.1856	0.6556	0.1387	0.8148
3	528.0	532.0	0.1387	0.8148	0.2273	0.6344
			0.2068	0.6463	0.1702	0.7965
4	532.0	536.0	0.1702	0.7965	0.2469	0.6213
			0.2273	0.6344	0.2003	0.7764
5	536.0	540.0	0.2003	0.7764	0.2659	0.6070
			0.2469	0.6213	0.2296	0.7543



Tolerance for each bin limit is ± 0.5 nm

Red Color Bin Table

Bin	Min Dom	Max Dom	Xmin	Ymin	Xmax	Ymax
	622	634	0.6904	0.3094	0.6945	0.2888
			0.6726	0.3106	0.7135	0.2865

Tolerance for each bin limit is ± 0.5 nm

Avago Color Bin on CIE 1931 Chromaticity Diagram.

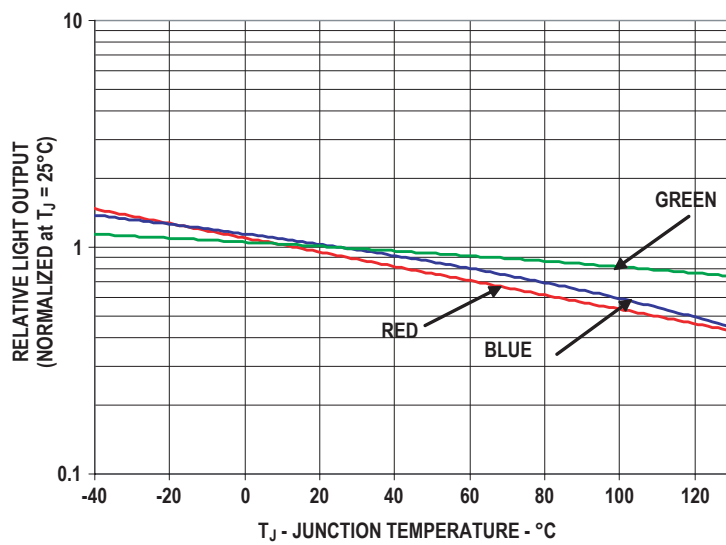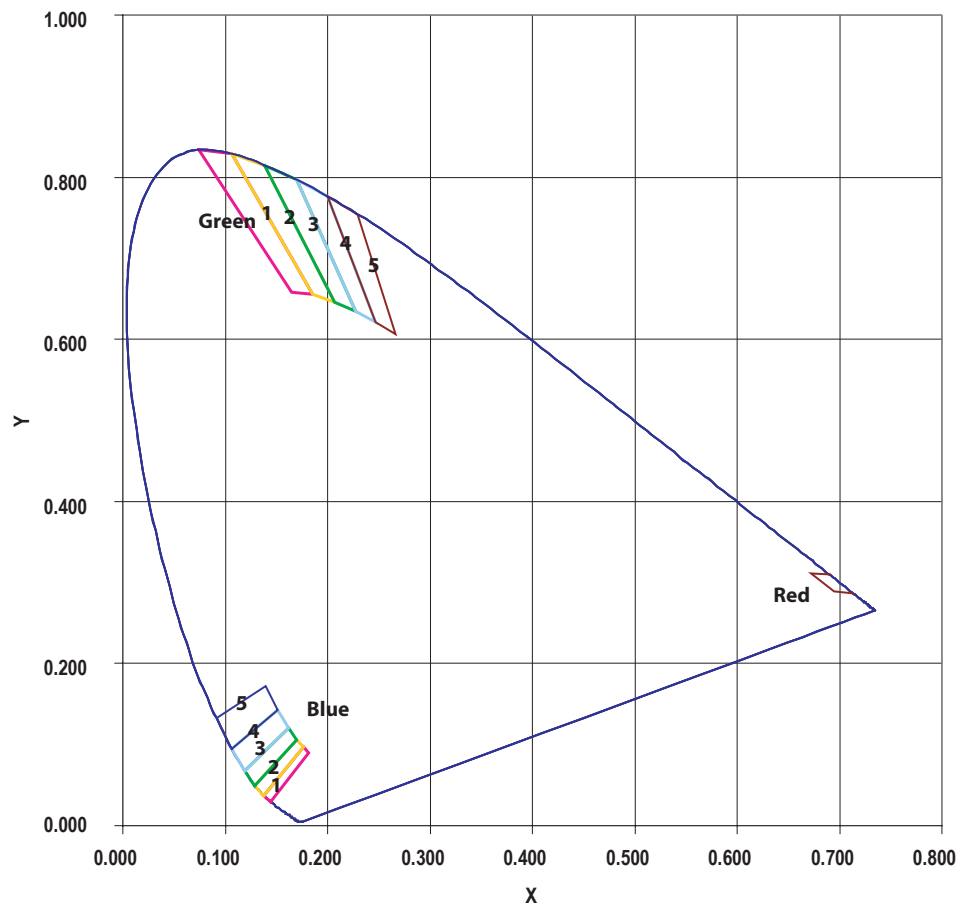


Precautions:

Lead Forming:

- The leads of an LED lamp may be preformed or cut to length prior to insertion and soldering on PC board.
- For better control, it is recommended to use proper tool to precisely form and cut the leads to applicable length rather than doing it manually.
- If manual lead cutting is necessary, cut the leads after the soldering process. The solder connection forms a mechanical ground which prevents mechanical stress due to lead cutting from traveling into LED package. This is highly recommended for hand solder operation, as the excess lead length also acts as small heat sink.

Soldering and Handling:

- Care must be taken during PCB assembly and soldering process to prevent damage to the LED component.
- LED component may be effectively hand soldered to PCB. However, it is only recommended under unavoidable circumstances such as rework. The closest manual soldering distance of the soldering heat source (soldering iron's tip) to the body is 1.59mm. Soldering the LED using soldering iron tip closer than 1.59mm might damage the LED.



- ESD precaution must be properly applied on the soldering station and personnel to prevent ESD damage to the LED component that is ESD sensitive. Do refer to Avago application note AN 1142 for details. The soldering iron used should have grounded tip to ensure electrostatic charge is properly grounded.
- Recommended soldering condition:

	Wave Soldering [1, 2]	Manual Solder Dipping
Pre-heat temperature	105 °C Max.	-
Preheat time	60 sec Max	-
Peak temperature	250 °C Max.	260 °C Max.
Dwell time	3 sec Max.	5 sec Max


Note:

- 1) Above conditions refers to measurement with thermocouple mounted at the bottom of PCB.
 - 2) It is recommended to use only bottom preheaters in order to reduce thermal stress experienced by LED.
- Wave soldering parameters must be set and maintained according to the recommended temperature and dwell time. Customer is advised to perform daily check on the soldering profile to ensure that it is always conforming to recommended soldering conditions.

Note:

1. PCB with different size and design (component density) will have different heat mass (heat capacity). This might cause a change in temperature experienced by the board if same wave soldering setting is used. So, it is recommended to re-calibrate the soldering profile again before loading a new type of PCB.
2. Avago Technologies' high brightness LED are using high efficiency LED die with single wire bond as shown below. Customer is advised to take extra precaution during wave soldering to ensure that the maximum wave temperature does not exceed 250°C and the solder contact time does not exceeding 3sec. Over-stressing the LED during soldering process might cause premature failure to the LED due to delamination.

Avago Technologies LED configuration

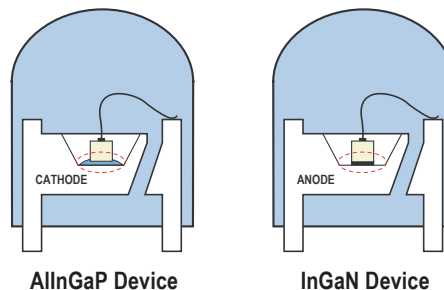


Note: Electrical connection between bottom surface of LED die and the lead frame is achieved through conductive paste.

- Any alignment fixture that is being applied during wave soldering should be loosely fitted and should not apply weight or force on LED. Non metal material is recommended as it will absorb less heat during wave soldering process.
- At elevated temperature, LED is more susceptible to mechanical stress. Therefore, PCB must allowed to cool down to room temperature prior to handling, which includes removal of alignment fixture or pallet.
- If PCB board contains both through hole (TH) LED and other surface mount components, it is recommended that surface mount components be soldered on the top side of the PCB. If surface mount need to be on the bottom side, these components should be soldered using reflow soldering prior to insertion the TH LED.
- Recommended PC board plated through holes (PTH) size for LED component leads.

LED component lead size	Diagonal	Plated through hole diameter
0.45 x 0.45 mm (0.018x 0.018 inch)	0.636 mm (0.025 inch)	0.98 to 1.08 mm (0.039 to 0.043 inch)
0.50 x 0.50 mm (0.020x 0.020 inch)	0.707 mm (0.028 inch)	1.05 to 1.15 mm (0.041 to 0.045 inch)

- Over-sizing the PTH can lead to twisted LED after clinching. On the other hand under sizing the PTH can cause difficulty inserting the TH LED.

Example of Wave Soldering Temperature Profile for TH LED




Technical drawing of a cathode assembly. The drawing shows a top view and a cross-section view (VIEW A-A).

Top View Dimensions:

- Overall width: 18.00 ± 0.50 (0.7087 $\pm$ 0.0197)
- Distance from left edge to first cathode center: 6.35 ± 1.30 (0.25 $\pm$ 0.0512)
- Distance between cathode centers: 12.70 ± 1.00 (0.50 $\pm$ 0.0394)
- Distance from left edge to second cathode center: 12.70 ± 0.30 (0.50 $\pm$ 0.0118)
- Distance from left edge to third cathode center: 25.40 ± 1.00 (1.00 $\pm$ 0.0394)
- Distance from left edge to fourth cathode center: 38.10 ± 1.00 (1.50 $\pm$ 0.0394)
- Distance from left edge to fifth cathode center: 50.80 ± 1.00 (2.00 $\pm$ 0.0394)
- Distance from left edge to sixth cathode center: 63.50 ± 1.00 (2.50 $\pm$ 0.0394)
- Distance from left edge to seventh cathode center: 76.20 ± 1.00 (3.00 $\pm$ 0.0394)
- Distance from left edge to eighth cathode center: 88.90 ± 1.00 (3.50 $\pm$ 0.0394)
- Distance from left edge to ninth cathode center: 101.60 ± 1.00 (4.00 $\pm$ 0.0394)
- Distance from left edge to tenth cathode center: 114.30 ± 1.00 (4.50 $\pm$ 0.0394)
- Distance from left edge to eleventh cathode center: 127.00 ± 1.00 (5.00 $\pm$ 0.0394)
- Distance from left edge to twelfth cathode center: 139.70 ± 1.00 (5.50 $\pm$ 0.0394)
- Distance from left edge to thirteenth cathode center: 152.40 ± 1.00 (6.00 $\pm$ 0.0394)
- Distance from left edge to fourteenth cathode center: 165.10 ± 1.00 (6.50 $\pm$ 0.0394)
- Distance from left edge to fifteenth cathode center: 177.80 ± 1.00 (7.00 $\pm$ 0.0394)
- Distance from left edge to sixteenth cathode center: 190.50 ± 1.00 (7.50 $\pm$ 0.0394)
- Distance from left edge to seventeenth cathode center: 203.20 ± 1.00 (8.00 $\pm$ 0.0394)
- Distance from left edge to eighteenth cathode center: 215.90 ± 1.00 (8.50 $\pm$ 0.0394)
- Distance from left edge to nineteenth cathode center: 228.60 ± 1.00 (9.00 $\pm$ 0.0394)
- Distance from left edge to twentieth cathode center: 241.30 ± 1.00 (9.50 $\pm$ 0.0394)
- Distance from left edge to twenty-first cathode center: 254.00 ± 1.00 (10.00 $\pm$ 0.0394)
- Distance from left edge to twenty-second cathode center: 266.70 ± 1.00 (10.50 $\pm$ 0.0394)
- Distance from left edge to twenty-third cathode center: 279.40 ± 1.00 (11.00 $\pm$ 0.0394)
- Distance from left edge to twenty-fourth cathode center: 292.10 ± 1.00 (11.50 $\pm$ 0.0394)
- Distance from left edge to twenty-fifth cathode center: 304.80 ± 1.00 (12.00 $\pm$ 0.0394)
- Distance from left edge to twenty-sixth cathode center: 317.50 ± 1.00 (12.50 $\pm$ 0.0394)
- Distance from left edge to twenty-seventh cathode center: 330.20 ± 1.00 (13.00 $\pm$ 0.0394)
- Distance from left edge to twenty-eighth cathode center: 342.90 ± 1.00 (13.50 $\pm$ 0.0394)
- Distance from left edge to twenty-ninth cathode center: 355.60 ± 1.00 (14.00 $\pm$ 0.0394)
- Distance from left edge to thirtieth cathode center: 368.30 ± 1.00 (14.50 $\pm$ 0.0394)
- Distance from left edge to thirty-first cathode center: 381.00 ± 1.00 (15.00 $\pm$ 0.0394)
- Distance from left edge to thirty-second cathode center: 393.70 ± 1.00 (15.50 $\pm$ 0.0394)
- Distance from left edge to thirty-third cathode center: 406.40 ± 1.00 (16.00 $\pm$ 0.0394)
- Distance from left edge to thirty-fourth cathode center: 419.10 ± 1.00 (16.50 $\pm$ 0.0394)
- Distance from left edge to thirty-fifth cathode center: 431.80 ± 1.00 (17.00 $\pm$ 0.0394)
- Distance from left edge to thirty-sixth cathode center: 444.50 ± 1.00 (17.50 $\pm$ 0.0394)
- Distance from left edge to thirty-seventh cathode center: 457.20 ± 1.00 (18.00 $\pm$ 0.0394)
- Distance from left edge to thirty-eighth cathode center: 469.90 ± 1.00 (18.50 $\pm$ 0.0394)
- Distance from left edge to thirty-ninth cathode center: 482.60 ± 1.00 (19.00 $\pm$ 0.0394)
- Distance from left edge to fortieth cathode center: 495.30 ± 1.00 (19.50 $\pm$ 0.0394)
- Distance from left edge to forty-first cathode center: 508.00 ± 1.00 (20.00 $\pm$ 0.0394)
- Distance from left edge to forty-second cathode center: 520.70 ± 1.00 (20.50 $\pm$ 0.0394)
- Distance from left edge to forty-third cathode center: 533.40 ± 1.00 (21.00 $\pm$ 0.0394)
- Distance from left edge to forty-fourth cathode center: 546.10 ± 1.00 (21.50 $\pm$ 0.0394)
- Distance from left edge to forty-fifth cathode center: 558.80 ± 1.00 (22.00 $\pm$ 0.0394)
- Distance from left edge to forty-sixth cathode center: 571.50 ± 1.00 (22.50 $\pm$ 0.0394)
- Distance from left edge to forty-seventh cathode center: 584.20 ± 1.00 (23.00 $\pm$ 0.0394)
- Distance from left edge to forty-eighth cathode center: 596.90 ± 1.00 (23.50 $\pm$ 0.0394)
- Distance from left edge to forty-ninth cathode center: 609.60 ± 1.00 (24.00 $\pm$ 0.0394)
- Distance from left edge to fiftieth cathode center: 622.30 ± 1.00 (24.50 $\pm$ 0.0394)
- Distance from left edge to fifty-first cathode center: 635.00 ± 1.00 (25.00 $\pm$ 0.0394)
- Distance from left edge to fifty-second cathode center: 647.70 ± 1.00 (25.50 $\pm$ 0.0394)
- Distance from left edge to fifty-third cathode center: 660.40 ± 1.00 (26.00 $\pm$ 0.0394)
- Distance from left edge to fifty-fourth cathode center: 673.10 ± 1.00 (26.50 $\pm$ 0.0394)
- Distance from left edge to fifty-fifth cathode center: 685.80 ± 1.00 (27.00 $\pm$ 0.0394)
- Distance from left edge to fifty-sixth cathode center: 698.50 ± 1.00 (27.50 $\pm$ 0.0394)
- Distance from left edge to fifty-seventh cathode center: 711.20 ± 1.00 (28.00 $\pm$ 0.0394)
- Distance from left edge to fifty-eighth cathode center: 723.90 ± 1.00 (28.50 $\pm$ 0.0394)
- Distance from left edge to fifty-ninth cathode center: 736.60 ± 1.00 (29.00 $\pm$ 0.0394)
- Distance from left edge to sixtyth cathode center: 749.30 ± 1.00 (29.50 $\pm$ 0.0394)
- Distance from left edge to sixty-first cathode center: 762.00 ± 1.00 (30.00 $\pm$ 0.0394)
- Distance from left edge to sixty-second cathode center: 774.70 ± 1.00 (30.50 $\pm$ 0.0394)
- Distance from left edge to sixty-third cathode center: 787.40 ± 1.00 (31.00 $\pm$ 0.0394)
- Distance from left edge to sixty-fourth cathode center: 800.10 ± 1.00 (31.50 $\pm$ 0.0394)
- Distance from left edge to sixty-fifth cathode center: 812.80 ± 1.00 (32.00 $\pm$ 0.0394)
- Distance from left edge to sixty-sixth cathode center: 825.50 ± 1.00 (32.50 $\pm$ 0.0394)
- Distance from left edge to sixty-seventh cathode center: 838.20 ± 1.00 (33.00 $\pm$ 0.0394)
- Distance from left edge to sixty-eighth cathode center: 850.90 ± 1.00 (33.50 $\pm$ 0.0394)
- Distance from left edge to sixty-ninth cathode center: 863.60 ± 1.00 (34.00 $\pm$ 0.0394)
- Distance from left edge to seventieth cathode center: 876.30 ± 1.00 (34.50 $\pm$ 0.0394)
- Distance from left edge to seventy-first cathode center: $889.$

Note: The ammo-packs drawing is applicable for packaging option –DD & –ZZ and regardless of standoff or non-standoff.

Packaging Box for Ammo Packs

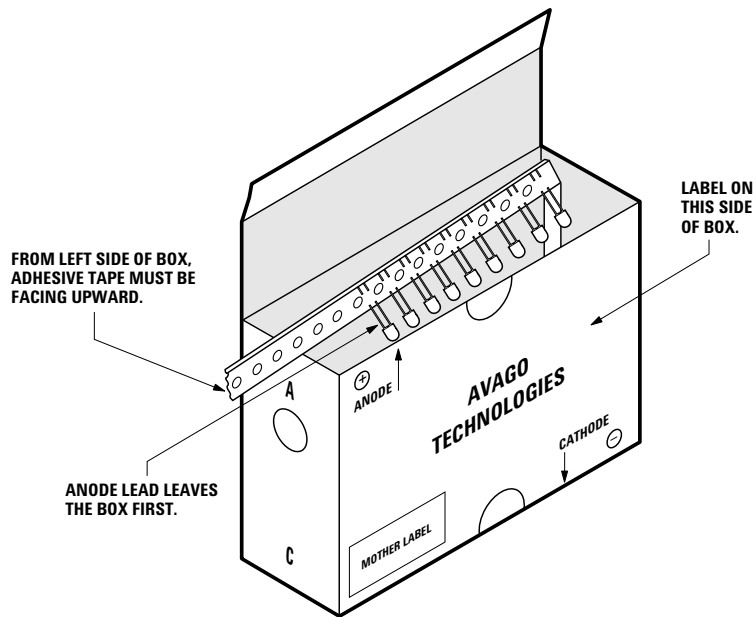

Note: For InGaN device, the ammo pack packaging box contains ESD logo.

Packaging Label

(i) Avago Mother Label: (Available on packaging box of ammo pack and shipping box)

	
STANDARD LABEL LS0002 RoHS Compliant e1 max temp 250C	
(1P) Item: Part Number 	(Q) QTY: Quantity 
(1T) Lot: Lot Number 	CAT: Intensity Bin 
LPN 	BIN: Refer to below information
(9D) MFG Date: Manufacturing Date 	REV:
(P) Customer Item: 	DeptID: 
(V) Vendor ID 	
Made In: Country of Origin 	

(ii) Avago Baby Label (Only available on bulk packaging)

Avago TECHNOLOGIES		RoHS Compliant e1 max temp 250C	
PART #: Part Number 			
LOT#: Lot Number 			
MFG DATE: Manufacturing Date 	QUANTITY: Packing Quantity 		
C/O: Country of Origin			
Customer P/N: 	CAT: Intensity Bin 		
Supplier Code: 	BIN: Refer to below information 		
	DATECODE: Date Code 		

Acronyms and Definition:

BIN:

(i) Color bin only or VF bin only

(Applicable for part number with color bins but without VF bin OR part number with VF bins and no color bin)

OR

(ii) Color bin incorporated with VF Bin

(Applicable for part number that have both color bin and VF bin)

Example:


(i) Color bin only or VF bin only

BIN: 2 (represent color bin 2 only)

BIN: VB (represent VF bin "VB" only)

(ii) Color bin incorporate with VF Bin

BIN: 2VB



DISCLAIMER: AVAGO'S PRODUCTS AND SOFTWARE ARE NOT SPECIFICALLY DESIGNED, MANUFACTURED OR AUTHORIZED FOR SALE AS PARTS, COMPONENTS OR ASSEMBLIES FOR THE PLANNING, CONSTRUCTION, MAINTENANCE OR DIRECT OPERATION OF A NUCLEAR FACILITY OR FOR USE IN MEDICAL DEVICES OR APPLICATIONS. CUSTOMER IS SOLELY RESPONSIBLE, AND WAIVES ALL RIGHTS TO MAKE CLAIMS AGAINST AVAGO OR ITS SUPPLIERS, FOR ALL LOSS, DAMAGE, EXPENSE OR LIABILITY IN CONNECTION WITH SUCH USE.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies, Pte. in the United States and other countries.
Data subject to change. Copyright © 2006 Avago Technologies Pte. All rights reserved. Obsoletes AV01-0304EN
AV02-0388EN - July 11, 2007

Avago
TECHNOLOGIES