

Voltage Regulator VRG8691/92

7.5 Amp LDO Adjustable Positive Voltage Regulators

Released Datasheet

Cobham.com/HiRel

March 24, 2016

COBHAM

The most important thing we build is trust

FEATURES

- ❑ Radiation performance
 - Total dose: 100 krad(Si),
Dose rate = 50-300 rad(Si)/s
- ❑ Output voltage adjustable: 1.0V to 3.3V
- ❑ Output current: 7.5A
- ❑ Dropout voltage: 0.5V at 7.5Amps
- ❑ Voltage reference: 1.0V $\pm$ 0.5%
- ❑ Load regulation: 0.5% max
- ❑ Line regulation: 0.2% max
- ❑ Ripple rejection: >80dB
- ❑ Enable Input - TTL / CMOS Compatible
- ❑ Slow Start capability
- ❑ Stable with multiple ceramic output capacitors
- ❑ Packaging – Hermetic metal
 - Thru-hole or Surface mount
 - 12 Leads, 0.900"L x 1.000"W x .205"Ht
 - Power package
 - Weight - 18 gm max
- ❑ Designed for aerospace and high reliability space applications

❑ **Radiation Hardness Assurance Plan: DLA Certified to MIL-PRF-38534, Appendix G.**

DESCRIPTION

The VRG8691/92 is capable of supplying in excess of 7.5Amps over the output voltage range as defined under recommended operating conditions. The regulator is exceptionally easy to set-up, requiring only 2 external resistors to set the output voltage. The module design has been optimized for excellent regulation and low drop-out voltage. Figures 2 through 5 illustrate setting output voltage, setting current limits and choosing a slow start capacitor. The VRG8691/92 serves a wide variety of applications including local on-card regulation, programmable output voltage regulation or precision current regulation.

The VRG8691/92 has been specifically designed to meet exposure to radiation environments. The VRG8691 is configured for a Thru-Hole 12 lead metal power package and the VRG8692 is configured for a Surface Mount 12 lead metal power package. It is guaranteed operational from -55°C to +125°C. Available screened to MIL-STD-883, the VRG8691/92 is ideal for demanding military and space applications.

CURRENT LIMIT (ICL)

The VRG8691/92 features internal current limiting making them virtually blowout-proof against overloads. The limit is nominally 11.5A @ $V_{in} = 5V$ (see Table 2), but may be increased or decreased with the addition of one external resistor (see Application Note 2).

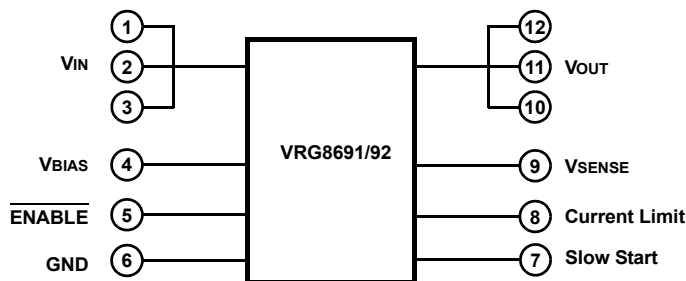


FIGURE 1 – BLOCK DIAGRAM / SCHEMATIC

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RANGE	UNITS
Operating (Junction) Temperature Range	-55 to +150	°C
Lead Temperature (soldering, 10 sec)	300	°C
Storage Temperature Range	-65 to +150	°C
VBIAS, VIN	7	V
Thermal Resistance (Junction to case θ_{JC})	1	°C/W
Power	25 <u>1/</u>	W

1/ Based on pass transistor limitations of $(V_{IN} - V_O) \times I_O$ and $\theta_{JC} < 1^\circ\text{C/W}$ with 25°C max T_J rise and $T_C = +125^\circ\text{C}$.

NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may effect device reliability.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	RANGE	UNITS
Output Voltage Range	1.0 to 3.3	V _{DC}
Case Operating Temperature Range	-55 to +125	°C
Output Current	0 to 7.5	A
VBIAS	3.3 to 5.5 <u>1/</u>	V _{DC}
VIN	1.8 to 5.5 <u>2/</u>	V _{DC}

1/ VBIAS must maintain a level equal or above VIN but not fall below 3.3V

2/ Depending upon VOUT setting.

ELECTRICAL PERFORMANCE CHARACTERISTICS 1/

PARAMETER	SYM	CONDITIONS	MIN	MAX	UNITS
Reference Voltage	VREF	$V_{IN} = V_{BIAS} = 5V$, $\overline{ENABLE} = 0$, $0A \leq I_{OUT} \leq 7.5A$	0.985	1.015	V
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	$2V \leq V_{IN} \leq 3V$, $V_{OUT} = 1.0V$, $C_{IN} \geq 47\mu F$, $4.3V \leq V_{IN} \leq 5.3V$, $V_{OUT} = 3.3V$, $C_{OUT} \geq 47\mu F$,	-	0.2	%/V
Load Regulation	$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	$0A \leq I_{OUT} \leq 7.5A$, $C_{IN} \geq 47\mu F$, $C_{OUT} \geq 47\mu F$,	-	0.5	%
Ripple Rejection Ratio		$f = 120\text{Hz}$, $C_{LOAD} = 47\mu F$, $V_{IN} + V_{RIP} \geq V_{OUT} + V_{DROP(MAX)}$ @ 5A, $V_{IN} = 4.3V$, $V_{RIP} = 1VP-P$, $V_{OUT} = 3.3V$	80	-	dB
Dropout Voltage	V _{DROP}	@ $\Delta V_{OUT} = 1\%$, $0A \leq I_{OUT} \leq 7.5A$	-	0.5	V
Adjustment Pin Current	I _{ADJ}		-	100	pA
Minimum Load Current	I _{MIN}		-	0	mA
Current Limit <u>2/</u>	I _{CL}		9.5	13.5	A
Long Term Stability <u>3/</u>	$\frac{\Delta V_{OUT}}{\Delta TIME}$		-	1	%
Supply Current (VBIAS)	I _{BIAS}		-	15	mA

Notes:

1/ Unless otherwise specified, these specifications apply for post radiation: $V_{BIAS} = V_{IN} = 5V$, $V_{OUT} = 3.3V$, $I_{OUT} = 7.5A$ and $-55^\circ\text{C} < T_C < +125^\circ\text{C}$, Min Input/Output capacity of $47\mu F$ Tant with $1\mu F$ ceramic in parallel.


2/ Current Limit is adjustable as shown in Application Note 2, Figures 3 and 4.

3/ Not tested. Shall be guaranteed to the specified limits after 1000hr life test.

APPLICATION NOTE 1

BASIC SET-UP

Setting the output voltage (V_{OUT}):

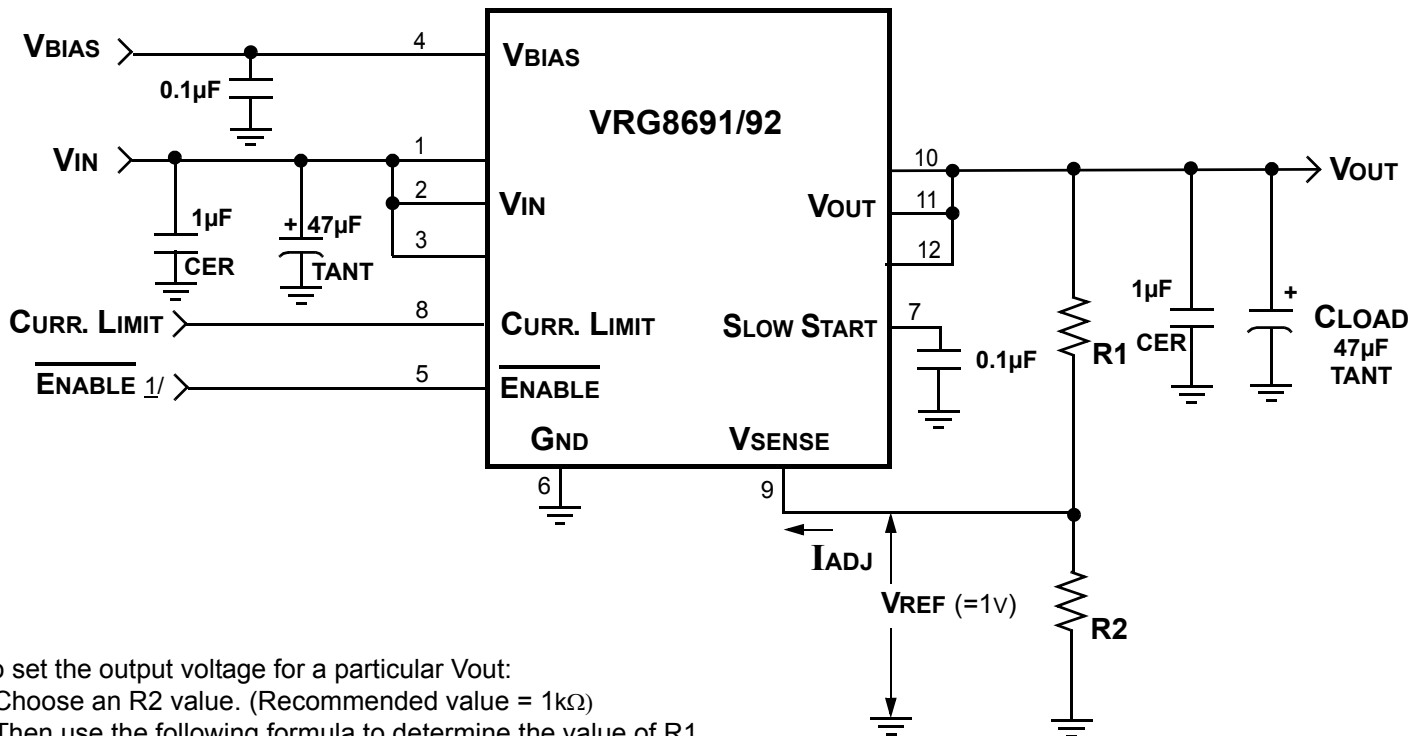

To set the output voltage for a particular V_{out}:

- Choose an R₂ value. (Recommended value = 1kΩ)
- Then use the following formula to determine the value of R₁.

$$R_1 = R_2 \times \frac{V_{OUT} - V_{REF}}{(R_2 \times I_{ADJ}) + V_{REF}}, \text{ where } V_{REF} = 1\text{V}, I_{ADJ} \text{ typ} = 10\text{pA}$$

Table 1 shows example values for R₁ and R₂ to achieve some standard voltages.

Table 2 shows the nominal current limit settings if the 'CURR. LIMIT' function (pin 8) is left open.

Table 1
Example R₁ & R₂ for typical V_{OUT}

V _{OUT}	R ₂	R ₁
3.3V	1kΩ	2.3kΩ
2.5V	1kΩ	1.5kΩ
1.8V	1kΩ	800Ω
1.0V	1kΩ	0Ω

Table 2
I_{CL}

V _{IN}	I _{CL} NOM
5V	11.5A
3.3V	7.5A
2.5V	5.7A
1.8V	4.1A

Notes:


- 1/ ENABLE should be asserted after both V_{IN} and V_{BIAS} are applied.
(See Application Note 3, Figure 5 for the configuration where a separate ENABLE control line is NOT required).
- 2/ I_{CL} varies directly with V_{IN}.
(See Application Note 2 for adjusting the Current Limit, I_{CL}).

FIGURE 2 –SETTING OUTPUT VOLTAGE

APPLICATION NOTE 2

SETTING THE CURRENT LIMIT

To Increase the Current Limit (ICL):

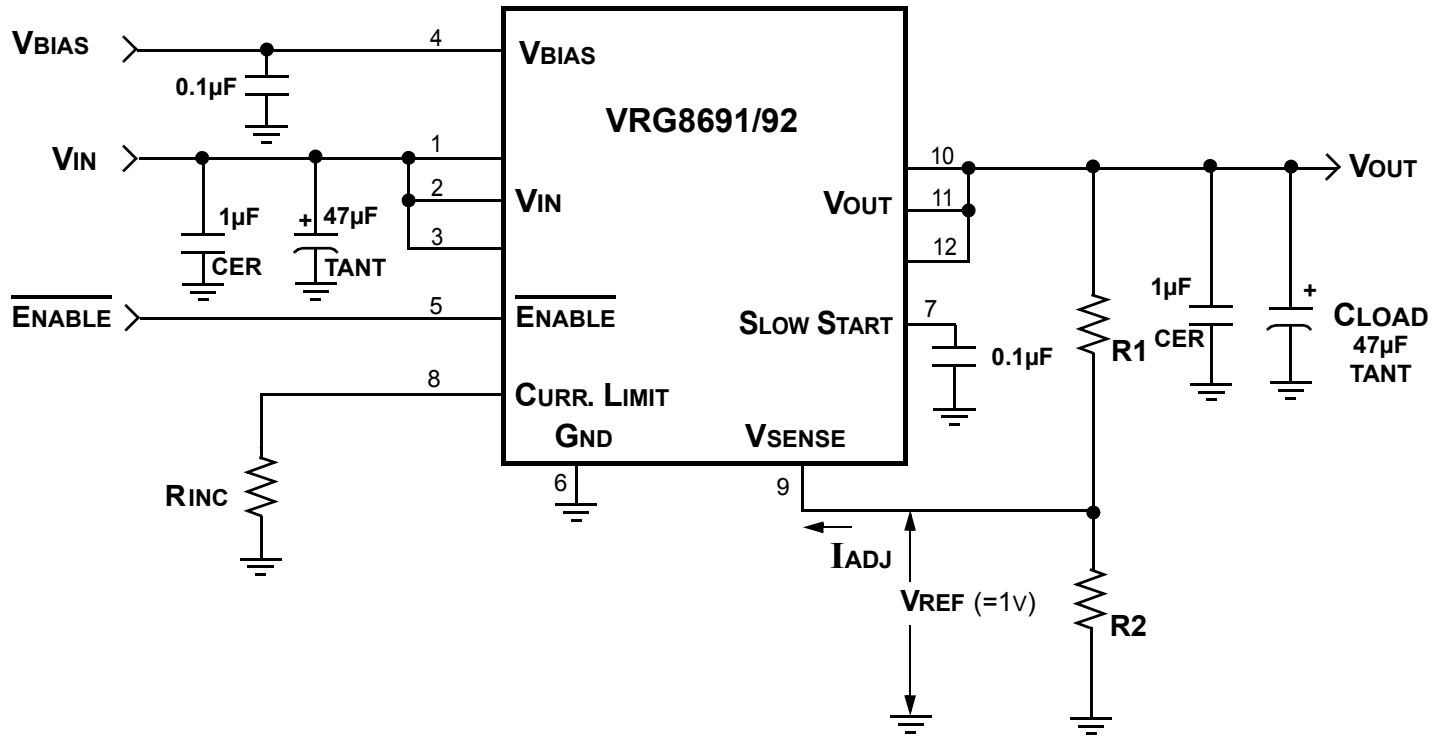

- If the 'CURR. LIMIT' function (pin 8) is left open, the ICL decreases from 11.5 A(NOM) as VIN is decreased from 5V (Table 3).

Table 3

VIN	RINC	ICL NOM
5V	Open	11.5 A
3.3V	Open	7.5 A
2.5V	Open	5.7 A
1.8V	Open	4.1 A

- To increase the current limit above the nominal setting for any VIN and ICL combination, use the following formula:

$$R_{INC}(K-OHMS) = \frac{30 \times V_{IN}}{\left(\frac{30 \times I_{CL}}{69} \right) - V_{IN}}$$

- To maintain ICL at the 11.5 A setting, for commonly found VIN voltages, apply RINC value found in Table 4.

Table 4


VIN	RINC	ICL NOM
5V	Open	11.5 A
3.3V	56kΩ	11.5 A
2.5V	30kΩ	11.5 A
1.8V	16kΩ	11.5 A

FIGURE 3 – INCREASING THE CURRENT LIMIT (ICL)

APPLICATION NOTE 2 (CONTINUED)

SETTING THE CURRENT LIMIT

To Decrease the Current Limit (ICL):

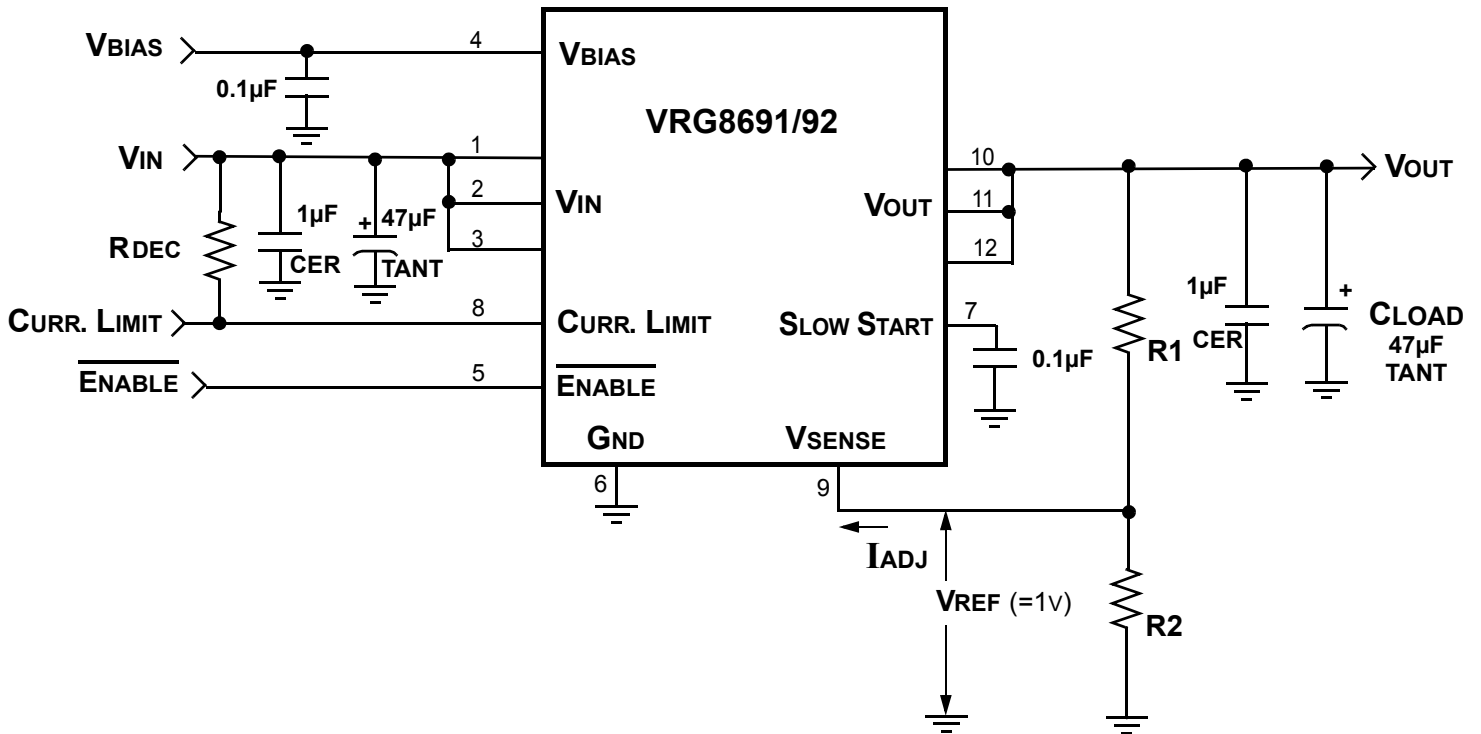

- As shown in Table 3, if the 'CURR. LIMIT' function (pin 8) is left open, the ICL decreases from 11.5 A(NOM) as VIN is decreased from 5V.

- To achieve any ICL, less than nominal, use RDEC which can be calculated using the following formula:

$$RDEC(K-OHMS) = \frac{31 \times V_{IN}}{\left(\frac{69 \times V_{IN}}{30}\right) - I_{CL}}$$

FIGURE 4 – DECREASING THE CURRENT LIMIT (ICL)

START UP SEQUENCE

- OPTION 1: Controlling the $\overline{\text{ENABLE}}$ line with a Digital signal (TTL / CMOS compatible).
 - Prior to applying power, disable the regulator by setting the $\overline{\text{ENABLE}}$ control line to a HIGH state.
 - Apply V_{IN} and V_{BIAS} . 1/
 - Wait until both V_{IN} and V_{BIAS} supplies have reached their operating levels.
 - Toggle the $\overline{\text{ENABLE}}$ control line to a LOW state to turn on V_{OUT} of the regulator.
- OPTION 2: Controlling the $\overline{\text{ENABLE}}$ line using the CDELAY feature.
 - Connect a CDELAY capacitor between V_{BIAS} and the $\overline{\text{ENABLE}}$ as shown in Figure 5 below. 2/
 - Apply V_{IN} and V_{BIAS} . 1/
 - CDELAY causes the regulator to self-enable after V_{BIAS} has reached operating level.

- 1/ VIN should be applied before VBIAS if the Slow Start feature is used.
- 2/ CDELAY capacitor of 10uF is adequate for VBIAS rise times of up to 50ms.

SCD8691
Rev J 3/24/2016


APPLICATION NOTE 4

V_{OUT} START UP RISE TIME CONTROL

Utilizing the Slow Start option:

When the VRG8691/92 is first powered up, using the Slow Start function controls the rate at which V_{OUT} rises to the required voltage set by R1 and R2.

Note: V_{IN} should be applied before V_{BIAS} when the Slow Start feature is used.

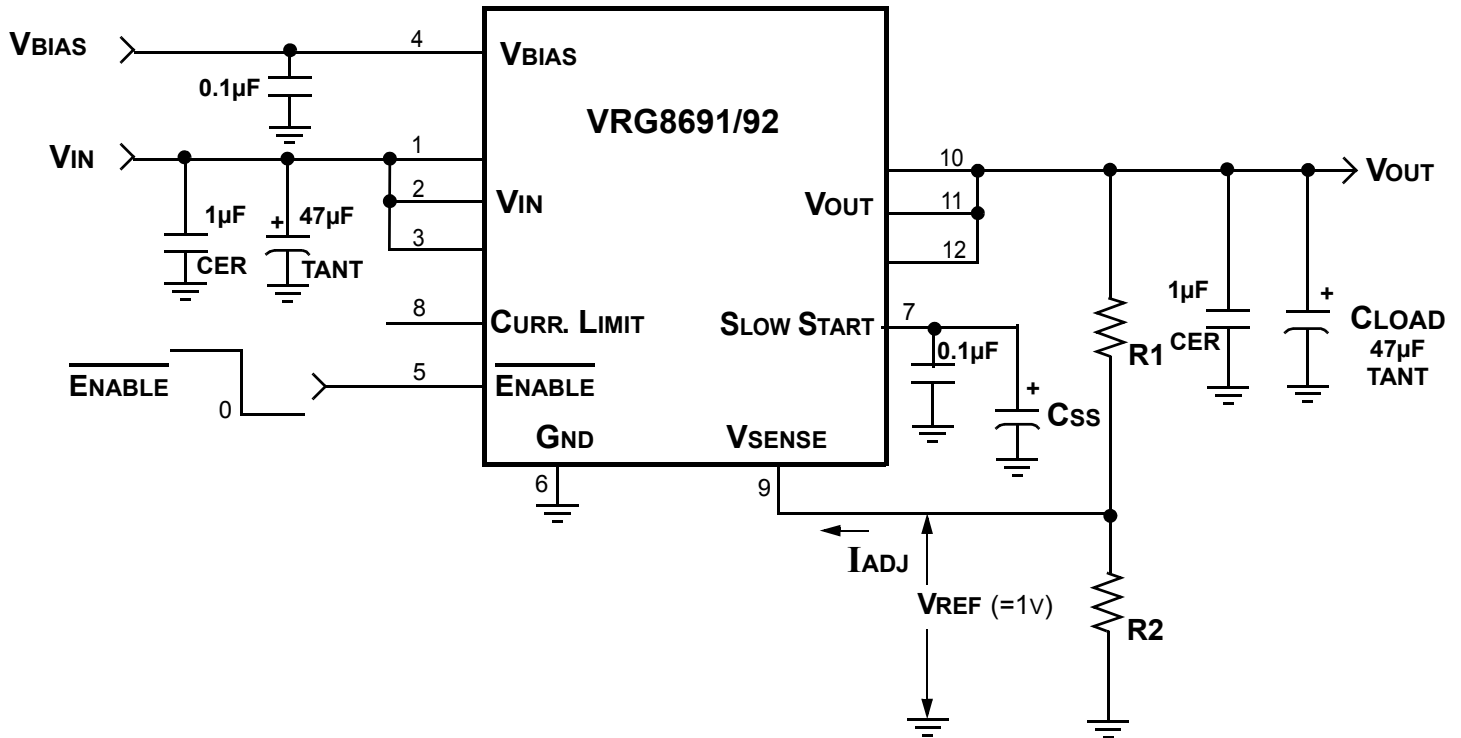

If it is desirable to control the output rise time, a capacitor (C_{SS}) can be asserted on the Slow Start pin to adjust the rise time for the following:

- A. Large load capacitance will cause high surge currents which will trip the current limit circuitry.
The use of C_{SS} will allow the output voltage to rise slowly thus mitigate the surge current phenomenon.

$$\frac{C_{SS}}{C_{LOAD}} > \frac{V_{OUT\ NOM}}{I_{CL} - I_{LOAD\ NOM}} \times (0.4 \times 0.0014)$$

- B. C_{SS} may be used solely to control V_{OUT} RISE TIME (T_r), when C_{LOAD} is not an issue.


$$T_R = \left(\frac{C_{SS} \times 2.5}{0.0014} \right) \quad \text{Note: } C_{SS} \text{ in Farads and } T_R \text{ in seconds.}$$

- C. C_{SS} is effective only when V_{IN} is applied prior to V_{BIAS} or $\overline{ENABLE}$.

FIGURE 6 – SLOW START

PIN NUMBERS vs FUNCTION

PIN	FUNCTION	PIN	FUNCTION
1	V _{IN}	7	Slow Start
2	V _{IN}	8	Current Limit
3	V _{IN}	9	V _{SENSE}
4	V _{BIAS}	10	V _{OUT}
5	$\overline{\text{ENABLE}}$	11	V _{OUT}
6	GROUND	12	V _{OUT}

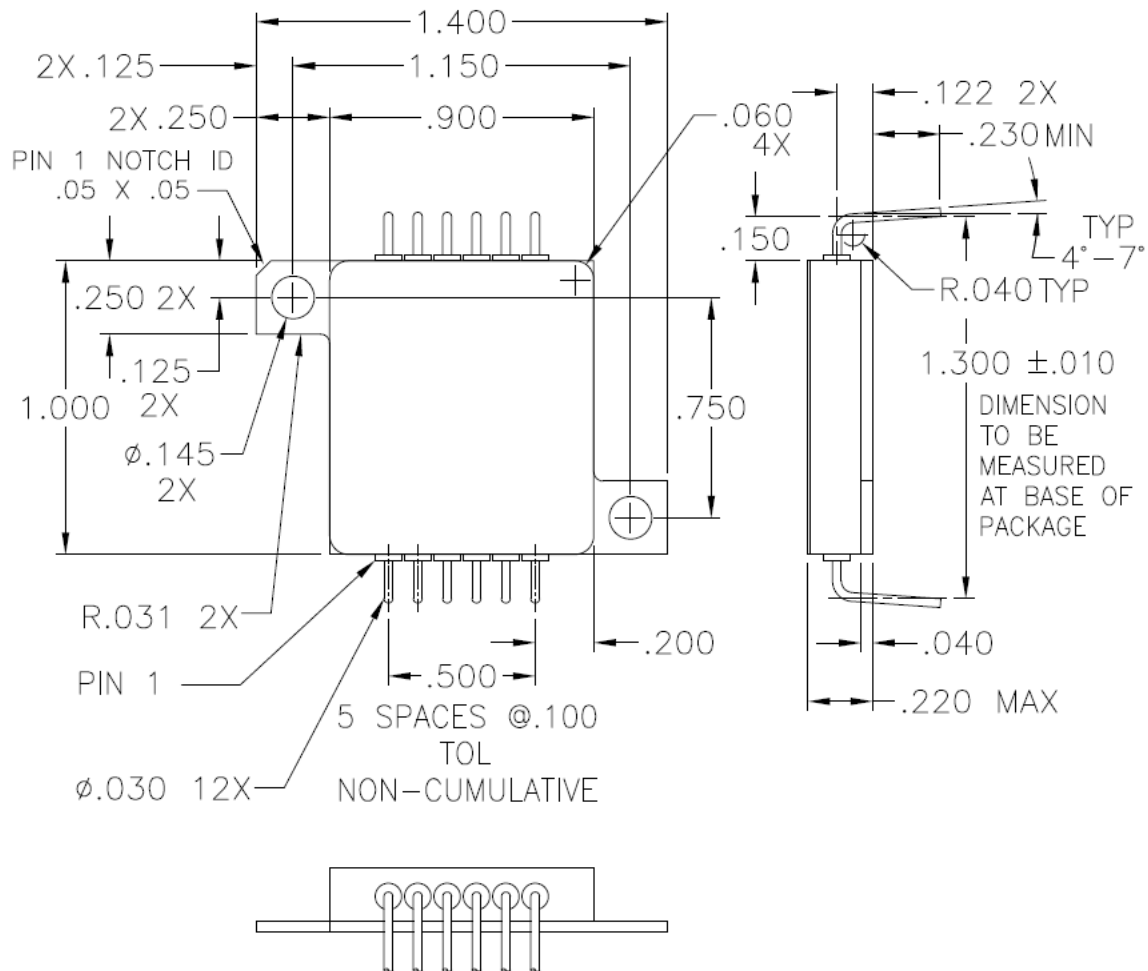


Notes:

1. Dimension Tolerance: ± 0.005 inches
2. Package contains BeO substrate
3. Case electrically isolated

FIGURE 7- PACKAGE OUTLINE — VRG8691 THRU-HOLE POWER PACKAGE

PIN NUMBERS vs FUNCTION

PIN	FUNCTION	PIN	FUNCTION
1	V _{IN}	7	Slow Start
2	V _{IN}	8	Current Limit
3	V _{IN}	9	V _{SENSE}
4	V _{BIAS}	10	V _{OUT}
5	$\overline{\text{ENABLE}}$	11	V _{OUT}
6	GROUND	12	V _{OUT}

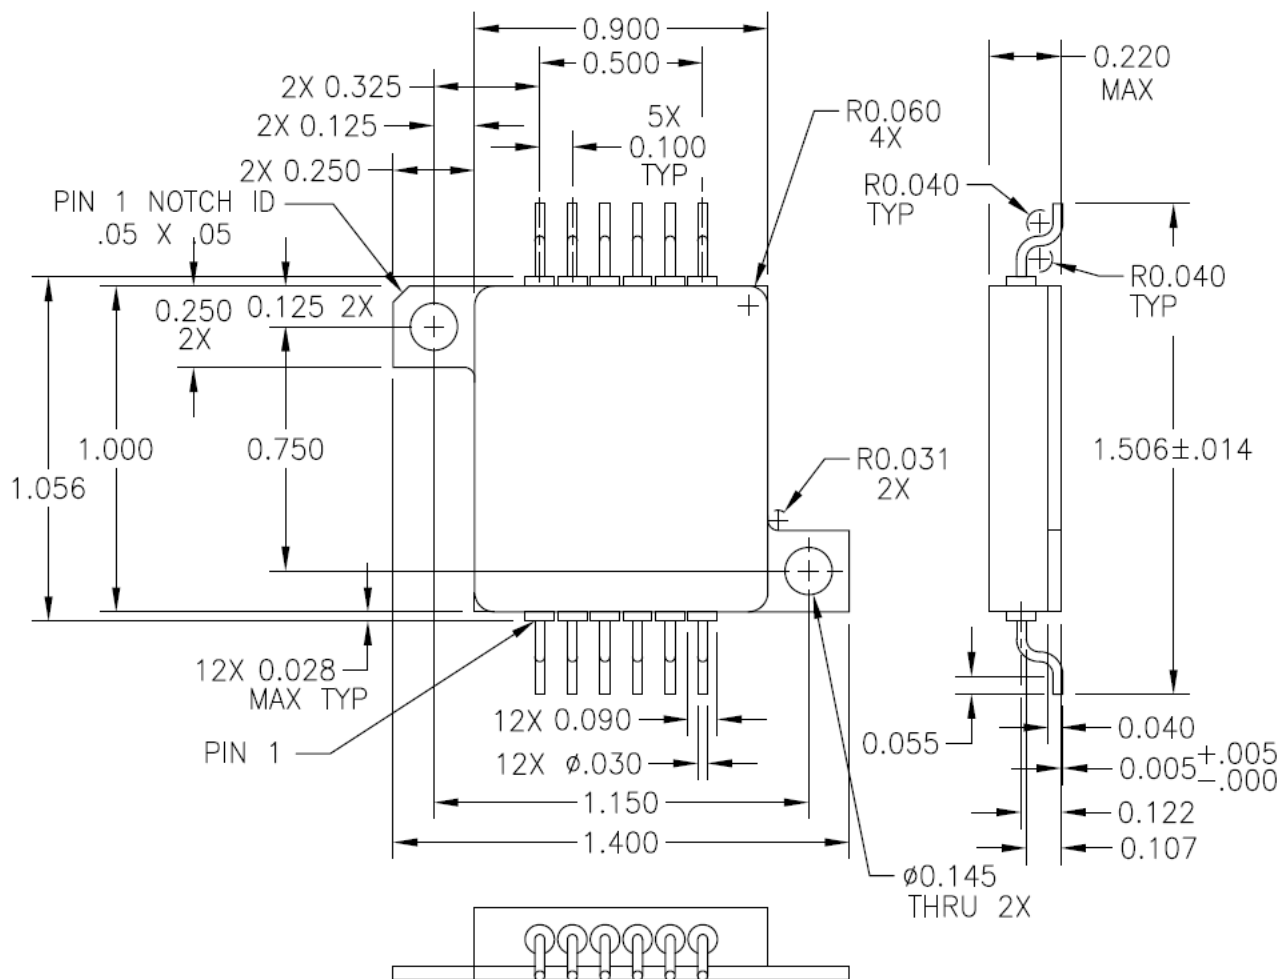

Notes:

1. Dimension Tolerance: ± 0.005 inches
2. Package contains BeO substrate
3. Case electrically isolated

FIGURE 8— PACKAGE OUTLINE — VRG8692 SURFACE MOUNT POWER PACKAGE

ORDERING INFORMATION

MODEL	DLA SMD #	SCREENING	PACKAGE
VRG8691-7	-	Commercial Flow, +25°C testing only	12 Lead Thru-Hole Power Pkg
VRG8691-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
VRG8691-201-1S	5962-0923701KXC	In accordance with DLA SMD	
VRG8691-201-2S	5962-0923701KXA		
VRG8691-901-1S	5962R0923701KXC	In accordance with DLA Certified RHA Program Plan to RHA Level "R", 100 krad(Si)	
VRG8691-901-2S	5962R0923701KXA		
VRG8692-7	-	Commercial Flow, +25°C testing only	12 Lead Surface Mount Power Pkg
VRG8692-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
VRG8692-201-1S	5962-0923701KYC	In accordance with DLA SMD	
VRG8692-201-2S	5962-0923701KYA		
VRG8692-901-1S	5962R0923701KYC	In accordance with DLA Certified RHA Program Plan to RHA Level "R", 100 krad(Si)	
VRG8692-901-2S	5962R0923701KYA		

REVISION HISTORY

Date	Revision	Change Description
03/24/2016	J	Import into Cobham format

Datasheet Definition

Advanced Datasheet - Product In Development

Preliminary Datasheet - Shipping Prototype

Datasheet - Shipping QML & Reduced Hi-Rel



EXPORT CONTROL:

*This product is controlled for export under the Export Administration Regulations (EAR), 15 CFR Parts 730-774.
A license from the Department of Commerce may be required prior to the export of this product from the United States.*

Cobham Semiconductor Solutions
35 S. Service Road
Plainview, NY 11803

E: info-ams@cobham.com
T: 800 645 8862

COBHAM

Aeroflex Plainview Inc., DBA Cobham Semiconductor Solutions, reserves the right to make changes to any products and services described herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.