



DATE : _____

SPECIFICATION

of Humidity sensor unit, HU1030NA

Revision	Contents	Date	Originator	Approved
Rev.0	Initial Release	2010. 11	Yongnam Seo	Soo-tae Park



GE SENSING KOREA

837-2 Hansan-ri, Cheongbuk-myeon, Pyongtaek-shi, Kyunggi-do, 451-833 Korea
TEL : +82-31-680-0600 FAX : +82-31-683-2038



Model : HU1030NA

REVISION : 00

PAGE 1 / 3

1. SCOPE

This specification applies to the Humidity sensor unit HU30series.

2. PRODUCT NAME AND PART NAME

Part Name : Humidity sensor unit

Type Name : HU1030NA

3. MAXIMUM RANGE

Items	Type name
	HU1030NA
Maximum rated voltage	DC 7V
Storage temperature range	0 ~ 50℃
Storage humidity range	20 ~ 90 %RH (Without condensation)

4. SPECIFICATION

Items	Type name
	HU1030NA
Humidity sensor type	Polymer Humidity Sensor HS-30P
Maximum current	≤ 2mA at 5.0V
Output voltage range (DC)	1.0 ~ 3.0V
Output impedance	~ 2.5 kΩ
Accuracy (Humidity calibration)	≤ ± 5%RH at 25℃, 25 ~ 90%RH, at 5.0V ≤ ± 10%RH at 5℃~45℃, 20 ~ 100%RH, at 5.0V ※ Output Voltage(V) = 0.02 × H+1 (H: Relative Humidity %RH)
Operating temperature range	0 ~ 50℃
Operating humidity range	20 ~ 90%RH (Without condensation)
Response time (90%)	≤3 minute

5. NORMAL OPERATING CONDITION

Items	Type name
	HU1030NA
Rated voltage	DC5±0.2V
Electrical capacitor	47μF/6.3V Electrical Capacitor (outside attachment)
Discharge resistor	100kΩF/0.25W Metal coated resistor (outside attachment)




Model : HU1030NA


REVISION : 00

PAGE 2 / 3


6. CIRCUITRY FOR INSPECTION

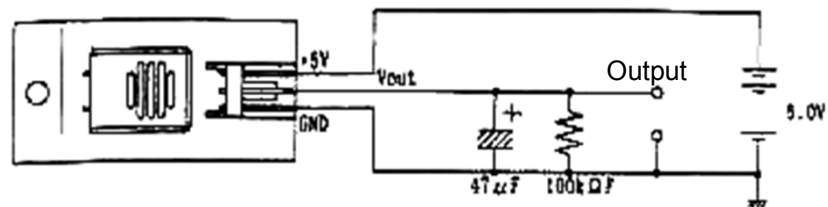

7. APPEARANCE

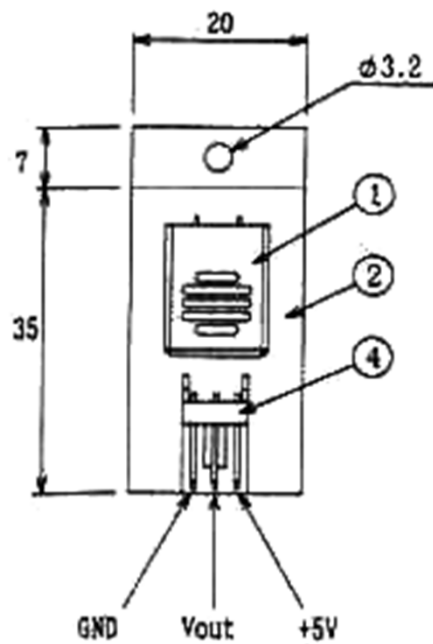

Unit : mm
PCB outside tolerance : ± 0.5

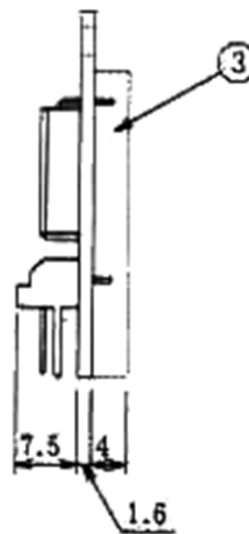

No.	Name	HU1030NA
①	Humidity sensor	HS30P
②	PCB	Material : CEM-3, t=1.6mm
③	Component mounting Area	Mounting Area for each component
④	Connector	AMP 171826-3 2.5mm pitch, 3P




Model : HU1030NA


REVISION : 00

PAGE 3 / 3

8. OUTPUT CHARACTERISTICS

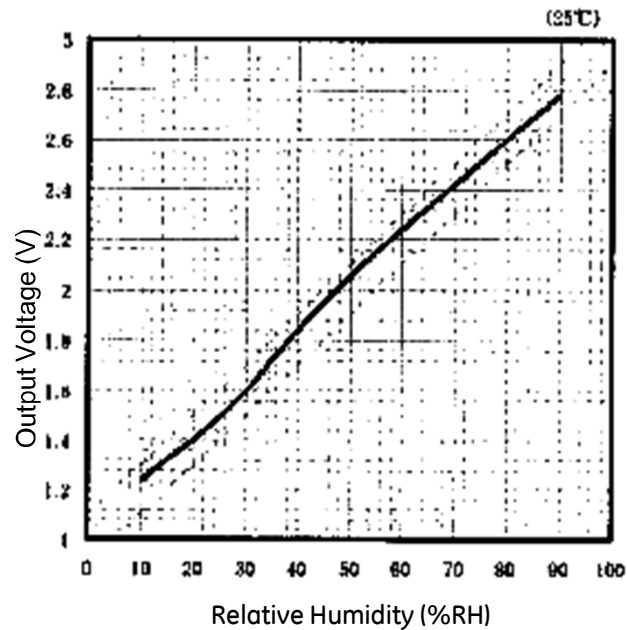

9. BLOCK DIAGRAM

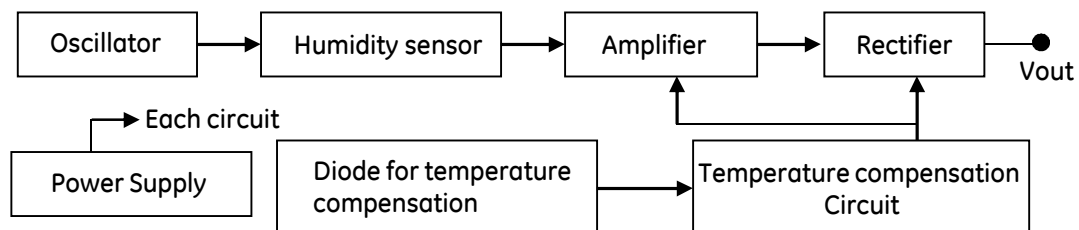

10. NOTES

- 1) Electrical capacitor and discharge resistor should be connected
- 2) Do not use this product below 0°C
- 3) Do not use this product in organic solvent, corrosive gas and other gases environment.
- 4) IF this product is not used at standard atmosphere pressure, Accuracy cannot be guaranteed.