THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

RoHS Compliant

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/18/10	D.GRIFFIN
B	ECN 5868: ADDED LENGTH 075 M, REVISED 03M TO .98	12/5/11	D.FRISIELLO
C	ECN 6320: ADDED NEW L-COM LOGO	8/3/12	D.FRISIELLO
D	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/14/12	DFP

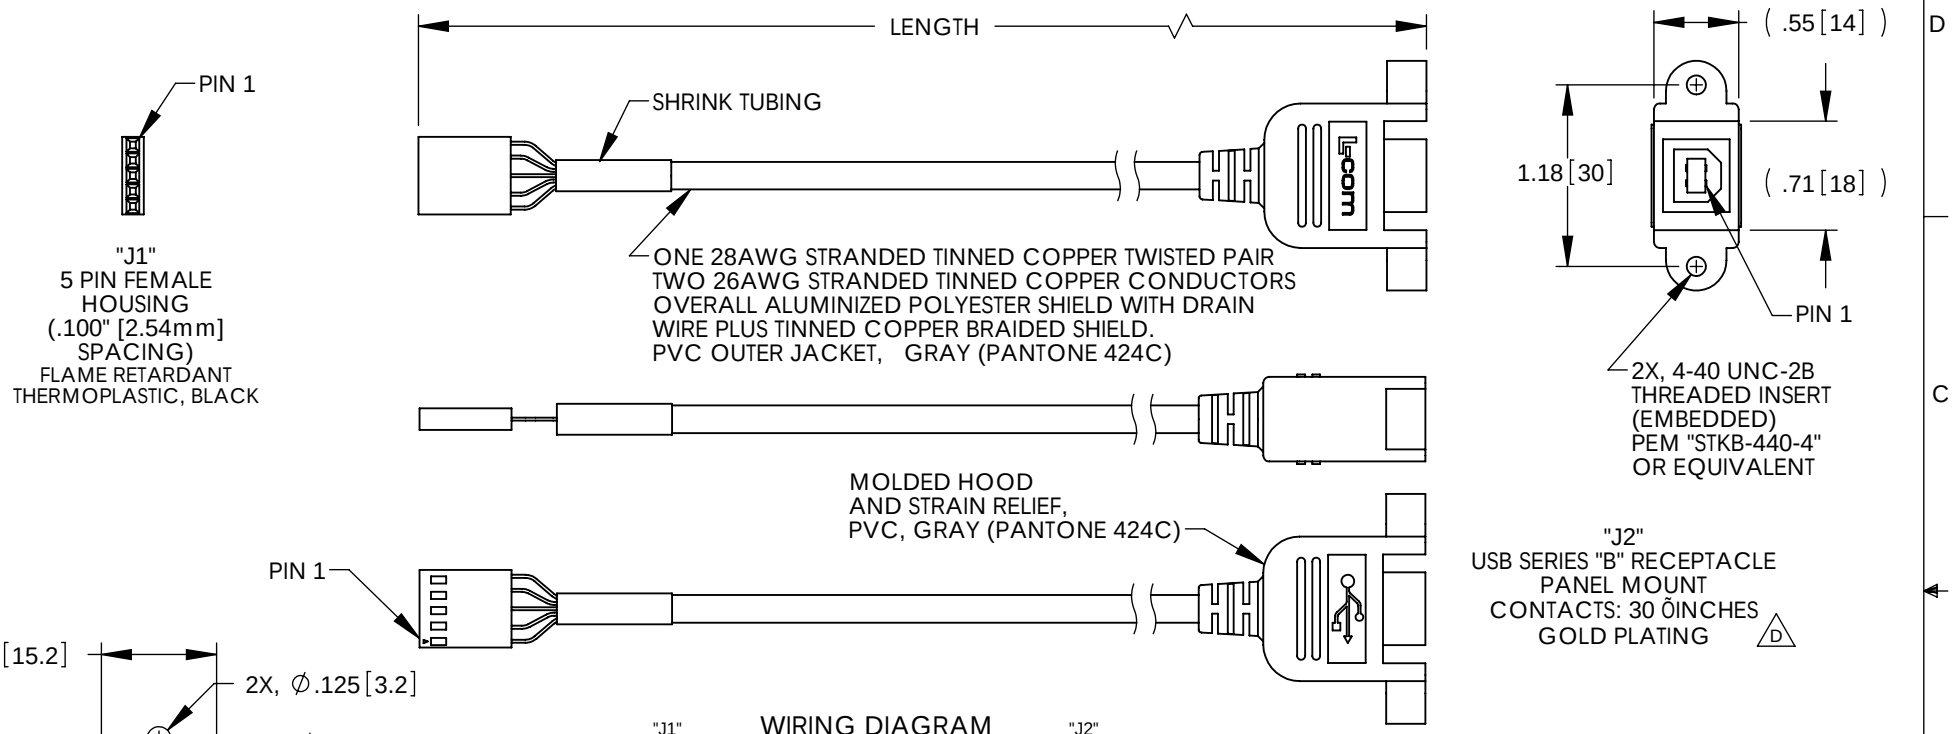

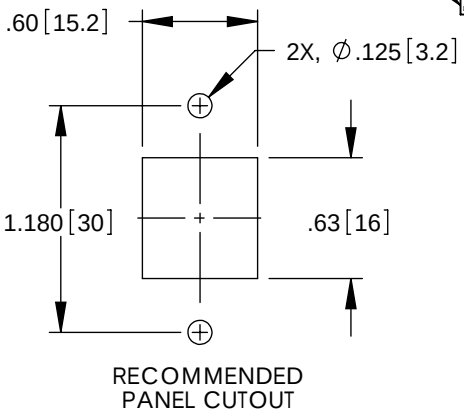

RECOMMENDED
PANEL CUTOUT

WIRING DIAGRAM

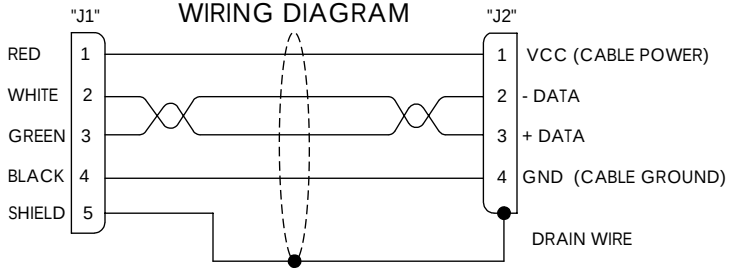

MODEL NUMBER	LENGTH METERS [FEET]
UPMB5-03M	0.3 [.98]
UPMB5-05M	0.5 [1.64]
UPMB5-075M	0.75 [2.46]
UPMB5-1M	1.0 [3.28]
UPMB5-2M	2.0 [6.56]
UPMB5-3M	3.0 [9.84]

D

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360Á SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. MOUNTING HARDWARE INCLUDED: 2X #4-40 X .38 LG. PHILLIPS HD SCREW
5. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES [mm]
OVERALL CABLE LENGTH TOLERANCE:
012 [305] = +1 [25] / -0
>12 [305] 060 [1524] = +2 [51] / -0
>60 [1524] 0120 [3048] = +4 [102] / -0
>120 [3048] 0300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0%
ALL OTHER DIMENSIONAL TOLERANCES:
.X = Ñ .2
.XX = Ñ .02
.XXX = Ñ.005

PROJECTION

APPROVALS	DATE
DRAWN BY D. PARHAM	01/04/2010
CHECKED BY D. CASTRO	01/12/2010
APPROVED BY S. SMITH	01/13/2010

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY OCCUR

L-COM Global Connectivity
45 BEECHWOOD DRIVE
NORTH ANDOVER, MA
01845

CATEGORY: USB

PRODUCT DESCRIPTION: CA USB-B PNL/5 POS

SIZE	FSCM NO.	DWG. NO.	REV.
A	43321	UPMB5	D

SCALE: NONE | CAD FILE: UPMB5.SLDDRW | SHEET 1 OF 1