



# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## General Description


The MAX8645X/MAX8645Y charge pumps drive up to eight white LEDs with regulated constant current for uniform intensity. The main group of LEDs (M1–M6) can be driven up to 30mA per LED for backlighting. The flash group of LEDs (F1 and F2) is independently controlled and can be driven up to 200mA per LED (or 400mA total). Two 200mA LDOs are on-board to provide power for camera functions. The LDOs' output voltages are pin programmable to meet different camera-module requirements. The MAX8645X and MAX8645Y differ only in LDO output voltages. By utilizing adaptive 1x/1.5x/2x charge-pump modes and very-low-dropout current regulators, the MAX8645X/MAX8645Y achieve high efficiency over the full 1-cell lithium-battery voltage range. The 1MHz fixed-frequency switching allows for tiny external components, and the regulation scheme is optimized to ensure low EMI and low input ripple.

The MAX8645X/MAX8645Y are available in a 28-pin TQFN, 4mm x 4mm (0.8mm max height) lead-free package.

## Applications

Camera Phones and Smartphones  
Backlighting and Flash  
PDAs, Digital Cameras, and Camcorders

## Typical Operating Circuit

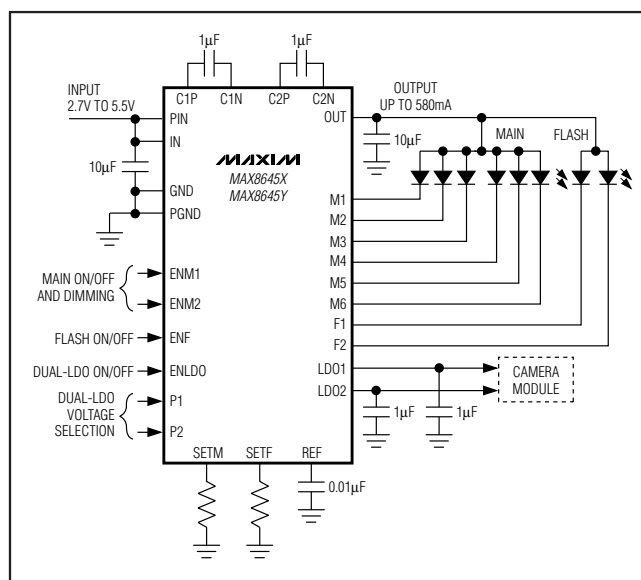

## Features

- ◆ Power Up to Eight LEDs
  - Up to 30mA/LED Drive for Backlight
  - Up to 400mA Total Drive for Flash
- ◆ Two Internal Low-Noise 200mA LDOs
- ◆ 94% Max/85% Avg Efficiency (P<sub>LED</sub>/P<sub>BATT</sub>) over Li+ Battery Discharge
- ◆ 0.2% Typical LED Current Matching
- ◆ Adaptive 1x/1.5x/2x Mode Switchover
- ◆ Single-Wire, Serial-Pulse Interface for Brightness Control (32 Steps)
- ◆ Thermal T<sub>A</sub> Derating Function
- ◆ Low Input Ripple and EMI
- ◆ 2.7V to 5.5V Supply Voltage Range
- ◆ Soft-Start, Overvoltage, and Thermal-Shutdown Protection
- ◆ 28-Pin TQFN, 4mm x 4mm Package

## Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE             |
|--------------|----------------|-------------------------|
| MAX8645XETI+ | -40°C to +85°C | 28 TQFN-EP<br>4mm x 4mm |
| MAX8645YETI+ | -40°C to +85°C | 28 TQFN-EP<br>4mm x 4mm |

EP = Exposed pad.

+ Denotes a lead-free package.

Pin Configuration appears at end of data sheet.

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## ABSOLUTE MAXIMUM RATINGS

PIN, IN, OUT, REFBP to GND.....-0.3V to +6.0V  
 SETF, SETM, ENLDO, ENM1, ENM2, ENF,  
 P1, P2, LDO1, LDO2 to GND.....-0.3V to (VIN + 0.3V)  
 M1, M2, M3, M4, M5, M6, F1,  
 F2 to GND.....-0.3V to (VOUT + 0.3V)  
 C1N, C2N to GND ..... -0.3V to (VIN + 1V)  
 C1P, C2P  
 to GND..... -0.3V to the greater of (VOUT + 1V) or (VIN + 1V)  
 PGND to GND .....-0.3V to +0.3V

OUT, LDO1, LDO2 Short Circuit to GND .....Continuous  
 Continuous Power Dissipation (TA = +70°C)  
 28-Pin TQFN 4mm x 4mm  
 (derate 20.8mW/°C above +70°C).....1666mW  
 Operating Temperature Range .....-40°C to +85°C  
 Junction Temperature.....+150°C  
 Storage Temperature Range.....-65°C to +150°C  
 Lead Temperature (soldering, 10s).....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(VIN = 3.6V, VGND = VPGND = 0V, ENM1 = ENM2 = ENF = IN, RSETM = RSETF = 6.8kΩ, P1 = P2 = unconnected, CREF = 0.01μF, TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = +25°C.) (Note 1)

| PARAMETER                            | CONDITIONS                                                       | MIN        | TYP  | MAX   | UNITS |
|--------------------------------------|------------------------------------------------------------------|------------|------|-------|-------|
| IN Operating Voltage                 |                                                                  | 2.7        |      | 5.5   | V     |
| Undervoltage-Lockout Threshold       | VIN rising or falling                                            | 2.25       | 2.45 | 2.60  | V     |
| Undervoltage-Lockout Hysteresis      |                                                                  |            | 130  |       | mV    |
| Supply Current                       | 1MHz switching, no load, 1.5x or 2x mode                         |            | 4.0  | 5.5   | mA    |
|                                      | 1x mode 10% setting, ENF = GND, VENLDO = VIN, ILDO1 = ILDO2 = 0A |            | 0.4  |       |       |
|                                      | ENM1 = ENM2 = ENF = GND, VENLDO = VIN, ILDO1 = ILDO2 = 0A        |            | 110  |       | μA    |
| Shutdown Supply Current              | ENM1 = ENM2 = ENF = ENLDO = GND                                  | TA = +25°C | 0.01 | 5     | μA    |
|                                      |                                                                  | TA = +85°C | 0.1  |       |       |
| EN_ High Voltage                     | VIN = 2.7V to 5.5V                                               | 1.4        |      |       | V     |
| EN_ Low Voltage                      | VIN = 2.7V to 5.5V                                               |            |      | 0.4   | V     |
| EN_ Input Current                    | VEN_ = 0V or 5.5V                                                | TA = +25°C | 0.01 | 1     | μA    |
|                                      |                                                                  | TA = +85°C | 0.1  |       |       |
| ENM_ or ENF Low Shutdown Delay tSHDN | See Figure 1                                                     | 2.5        |      |       | ms    |
| ENM_ or ENF tLO                      | See Figure 1                                                     | 0.5        |      | 250.0 | μs    |
| ENM_ or ENF tHI                      | See Figure 1                                                     | 0.5        |      |       | μs    |
| Initial ENM_ or ENF tHI              | Only required for first ENM_ or ENF pulse; see Figure 1          | 200        |      |       | μs    |
| P1, P2 Shutdown Input Current        |                                                                  |            | 1    |       | μA    |
| P1, P2 Input Impedance               |                                                                  |            | 150  |       | kΩ    |
| Thermal-Shutdown Threshold           | Temperature rising                                               |            | +160 |       | °C    |
| Thermal-Shutdown Hysteresis          |                                                                  |            | 20   |       | °C    |
| <b>CHARGE PUMP</b>                   |                                                                  |            |      |       |       |
| Overvoltage-Protection Threshold     | VOUT rising                                                      |            | 5    |       | V     |
| Soft-Start Time                      |                                                                  |            | 2    |       | ms    |

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

MAX8645X/MAX8645Y

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{GND} = V_{PGND} = 0V$ ,  $ENM1 = ENM2 = ENF = IN$ ,  $R_{SETM} = R_{SETF} = 6.8k\Omega$ ,  $P1 = P2 = \text{unconnected}$ ,  $C_{REF} = 0.01\mu F$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                          | CONDITIONS                                       |            | MIN   | TYP   | MAX  | UNITS |    |
|----------------------------------------------------|--------------------------------------------------|------------|-------|-------|------|-------|----|
| 1x to 1.5x or 1.5x to 2x Mode Transition Threshold |                                                  |            | 90    | 100   | 110  | mV    |    |
| Input Voltage-Mode Transition Hysteresis           |                                                  |            | 150   |       |      | mV    |    |
| Charge-Pump Maximum OUT Current                    | VIN ≥ 3.15V, VOUT = 3.9V                         |            | 580   |       |      | mA    |    |
| Open-Loop OUT Resistance                           | 1x mode (VIN - VOUT) / IOUT                      |            | 0.3   |       |      | Ω     |    |
|                                                    | 1.5x mode (1.5VIN - VOUT) / IOUT                 |            | 1.1   |       |      |       |    |
|                                                    | 2x mode (2VIN - VOUT) / IOUT                     |            | 1.5   |       |      |       |    |
| Charge-Pump Short-Circuit Current                  | VOUT < 1.25V                                     |            | 500   |       |      | mA    |    |
| Switching Frequency                                |                                                  |            | 1     |       |      | MHz   |    |
| OUT Pulldown Resistance in Shutdown                | ENM_ = ENF = GND                                 |            | 5     |       |      | kΩ    |    |
| LED DRIVER                                         |                                                  |            |       |       |      |       |    |
| SET_ Bias Voltage                                  | TA = +25°C                                       |            | 0.6   |       |      | V     |    |
| SET_ Leakage in Shutdown                           | ENM_ = ENF = GND                                 | TA = +25°C | 0.01  |       | 1    | μA    |    |
|                                                    |                                                  | TA = +85°C | 0.1   |       |      |       |    |
| SET_ Current Range                                 |                                                  |            | 10    | 145   |      | μA    |    |
| SETM-to-Main LED Current Ratio (IM_/ISETM)         | 100% setting, M1–M6                              |            | 230   |       |      | A/A   |    |
| SETF-to-Flash LED Current Ratio (IF_/ISETF)        | 100% setting, F1 and F2                          |            | 1380  |       |      | A/A   |    |
| M_, F_ Current Accuracy                            | TA = +25°C                                       |            | -1.25 | +1.25 |      | %     |    |
|                                                    | TA = -40°C to current derating start temperature |            | -4    | +4    |      |       |    |
| Maximum Main LED Sink Current                      | RSETM = 4.6kΩ, for each M_                       |            | 30    |       |      | mA    |    |
| Maximum Flash LED Sink Current                     | RSETF = 4.12kΩ, IF1 + IF2                        |            | 400   |       |      | mA    |    |
| Current-Derating-Function Start Temperature        |                                                  |            | +40   |       |      | °C    |    |
| Current-Derating-Function Slope                    | TA = +40°C to +85°C                              |            | -1.7  |       |      | %/°C  |    |
| Dropout Voltage                                    | (Note 2)                                         |            | 40    |       |      | 90    | mV |
| 1.5x and 2x Regulation Voltage                     |                                                  |            | 150   |       |      | mV    |    |
| M_, F_ Leakage in Shutdown                         | ENM_ = ENF = GND                                 | TA = +25°C | 0.01  |       | 2    | μA    |    |
|                                                    |                                                  | TA = +85°C | 0.1   |       |      |       |    |
| LDO_                                               |                                                  |            |       |       |      |       |    |
| Output Voltage Accuracy                            | ILDO_ = 150mA, relative to VOUT(NOM) (Note 3)    |            | -1.7  | 0     | +1.7 | %     |    |
| Output Current Range                               |                                                  |            | 0     | 200   |      | mA    |    |
| Current Limit                                      | VLDO_ = 0V                                       |            | 280   | 475   | 750  | mA    |    |
| Soft-Start Current Limit                           |                                                  |            | 160   |       |      | mA    |    |

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{IN} = 3.6V$ ,  $V_{GND} = V_{PGND} = 0V$ ,  $ENM1 = ENM2 = ENF = IN$ ,  $R_{SETM} = R_{SETF} = 6.8k\Omega$ ,  $P1 = P2 = \text{unconnected}$ ,  $C_{REF} = 0.01\mu F$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                                | CONDITIONS                                                  | MIN | TYP | MAX | UNITS         |
|----------------------------------------------------------|-------------------------------------------------------------|-----|-----|-----|---------------|
| Soft-Start Done Time                                     |                                                             |     | 100 |     | $\mu s$       |
| Dropout Voltage                                          | $I_{LDO\_} = 200mA$ (Note 4)                                |     | 120 | 320 | mV            |
| Load Regulation                                          | $V_{IN} = 3.7V$ , $100\mu A < I_{LDO\_} < 200mA$            |     |     | 1.3 | %             |
| Power-Supply Rejection<br>$\Delta V_{OUT}/\Delta V_{IN}$ | 10Hz to 10kHz, $C_{LDO\_} = 1\mu F$ , $I_{LDO\_} = 10\mu A$ |     | -60 |     | dB            |
| Output Noise Voltage (RMS)                               | 10Hz to 100kHz, $C_{LDO\_} = 1\mu F$ , $I_{LDO\_} = 10mA$   |     | 40  |     | $\mu V_{RMS}$ |

**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ C$ . Limits over the operating temperature range are guaranteed by design.




**Note 2:** LED dropout voltage is defined as the  $M_-$  or  $F_-$  to GND voltage at which current into  $M_-$  or  $F_-$  drops 10% from the value at  $M_-$  or  $F_- = 0.2V$ .

**Note 3:** (Greater of  $2.7V$  or  $(V_{LDO\_} + 0.5V)$ )  $\leq V_{IN} \leq 5.5V$ .

**Note 4:** LDO dropout voltage is defined as  $V_{IN} - V_{OUT}$  when  $V_{OUT}$  is 100mV below the value of  $V_{OUT}$  measured when  $V_{IN} = V_{OUT(NOM)} + 1V$ . Since the minimum input voltage is  $2.7V$ , this specification is only meaningful when  $V_{OUT(NOM)} > 2.5V$ .

## Typical Operating Characteristics

( $V_{IN} = V_{EN\_} = 3.6V$ , circuit of Figure 2,  $T_A = +25^\circ C$ , unless otherwise noted.)

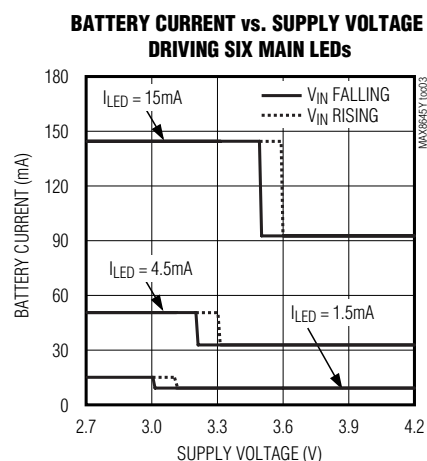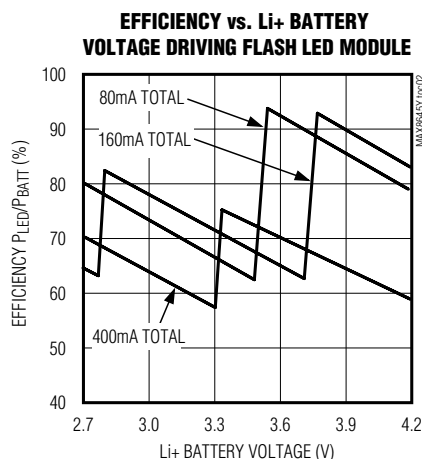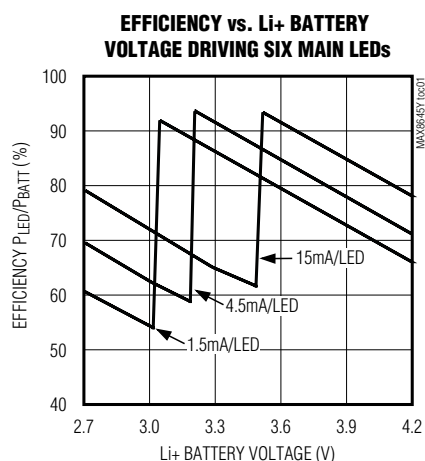


# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN


## Typical Operating Characteristics (continued)

( $V_{IN} = V_{EN\_} = 3.6V$ , circuit of Figure 2,  $T_A = +25^\circ C$ , unless otherwise noted.)


**BATTERY CURRENT vs. SUPPLY VOLTAGE DRIVING FLASH**

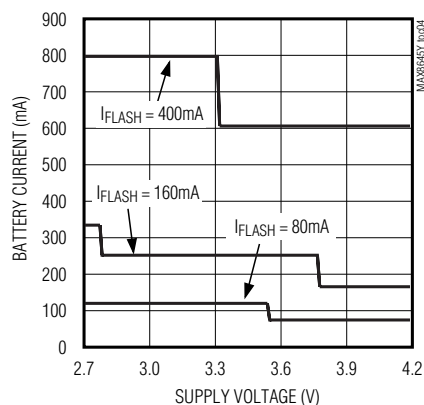


**LDO GROUND-PIN SUPPLY CURRENT vs. SUPPLY VOLTAGE**

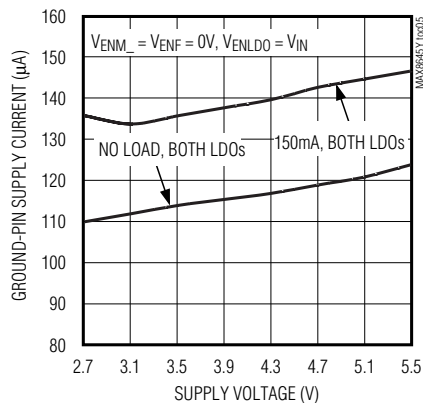


**INPUT RIPPLE VOLTAGE vs. SUPPLY VOLTAGE WITH SIX MAIN LEDs**

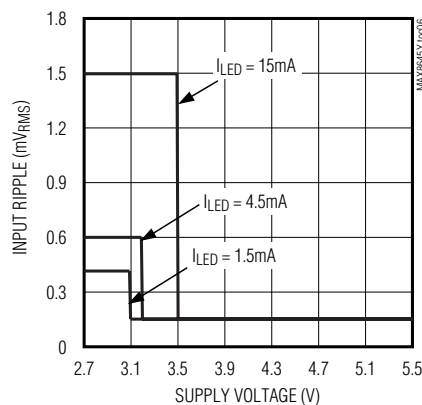


**INPUT RIPPLE VOLTAGE vs. SUPPLY VOLTAGE WITH FLASH AND MAIN LEDs**

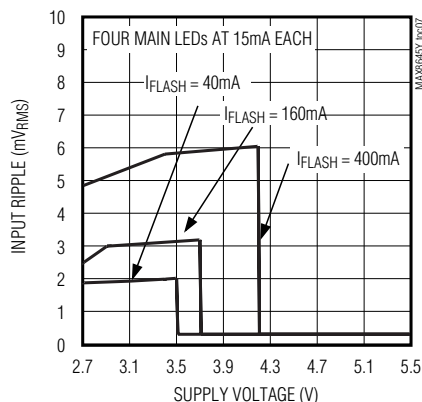


**LED CURRENT MATCHING vs. SUPPLY VOLTAGE WITH SIX MAIN LEDs**

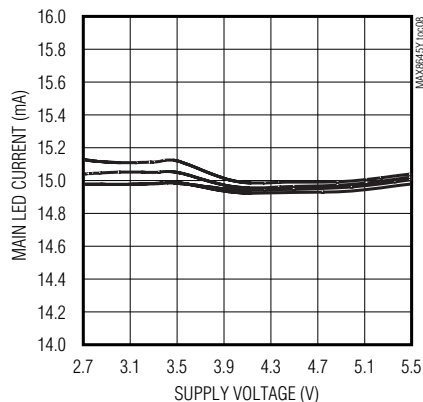


**LED CURRENT MATCHING vs. SUPPLY VOLTAGE WITH TWO FLASH LEDs**

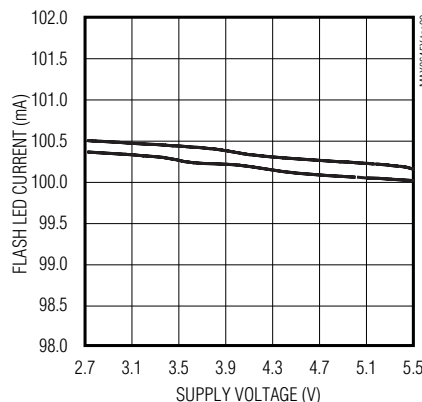


**LED CURRENT vs. AMBIENT TEMPERATURE WITH SIX MAIN LEDs**

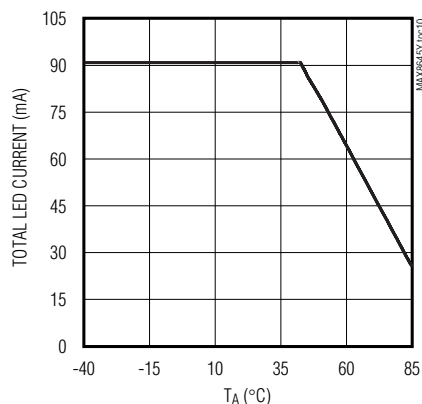

**LED CURRENT vs. AMBIENT TEMPERATURE WITH FLASH**

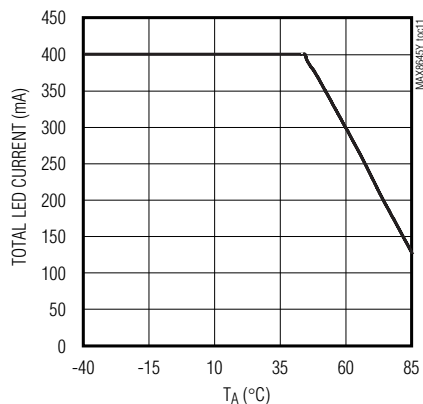







**INDIVIDUAL MAIN LED CURRENT vs. R\_SETM**

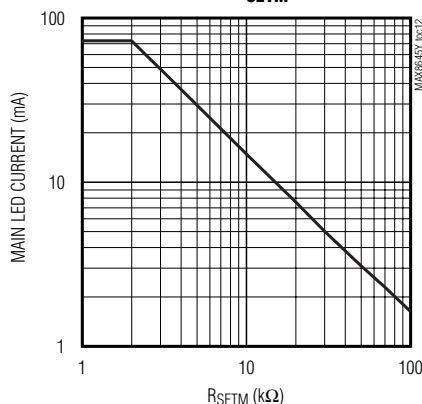

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## Typical Operating Characteristics (continued)

( $V_{IN} = V_{EN\_} = 3.6V$ , circuit of Figure 2,  $T_A = +25^\circ C$ , unless otherwise noted.)

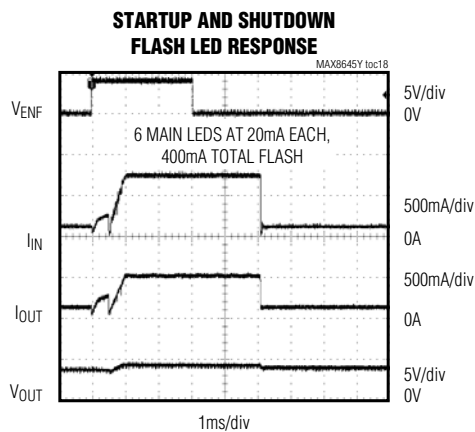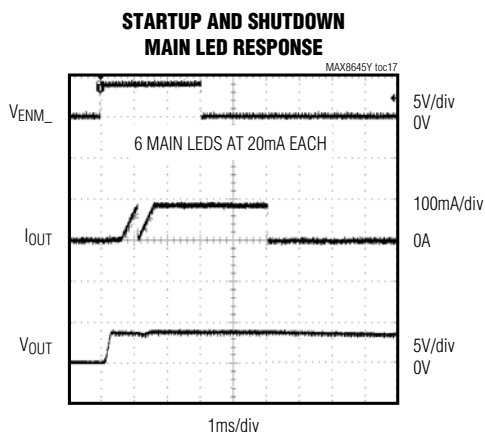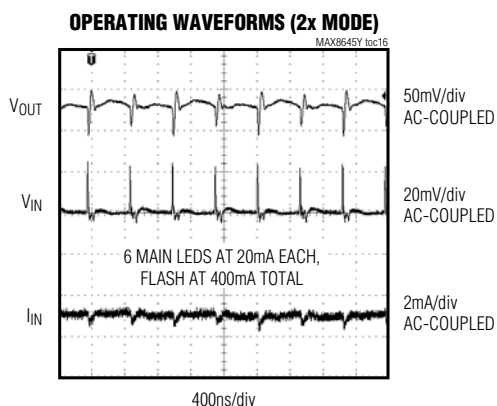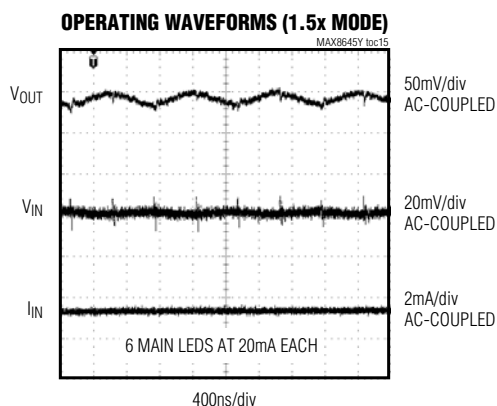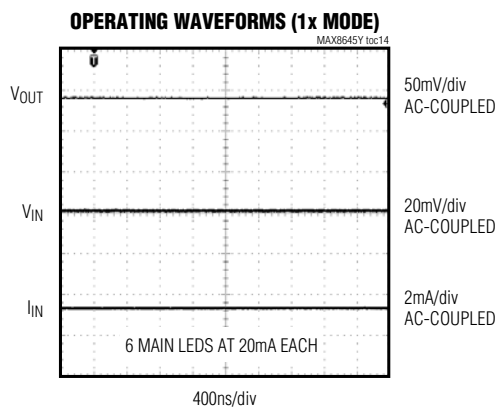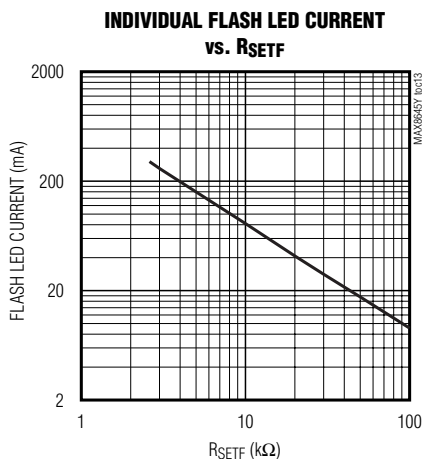


# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN


## Typical Operating Characteristics (continued)

( $V_{IN} = V_{EN\_} = 3.6V$ , circuit of Figure 2,  $T_A = +25^\circ C$ , unless otherwise noted.)


**SINGLE-WIRE DIMMING RESPONSE**

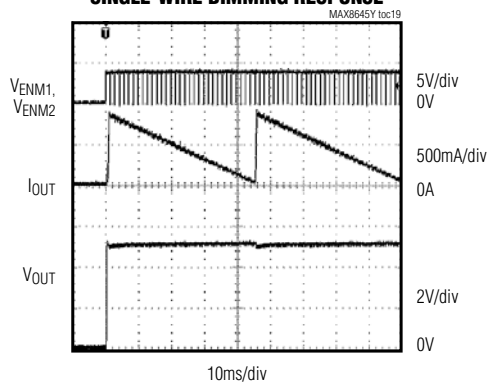


**LDO DROPOUT VOLTAGE vs. OUTPUT CURRENT**

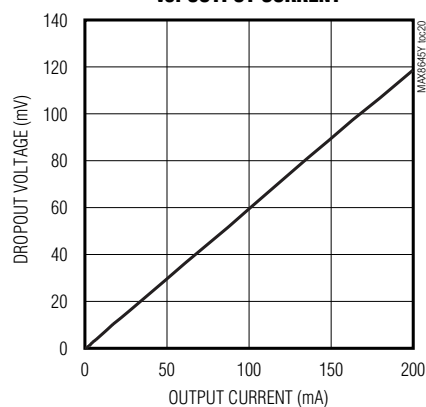


**LDO OUTPUT VOLTAGE ACCURACY vs. OUTPUT CURRENT**

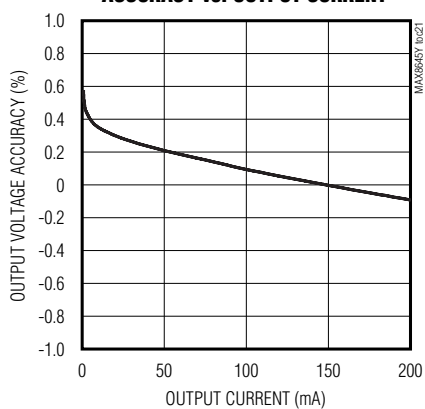

**LOAD-TRANSIENT RESPONSE**

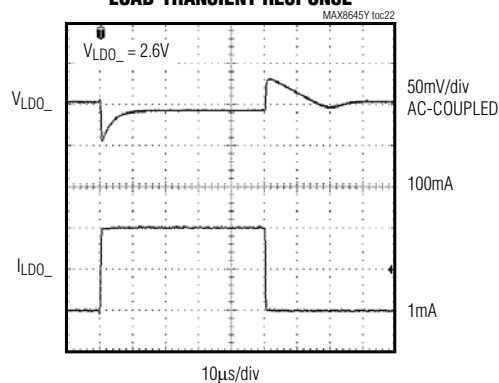

**LOAD-TRANSIENT RESPONSE NEAR DROPOUT**

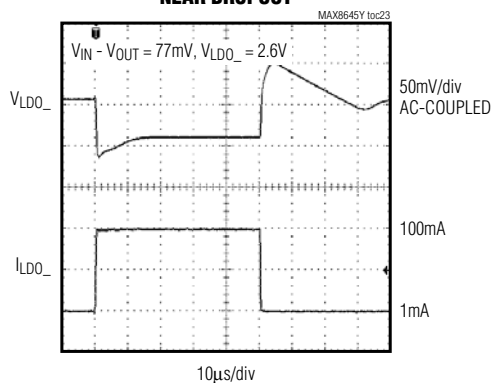

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## Pin Description

| PIN   | NAME   | FUNCTION                                                                                                                                                                                                                                                                                                                                                                             |
|-------|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | PIN    | Supply Voltage Input. Bypass to PGND with a 10 $\mu$ F ceramic capacitor. The input voltage range is 2.7V to 5.5V. PIN is high impedance during shutdown.                                                                                                                                                                                                                            |
| 2     | IN     | Chip Supply Voltage Input. Bypass to GND with a 10 $\mu$ F ceramic capacitor as close as possible to the IC. The input voltage range is 2.7V to 5.5V. IN is high impedance during shutdown.                                                                                                                                                                                          |
| 3     | GND    | Ground. Connect GND to system ground and the input bypass capacitor as close as possible to the IC.                                                                                                                                                                                                                                                                                  |
| 4     | LDO1   | LDO1 Output. Bypass with a 1 $\mu$ F ceramic capacitor to GND. LDO1 is pulled to ground through an internal 400k $\Omega$ resistor during shutdown.                                                                                                                                                                                                                                  |
| 5     | LDO2   | LDO2 Output. Bypass with a 1 $\mu$ F ceramic capacitor to GND. LDO2 is pulled to ground through an internal 400k $\Omega$ resistor during shutdown.                                                                                                                                                                                                                                  |
| 6     | REFBP  | Reference Filter. Bypass REFBP with a 0.01 $\mu$ F ceramic capacitor to GND.                                                                                                                                                                                                                                                                                                         |
| 7     | SETF   | Bias Current Set Input for F1, F2. The current flowing out of SETF sets the maximum (100%) bias current into each LED. V <sub>SETF</sub> is internally biased to 0.6V. Connect a resistor (R <sub>SETF</sub> ) from SETF to GND to set the flash current. R <sub>SETF</sub> = 82.8 / I <sub>LED(MAX)</sub> . SETF is high impedance during shutdown.                                 |
| 8     | SETM   | Bias Current Set Input for M1–M4. The current flowing out of SETM sets the maximum (100%) bias current into each LED. V <sub>SETM</sub> is internally biased to 0.6V. Connect a resistor (R <sub>SETM</sub> ) from SETM to GND to set the main LED current. R <sub>SETM</sub> = 138 / I <sub>LED(MAX)</sub> . SETM is high impedance during shutdown.                                |
| 9, 10 | F2, F1 | 400mA Combined-Current Flash LED Cathode Connection and Charge-Pump Feedback. Current flowing into F <sub>-</sub> is based on I <sub>SETF</sub> . The charge pump regulates the lowest F <sub>-</sub> voltage to 0.15V. Grounding any F <sub>-</sub> input forces OUT to operate at approximately 5V. Connect F <sub>-</sub> to OUT if this LED is not populated.                    |
| 11–16 | M6–M1  | 30mA Main LED Cathode Connection and Charge-Pump Feedback. Current flowing into M <sub>-</sub> is based on the EN <sub>-</sub> configuration and I <sub>SETM</sub> . The charge pump regulates the lowest M <sub>-</sub> input voltage to 0.15V. Grounding any M <sub>-</sub> forces OUT to operate at approximately 5V. Connect M <sub>-</sub> to OUT if this LED is not populated. |
| 17    | P2     | Default Output-Voltage Select Input. P1 and P2 set the LDO1 and LDO2 voltages to one of nine combinations (Table 2). P2 is high impedance in an off condition and shortly after an on condition.                                                                                                                                                                                     |
| 18    | ENLDO  | LDO Output Enable. Drive to a logic-level high to turn on both LDOs. Drive to a logic-level low to turn off both LDOs.                                                                                                                                                                                                                                                               |
| 19    | ENM2   | Enable and Dimming Control for M1–M6. Drive both ENM1 and ENM2 to a logic-level high to turn on the main LEDs. Drive both ENM1 and ENM2 to a logic-level low to turn off the main LEDs. The dimming technique is discussed in the <i>Applications Information</i> section.                                                                                                           |
| 20    | ENM1   | Enable and Dimming Control for M1–M6. Drive both ENM1 and ENM2 to a logic-level high to turn on the main LEDs. Drive both ENM1 and ENM2 to a logic-level low to turn off the main LEDs. The dimming technique is discussed in the <i>Applications Information</i> section.                                                                                                           |
| 21    | ENF    | Enable and Dimming Control for F1, F2. Drive ENF to a logic-level high to turn on the flash LEDs. Drive ENF to a logic-level low to turn off the flash LEDs. The dimming technique is discussed in the <i>Applications Information</i> section.                                                                                                                                      |
| 22    | C1N    | Transfer Capacitor 1 Negative Connection. Connect a 1 $\mu$ F ceramic capacitor between C1P and C1N. C1N is internally shorted to IN during shutdown.                                                                                                                                                                                                                                |

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## Pin Description (continued)

| PIN | NAME | FUNCTION                                                                                                                                                                                            |
|-----|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 23  | C1P  | Transfer Capacitor 1 Positive Connection. Connect a 1μF ceramic capacitor between C1P and C1N. During shutdown, if OUT > IN, C1P is shorted to OUT. If OUT < IN, C1P is shorted to IN.              |
| 24  | PGND | Power Ground. Connect PGND to system ground. PGND is used for charge-pump switching currents.                                                                                                       |
| 25  | OUT  | Charge-Pump Output. Bypass OUT to GND with a 10μF ceramic capacitor. Connect to the anodes of all the LEDs. OUT is internally pulled to ground through a 5kΩ resistor during shutdown.              |
| 26  | C2P  | Transfer Capacitor 2 Positive Connection. Connect a 1μF ceramic capacitor between C2P and C2N. During shutdown, if OUT > IN, C2P is shorted to OUT. If OUT < IN, C2P is shorted to IN.              |
| 27  | C2N  | Transfer Capacitor 2 Negative Connection. Connect a 1μF ceramic capacitor between C2P and C2N. C2N is internally shorted to IN during shutdown.                                                     |
| 28  | P1   | Default Output-Voltage Select Input. P1 and P2 set the LDO1 and LDO2 voltages to one of nine combinations (Table 2). P1 is high impedance in an off condition and shortly after in an on condition. |
| —   | EP   | Exposed Paddle. Connect to GND and PGND.                                                                                                                                                            |

## Detailed Description

The MAX8645X/MAX8645Y charge pumps drive up to six white LEDs in the main display for backlighting and up to two white LEDs for flash, all with regulated constant current for uniform intensity. By utilizing adaptive 1x/1.5x/2x charge-pump modes and very-low-dropout current regulators, they achieve high efficiency over the 1-cell lithium-battery input voltage range. 1MHz fixed-frequency switching allows for tiny external components and low input ripple. Two on-board 200mA programmable-output-voltage LDOs are provided to meet camera-module requirements.

### 1x to 1.5x Switchover

When  $V_{IN}$  is higher than  $V_{OUT}$ , the MAX8645X/MAX8645Y operate in 1x mode and  $V_{OUT}$  is pulled up to  $V_{IN}$ . The internal current regulators regulate the LED current. As  $V_{IN}$  drops,  $V_{M-}$  (or  $V_{F-}$ ) eventually falls below the switchover threshold of 100mV and the MAX8645X/MAX8645Y start switching in 1.5x mode. When the input voltage rises above  $V_{OUT}$  by approximately 50mV, the MAX8645X/MAX8645Y switch back to 1x mode.

### 1.5x to 2x Switchover

When  $V_{IN}$  is less than  $V_{OUT}$  but greater than  $2/3 V_{OUT}$ , the MAX8645X/MAX8645Y operate in 1.5x mode. The internal current regulators regulate the LED current. As  $V_{IN}$  drops,  $V_{M-}$  (or  $V_{F-}$ ) eventually falls below the switchover threshold of 100mV, and the MAX8645X/MAX8645Y start switching in 2x mode. When the input voltage rises above  $2/3 V_{OUT}$  by approximately 50mV, the MAX8645X/MAX8645Y switch back to 1.5x mode.

True Shutdown is a trademark of Maxim Integrated Products, Inc.

## Soft-Start

The MAX8645X/MAX8645Y include soft-start circuitry to limit inrush current at turn-on. Once the input voltage is applied, the output capacitor is charged directly from the input with a ramped current source (with no charge-pump action) until the output voltage approaches the input voltage. Once the output capacitor is charged, the charge pump determines if 1x, 1.5x, or 2x mode is required. In the case of 1x mode, the soft-start is terminated and normal operation begins. In the case of 1.5x or 2x mode, soft-start operates until the lowest voltage of M1–M6 and F1, F2 reaches regulation. If the output is shorted to ground or is pulled to less than 1.25V, the output current is limited by soft-start.

## True Shutdown™ Mode

When ENM1, ENM2, and ENF are simultaneously held low for 2.5ms or longer, the MAX8645X/MAX8645Y are shut down and put in a low-current shutdown mode, and the input is isolated from the output. OUT is internally pulled to GND with 5kΩ during shutdown.

## Thermal Derating

The MAX8645X/MAX8645Y limit the maximum LED current depending on the die temperature. The maximum LED current is set by the RSETM and RSETF resistors. Once the temperature reaches +40°C, the LED current decreases by 1.7%/°C. Due to the package's exposed paddle, the die temperature is always very close to the PCB temperature.

The temperature derating function allows the LED current to be safely set higher at normal operating temperatures, thereby allowing either a brighter display or fewer LEDs to be used for normal display brightness.

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

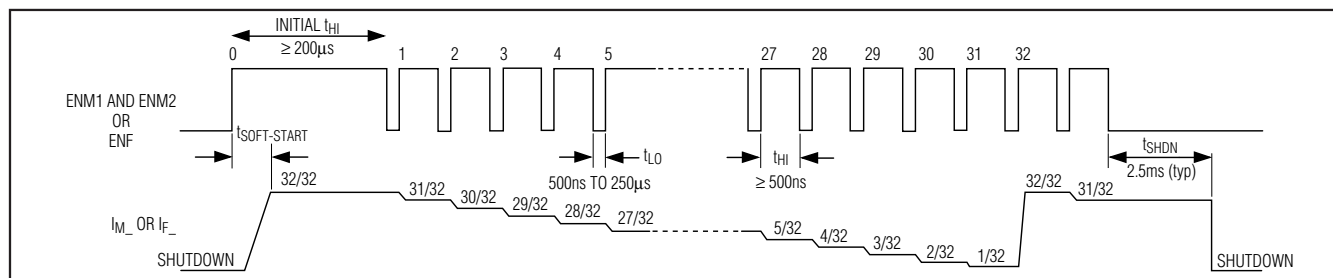


Figure 1. ENM\_ and ENF Timing Diagram

## Thermal Shutdown

The MAX8645X/MAX8645Y include a thermal-limit circuit that shuts down the IC at approximately +160°C. Turn-on occurs after the IC cools by approximately 20°C.

## Applications Information

### Setting the Main Output Current

SETM controls M1–M6 regulation current. Current flowing into M1, M2, M3, M4, M5, and M6 is a multiple of the current flowing out of SETM:

$$I_{M1} = I_{M2} = I_{M3} = I_{M4} = I_{M5} = I_{M6} = K \times (0.6V / R_{SETM})$$

where  $K = 230$ , and  $R_{SETM}$  is the resistor connected between SETM and GND (see the *Typical Operating Circuit*).

Table 1. ENM1/ENM2 States

| ENM1/ENM2 STATES         | BRIGHTNESS      | M1–M6 CURRENT         |
|--------------------------|-----------------|-----------------------|
| ENM1 = low, ENM2 = low   | Shutdown        | 0                     |
| ENM1 = high, ENM2 = high | Full brightness | $230 \times I_{SETM}$ |

### Setting the Flash Output Current

SETF controls the F1, F2 regulation current. Current flowing into F1 and F2 is a multiple of the current flowing out of SETF:

$$I_{F1} = I_{F2} = N \times (0.6V / R_{SETF})$$

where  $N = 1380$ .

### Single-Wire Pulse Dimming

For more dimming flexibility or to reduce the number of control traces, the MAX8645X/MAX8645Y support serial pulse dimming. Connect ENM1 and ENM2 together to enable single-wire pulse dimming of the main LEDs (or ENF only for single-wire pulse dimming of the flash LEDs). See Figure 2. When ENM1 and ENM2 (or ENF) go high simultaneously, the main (or flash) LEDs are enabled at full brightness. Each subsequent low-going pulse (500ns to 250μs pulse width) reduces the LED

current by 3.125% (1/32), so after one pulse, the LED current is 96.9% (or 31/32)  $\times I_{LED}$ . The 31st pulse reduces the current to 0.03125  $\times I_{LED}$ . The 32nd pulse sets the LED current back to  $I_{LED}$ . Figure 1 shows a timing diagram for single-wire pulse dimming. Because soft-start is longer than the initial  $t_{HI}$ , apply dimming pulses quickly upon startup (after initial  $t_{HI}$ ) to avoid LED current transitioning through full brightness.

### Simple On/Off Control

If dimming control is not required, connect ENM1 to ENM2 for simple on/off control. Drive both ENM1 and ENM2 to a logic-level high to turn on the main LEDs. Drive both ENM1 and ENM2 to a logic-level low to turn off the main LEDs. ENF is the simple on/off control for the flash LEDs. Drive ENF to a logic-level high to turn on the flash LEDs. Drive ENF to a logic-level low to turn off the flash LEDs. In this case, LED current is set by the values of  $R_{SETM}$  and  $R_{SETF}$ .

### Driving Fewer than Eight LEDs

When driving fewer than eight LEDs, two connection schemes can be used. The first scheme is shown in Figure 3 where LED drivers are connected together. This method allows increased current through the LED and effectively allows total LED current to be  $I_{LED}$  multiplied by the number of connected drivers. The second method of connection is shown in Figure 4 where standard white LEDs are used and fewer than eight are connected. This scheme does not alter current through each LED but ensures that the unused LED driver is properly disabled.

### Input Ripple

For LED drivers, input ripple is more important than output ripple. Input ripple is highly dependent on the source supply's impedance. Adding a lowpass filter to the input further reduces input ripple. Alternately, increasing  $C_{IN}$  to 22μF cuts input ripple in half with only a small increase in footprint. The 1x mode always has very low input ripple.

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

MAX8645X/MAX8645Y

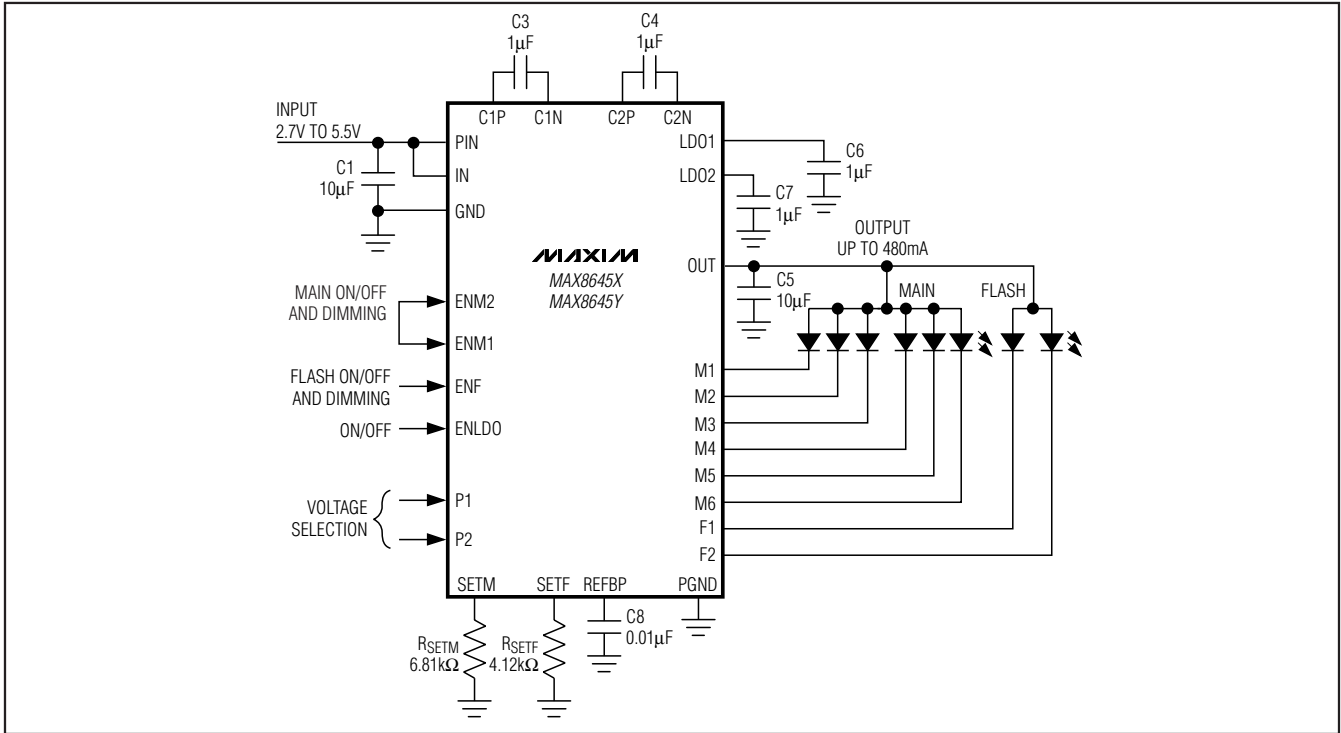


Figure 2. Dimming Using Single-Wire, Serial-Pulse Interface

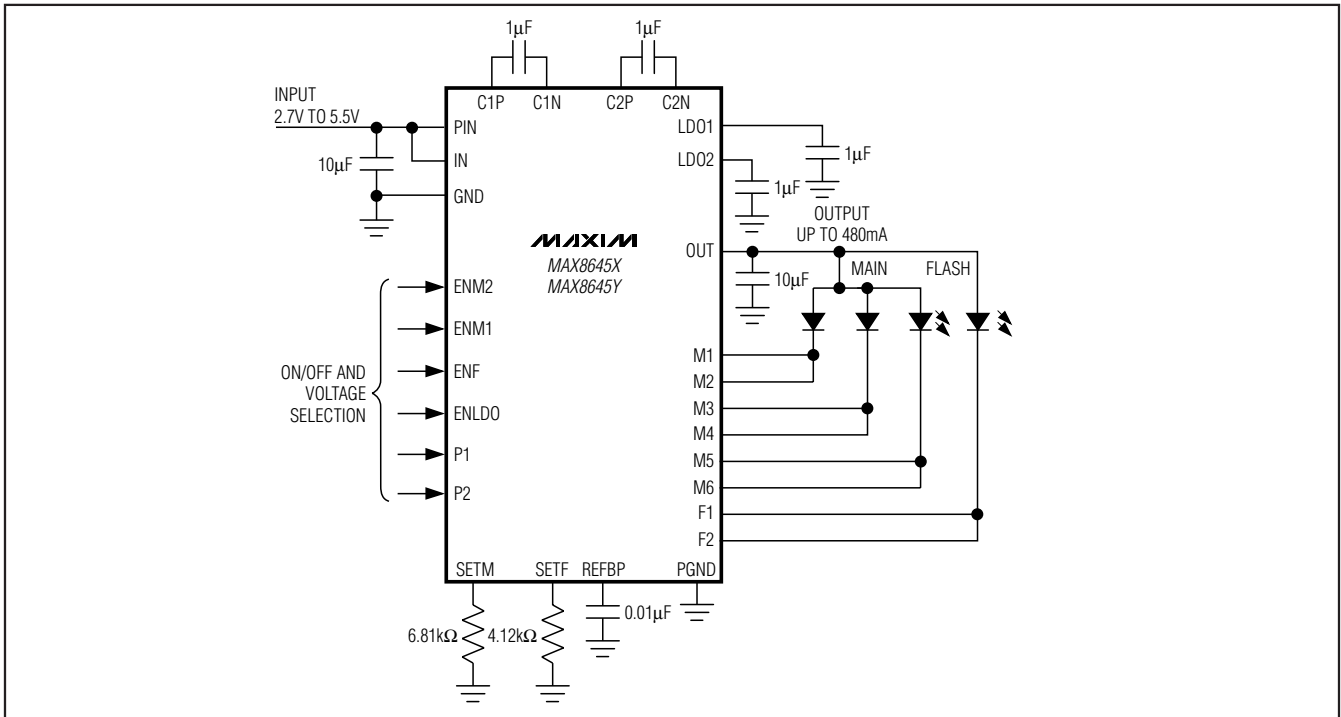


Figure 3. Providing Increased LED Current per LED

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

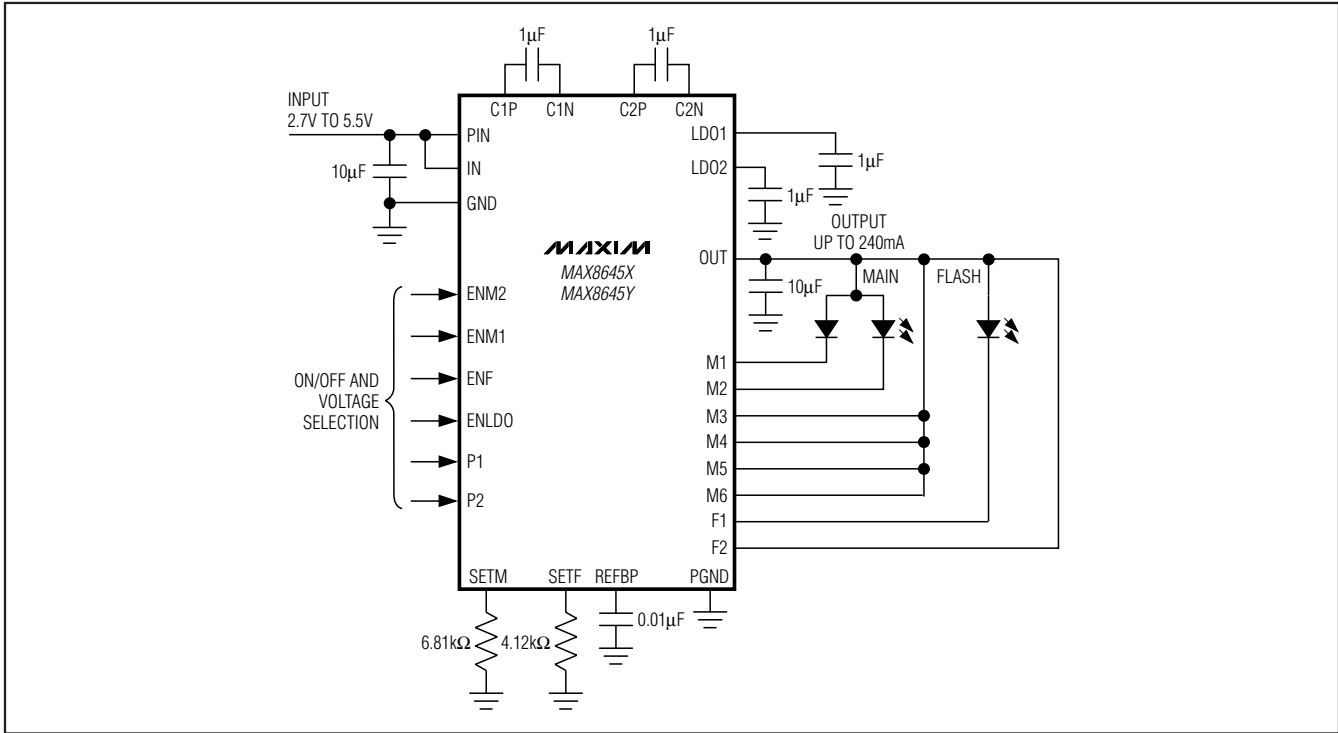


Figure 4. Schematic for When Fewer than 8 LEDs Are Acceptable

Typical operating waveforms shown in the *Typical Operating Characteristics* show input ripple current in 1x, 1.5x, and 2x modes.

## LDO Output Voltage Selection (P1 and P2)

As shown in Table 2, the LDO output voltages, LDO1 and LDO2 are pin programmable by the logic states of P1 and P2. P1 and P2 are tri-level inputs: IN, open, and GND. The input voltage,  $V_{IN}$ , must be greater than the selected LDO1 and LDO2 voltages. The logic states of P1 and P2 can be programmed only during ENLDO low. Once the LDO\_ voltages are programmed, their values do not change by changing P1 or P2 during ENLDO high.

## Component Selection

Use only ceramic capacitors with an X5R, X7R, or better dielectric. See Table 3 for a list of recommended parts.

Connect a 1µF ceramic capacitor between LDO1 and GND, and a second 1µF ceramic capacitor between LDO2 and GND for 200mA applications. The LDO output capacitor's ( $C_{LDO}$ ) equivalent series resistance (ESR) affects stability and output noise. Use output

Table 2. P1 and P2, LDO Output Voltage Selection

| P1   | P2   | MAX8645X |          | MAX8645Y |          |
|------|------|----------|----------|----------|----------|
|      |      | LDO1 (V) | LDO2 (V) | LDO1 (V) | LDO2 (V) |
| IN   | IN   | 3.3      | 1.8      | 2.8      | 2.6      |
| IN   | OPEN | 3.0      | 1.5      | 2.8      | 2.8      |
| IN   | GND  | 2.8      | 1.5      | 2.9      | 1.5      |
| OPEN | IN   | 3.3      | 1.5      | 2.6      | 1.9      |
| OPEN | OPEN | 2.6      | 1.8      | 2.6      | 2.6      |
| OPEN | GND  | 2.6      | 1.5      | 2.8      | 1.9      |
| GND  | IN   | 3.0      | 1.8      | 2.9      | 1.8      |
| GND  | OPEN | 2.8      | 1.8      | 2.9      | 1.9      |
| GND  | GND  | 2.5      | 1.8      | 2.9      | 2.9      |

capacitors with an ESR of 0.1Ω or less to ensure stability and optimum transient response. Connect  $C_{LDO}$  as close as possible to the MAX8645X/MAX8645Y to minimize the impact of PCB trace inductance.

# 1x/1.5x/2x White LED Charge Pump with Two LDOs in 4mm x 4mm TQFN

Table 3. Recommended Components for Figure 2

| DESIGNATION    | VALUE       | MANUFACTURER        | PART           | DESCRIPTION                                   |
|----------------|-------------|---------------------|----------------|-----------------------------------------------|
| C1, C5         | 10μF        | TDK                 | C2012X5R0J106M | 10μF ±20%, 6.3V X5R ceramic capacitors (0805) |
| C3, C4, C6, C7 | 1μF         | TDK                 | C1005X5R0J105M | 1μF ±20%, 6.3V X5R ceramic capacitors (0402)  |
| C8             | 0.01μF      | TDK                 | C1005X7R1E103K | 0.01μF ±10%, 25V X7R ceramic capacitor (0402) |
| D1–D4          | —           | Nichia              | NSCW215T       | White LEDs                                    |
| D5 (D5–D8)     | —           | Nichia              | NBCW011T       | White LEDs, 4 LEDs in one package             |
| RSETM, RSETF   | As required | Panasonic<br>Vishay | —              | 1% resistors                                  |

## PCB Layout and Routing

The MAX8645X/MAX8645Y are high-frequency, switched-capacitor voltage regulators. For best circuit performance, use a solid ground plane and place C<sub>IN</sub>, C<sub>OUT</sub>, C3, and C4 as close as possible to the IC. There should be no vias on C<sub>IN</sub>. Connect GND and PGND to the exposed paddle directly under the IC. Refer to the MAX8645Y evaluation kit for an example.

## Chip Information


PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO.            |
|--------------|--------------|-------------------------|
| 28 TDFN-EP   | T2844-1      | <a href="#">21-0139</a> |

## Pin Configuration

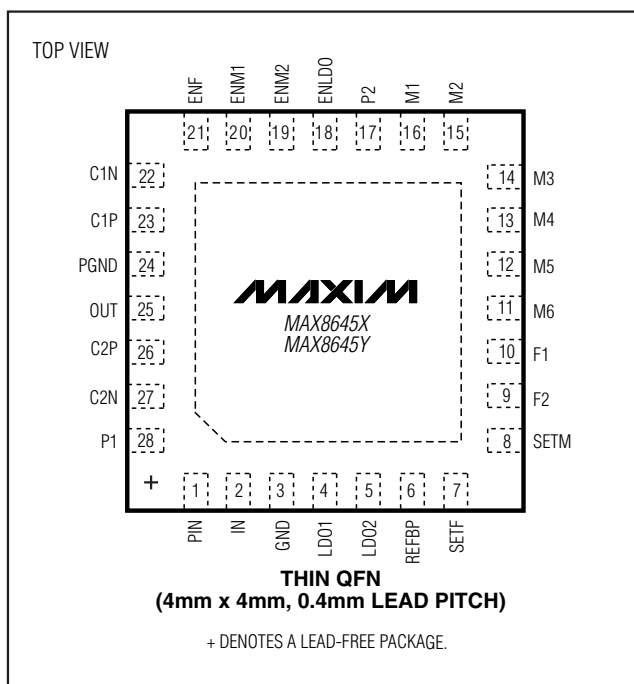

# 1x/1.5x/2x White LED Charge Pumps with Two LDOs in 4mm x 4mm TQFN

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                               | PAGES CHANGED |
|-----------------|---------------|-------------------------------------------------------------------------------------------|---------------|
| 4               | 6/08          | Removed PWM dimming control feature and updated ENM_ and ENF low shutdown delay EC values | 1, 2, 8-11    |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 \_\_\_\_\_ 14