



SANYO Semiconductors

DATA SHEET



LA2616V

Monolithic Linear IC
 Featuring the AViSS 3D Surround Algorithm
 Analog Surround IC

Overview

The LA2616V is sound field playback processing ICs for use in audio equipment, TVs, and PCs. These ICs allow equipment to easily reproduce a spatial realistic sound field from a stereo signal from a music, video, or other audio source.

Features

- Supports a wide operating supply voltage range, and can be used in a wide range of applications.
- The added surround signal level can be adjusted.
- Low-noise low-distortion bypass mode
- Provides a natural feeling of spaciousness without degrading the tonal coloration of the source.
- Clear vocal positioning without any apparent loss of center to the sound
- Miniature packages : SSOP16

Functions

- Surround signal processing
- Surround/bypass switching
- Variable surround effect
- LED drive circuit

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		13	V
Allowable power dissipation	P_d max	$T_a \leq 70^\circ\text{C}$ *	250	mW
Operating temperature	T_{opr}		-25 to +70	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

* Mounted on a specified board : 114.3mm × 76.1mm × 1.6mm, glass epoxy board.

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.

■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings		Unit
Recommended supply voltage	V_{CC}		9.0		V
Operating supply voltage range	$V_{CC\ opg}$		4.5 to 12.0		V


Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 9\text{V}$, $V_I = 300\text{mVrms}$ (left and right input), $f = 1\text{kHz}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Quiescent current	I_{CCT}	No signal, surround off		4	8	mA
Voltage gain	V_{GT}	Surround off	-2	0	+2	dB
	V_{GS}	Surround on	-2	0	+2	dB
Maximum output voltage	$V_O\ max\ T$	THD = 3%, surround off	1	2.5		Vrms
	$V_O\ max\ S$	THD = 3%, surround on	1	2.5		Vrms
Total harmonic distortion	THD T	Surround off		0.01	0.03	%
	THD S	Surround on		0.2	0.5	%
Crosstalk	CT T	Surround off	80	85		dB
Output noise voltage	$V_{NO}\ T$	Surround off		-100	-90	dBm
	$V_{NO}\ S$	Surround on		-90	-80	dBm
LED current	I_{LED}			6	10	mA



Package Dimensions

unit : mm (typ)










3178B






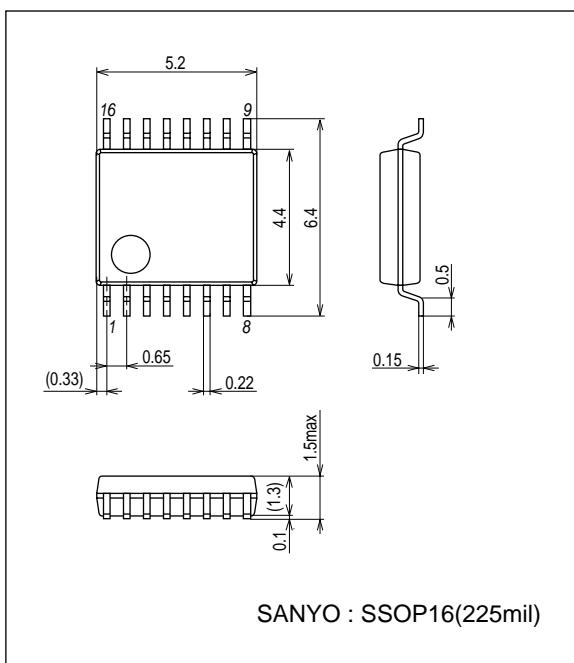


Block Diagram

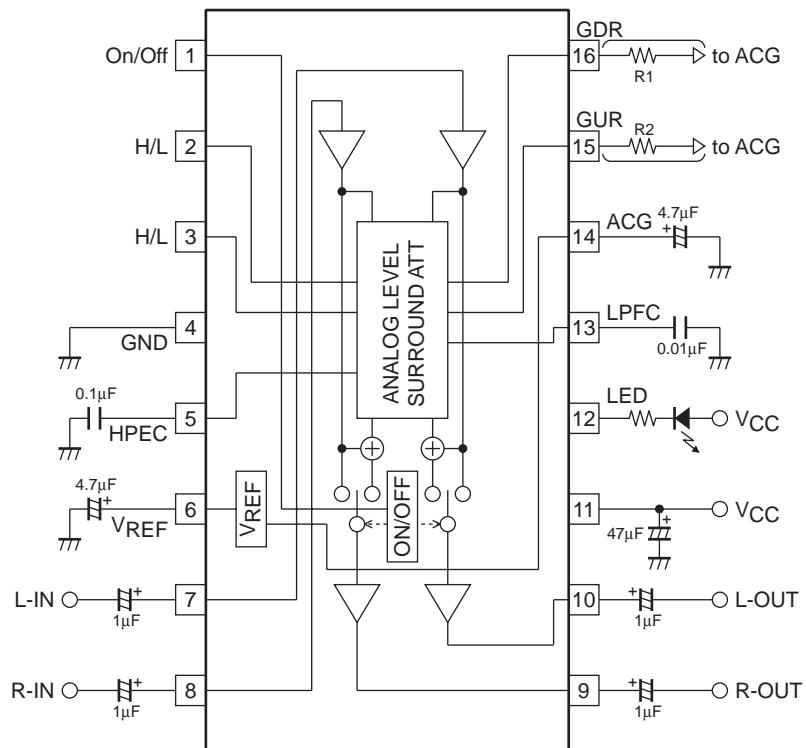

Pin Functions

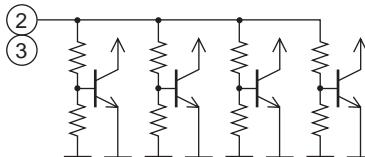Pin No.	Pin name	Pin voltage	Pin function	Equivalent circuit
1	CONT1	0V, 5V	Surround on/off control	
2 3	CONT2 CONT3	0V, 5V	Surround effect selection	
5	HPEC	1/2 V _{CC}	High-pass filter capacitor connection	
7 8	L-IN R-IN	1/2 V _{CC}	Input	
9 10	R-OUT L-OUT	1/2 V _{CC}	Output	
12	LED	V _{CC}	LED connection	
13	LPFC	1/2 V _{CC}	Low-pass filter capacitor connection	
15	GUR	1/2 V _{CC}	Surround effect maximum value setting	
16	GDR	1/2 V _{CC}	Surround effect maximum value setting	

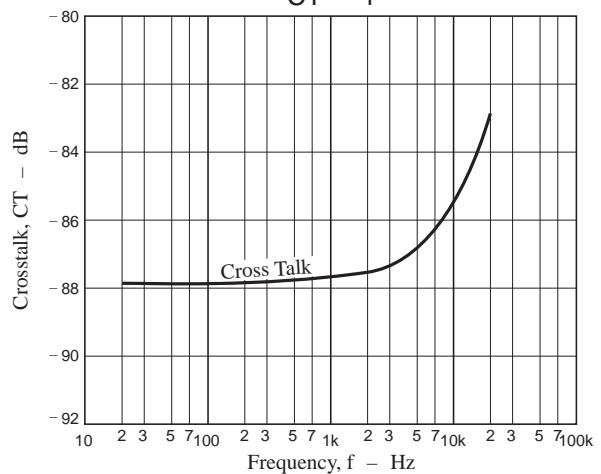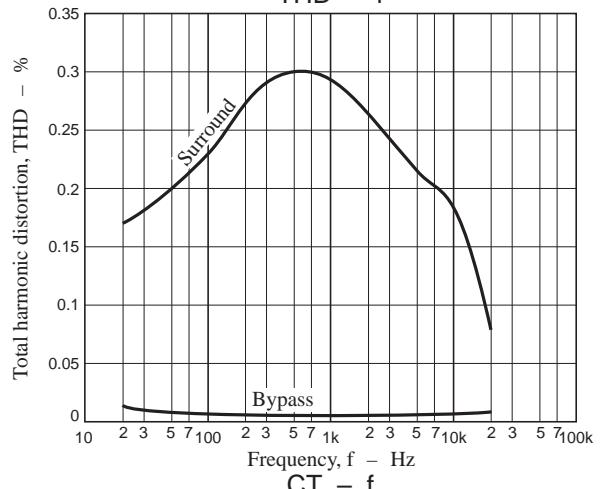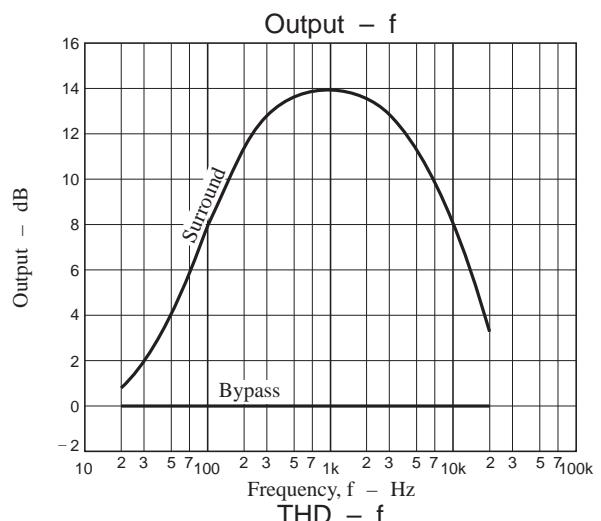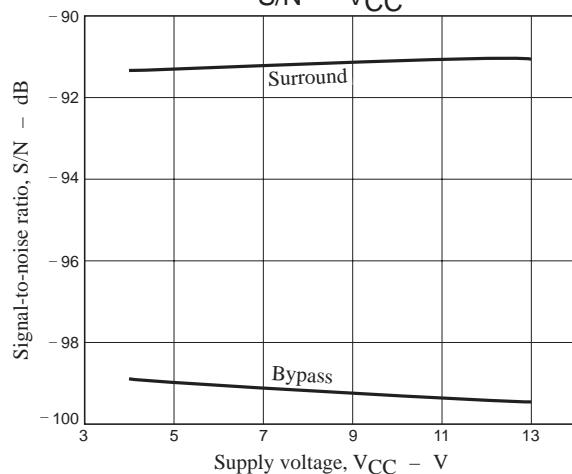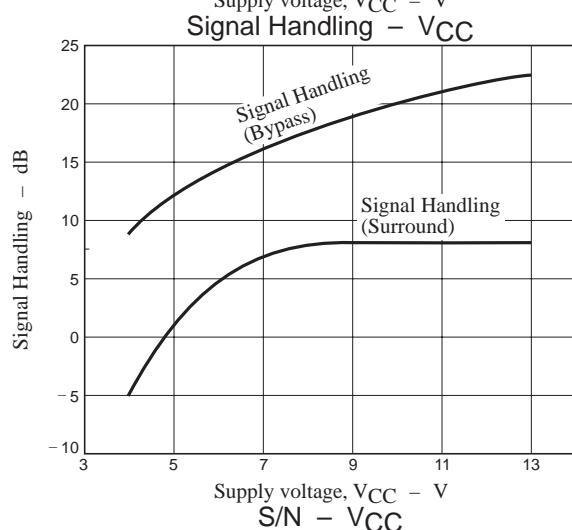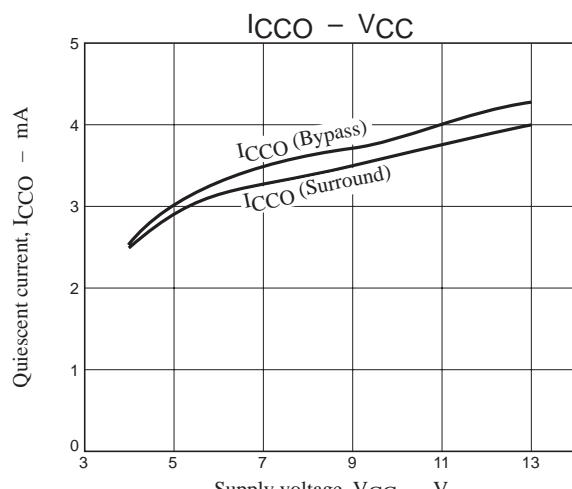

Surround Effect

The maximum value of the surround effect is set with pins 15 and 16.

- The surround effect is increased by connecting an external resistor to pin 15.
- The surround effect is decreased by connecting an external resistor to pin 16.
- The device may be used with no external resistors on pins 15 and 16.

The level of the surround effect is controlled by pins 1 to 3.

Pin 1	Pin 2	Pin 3	Effect
Low	Low	Low	Maximum
	High	Low	Midiam
	Low	High	Minimum
High	Bypass		

Note* : For the high level, a potential over 3V and under V_{CC} must be used.

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of August, 2008. Specifications and information herein are subject to change without notice.