

## 7534 Group

### SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

REJ03B0099-0200Z

Rev.2.00

Jun 21, 2004

#### DESCRIPTION

The 7534 Group is the 8-bit microcomputer based on the 740 family core technology.

The 7534 Group has a USB, 8-bit timers, and an A/D converter, and is useful for an input device for personal computer peripherals.

#### FEATURES


- Basic machine-language instructions ..... 69
- The minimum instruction execution time ..... 0.34  $\mu$ s  
(at 6 MHz oscillation frequency for the shortest instruction)
- Memory size
  - ROM ..... 8K to 16K bytes
  - RAM ..... 256 to 384 bytes
- Programmable I/O ports ..... 28 (36-pin type)  
..... 24 (32-pin type)  
..... 33 (42-pin type)
- Interrupts ..... 14 sources, 8 vectors
- Timers ..... 8-bit X 3

- Serial I/O1 ..... used only for Low Speed in USB  
(based on USBSpec. Rev.1.1)  
(USB/UART)
- Serial I/O2 ..... 8-bit X 1  
(Clock-synchronized)
- A/D converter ..... 10-bit X 8 channels
- Clock generating circuit ..... Built-in type  
(connect to external ceramic resonator or quartz-crystal oscillator)
- Watchdog timer ..... 16-bit X 1
- Power source voltage  
At 6 MHz XIN oscillation frequency at ceramic resonator  
..... 4.1 to 5.5 V(4.4 to 5.25 V at USB operation)
- Power dissipation ..... 30 mW (standard)
- Operating temperature range ..... -20 to 85  $^{\circ}$ C  
(0 to 70  $^{\circ}$ C at USB operation)
- Built-in USB 3.3 V Regulator + transceiver based on USB Spec.  
Rev.1.1

#### APPLICATION

Input device for personal computer peripherals

#### PIN CONFIGURATION (TOP VIEW)

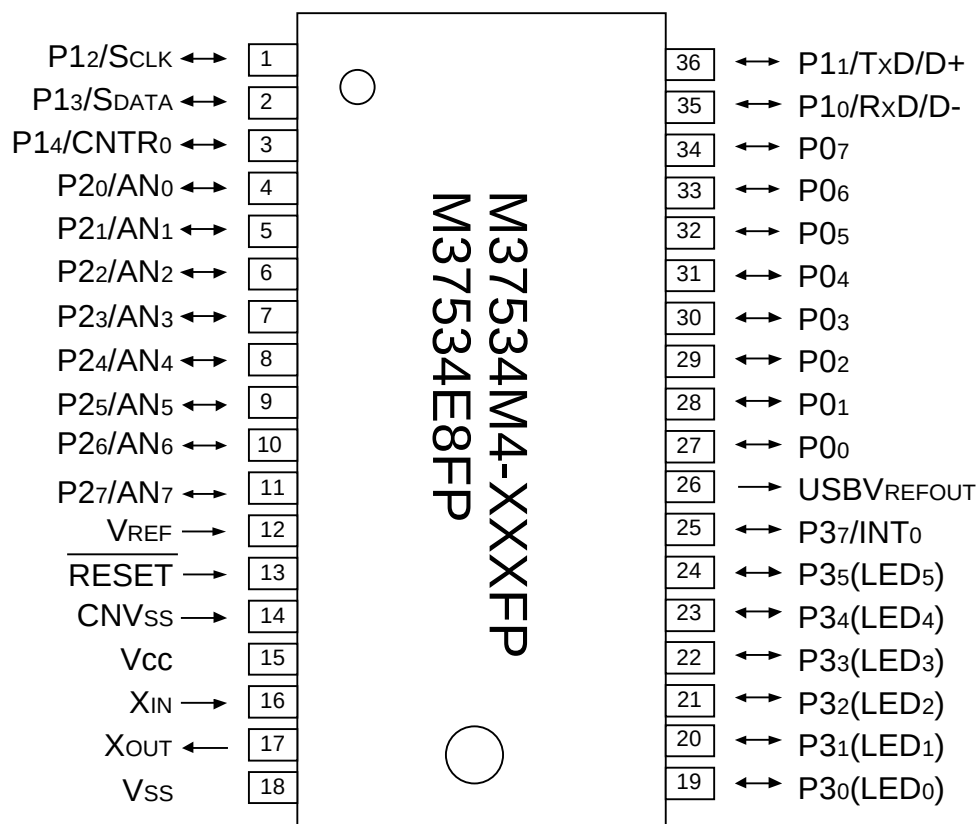

Package type: 36P2R-A

Fig. 1 Pin configuration of M37534M4-XXXXFP, M37534E8FP

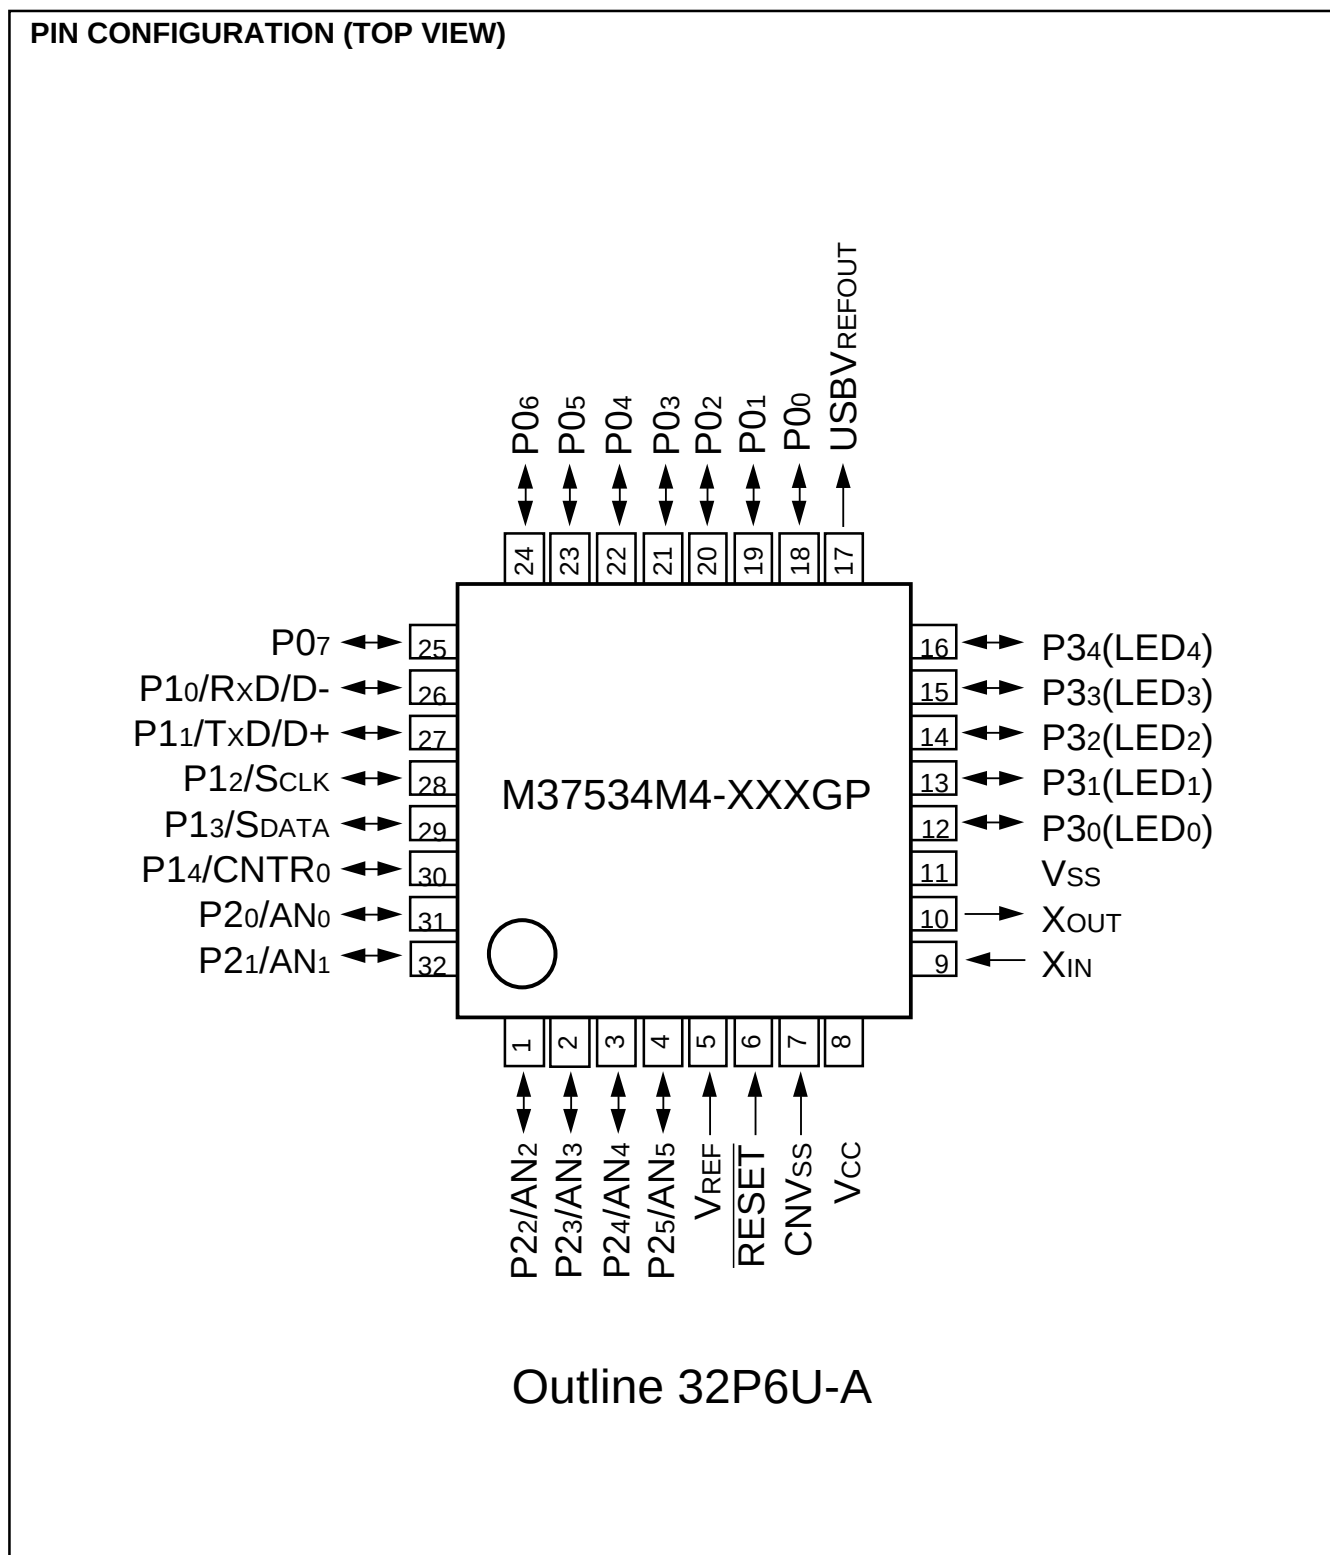


Fig. 2 Pin configuration of M37534M4-XXXGP

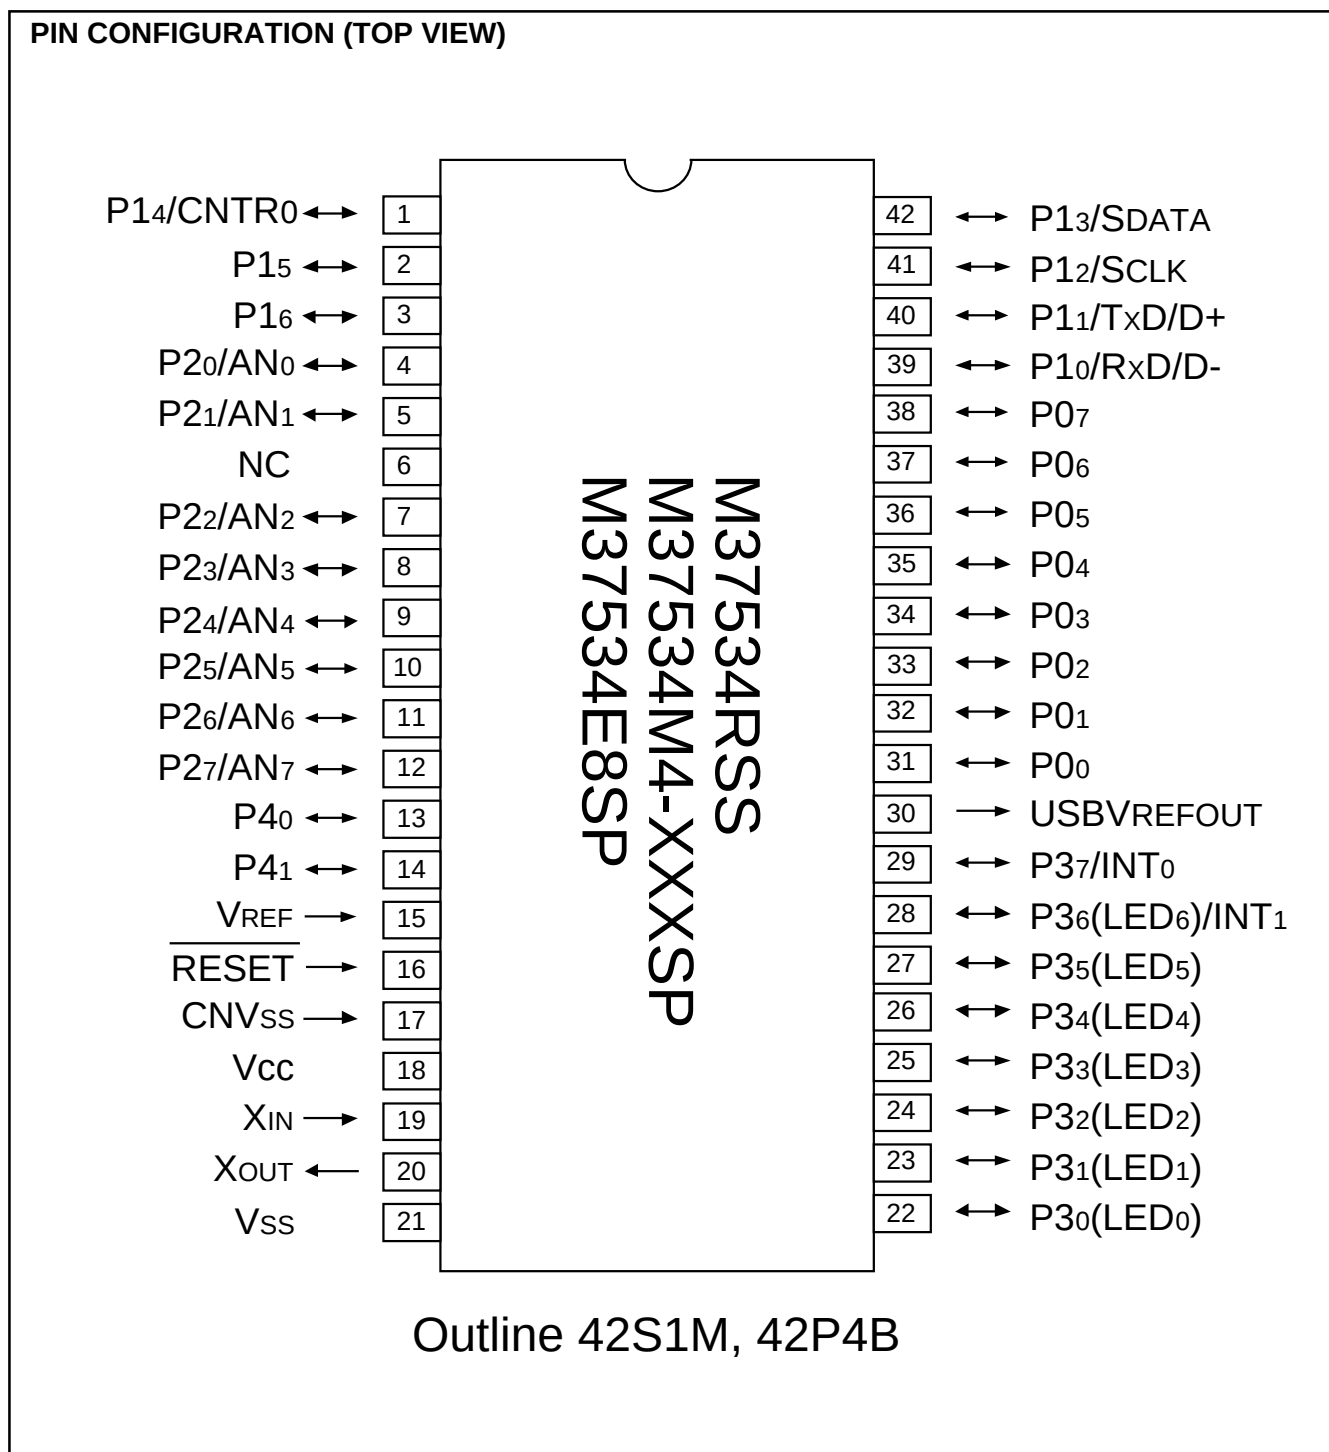


Fig. 3 Pin configuration of M37534RSS, M37534M4-XXXSP, M37534E8SP

## FUNCTIONAL BLOCK

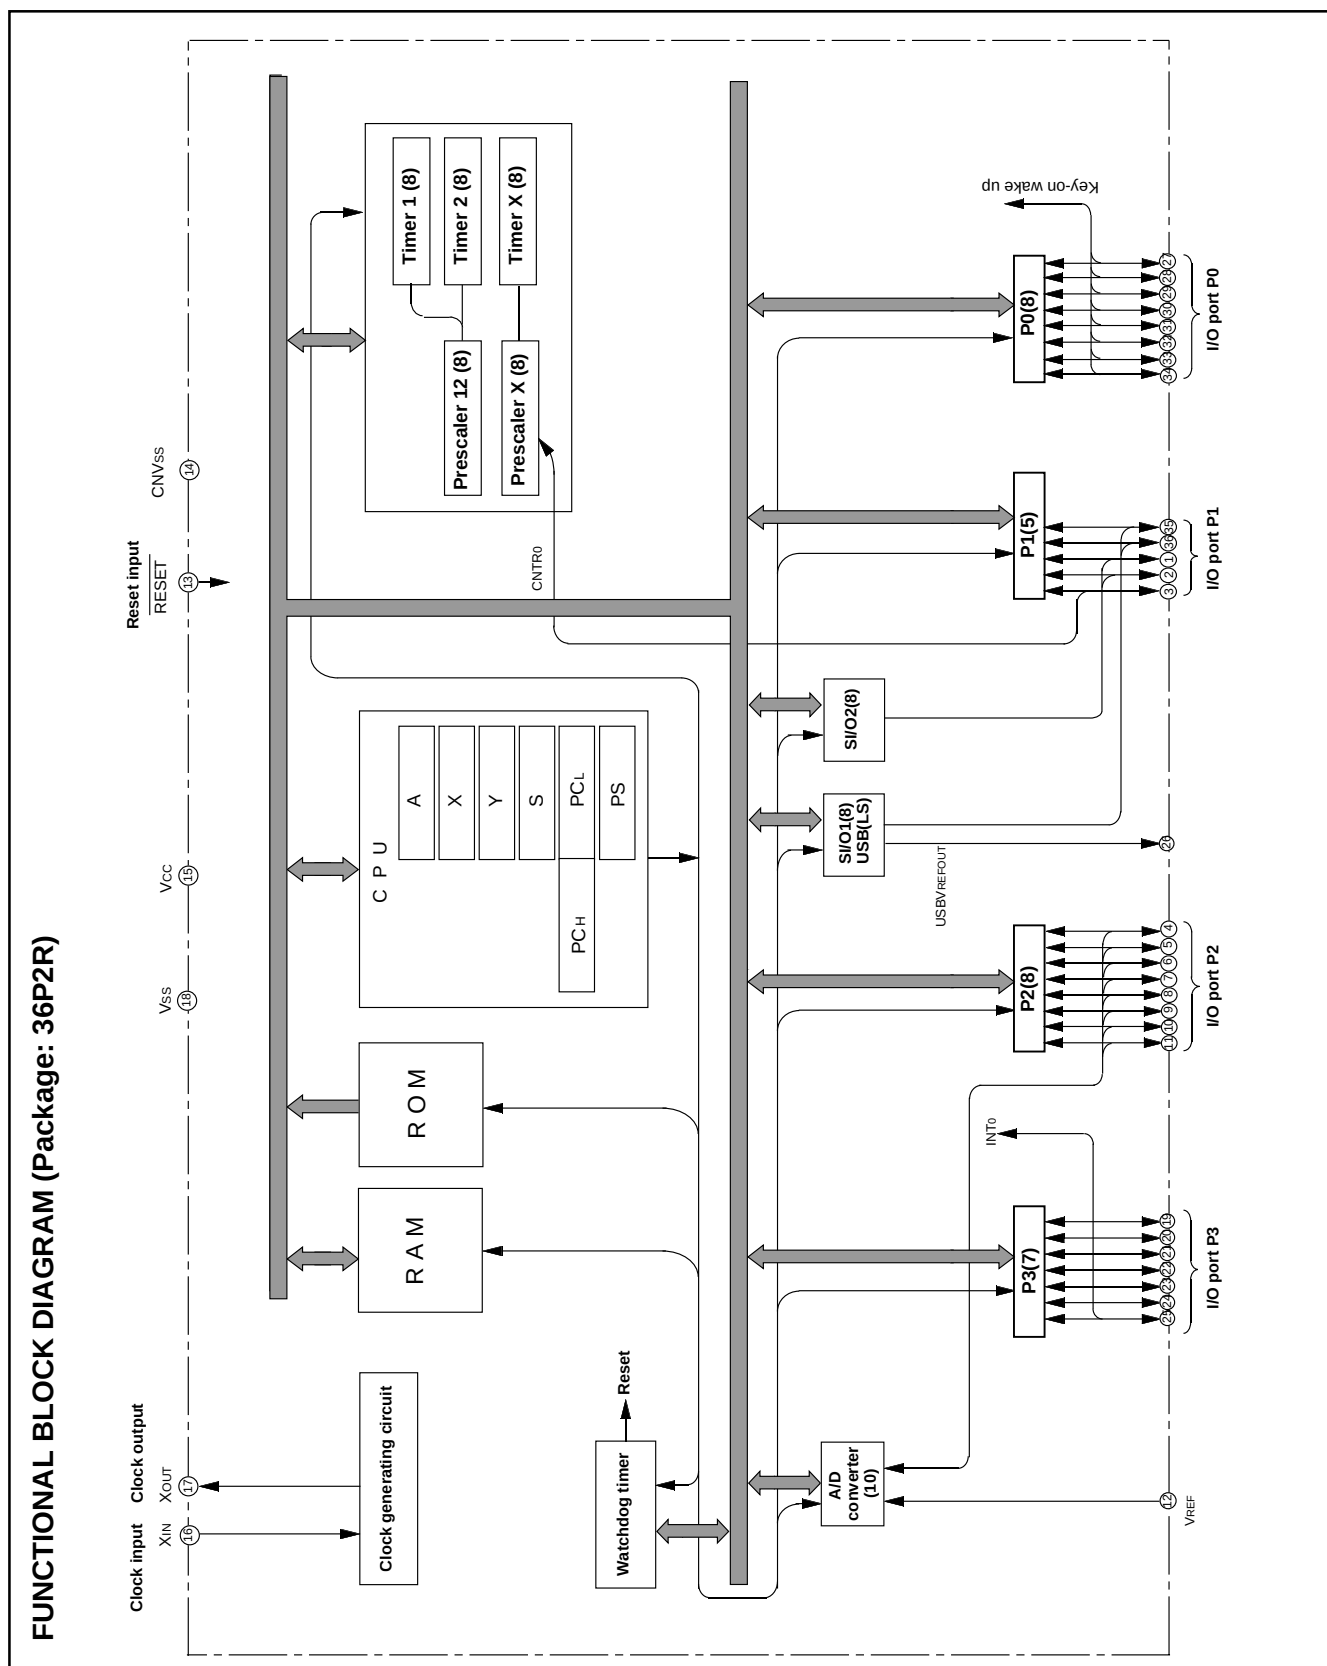


Fig. 4 Functional block diagram (36P2R package type)

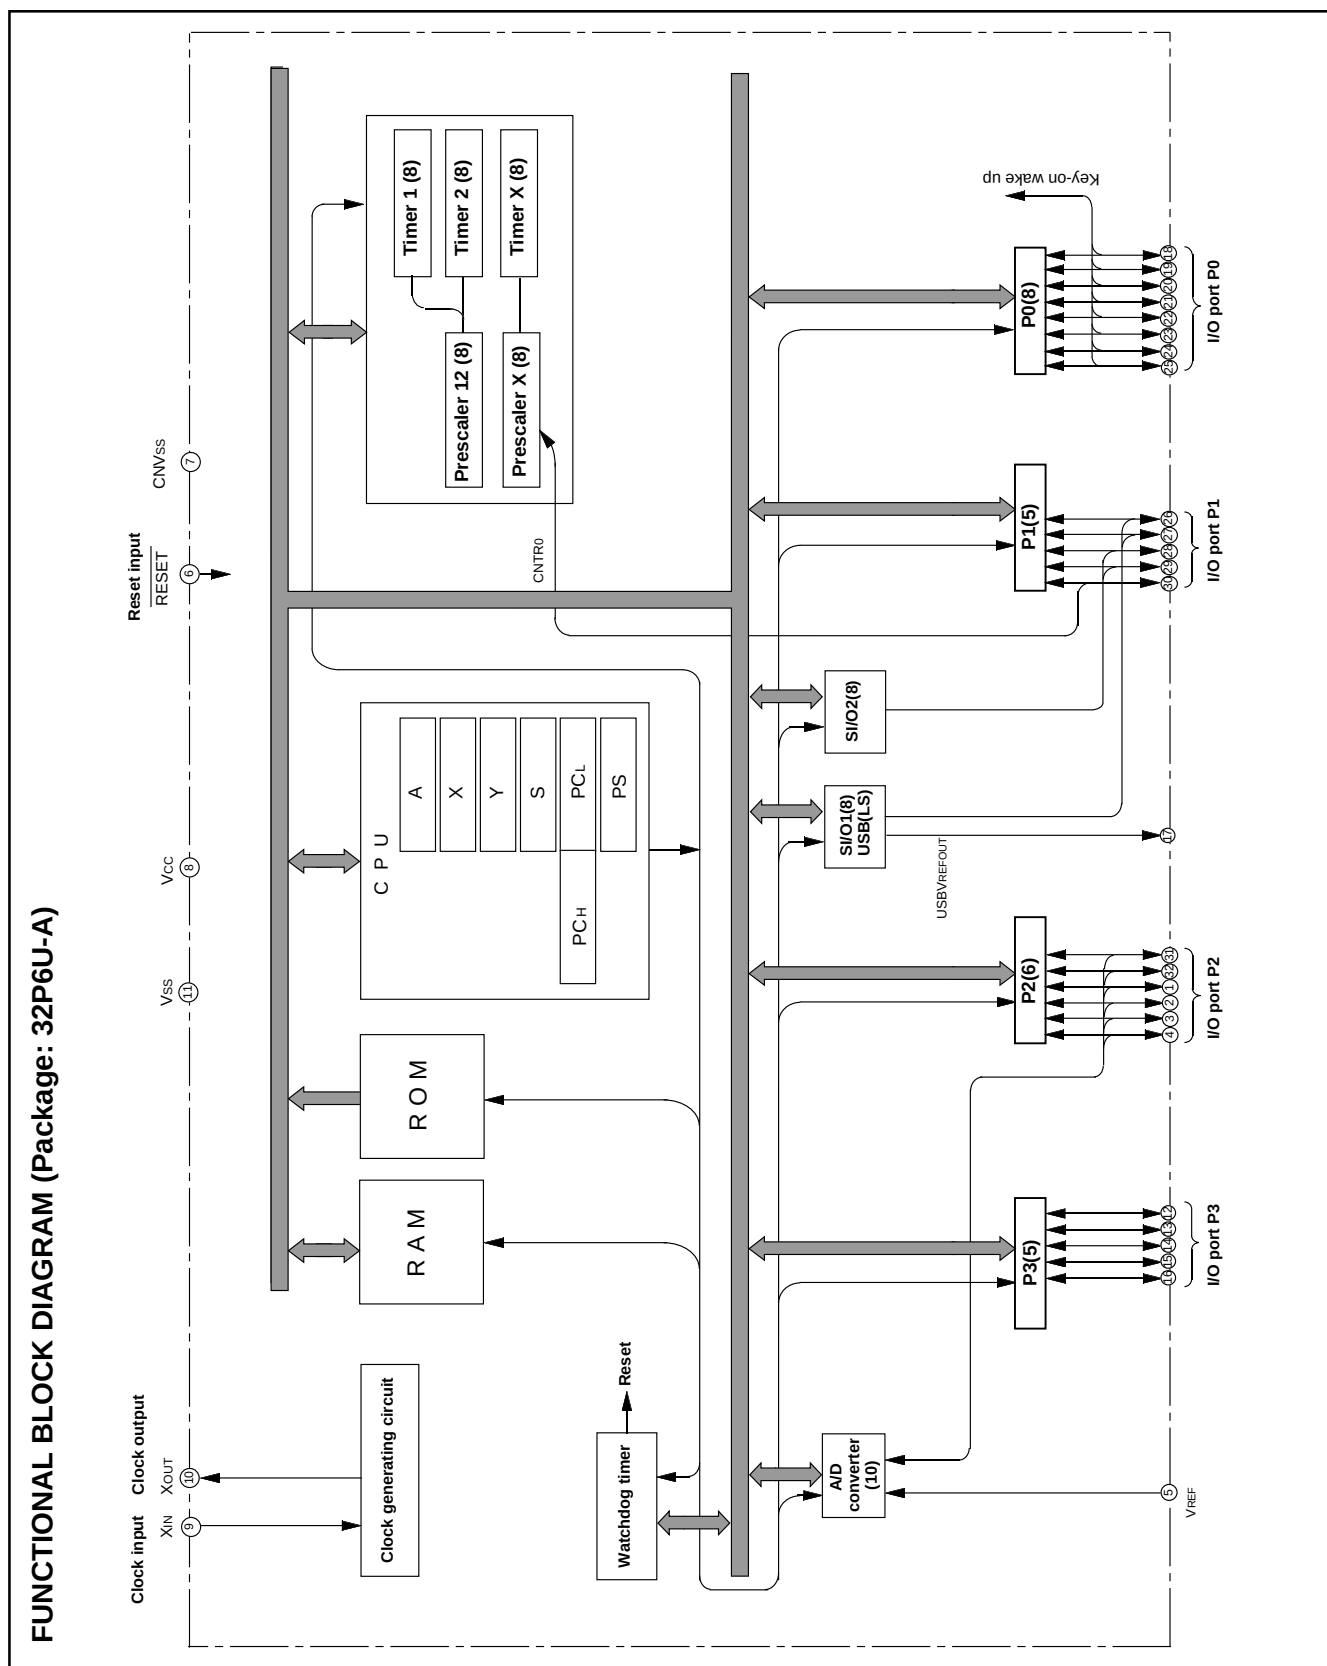


Fig. 5 Functional block diagram (32P6U-A package type)

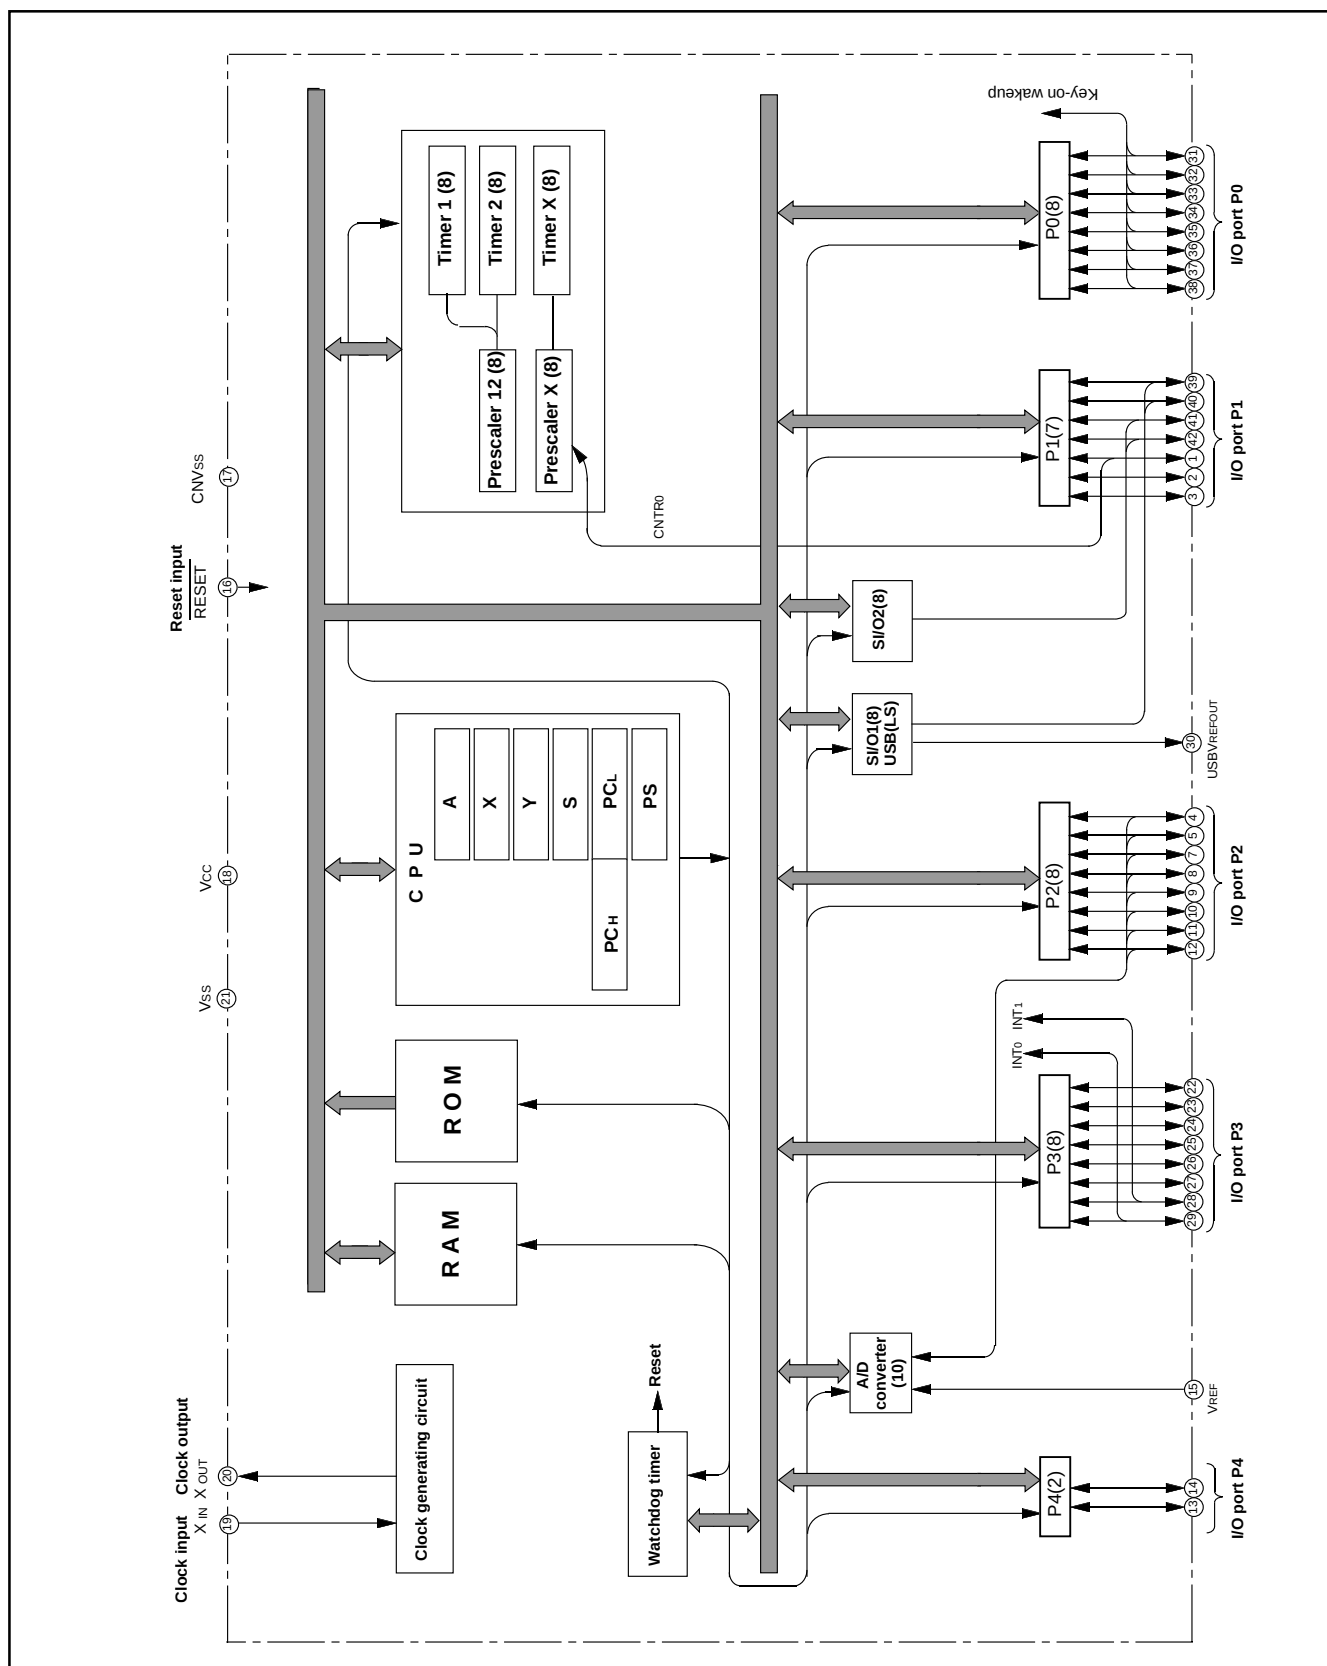


Fig. 6 Functional block diagram (42P4B package type)

## PIN DESCRIPTION

**Table 1 Pin description**

| Pin                      | Name                         | Function                                                                                                                                                                                                                                                                                                                                                                                  | Function expect a port function                  |
|--------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Vcc, Vss                 | Power source                 | •Apply voltage of 4.1 to 5.5 V (4.4 to 5.25 V at USB operating) to Vcc, and 0 V to Vss.                                                                                                                                                                                                                                                                                                   |                                                  |
| VREF                     | Analog reference voltage     | •Reference voltage input pin for A/D converter                                                                                                                                                                                                                                                                                                                                            |                                                  |
| USBVREFOUT               | USB reference voltage output | •Output pin for pulling up a D- line with 1.5 kΩ external resistor                                                                                                                                                                                                                                                                                                                        |                                                  |
| CNVss                    | CNVss                        | •Chip operating mode control pin, which is always connected to Vss.                                                                                                                                                                                                                                                                                                                       |                                                  |
| RESET                    | Reset input                  | •Reset input pin for active "L"                                                                                                                                                                                                                                                                                                                                                           |                                                  |
| XIN                      | Clock input                  | •Input and output pins for main clock generating circuit                                                                                                                                                                                                                                                                                                                                  |                                                  |
| XOUT                     | Clock output                 | •Connect a ceramic resonator or quartz crystal oscillator between the XIN and XOUT pins.<br>•If an external clock is used, connect the clock source to the XIN pin and leave the XOUT pin open.                                                                                                                                                                                           |                                                  |
| P00–P07                  | I/O port P0                  | •8-bit I/O port.<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level<br>•CMOS 3-state output structure<br>•Whether a built-in pull-up resistor is to be used or not can be determined by program.                                                                                                         | •Key-input (key-on wake up interrupt input) pins |
| P10/RxD/D-<br>P11/TxD/D+ | I/O port P1                  | •7-bit I/O port<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level<br>•CMOS 3-state output structure<br>•CMOS/TTL level can be switched for P10, P12, P13.<br>•When using the USB function, input level of ports P10 and P11 becomes USB input level, and output level of them becomes USB output level. | •Serial I/O1 function pin                        |
| P12/SCLK                 |                              |                                                                                                                                                                                                                                                                                                                                                                                           | •Serial I/O2 function pin                        |
| P13/SDATA                |                              |                                                                                                                                                                                                                                                                                                                                                                                           | •Timer X function pin                            |
| P14/CNTR0                |                              |                                                                                                                                                                                                                                                                                                                                                                                           |                                                  |
| P15, P16                 |                              |                                                                                                                                                                                                                                                                                                                                                                                           |                                                  |
| P20/AN0–<br>P27/AN7      | I/O port P2                  | •8-bit I/O port having almost the same function as P0<br>•CMOS compatible input level<br>•CMOS 3-state output structure                                                                                                                                                                                                                                                                   | •Input pins for A/D converter                    |
| P30–P35                  | I/O port P3                  | •8-bit I/O port<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level (CMOS/TTL level can be switched for P36, P37).<br>•CMOS 3-state output structure<br>•P30 to P36 can output a large current for driving LED.                                                                                           |                                                  |
| P36/INT1<br>P37/INT0     |                              | •Whether a built-in pull-up resistor is to be used or not can be determined by program.                                                                                                                                                                                                                                                                                                   | •Interrupt input pins                            |
| P40, P41                 | I/O port P4                  | •2-bit I/O port<br>•I/O direction register allows each pin to be individually programmed as either input or output.                                                                                                                                                                                                                                                                       |                                                  |

## GROUP EXPANSION

Mitsubishi expands the 7534 group as follow:

### Memory type

Support for Mask ROM version, One Time PROM version, and Emulator MCU .

### Memory size

ROM/PROM size ..... 8 K to 16 K bytes

RAM size ..... 256 to 384 bytes

### Package

36P2R-A ..... 0.8 mm-pitch plastic molded SOP

32P6U-A ..... 0.8 mm-pitch plastic molded LQFP

42P4B ..... 42 pin plastic molded SDIP

42SIM ..... 42 pin shrink ceramic PIGGY BACK

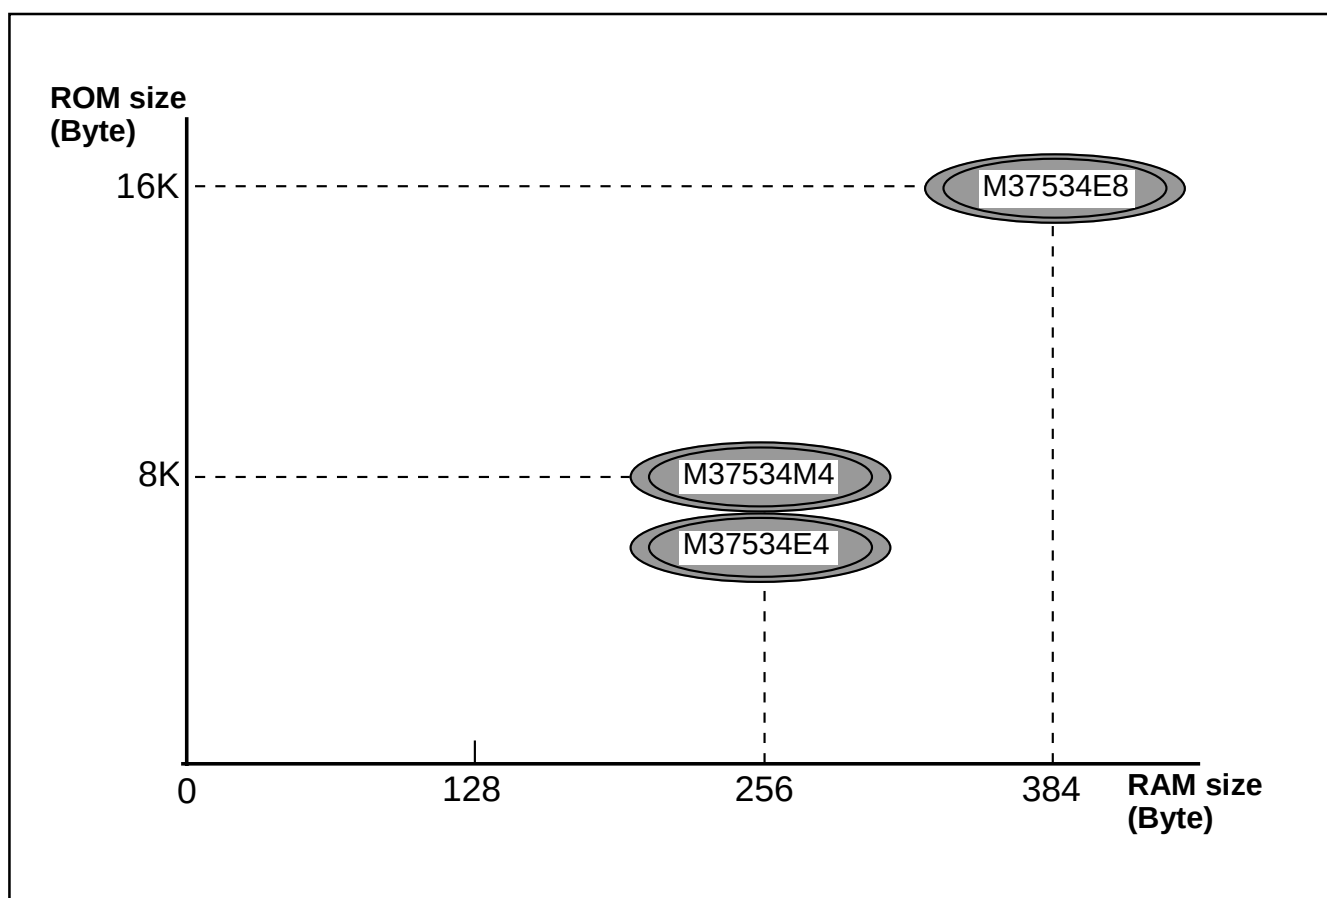


Fig. 7 Memory expansion

Currently supported products are listed below.

Table 2 List of supported products

| Part number    | (P) ROM size (bytes)<br>ROM size for User () | RAM size<br>(bytes) | Package | Remarks                       |
|----------------|----------------------------------------------|---------------------|---------|-------------------------------|
| M37534M4-XXXFP | 8192 (8062)                                  | 256                 | 36P2R-A | Mask ROM version              |
| M37534M4-XXXGP | 8192 (8062)                                  | 256                 | 32P6U-A | Mask ROM version              |
| M37534M4-XXXSP | 8192 (8062)                                  | 256                 | 42P4B   | Mask ROM version              |
| M37534E4GP     | 8192 (8062)                                  | 256                 | 32P6U-A | One Time PROM version (blank) |
| M37534E8FP     | 16384 (16254)                                | 384                 | 36P2R-A | One Time PROM version (blank) |
| M37534E8SP     | 16384 (16254)                                | 384                 | 42P4B   | One Time PROM version (blank) |
| M37534RSS      | —                                            | 384                 | 42S1M   | Emulator MCU                  |



## FUNCTIONAL DESCRIPTION

### Central Processing Unit (CPU)

The 7534 Group uses the standard 740 family instruction set. Refer to the table of 740 family addressing modes and machine-language instructions or the 740 Family Software Manual for details on each instruction set.

Machine-resident 740 family instructions are as follows:

1. The FST and SLW instructions cannot be used.
2. The MUL and DIV instructions cannot be used.
3. The WIT instruction can be used.
4. The STP instruction can be used.

#### [CPU Mode Register] CPUM

The CPU mode register contains the stack page selection bit. This register is allocated at address 003B16.

#### Note on stack page

When 1 page is used as stack area by the stack page selection bit, the area which can be used as stack depends on RAM size. Especially, be careful that the RAM area varies in Mask ROM version, One Time PROM version and Emulator MCU.

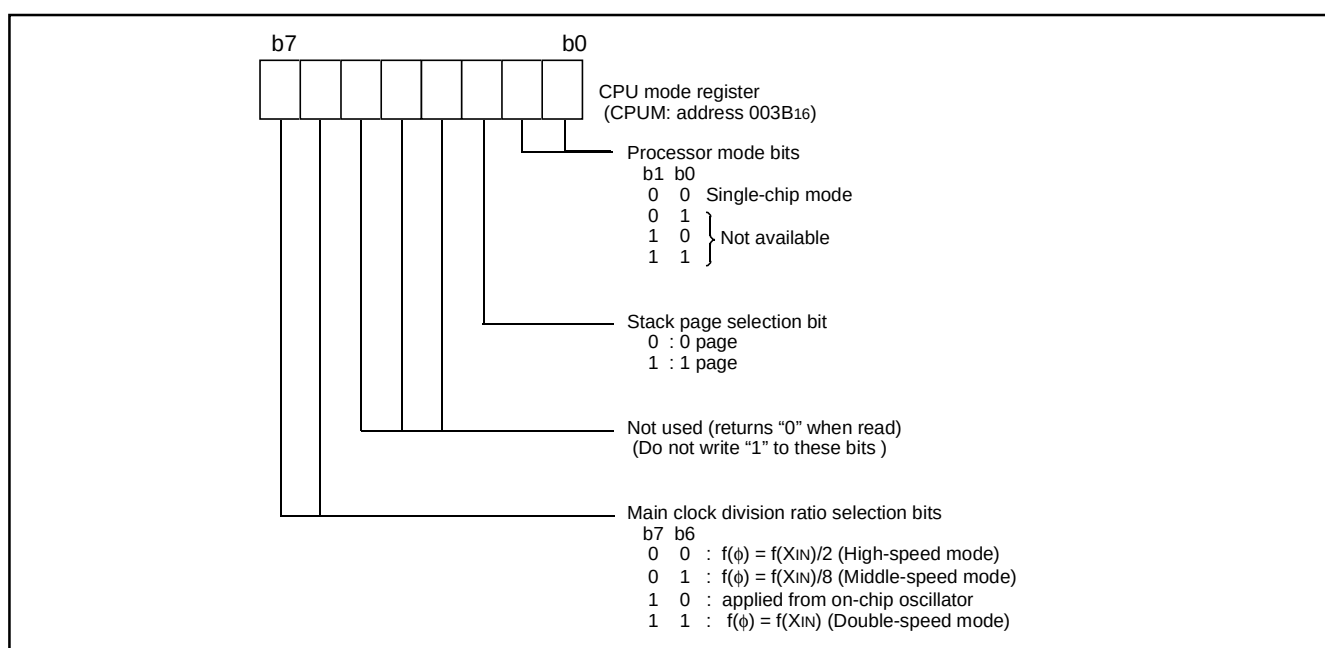


Fig. 8 Structure of CPU mode register

#### Switching method of CPU mode register

Switch the CPU mode register (CPUM) at the head of program after releasing Reset in the following method.

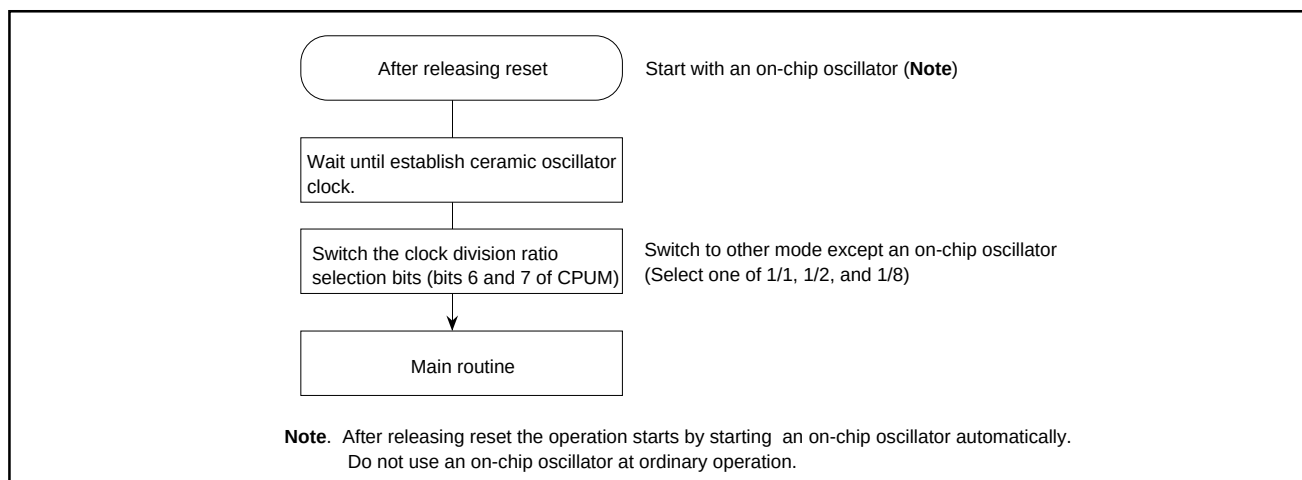


Fig. 9 Switching method of CPU mode register

## Memory

### Special function register (SFR) area

The SFR area in the zero page contains control registers such as I/O ports and timers.

### RAM

RAM is used for data storage and for a stack area of subroutine calls and interrupts.

### ROM

The first 128 bytes and the last 2 bytes of ROM are reserved for device testing and the rest is a user area for storing programs.

### Interrupt vector area

The interrupt vector area contains reset and interrupt vectors.

### Zero page

The 256 bytes from addresses  $0000_{16}$  to  $00FF_{16}$  are called the zero page area. The internal RAM and the special function registers (SFR) are allocated to this area.

The zero page addressing mode can be used to specify memory and register addresses in the zero page area. Access to this area with only 2 bytes is possible in the zero page addressing mode.

### Special page

The 256 bytes from addresses  $FF00_{16}$  to  $FFFF_{16}$  are called the special page area. The special page addressing mode can be used to specify memory addresses in the special page area. Access to this area with only 2 bytes is possible in the special page addressing mode.

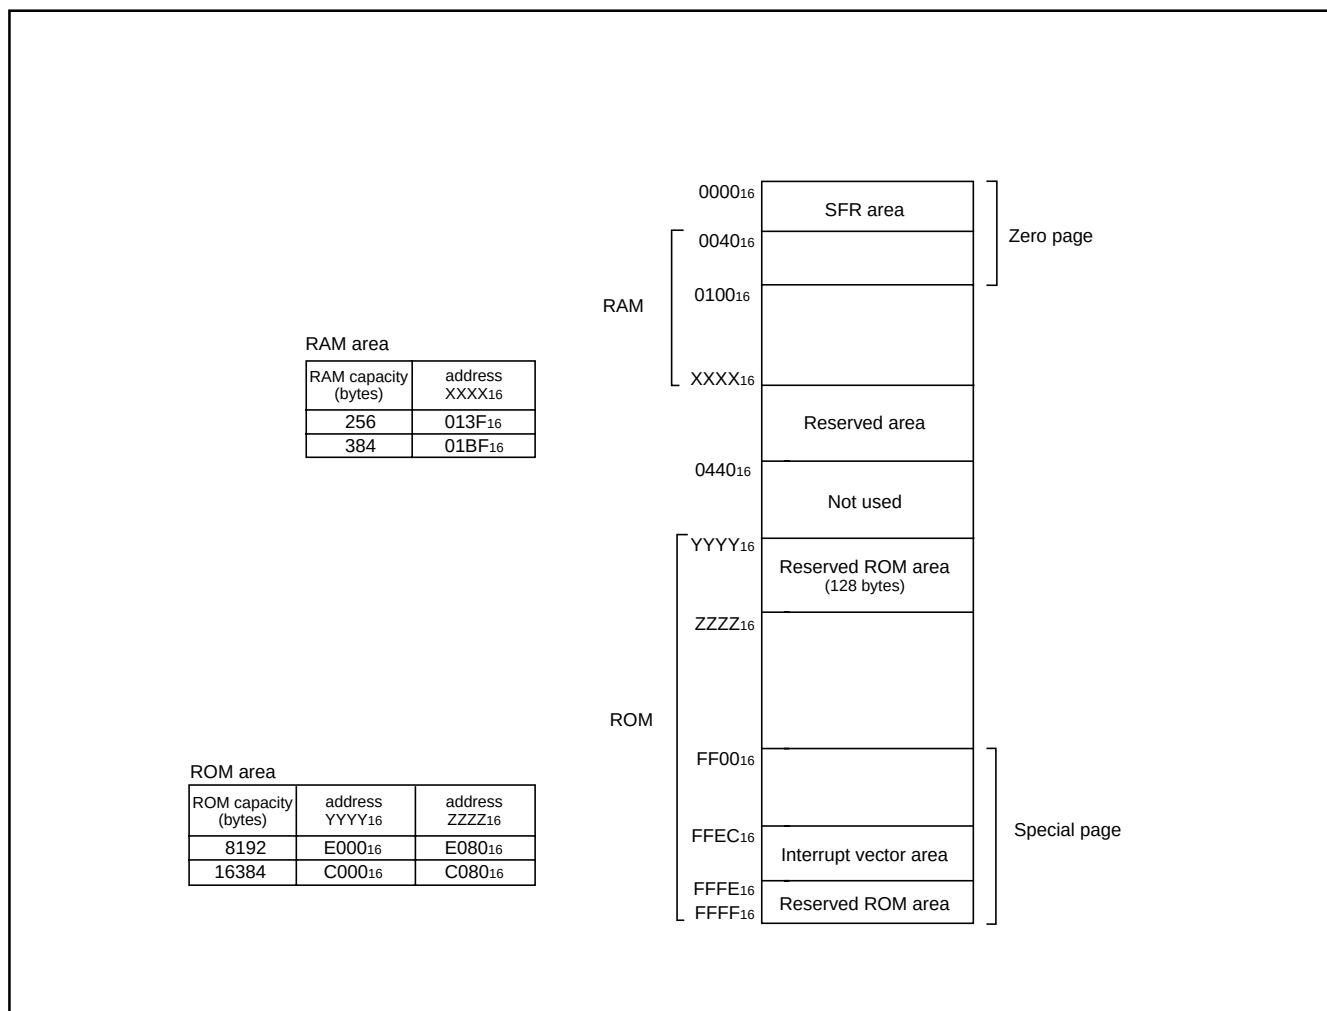


Fig. 10 Memory map diagram

|                    |                                                             |                    |                                                        |
|--------------------|-------------------------------------------------------------|--------------------|--------------------------------------------------------|
| 0000 <sub>16</sub> | Port P0 (P0)                                                | 0020 <sub>16</sub> | USB interrupt control register (USBICON)               |
| 0001 <sub>16</sub> | Port P0 direction register (P0D)                            | 0021 <sub>16</sub> | USB transmit data byte number set register 0 (EP0BYTE) |
| 0002 <sub>16</sub> | Port P1 (P1)                                                | 0022 <sub>16</sub> | USB transmit data byte number set register 1 (EP1BYTE) |
| 0003 <sub>16</sub> | Port P1 direction register (P1D)                            | 0023 <sub>16</sub> | USBPID control register 0 (EP0PID)                     |
| 0004 <sub>16</sub> | Port P2 (P2)                                                | 0024 <sub>16</sub> | USBPID control register 1 (EP1PID)                     |
| 0005 <sub>16</sub> | Port P2 direction register (P2D)                            | 0025 <sub>16</sub> | USB address register (USBA)                            |
| 0006 <sub>16</sub> | Port P3 (P3)                                                | 0026 <sub>16</sub> | USB sequence bit initialization register (INISQ1)      |
| 0007 <sub>16</sub> | Port P3 direction register (P3D)                            | 0027 <sub>16</sub> | USB control register (USBCON)                          |
| 0008 <sub>16</sub> | Port P4 (P4)                                                | 0028 <sub>16</sub> | Prescaler 12 (PRE12)                                   |
| 0009 <sub>16</sub> | Port P4 direction register (P4D)                            | 0029 <sub>16</sub> | Timer 1 (T1)                                           |
| 000A <sub>16</sub> |                                                             | 002A <sub>16</sub> | Timer 2 (T2)                                           |
| 000B <sub>16</sub> |                                                             | 002B <sub>16</sub> | Timer X mode register (TM)                             |
| 000C <sub>16</sub> |                                                             | 002C <sub>16</sub> | Prescaler X (PREX)                                     |
| 000D <sub>16</sub> |                                                             | 002D <sub>16</sub> | Timer X (TX)                                           |
| 000E <sub>16</sub> |                                                             | 002E <sub>16</sub> | Timer count source set register (TCSS)                 |
| 000F <sub>16</sub> |                                                             | 002F <sub>16</sub> |                                                        |
| 0010 <sub>16</sub> |                                                             | 0030 <sub>16</sub> | Serial I/O2 control register (SIO2CON)                 |
| 0011 <sub>16</sub> |                                                             | 0031 <sub>16</sub> | Serial I/O2 register (SIO2)                            |
| 0012 <sub>16</sub> |                                                             | 0032 <sub>16</sub> |                                                        |
| 0013 <sub>16</sub> |                                                             | 0033 <sub>16</sub> |                                                        |
| 0014 <sub>16</sub> |                                                             | 0034 <sub>16</sub> | A/D control register (ADCON)                           |
| 0015 <sub>16</sub> |                                                             | 0035 <sub>16</sub> | A/D conversion register (low-order) (ADL)              |
| 0016 <sub>16</sub> | Pull-up control register (PULL)                             | 0036 <sub>16</sub> | A/D conversion register (high-order) (ADH)             |
| 0017 <sub>16</sub> | Port P1P3 control register (P1P3C)                          | 0037 <sub>16</sub> |                                                        |
| 0018 <sub>16</sub> | Transmit/Receive buffer register (TB/RB)                    | 0038 <sub>16</sub> | MISRG                                                  |
| 0019 <sub>16</sub> | USB status register (USBSTS)/UART status register (UARTSTS) | 0039 <sub>16</sub> | Watchdog timer control register (WDTCON)               |
| 001A <sub>16</sub> | Serial I/O1 control register (SIO1CON)                      | 003A <sub>16</sub> | Interrupt edge selection register (INTEDGE)            |
| 001B <sub>16</sub> | UART control register (UARTCON)                             | 003B <sub>16</sub> | CPU mode register (CPUM)                               |
| 001C <sub>16</sub> | Baud rate generator (BRG)                                   | 003C <sub>16</sub> | Interrupt request register 1 (IREQ1)                   |
| 001D <sub>16</sub> | USB data toggle synchronization register ( TRSYNC)          | 003D <sub>16</sub> |                                                        |
| 001E <sub>16</sub> | USB interrupt source discrimination register 1 (USBIR1)     | 003E <sub>16</sub> | Interrupt control register 1 (ICON1)                   |
| 001F <sub>16</sub> | USB interrupt source discrimination register 2 (USBIR2)     | 003F <sub>16</sub> |                                                        |

Fig. 11 Memory map of special function register (SFR)

## I/O Ports

### [Direction registers] PiD

The I/O ports have direction registers which determine the input/output direction of each pin. Each bit in a direction register corresponds to one pin, and each pin can be set to be input or output.

When "1" is set to the bit corresponding to a pin, this pin becomes an output port. When "0" is set to the bit, the pin becomes an input port. When data is read from a pin set to output, not the value of the pin itself but the value of port latch is read. Pins set to input are floating, and permit reading pin values.

If a pin set to input is written to, only the port latch is written to and the pin remains floating.

### [Pull-up control] PULL

By setting the pull-up control register (address 0016<sub>16</sub>), ports P0 and P3 can exert pull-up control by program. However, pins set to output are disconnected from this control and cannot exert pull-up control.

### [Port P1P3 control] P1P3C

By setting the port P1P3 control register (address 0017<sub>16</sub>), a CMOS input level or a TTL input level can be selected for ports P10, P12, P13, P36 and P37 by program.

Then, as for the 36-pin version, set "1" to each bit 6 of the port P3 direction register and port P3 register.

As for the 32-pin version, set "1" to respective bits 5, 6, 7 of the port P3 direction register and port P3 register.

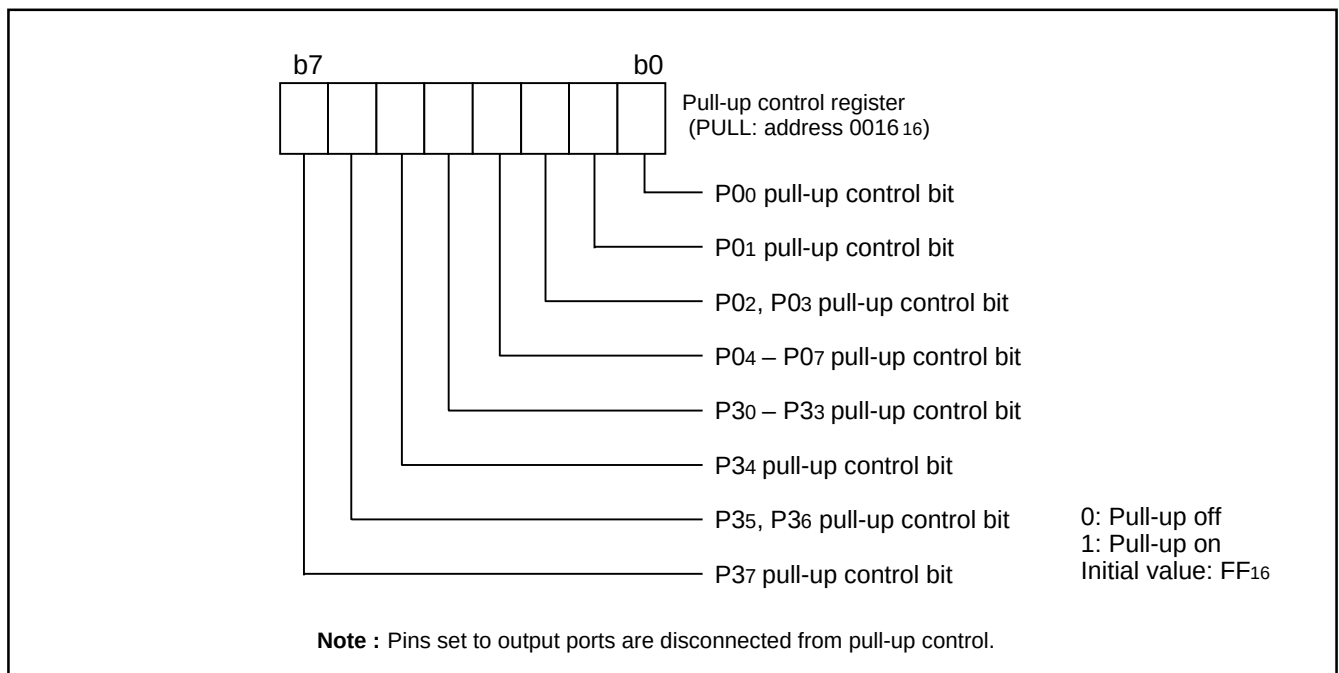


Fig. 12 Structure of pull-up control register

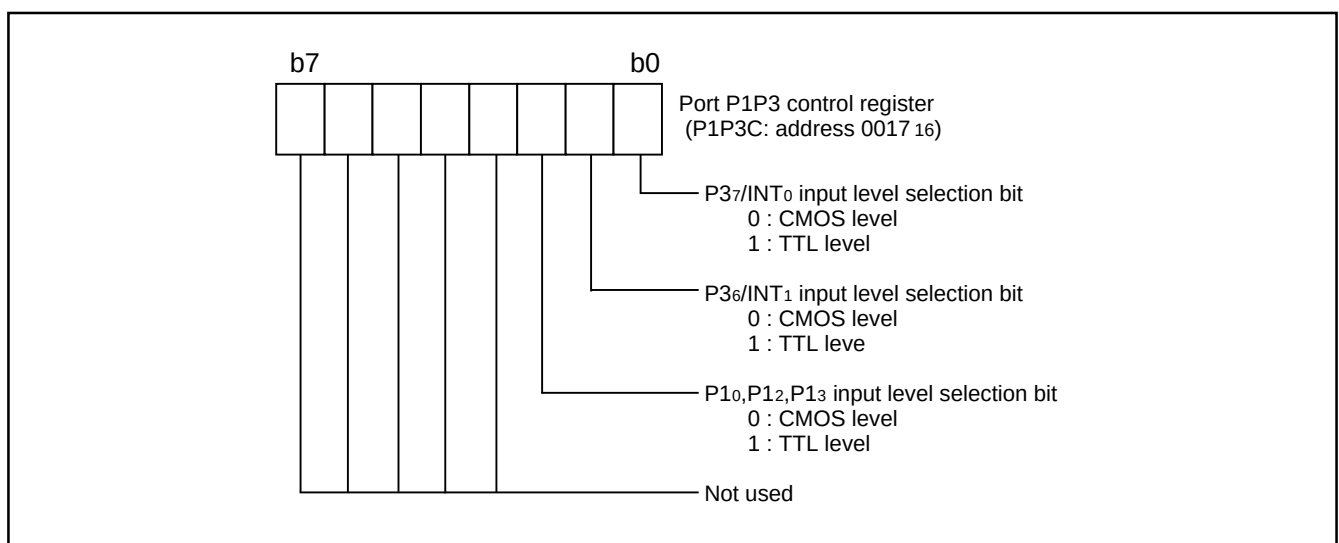


Fig. 13 Structure of port P1P3 control register

**Table 3 I/O port function table**

| Pin                      | Name        | Input/output        | I/O format                                                                                                                | Non-port function                 | Related SFRs                      | Diagram No.          |
|--------------------------|-------------|---------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-----------------------------------|----------------------|
| P00–P07                  | I/O port P0 | I/O individual bits | •CMOS compatible input level<br>•CMOS 3-state output                                                                      | Key input interrupt               | Pull-up control register          | (1)                  |
| P10/RxD/D-<br>P11/TxD/D+ | I/O port P1 |                     | •USB input/output level when selecting USB function<br><br>•CMOS compatible input level<br>•CMOS 3-state output<br>(Note) | Serial I/O1 function input/output | Serial I/O1 control register      | (2)<br>(3)           |
| P12/SCLK<br>P13/SDATA    |             |                     |                                                                                                                           | Serial I/O2 function input/output | Serial I/O2 control register      | (4)<br>(5)           |
| P14/CNTR0                |             |                     |                                                                                                                           | Timer X function input/output     | Timer X mode register             | (6)                  |
| P15, P16                 |             |                     |                                                                                                                           |                                   |                                   | (10)                 |
| P20/AN0–P27/AN7          |             |                     |                                                                                                                           | I/O port P2                       | A/D conversion input              | A/D control register |
| P30–P35                  | I/O port P3 |                     |                                                                                                                           |                                   |                                   | (8)                  |
| P36/INT1<br>P37/INT0     |             |                     |                                                                                                                           | External interrupt input          | Interrupt edge selection register | (9)                  |
| P40, P41                 |             |                     |                                                                                                                           | I/O port P4                       |                                   |                      |

**Note:** Port P10, P12, P13, P36, P37 is CMOS/TTL level.



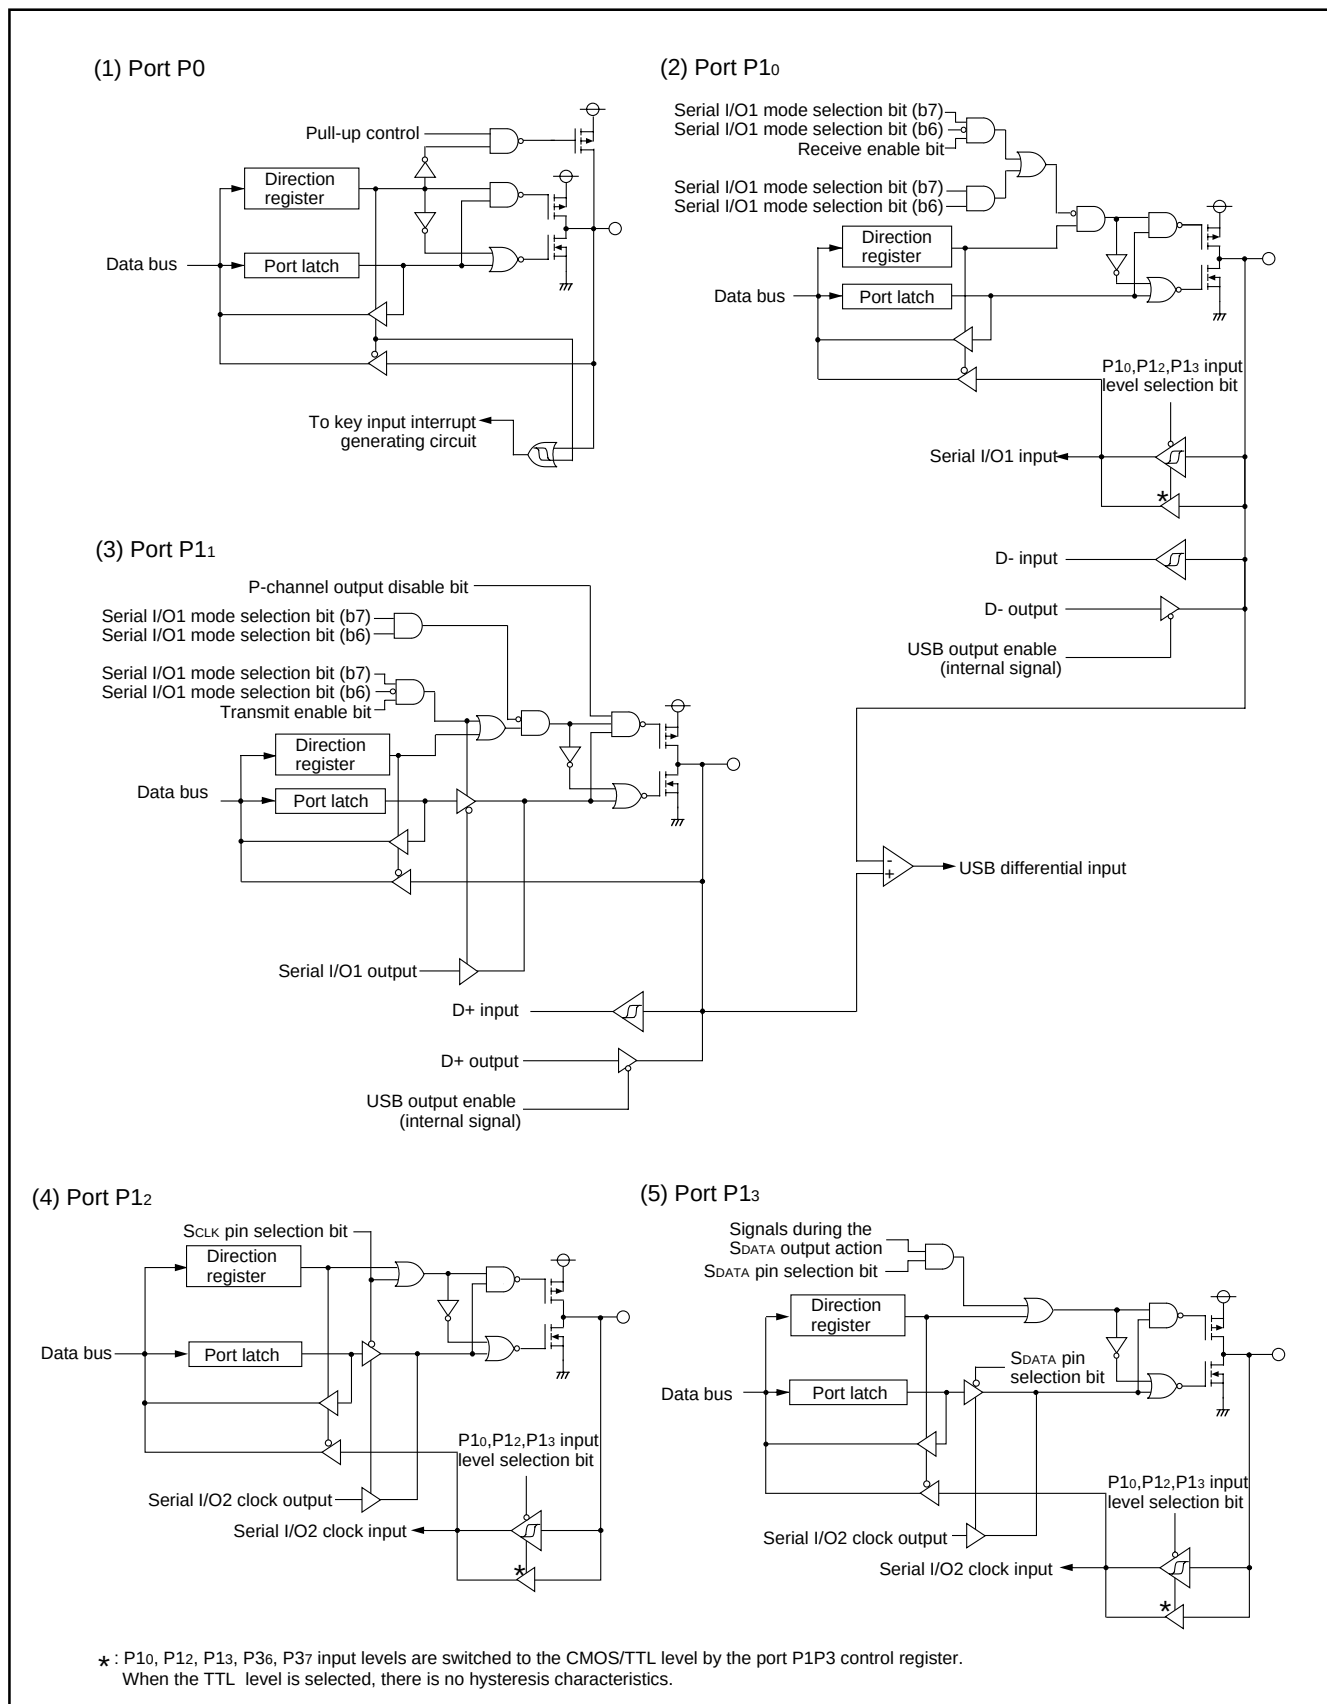


Fig. 14 Block diagram of ports (1)


(6) Ports P14

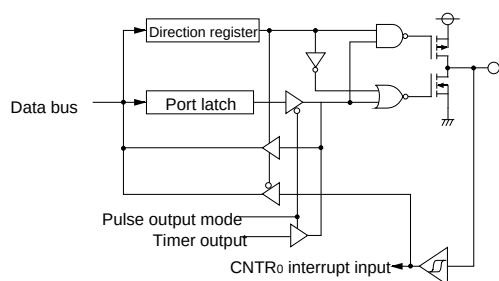


(7) Ports P20–P27

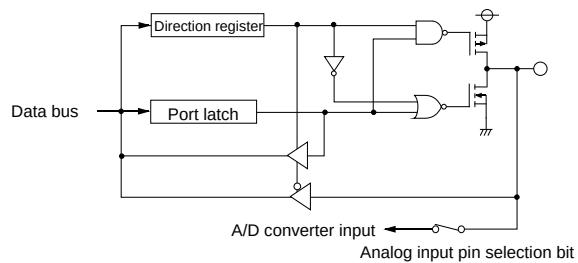


(8) Ports P30–P35

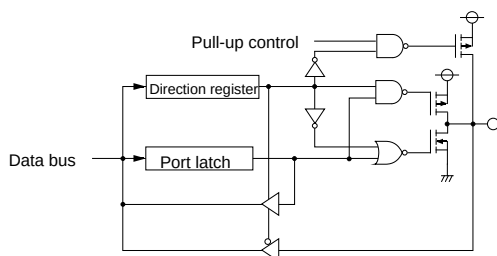

(9) Ports P36, P37

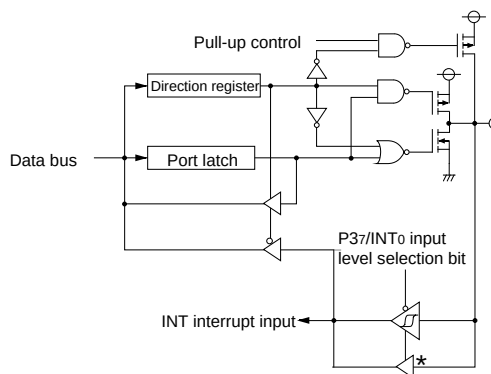

(10) Ports P15, P16, P40, P41

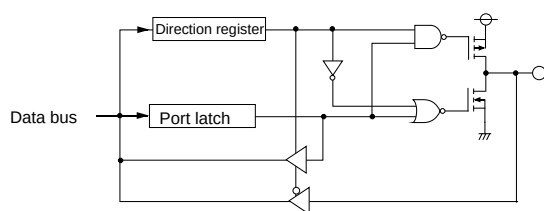

★: P10, P12, P13, P36, P37 input levels are switched to the CMOS/TTL level by the port P1P3 control register. When the TTL level is selected, there is no hysteresis characteristics.

Fig. 15 Block diagram of ports (2)

## Interrupts

Interrupts occur by 14 different sources : 4 external sources, 9 internal sources and 1 software source.

### Interrupt control

All interrupts except the BRK instruction interrupt have an interrupt request bit and an interrupt enable bit, and they are controlled by the interrupt disable flag. When the interrupt enable bit and the interrupt request bit are set to "1" and the interrupt disable flag is set to "0", an interrupt is accepted.

The interrupt request bit can be cleared by program but not be set.

The interrupt enable bit can be set and cleared by program.

It becomes usable by switching CNTR0 and A/D interrupt sources with bit 7 of the interrupt edge selection register, timer 2 and serial I/O2 interrupt sources with bit 6, timer X and key-on wake-up interrupt sources with bit 5, and serial I/O transmit and INT1 interrupt sources with bit 4.

The reset and BRK instruction interrupt can never be disabled with any flag or bit. All interrupts except these are disabled when the interrupt disable flag is set.

When several interrupts occur at the same time, the interrupts are received according to priority.

### Interrupt operation

Upon acceptance of an interrupt the following operations are automatically performed:

1. The processing being executed is stopped.
2. The contents of the program counter and processor status register are automatically pushed onto the stack.
3. The interrupt disable flag is set and the corresponding interrupt request bit is cleared.
4. Concurrently with the push operation, the interrupt destination address is read from the vector table into the program counter.

### Notes on use

When the active edge of an external interrupt (INT0, INT1, CNTR0) is set, the interrupt request bit may be set.

Therefore, please take following sequence:

1. Disable the external interrupt which is selected.
2. Change the active edge in interrupt edge selection register. (in case of CNTR0: Timer X mode register)
3. Clear the set interrupt request bit to "0".
4. Enable the external interrupt which is selected.

**Table 6 Interrupt vector address and priority**

| Interrupt source                            | Priority | Vector addresses (Note 1) |                    | Interrupt request generating conditions                                      | Remarks                                     |
|---------------------------------------------|----------|---------------------------|--------------------|------------------------------------------------------------------------------|---------------------------------------------|
|                                             |          | High-order                | Low-order          |                                                                              |                                             |
| Reset (Note 2)                              | 1        | FFFD <sub>16</sub>        | FFFC <sub>16</sub> | At reset input                                                               | Non-maskable                                |
| UART receive                                | 2        | FFFB <sub>16</sub>        | FFFA <sub>16</sub> | At completion of UART data receive                                           | Valid in UART mode                          |
| USB IN token                                |          |                           |                    | At detection of IN token                                                     | Valid in USB mode                           |
| UART transmit                               | 3        | FFF9 <sub>16</sub>        | FFF8 <sub>16</sub> | At completion of UART transmit shift or when transmit buffer is empty        | Valid in UART mode                          |
| USB SETUP/OUT token<br>Reset/Suspend/Resume |          |                           |                    | At detection of SETUP/OUT token or<br>At detection of Reset/ Suspend/ Resume | Valid in USB mode                           |
| INT1                                        |          |                           |                    | At detection of either rising or falling edge of INT1 input                  | External interrupt (active edge selectable) |
| INT0                                        | 4        | FFF7 <sub>16</sub>        | FFF6 <sub>16</sub> | At detection of either rising or falling edge of INT0 input                  | External interrupt (active edge selectable) |
| Timer X                                     | 5        | FFF5 <sub>16</sub>        | FFF4 <sub>16</sub> | At timer X underflow                                                         | External interrupt (valid at falling)       |
| Key-on wake-up                              |          |                           |                    | At falling of conjunction of input logical level for port P0 (at input)      |                                             |
| Timer 1                                     | 6        | FFF3 <sub>16</sub>        | FFF2 <sub>16</sub> | At timer 1 underflow                                                         | STP release timer underflow                 |
| Timer 2                                     | 7        | FFF1 <sub>16</sub>        | FFF0 <sub>16</sub> | At timer 2 underflow                                                         |                                             |
| Serial I/O2                                 |          |                           |                    | At completion of transmit/receive shift                                      |                                             |
| CNTR0                                       | 8        | FFEF <sub>16</sub>        | FFEE <sub>16</sub> | At detection of either rising or falling edge of CNTR0 input                 | External interrupt (active edge selectable) |
| A/D conversion                              |          |                           |                    | At completion of A/D conversion                                              |                                             |
| BRK instruction                             | 9        | FFED <sub>16</sub>        | FFEC <sub>16</sub> | At BRK instruction execution                                                 | Non-maskable software interrupt             |

**Note 1:** Vector addressed contain internal jump destination addresses.

**2:** Reset function in the same way as an interrupt with the highest priority.



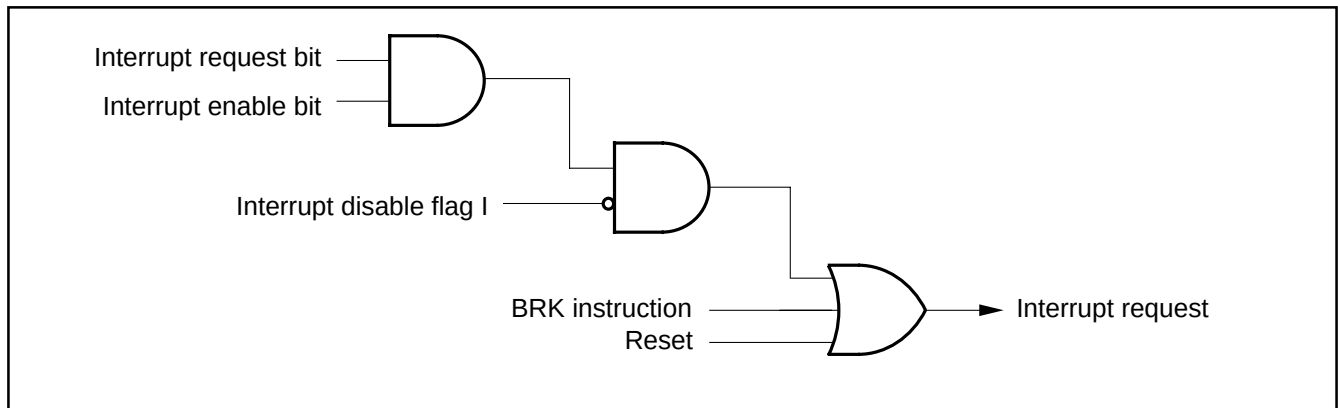


Fig. 16 Interrupt control

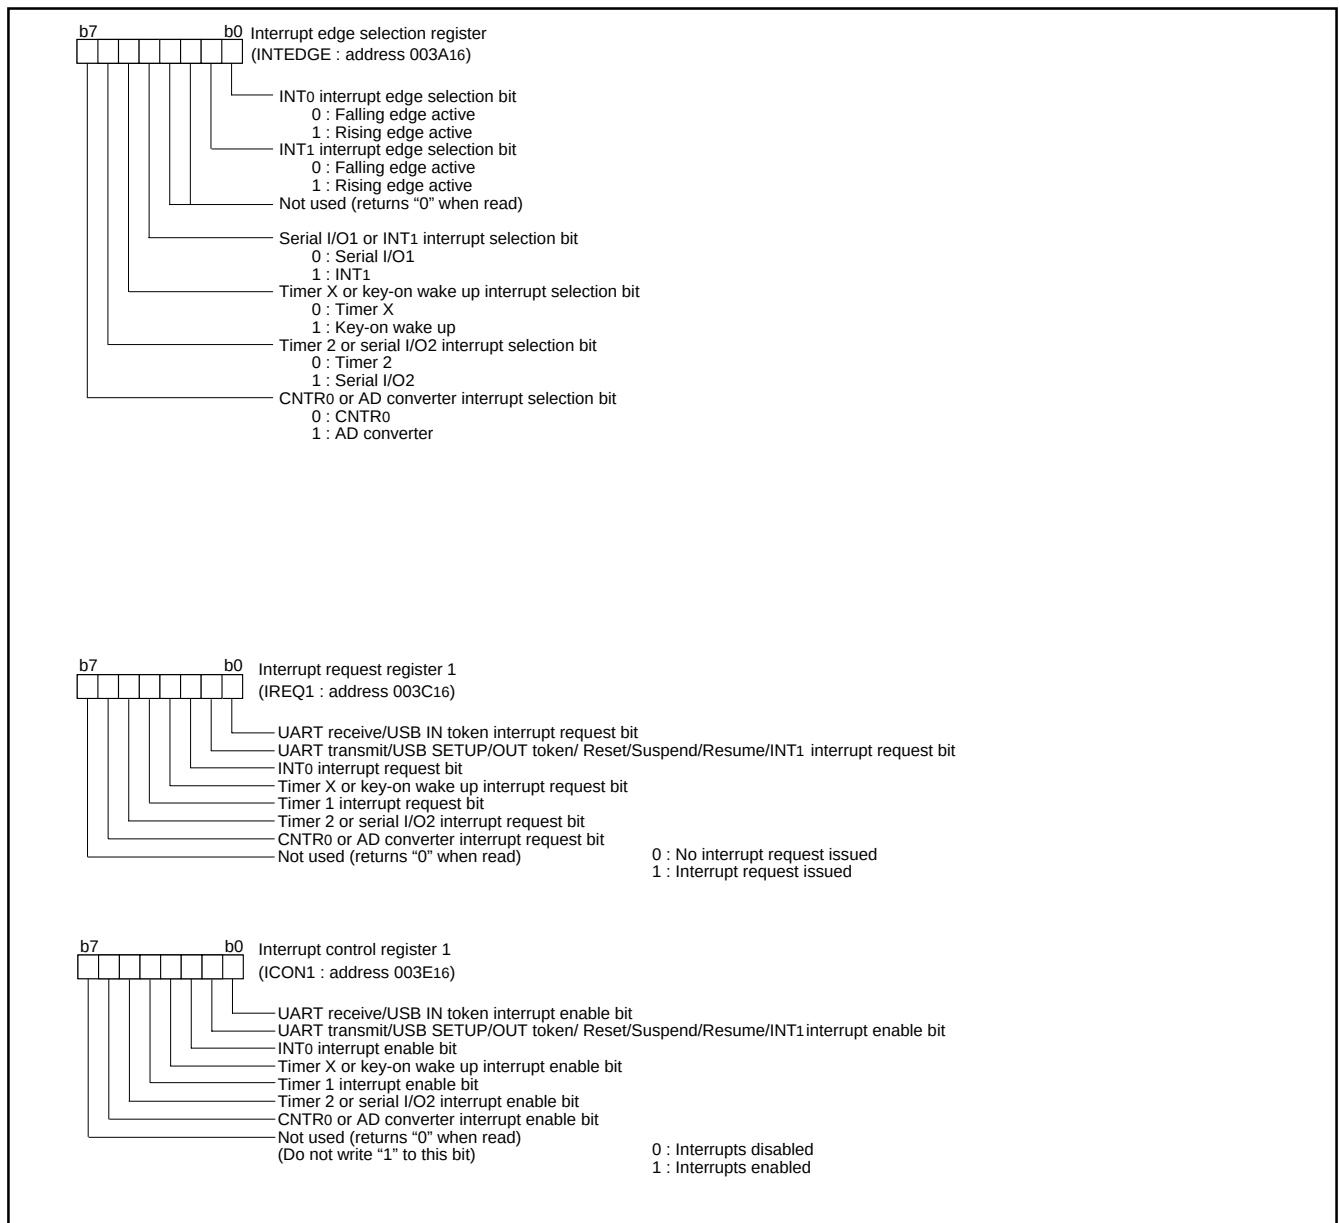


Fig. 17 Structure of Interrupt-related registers

## Key Input Interrupt (Key-On Wake-Up)

A key-on wake-up interrupt request is generated by applying "L" level to any pin of port P0 that has been set to input mode.

In other words, it is generated when the AND of input level goes from "1" to "0". An example of using a key input interrupt is shown in Figure 18, where an interrupt request is generated by pressing one of the keys provided as an active-low key matrix which uses ports P00 to P03 as input ports.

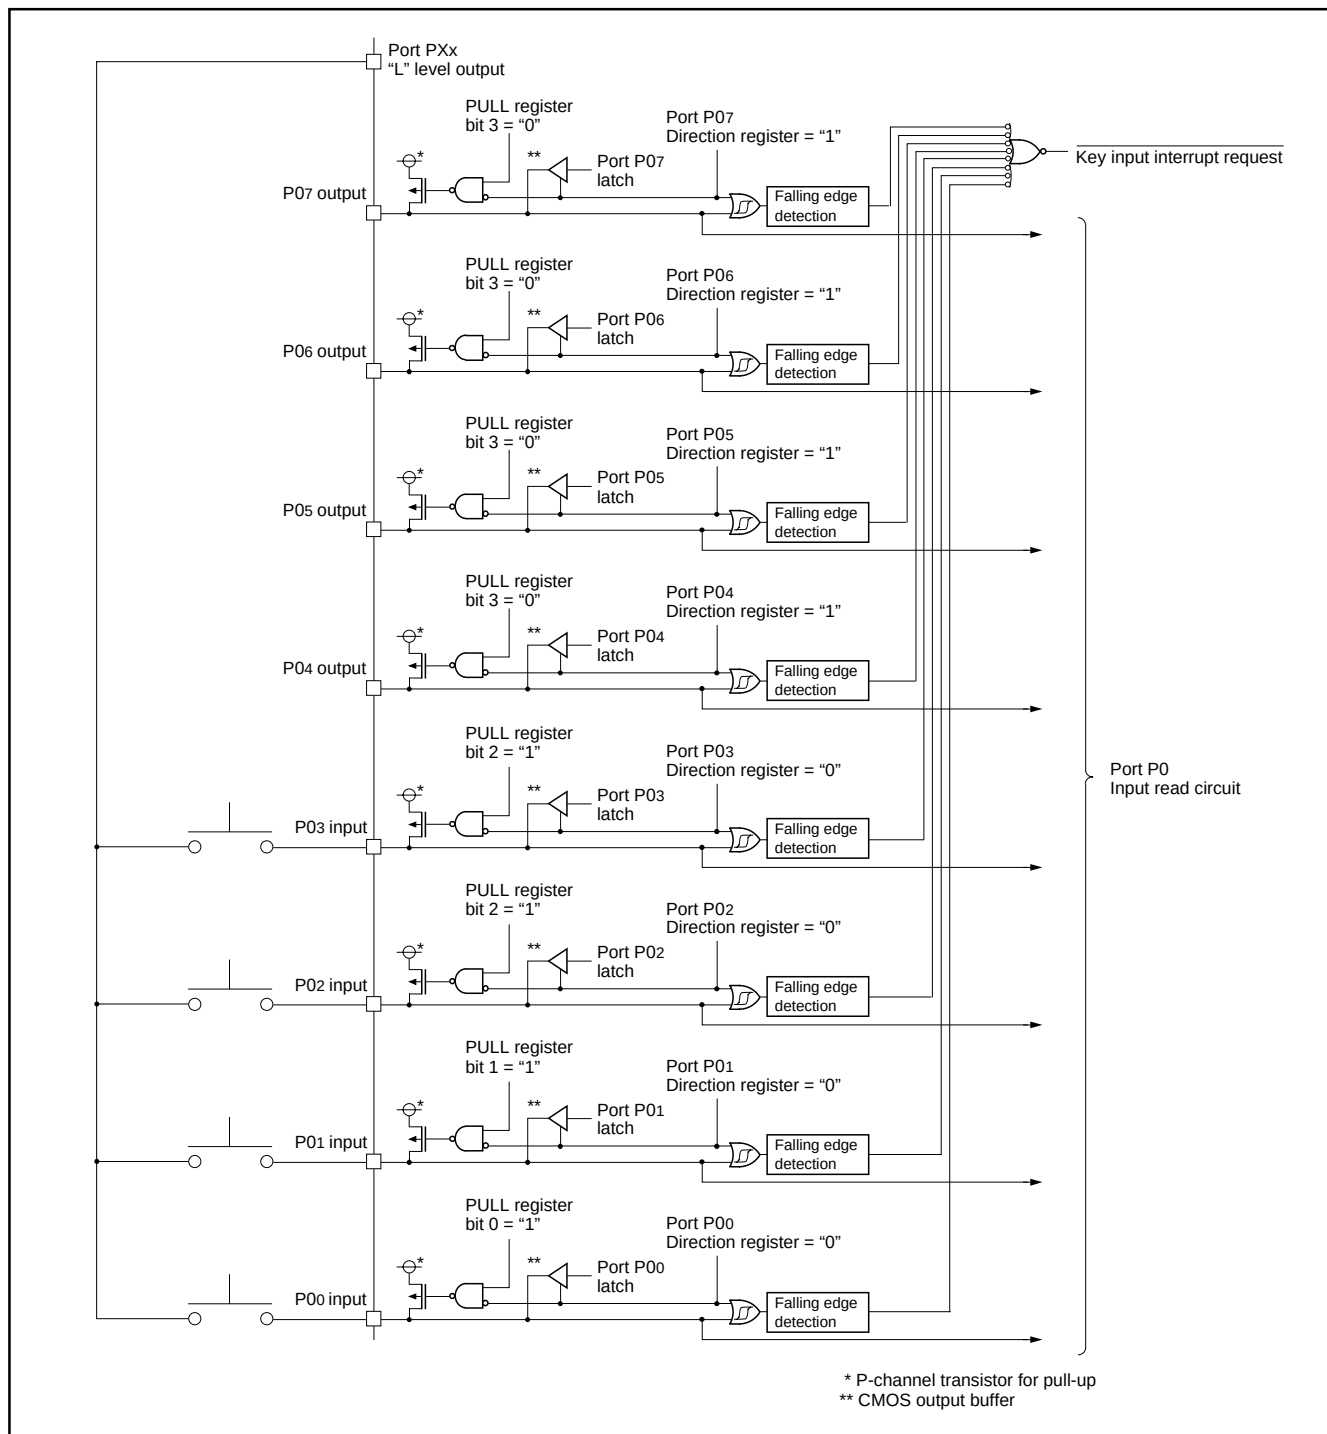


Fig. 18 Connection example when using key input interrupt and port P0 block diagram

## Timers

The 7534 Group has 3 timers: timer X, timer 1 and timer 2.

The division ratio of every timer and prescaler is  $1/(n+1)$  provided that the value of the timer latch or prescaler is  $n$ .

All the timers are down count timers. When a timer reaches "0", an underflow occurs at the next count pulse, and the corresponding timer latch is reloaded into the timer. When a timer underflows, the interrupt request bit corresponding to each timer is set to "1".

### ●Timer 1, Timer 2

Prescaler 12 always counts  $f(X_{IN})/16$ . Timer 1 and timer 2 always count the prescaler output and periodically sets the interrupt request bit.

### ●Timer X

Timer X can be selected in one of 4 operating modes by setting the timer X mode register.

#### • Timer Mode

The timer counts the signal selected by the timer X count source selection bit.

#### • Pulse Output Mode

The timer counts the signal selected by the timer X count source selection bit, and outputs a signal whose polarity is inverted each time the timer value reaches "0", from the CNTR<sub>0</sub> pin.

When the CNTR<sub>0</sub> active edge switch bit is "0", the output of the CNTR<sub>0</sub> pin is started with an "H" output.

At "1", this output is started with an "L" output. When using a timer in this mode, set the port P14 direction register to output mode.

#### • Event Counter Mode

The operation in the event counter mode is the same as that in the timer mode except that the timer counts the input signal from the CNTR<sub>0</sub> pin.

When the CNTR<sub>0</sub> active edge switch bit is "0", the timer counts the rising edge of the CNTR<sub>0</sub> pin. When this bit is "1", the timer counts the falling edge of the CNTR<sub>0</sub> pin.

#### • Pulse Width Measurement Mode

When the CNTR<sub>0</sub> active edge switch bit is "0", the timer counts the signal selected by the timer X count source selection bit while the CNTR<sub>0</sub> pin is "H". When this bit is "1", the timer counts the signal while the CNTR<sub>0</sub> pin is "L".

In any mode, the timer count can be stopped by setting the timer X count stop bit to "1". Each time the timer overflows, the interrupt request bit is set.

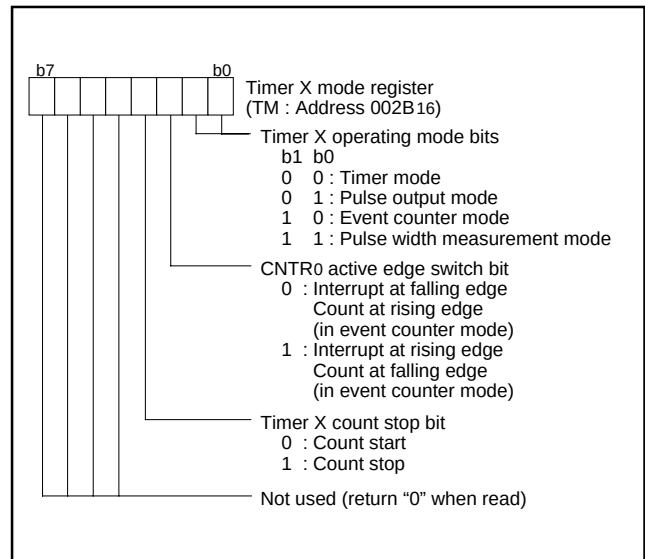


Fig. 19 Structure of timer X mode register

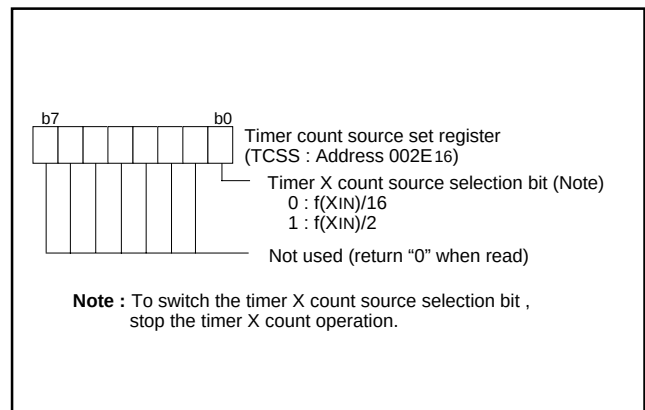


Fig. 20 Timer count source set register

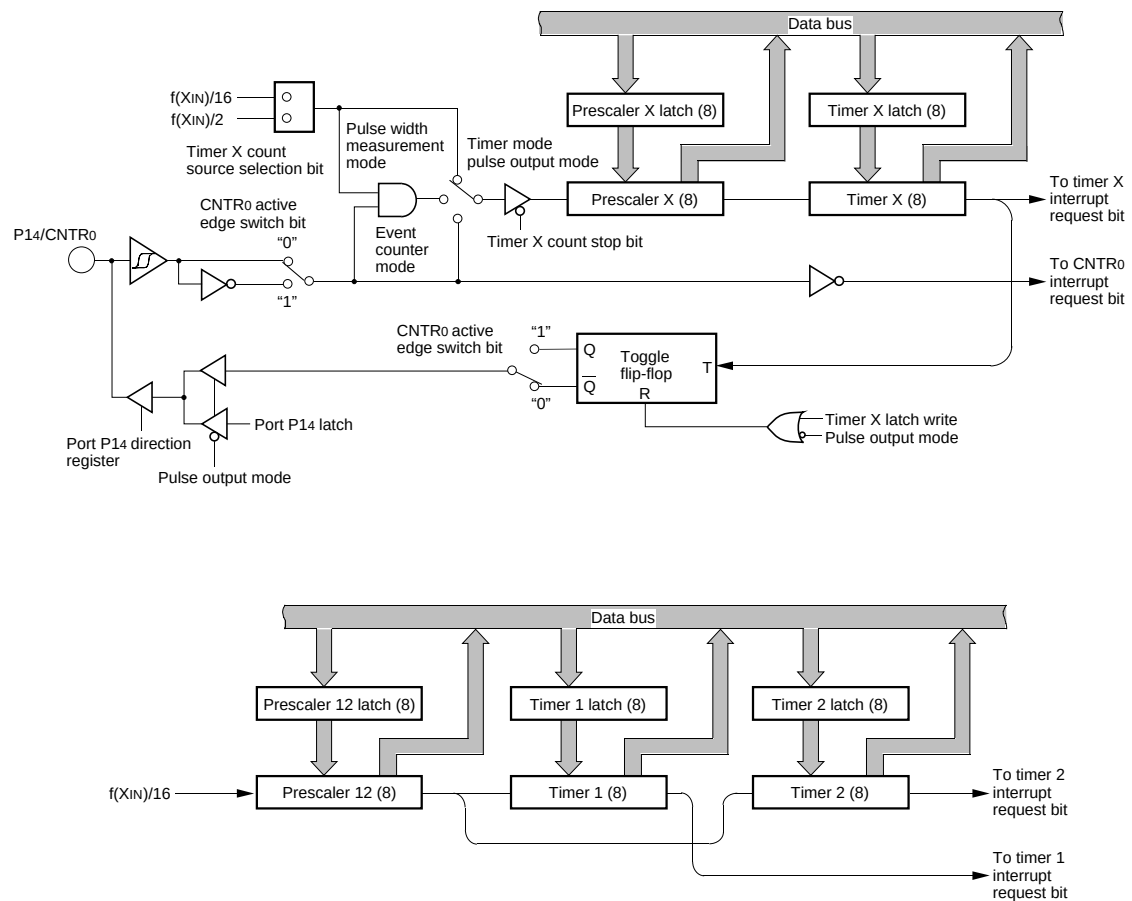


Fig. 21 Block diagram of timer X, timer 1 and timer 2

## Serial I/O

### Serial I/O1

#### Asynchronous serial I/O (UART) mode

Serial I/O1 can be used as an asynchronous (UART) serial I/O. A dedicated timer (baud rate generator) is also provided for baud rate generation when serial I/O1 is in operation.

Eight serial data transfer formats can be selected, and the transfer formats to be used by a transmitter and a receiver must be identical.

Each of the transmit and receive shift registers has a buffer register

(the same address on memory). Since the shift register cannot be written to or read from directly, transmit data is written to the transmit buffer, and receive data is read from the respective buffer registers. These buffer registers can also hold the next data to be transmitted and receive 2-byte receive data in succession.

By selecting "1" for continuous transmit valid bit (bit 2 of SIO1CON), continuous transmission of the same data is made possible.

This can be used as a simplified PWM.

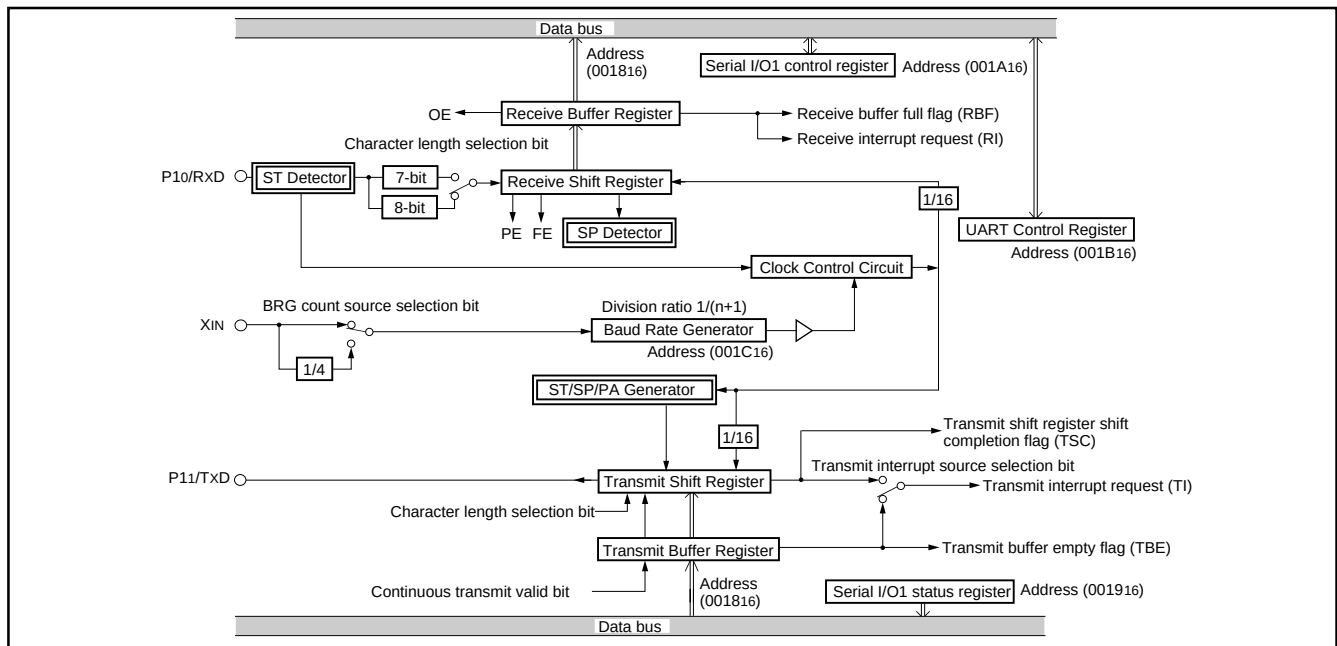


Fig. 22 Block diagram of UART serial I/O

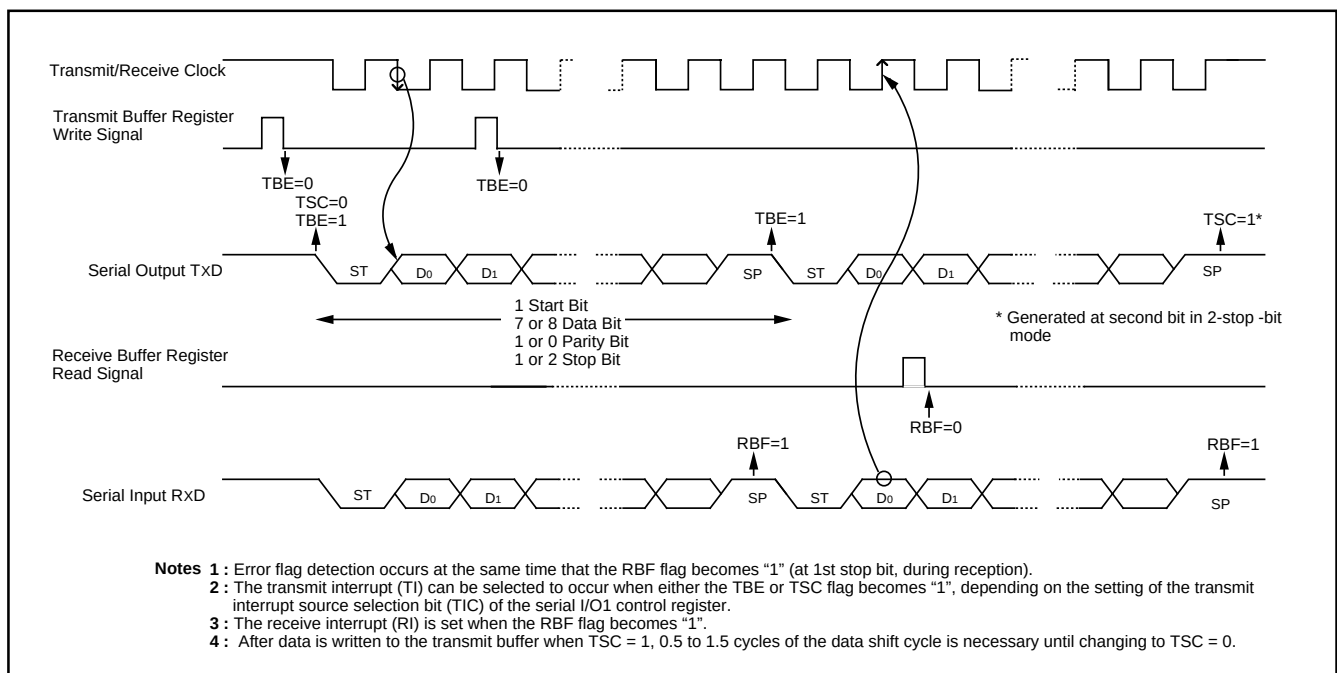


Fig. 23 Operation of UART serial I/O function

**[Serial I/O1 control register] SIO1CON**

The serial I/O1 control register consists of eight control bits for the serial I/O1 function.

**[UART control register] UARTCON**

The UART control register consists of four control bits (bits 0 to 3) which are valid when asynchronous serial I/O is selected and set the data format of an data transfer. One bit in this register (bit 4) is always valid and sets the output structure of the P11/TxD pin.

**[UART status register] UARTSTS**

The read-only UART status register consists of seven flags (bits 0 to 6) which indicate the operating status of the UART function and various errors. This register functions as the UART status register (UARTSTS) when selecting the UART.

The receive buffer full flag (bit 1) is cleared to "0" when the receive buffer is read.

If there is an error, it is detected at the same time that data is transferred from the receive shift register to the receive buffer, and the receive buffer full flag is set. A write to the UART status register clears all the error flags OE, PE, FE, and SE (bit 3 to bit 6, respectively). Writing "0" to the serial I/O1 mode selection bits MOD1 and MOD0 (bit 7 and 6 of the Serial I/O1 control register) also clears all the status flags, including the error flags.


All bits of the serial I/O1 status register are initialized to "8116" at reset, but if the transmit enable bit (bit 4) of the serial I/O1 control register has been set to "1", the continuous transmit valid bit (bit 2) becomes "1".

**[Transmit/Receive buffer register] TB/RB**

The transmit buffer and the receive buffer are located at the same address. The transmit buffer is write-only and the receive buffer is read-only. If a character bit length is 7-bit, the MSB of data stored in the receive buffer is "0".

**[Baud Rate Generator] BRG**

The baud rate generator determines the baud rate for serial transfer. The baud rate generator divides the frequency of the count source by  $1/(n + 1)$ , where n is the value written to the baud rate generator.

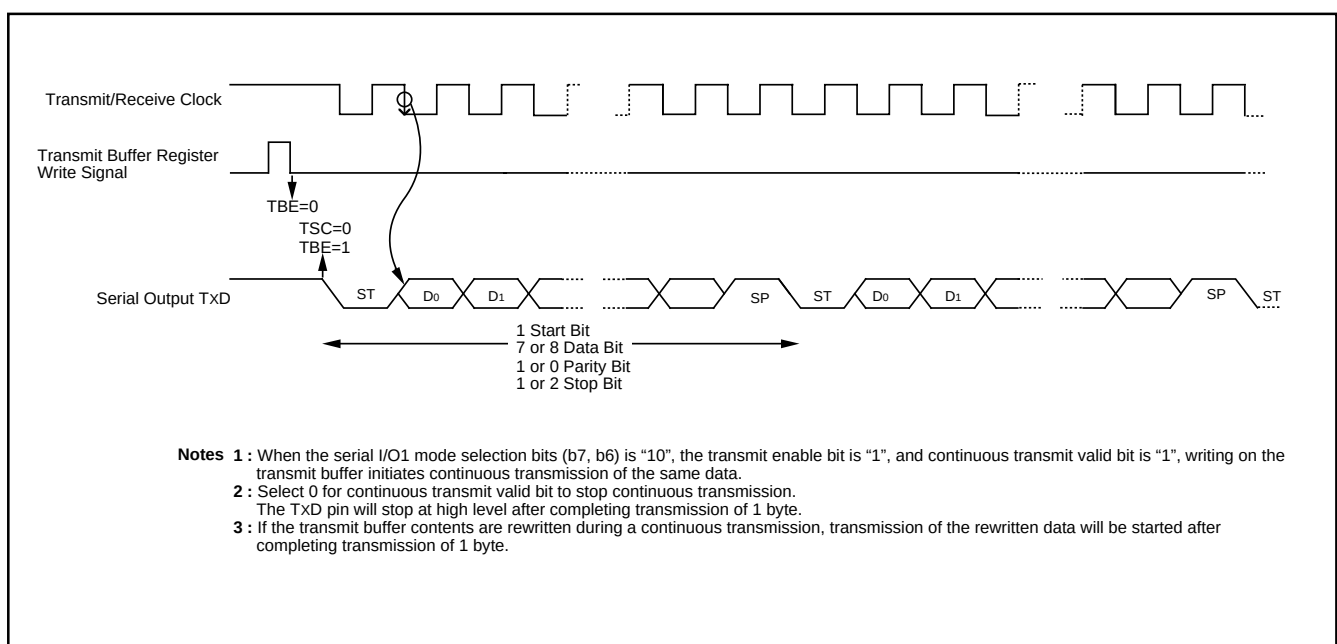

**Fig. 24 Continuous transmission operation of UART serial I/O**

### • Universal serial bus (USB) mode

By setting bits 7 and 6 of the serial I/O1 control register (address 001A16) to "11", the USB mode is selected.

This mode conforms to "Low Speed device" of USB Specification 1.1. In this mode serial I/O1 interrupt have 6 sources; USB in and out token receive, setup token receive, USB reset, suspend, and

resume. The USB status/UART status register functions as the USB status register (USBSTS). There is the USBVREFOUT pin for the USB reference voltage output, and a D-line with 1.5 kΩ external resistor can be pull up. USB mode block and USB transceiver block shown in figures 25 and 26.

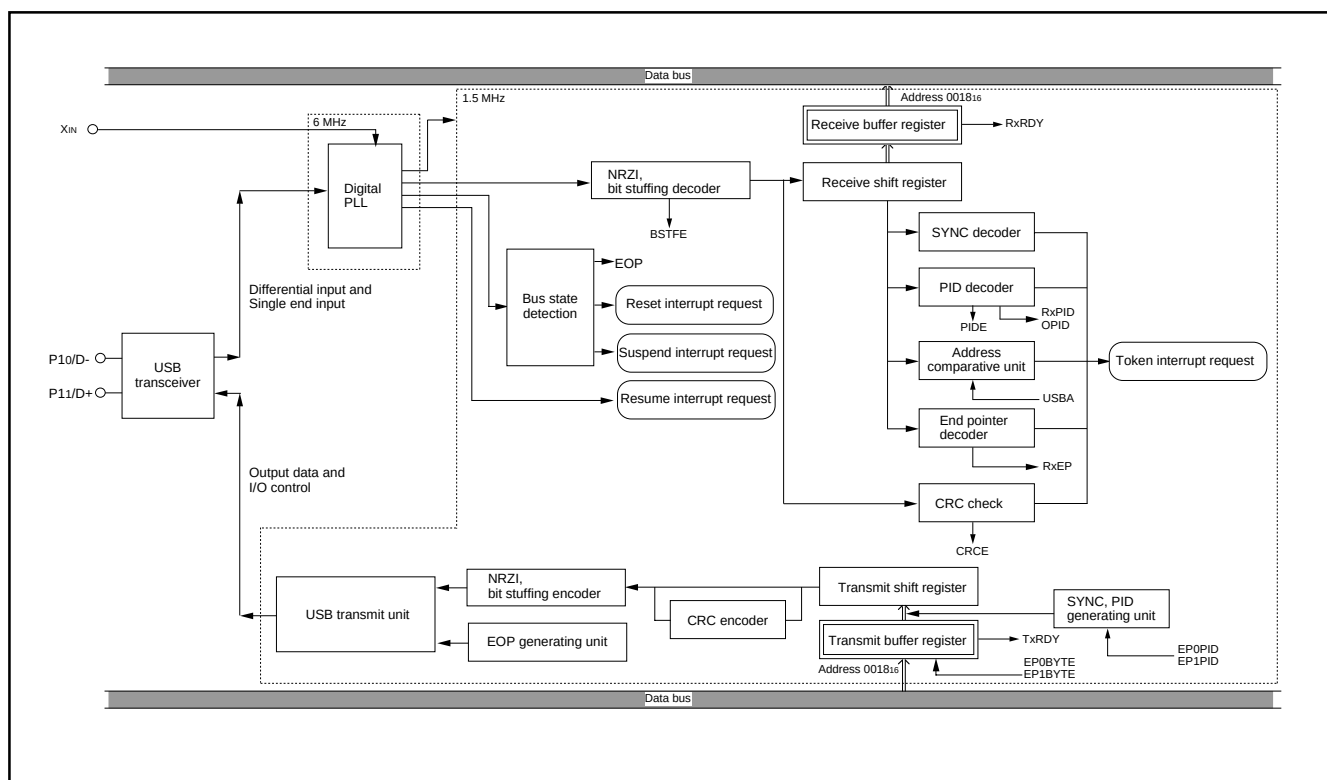


Fig. 25 USB mode block diagram

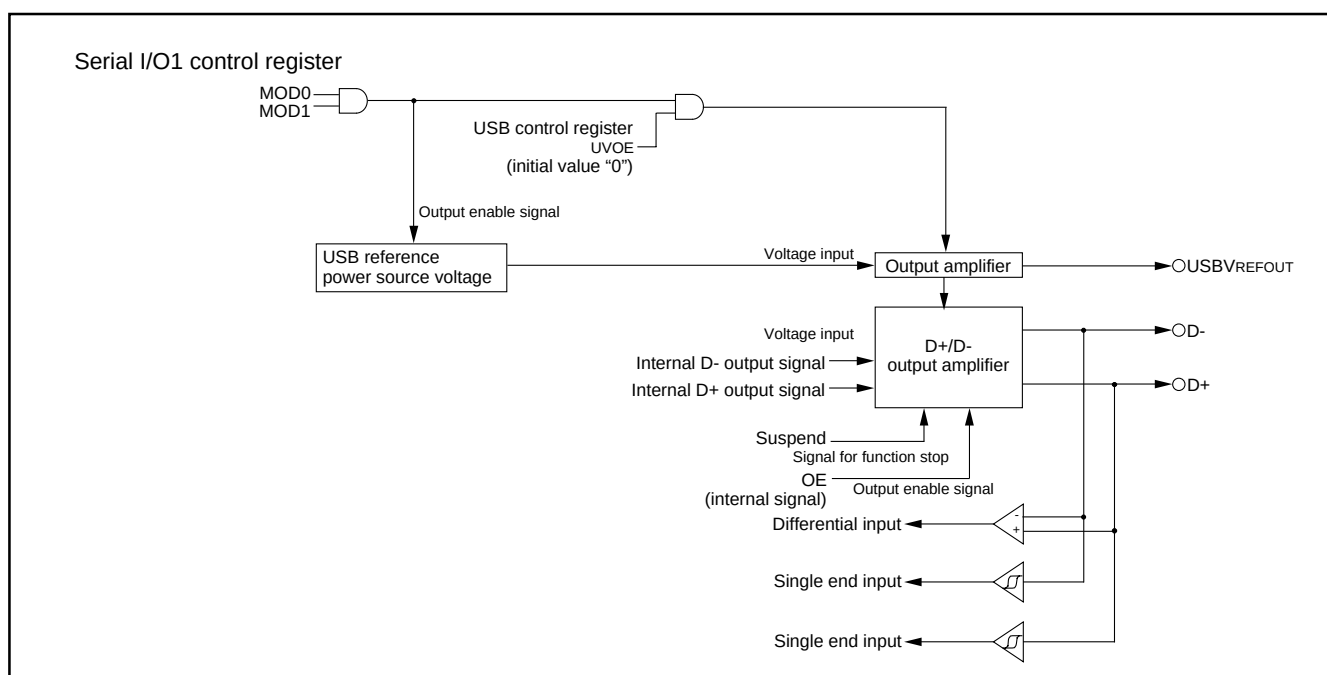


Fig. 26 USB transceiver block diagram

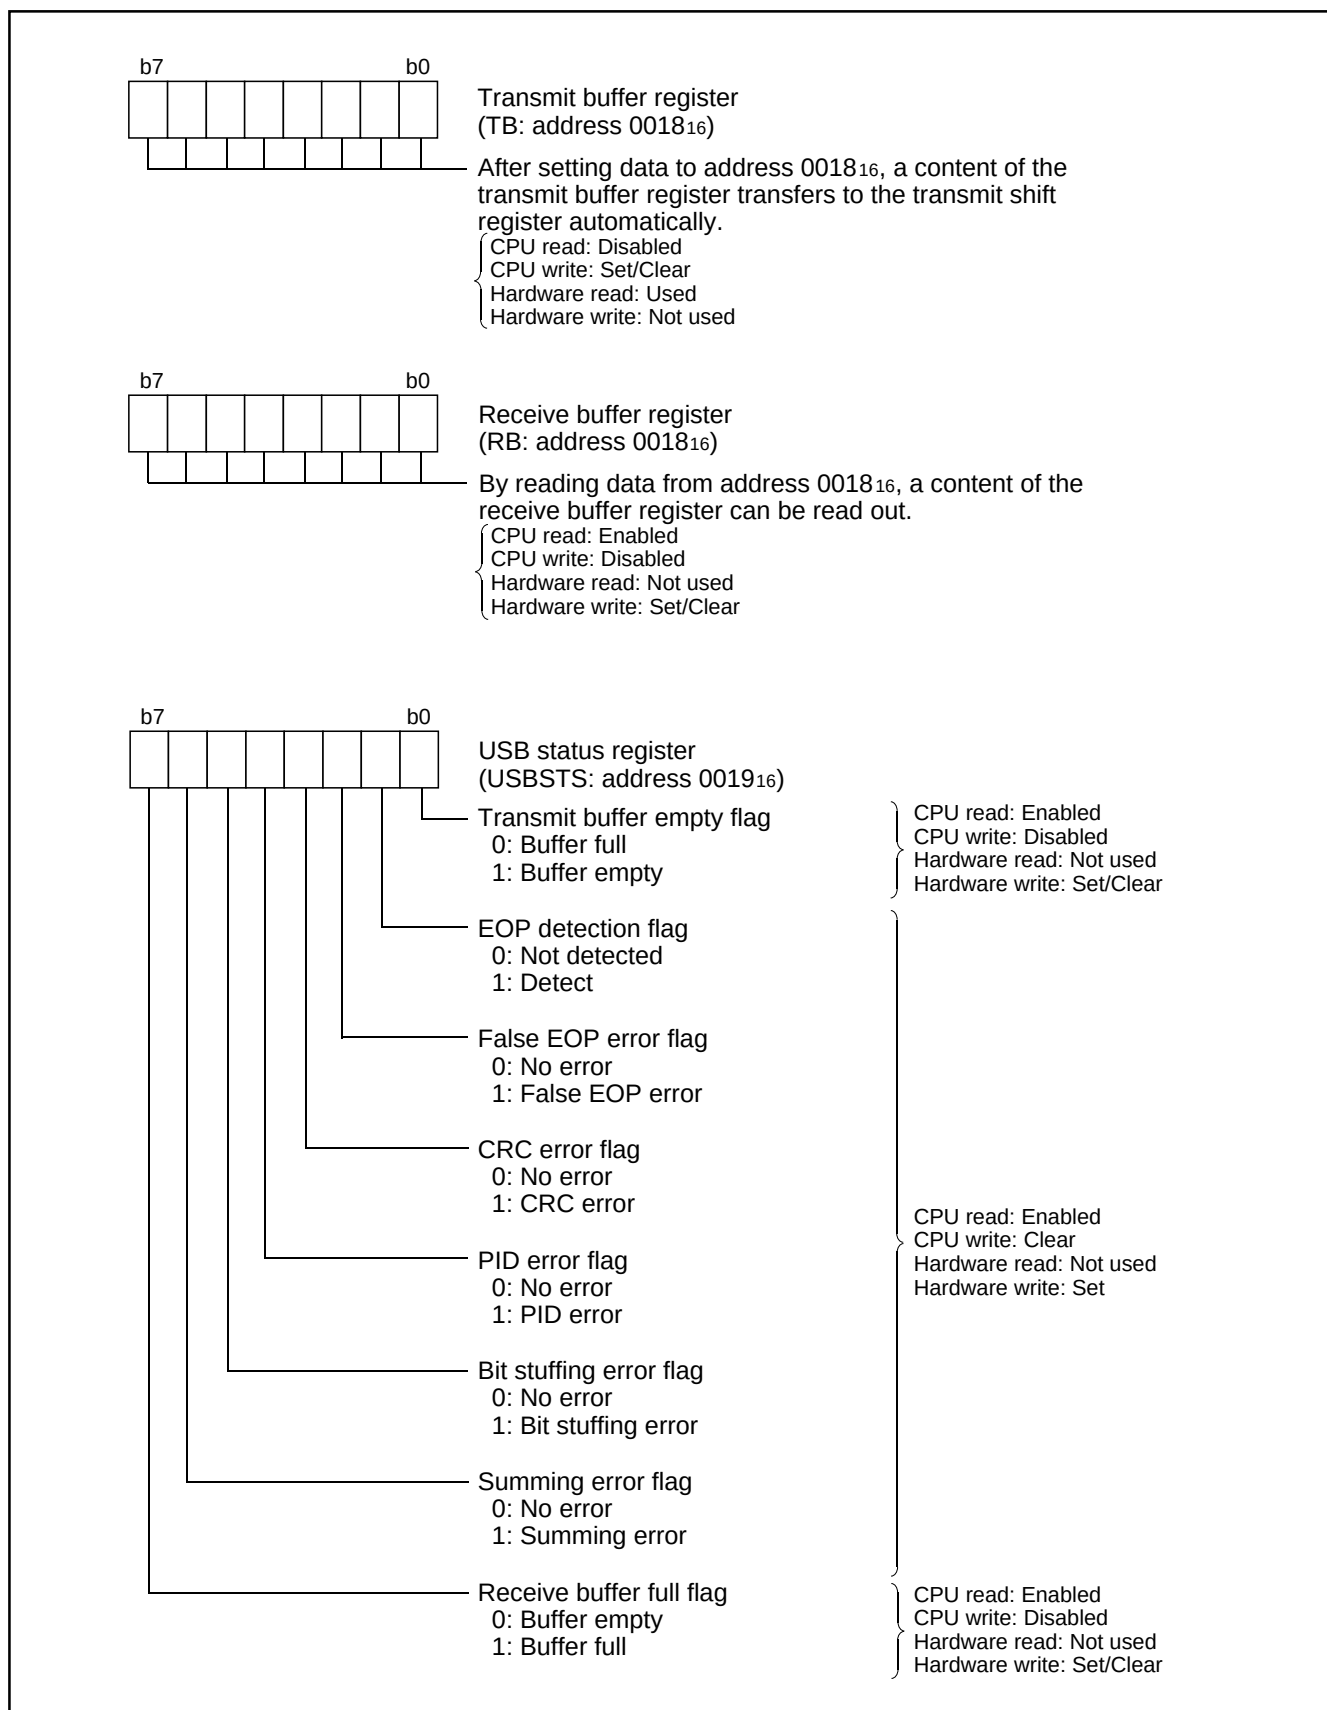


Fig. 27 Structure of serial I/O1-related registers (1)



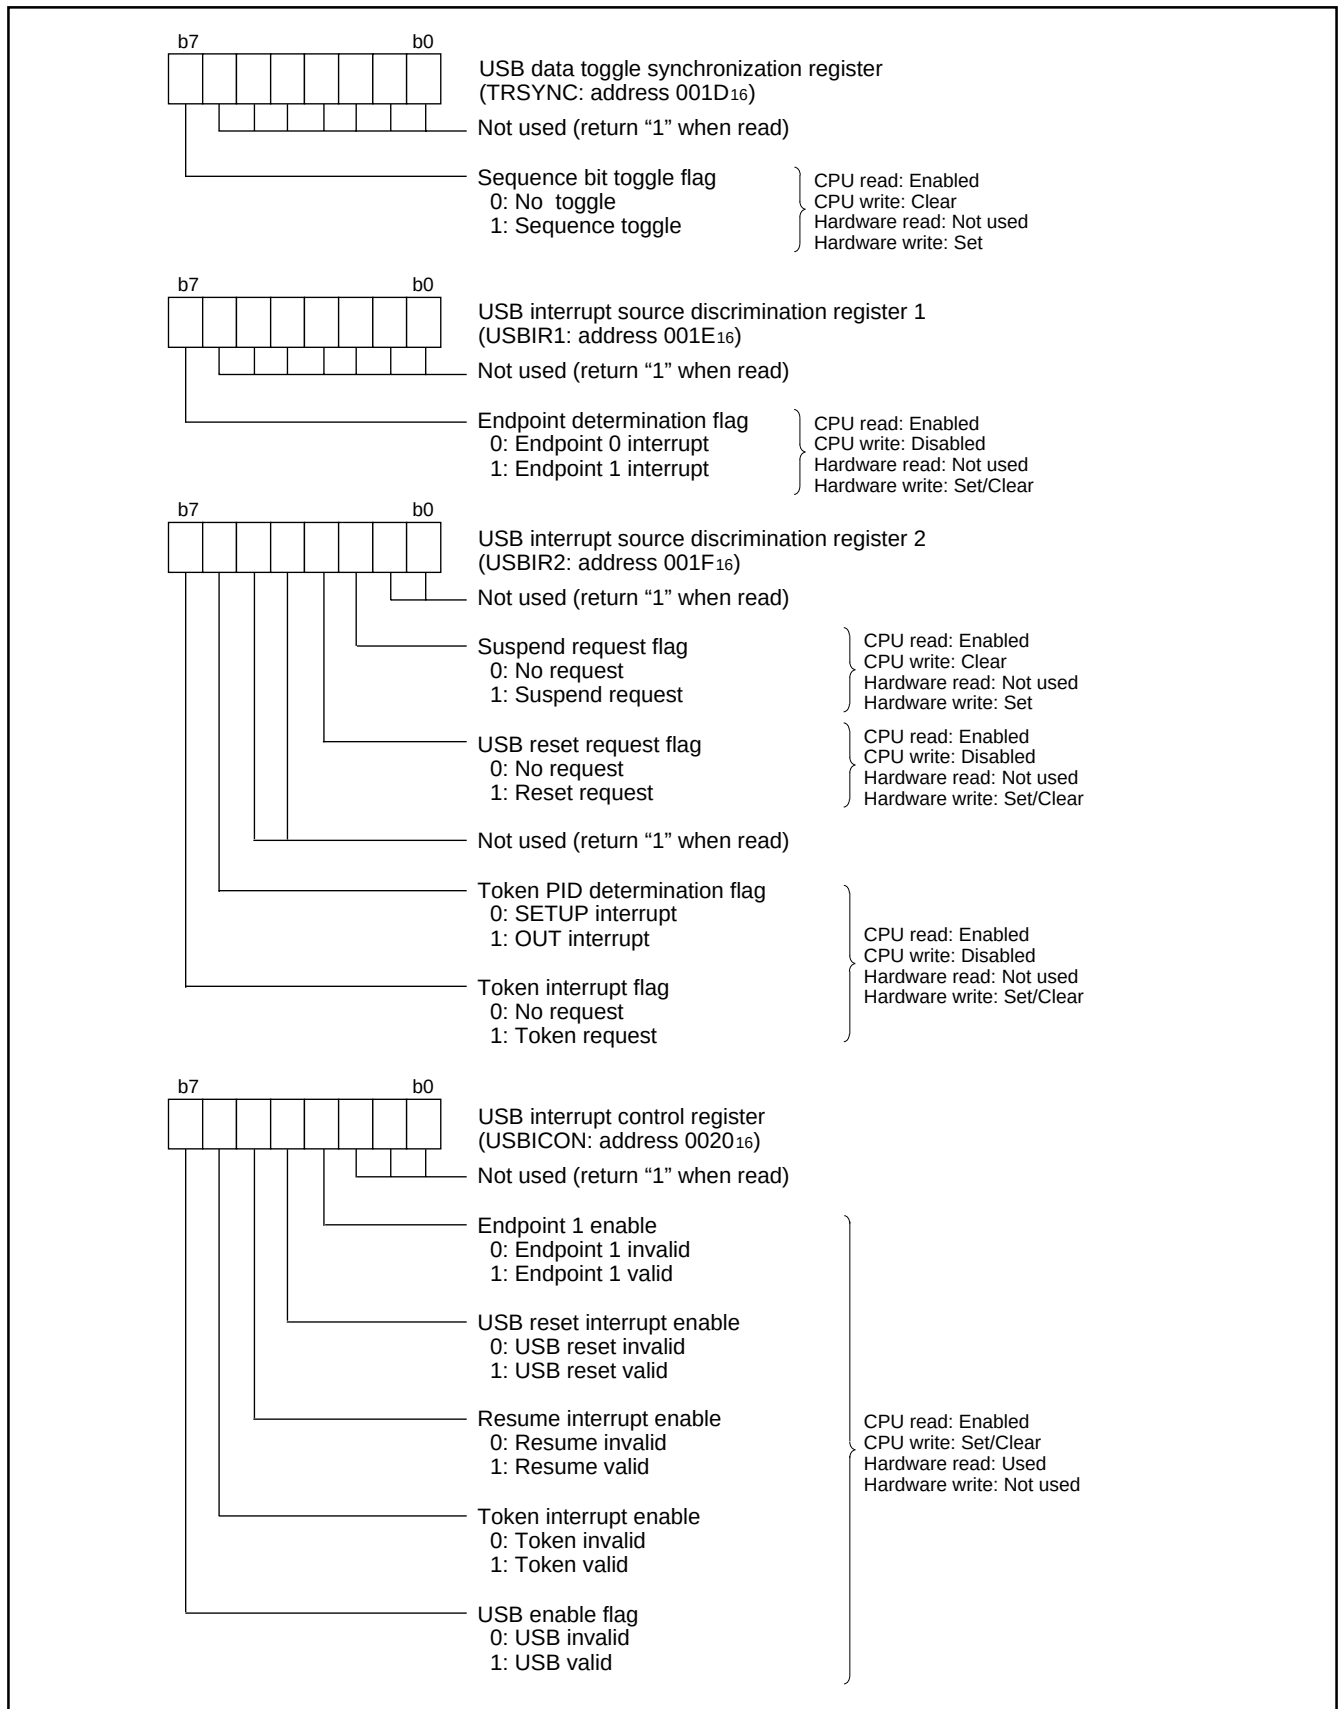


Fig. 28 Structure of serial I/O1-related registers (2)

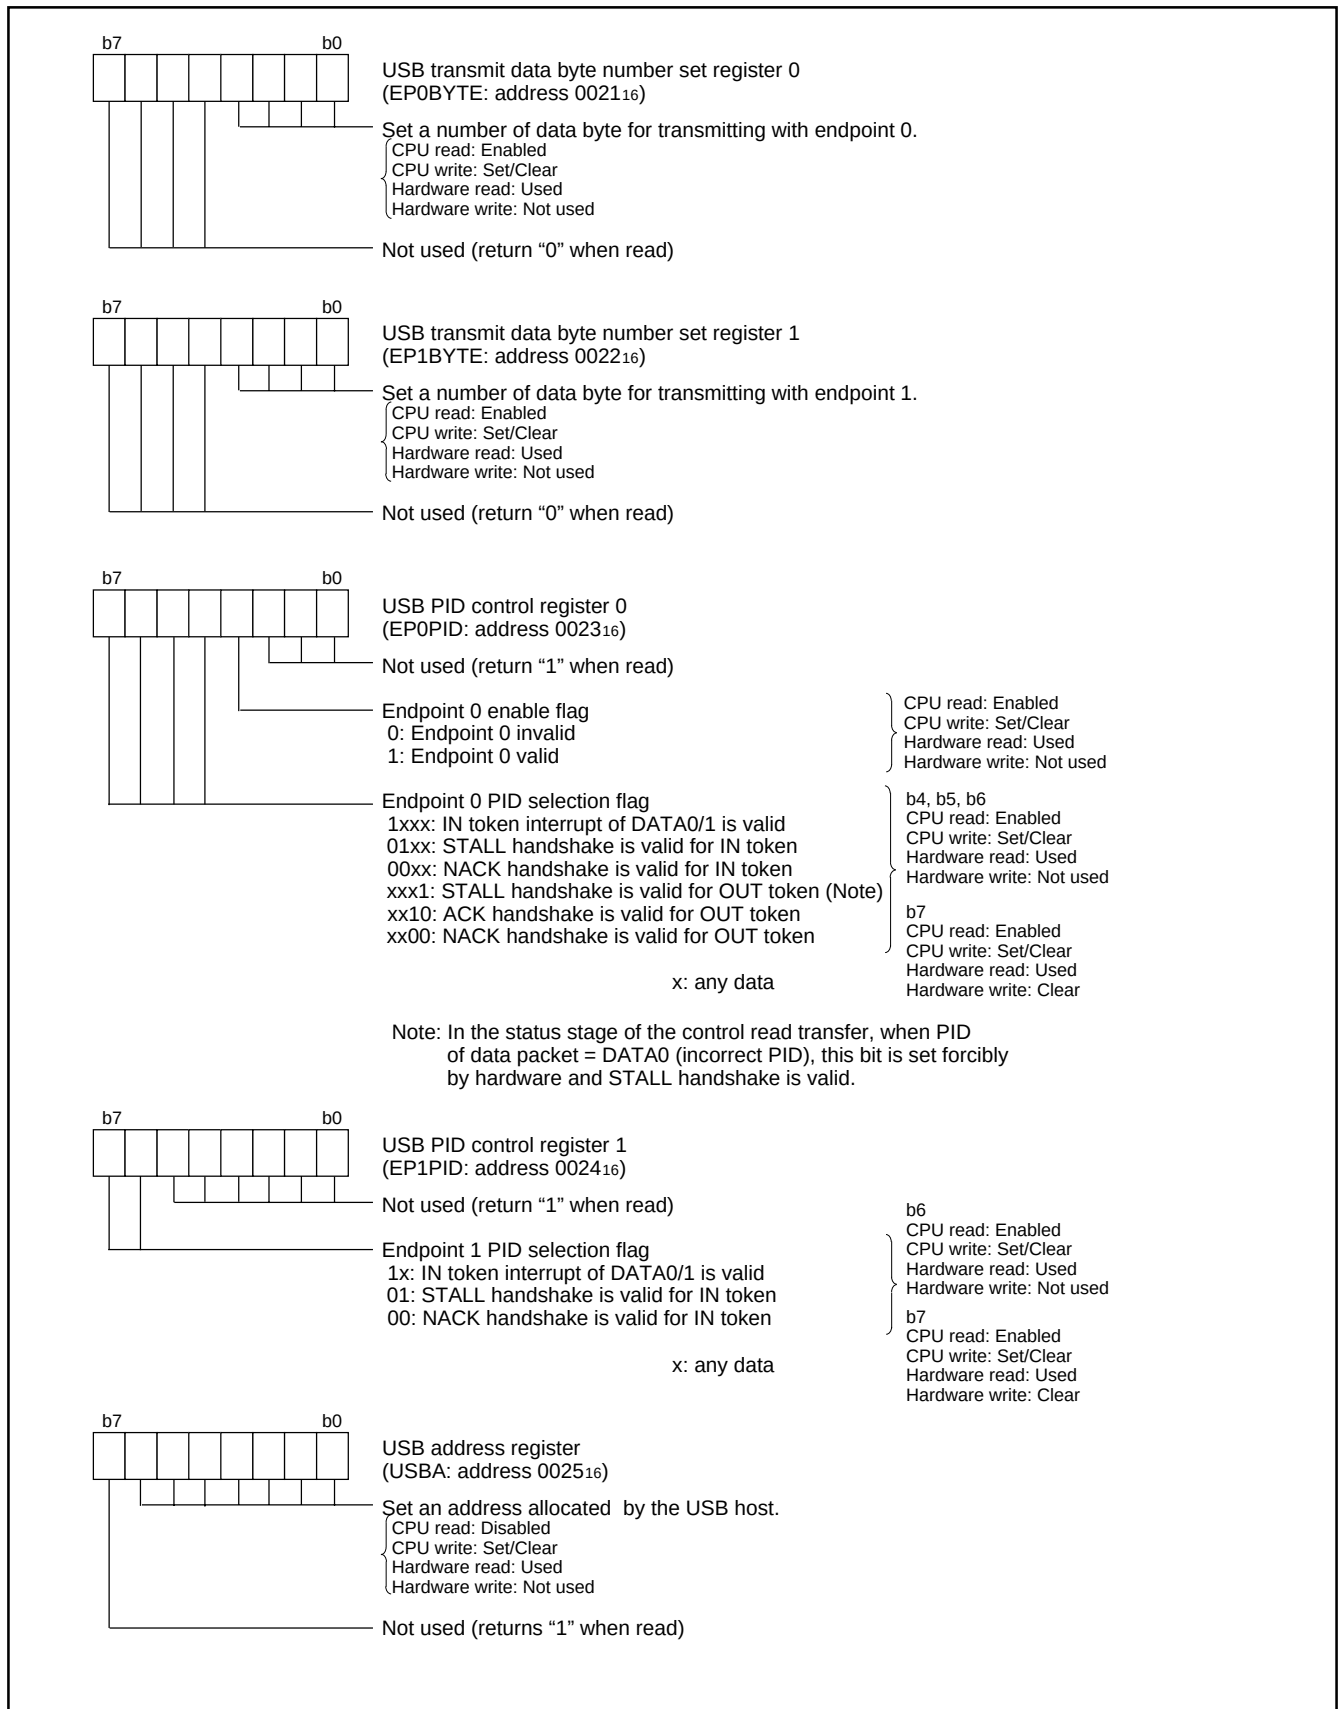


Fig. 29 Structure of serial I/O1-related registers (3)

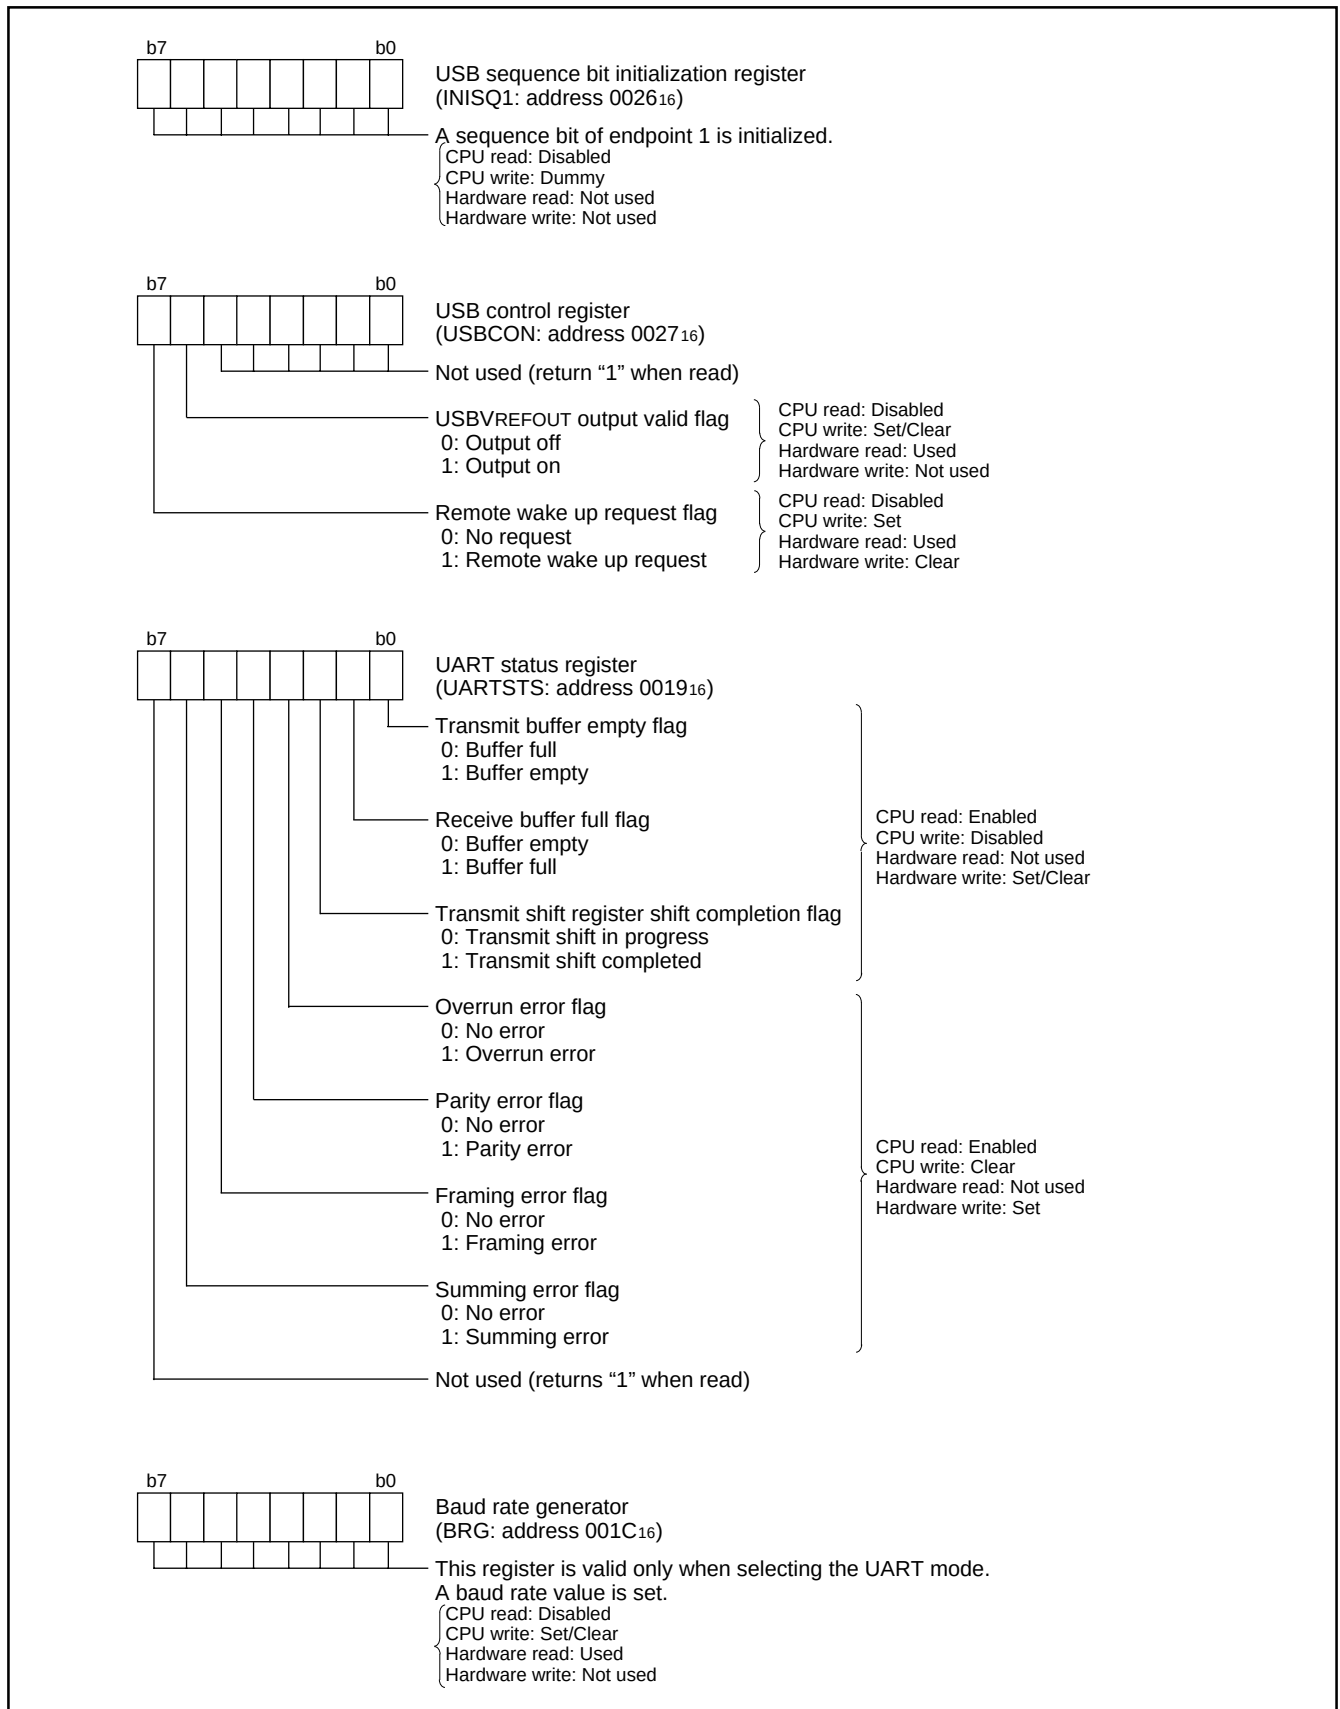


Fig. 30 Structure of serial I/O1-related registers (4)

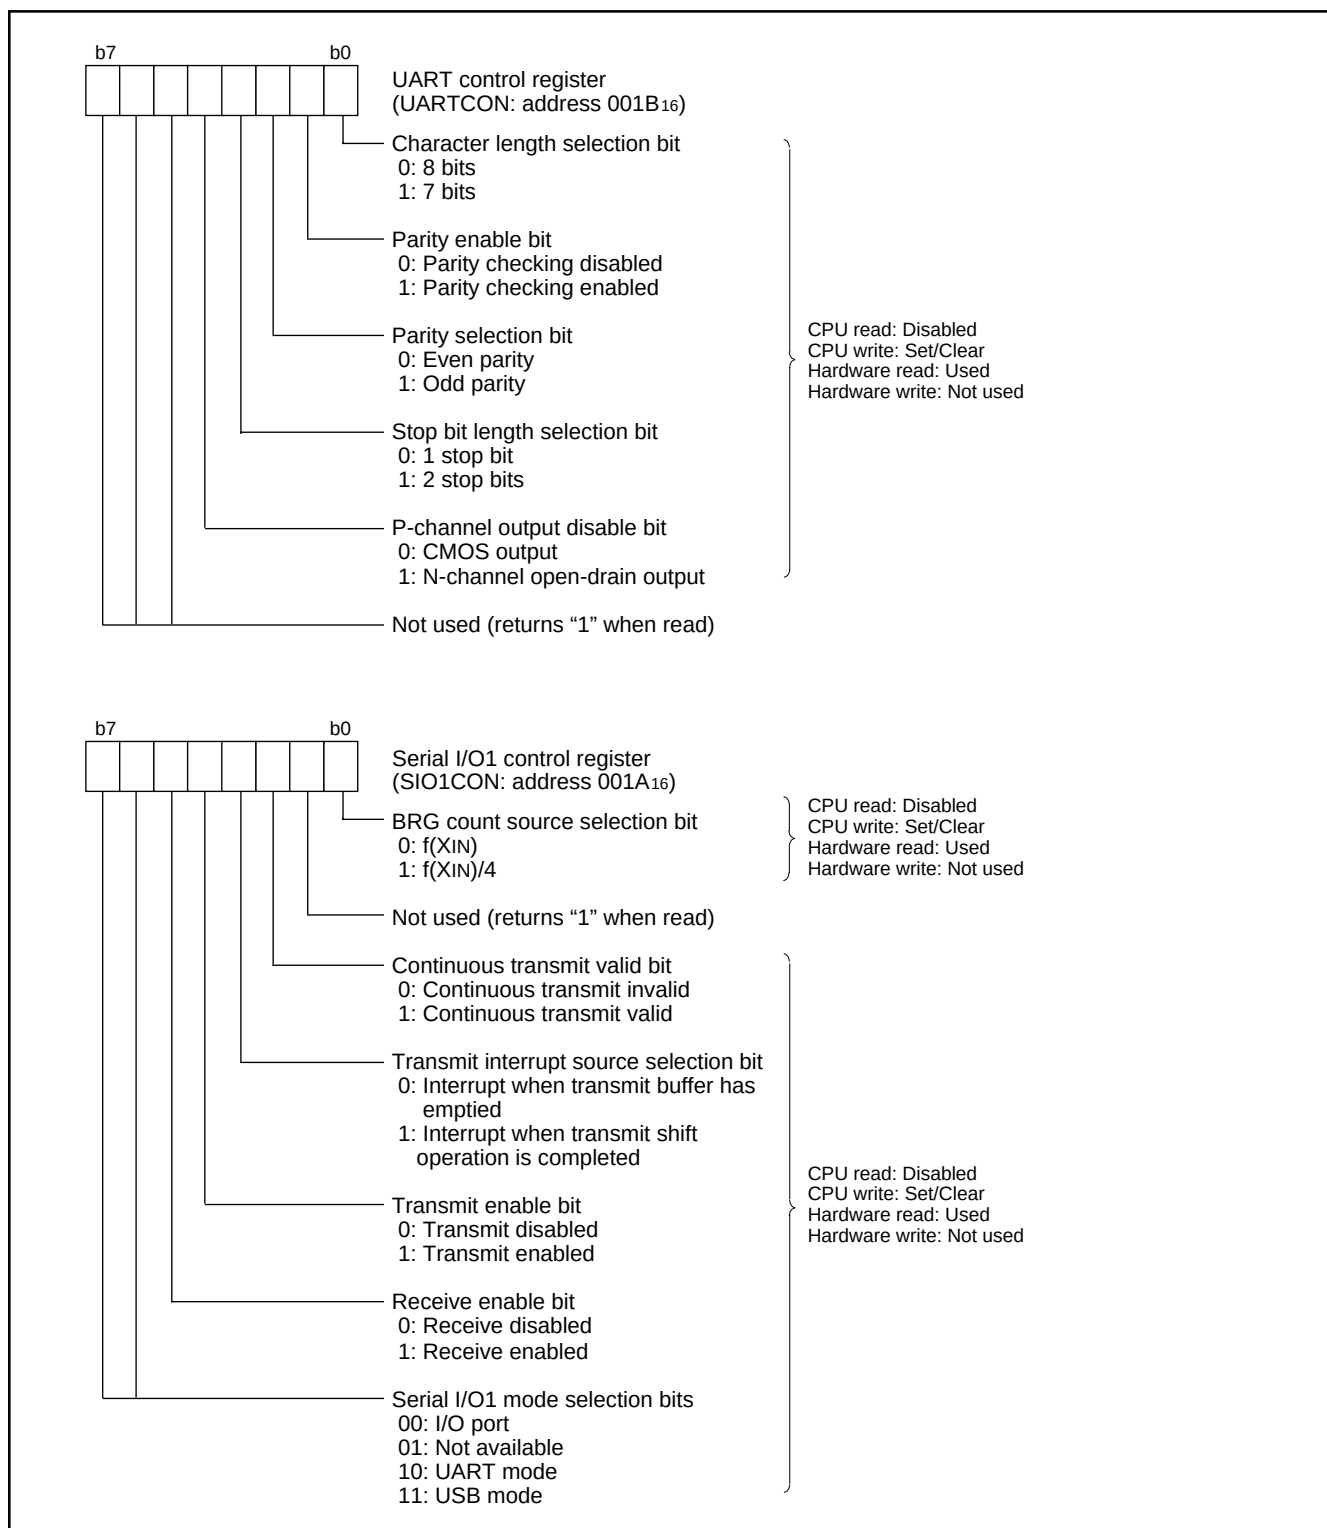


Fig. 31 Structure of serial I/O1-related registers (5)

**Note on using USB mode****Handling of SE0 signal in program (at receiving)**

7534 group has the border line to detect as USB RESET or EOP (End of Packet) on the width of SE0 (Single Ended 0).

A response apposite to a state of the device is expected.

The name of the following short words which is used in table 5 shows as follow.

- TKNE: Token interrupt enable (bit 6 of address 20<sub>16</sub>)
- RSME: Resume interrupt enable (bit 5 of address 20<sub>16</sub>)
- RSTE: USB reset interrupt enable (bit 4 of address 20<sub>16</sub>)
- Spec: A response of the device requested by USB Specification 1.1
- SIE: Hardware operation in 7534 group
- F/W: Recommendation process in the program
- FEOPE: False EOP error flag (bit 2 of address 19<sub>16</sub>)
- RxPID: Token interrupt flag (bit 7 of address 1F<sub>16</sub>)

**Table 5 Relation of the width of SE0 and the state of the device**

|                             |      | State of device                                                                             |                                                                                                          |                                                                                                          |                                                                  |
|-----------------------------|------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Width of SE0                |      | Idle state<br>TKNE = X<br>RSME = 0<br>RSTE =1                                               | End of Token in transaction<br>TKNE = 1<br>RSME = 0<br>RSTE =1                                           | End of data or handshake<br>in transaction<br>TKNE = 0<br>RSME = 0<br>RSTE = 0 or 1                      | Suspend state<br>TKNE = 0<br>RSME = 1<br>RSTE = 0                |
|                             |      |                                                                                             |                                                                                                          |                                                                                                          |                                                                  |
| 0 $\mu$ s<br>0.5 $\mu$ s    | Spec | Ignore                                                                                      | Ignore                                                                                                   | Ignore                                                                                                   | Spec<br>Reset or resume                                          |
|                             | SIE  | Keep counting suspend timer                                                                 | Not detected as EOP(in case of no detection EOP, SIE returns idle state as time out. FEOPE flag is set.) | Not detected as EOP(in case of no detection EOP, SIE returns idle state as timeup. FEOPE flag is set.)   |                                                                  |
|                             | F/W  | Not acknowledge                                                                             | Not acknowledge                                                                                          | Wait for the next EOP flag                                                                               |                                                                  |
| 0.5 $\mu$ s<br>2.5 $\mu$ s  | Spec | Keep alive                                                                                  | EOP                                                                                                      | EOP                                                                                                      | SIE<br>Reset interrupt request                                   |
|                             | SIE  | Initialize suspend timer count value                                                        | Token interrupt request                                                                                  | Set EOP flag                                                                                             |                                                                  |
|                             | F/W  | Not acknowledge                                                                             | Token interrupt processing execute                                                                       | After checking the set of EOP flag, go to the next processing                                            |                                                                  |
| 2.5 $\mu$ s<br>2.67 $\mu$ s | Spec | Keep alive or Reset                                                                         | EOP or Reset                                                                                             | EOP or Reset                                                                                             | F/W<br>Reset interrupt processing<br>Resume interrupt processing |
|                             | SIE  | may determine as keep alive and Reset interrupt                                             | may determine as EOP and Reset interrupt                                                                 | may determine as EOP and Reset interrupt                                                                 |                                                                  |
|                             | F/W  | Keep alive in case of no interrupt request<br>Reset processing in case of interrupt request | RxPID = 1> Token interrupt processing<br>RxPID = 0> Reset interrupt processing                           | Continue the processing in case of no interrupt request<br>Reset processing in case of interrupt request |                                                                  |
| 2.67 $\mu$ s                | Spec | Reset                                                                                       | Reset                                                                                                    | Reset                                                                                                    |                                                                  |
|                             | SIE  | Reset interrupt request                                                                     | Reset interrupt request                                                                                  | Reset interrupt request                                                                                  |                                                                  |
|                             | F/W  | Reset processing                                                                            | Reset processing                                                                                         | Reset processing                                                                                         |                                                                  |

- Function of USBPID control register 0 (address 0023<sub>16</sub>)

Bit 4 (STALL handshake control for OUT token) of this register is forcibly set by SIE under the special condition shown below.

Set condition; when PID of data packet = DATA0 (incorrect PID) in the status stage of the control read transfer.

- SYNC field at reception

Normally, the SYNC field consists of "KJKJKJKK" (8 bits). However, as for SIE of the 7534 Group, when the low-order 6 bits are "KJKJKK", it is determined as SYNC.

## ●Serial I/O2

The serial I/O2 function can be used only for clock synchronous serial I/O.

For clock synchronous serial I/O2 the transmitter and the receiver must use the same clock. When the internal clock is used, transfer is started by a write signal to the serial I/O2 register.

### [Serial I/O2 control register] SIO2CON

The serial I/O2 control register contains 8 bits which control various serial I/O functions.

- For receiving, set "0" to bit 3.
- When receiving, bit 7 is cleared by writing dummy data to serial I/O2 register after shift is completed.
- Bit 7 is set earlier a half cycle of shift clock than completion of shift operation. Accordingly, when checking shift completion by using this bit, the setting is as follows:
  - (1) check that this bit is set to "1",
  - (2) wait a half cycle of shift clock,
  - (3) read/write to serial I/O2 register.

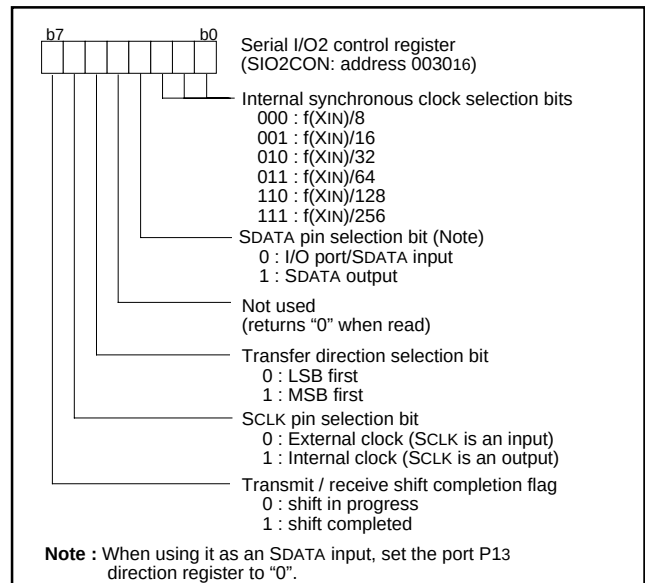


Fig. 32 Structure of serial I/O2 control registers

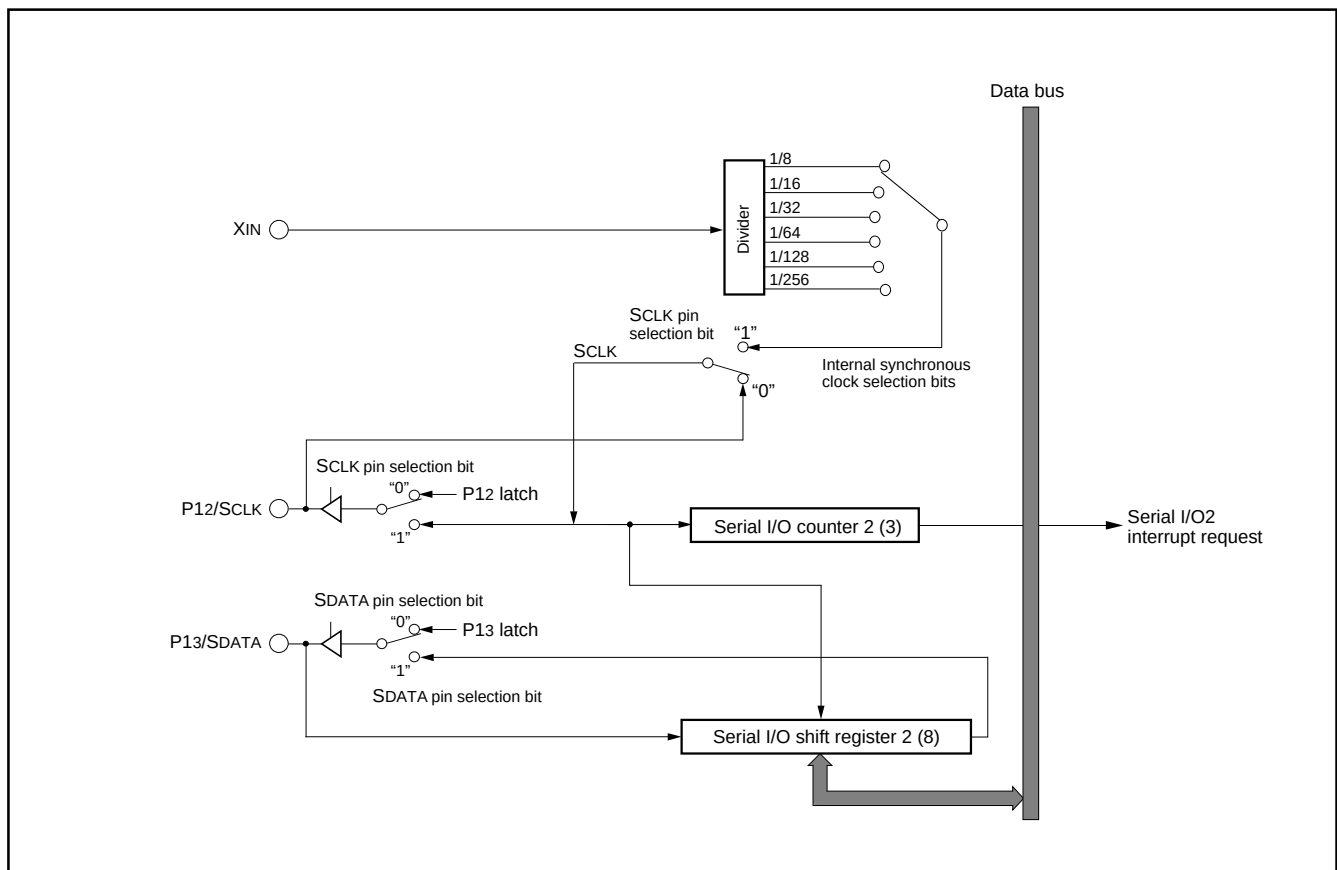


Fig. 33 Block diagram of serial I/O2

### Serial I/O2 operation

By writing to the serial I/O2 register(address 003116) the serial I/O2 counter is set to "7".

After writing, the S<sub>DATA</sub> pin outputs data every time the transfer clock shifts from a high to a low level. And, as the transfer clock shifts from a low to a high, the S<sub>DATA</sub> pin reads data, and at the same time the contents of the serial I/O2 register are shifted by 1 bit.

When the internal clock is selected as the transfer clock source, the following operations execute as the transfer clock counts up to 8.

- Serial I/O2 counter is cleared to "0".
- Transfer clock stops at an "H" level.
- Interrupt request bit is set.
- Shift completion flag is set.

Also, the S<sub>DATA</sub> pin is in a high impedance state after the data transfer is complete. Refer to Figure 34.

When the external clock is selected as the transfer clock source, the interrupt request bit is set as the transfer clock counts up to 8, but external control of the clock is required since it does not stop. Notice that the S<sub>DATA</sub> pin is not in a high impedance state on the completion of data transfer.

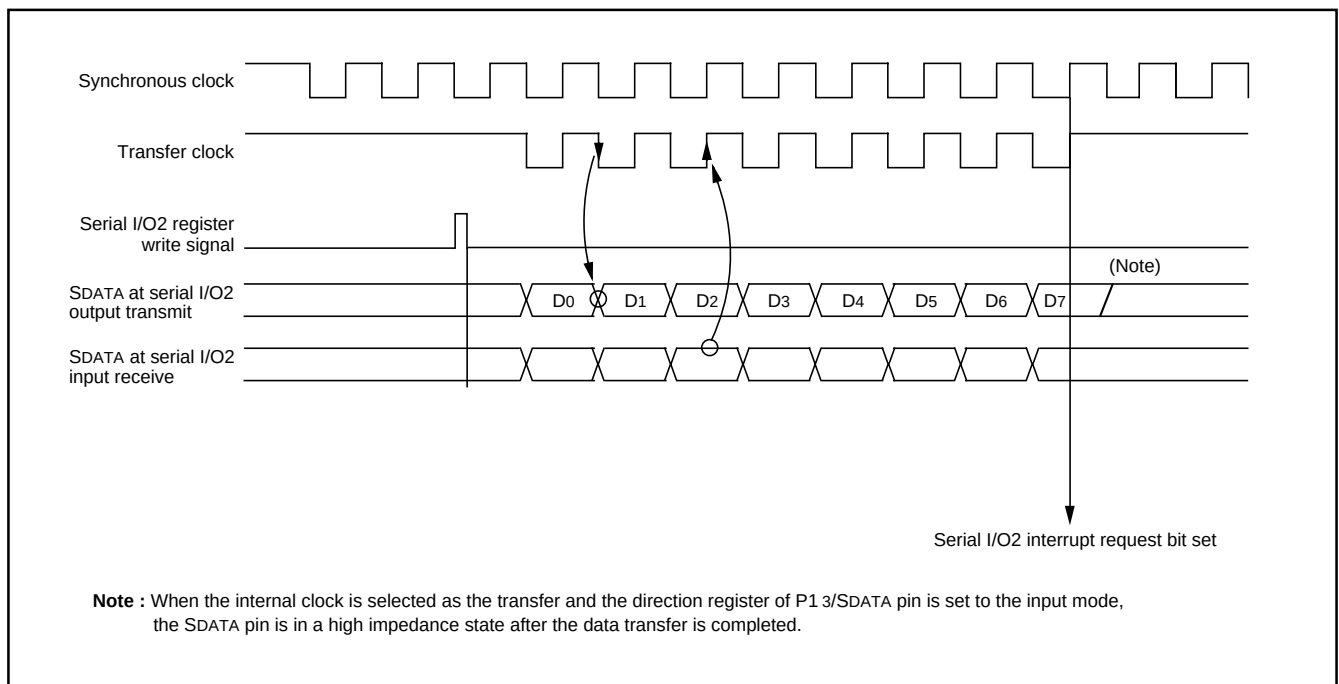


Fig. 34 Serial I/O2 timing (LSB first)

## A/D Converter

The functional blocks of the A/D converter are described below.

### [A/D conversion register] AD

The A/D conversion register is a read-only register that stores the result of A/D conversion. Do not read out this register during an A/D conversion.

### [A/D control register] ADCON

The A/D control register controls the A/D converter. Bit 2 to 0 are analog input pin selection bits. Bit 4 is the AD conversion completion bit. The value of this bit remains at "0" during A/D conversion, and changes to "1" at completion of A/D conversion.

A/D conversion is started by setting this bit to "0".

### [Comparison voltage generator]

The comparison voltage generator divides the voltage between VSS and VREF by 1024 by a resistor ladder, and outputs the divided voltages. Since the generator is disconnected from VREF pin and VSS pin, current is not flowing into the resistor ladder.

### [Channel Selector]

The channel selector selects one of ports P27/AN7 to P20/AN0, and inputs the voltage to the comparator.

### [Comparator and control circuit]

The comparator and control circuit compares an analog input voltage with the comparison voltage and stores its result into the A/D conversion register. When A/D conversion is completed, the control circuit sets the AD conversion completion bit and the AD interrupt request bit to "1". Because the comparator is constructed linked to a capacitor, set  $f(X_{IN})$  to 500 kHz or more during A/D conversion.

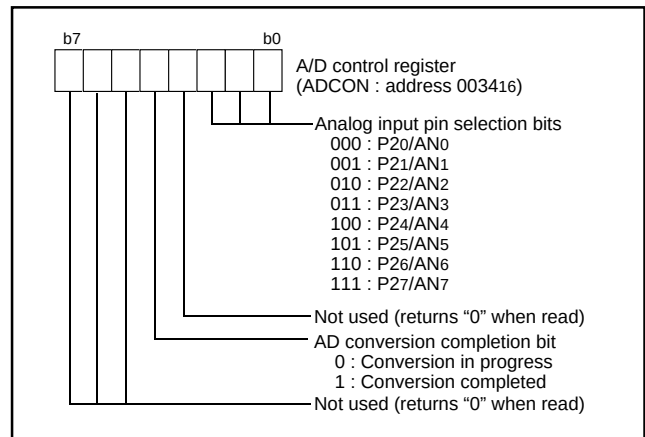


Fig. 35 Structure of A/D control register

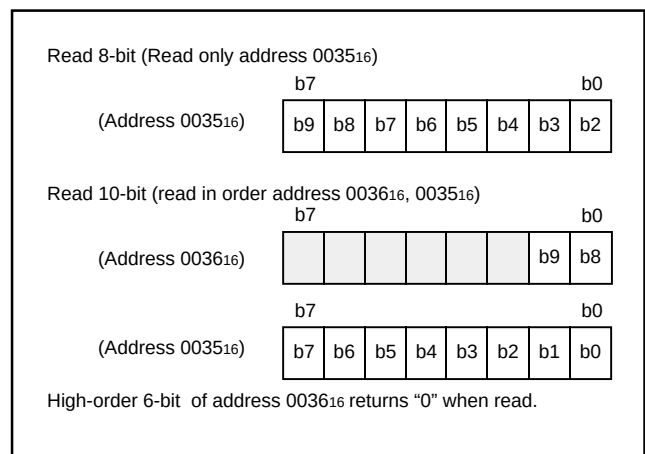


Fig. 36 Structure of A/D conversion register

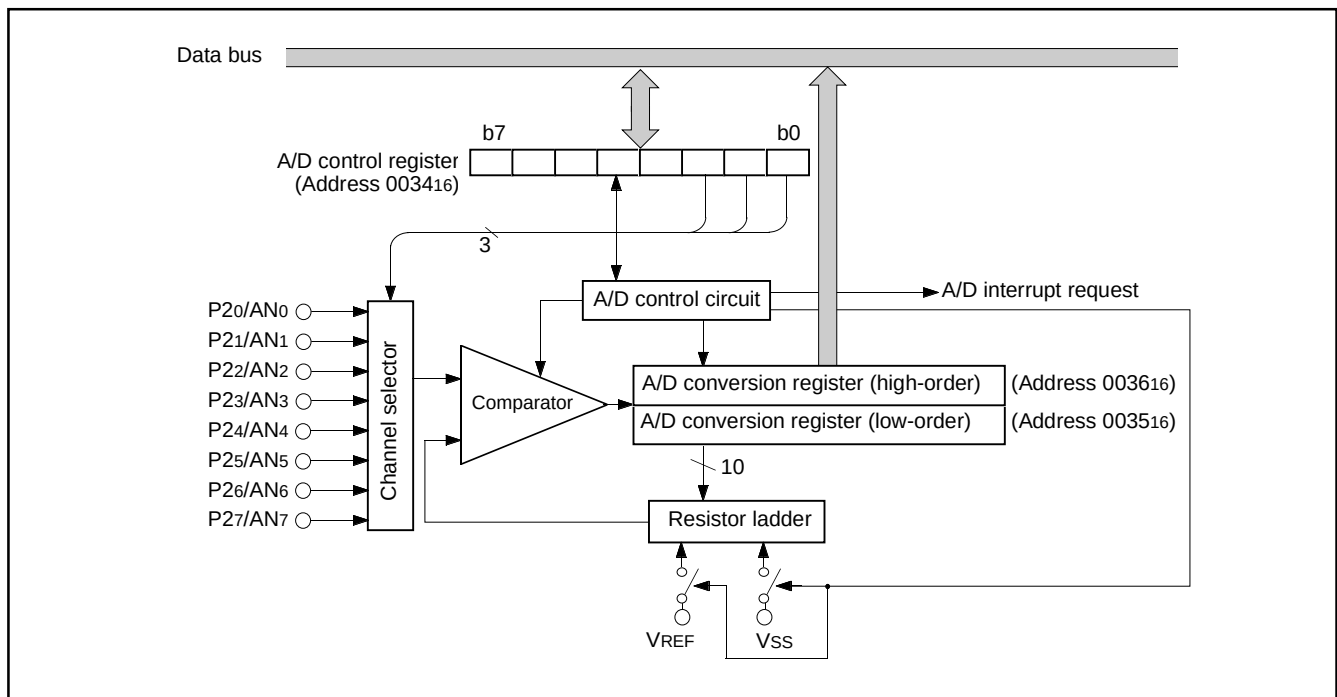


Fig. 37 Block diagram of A/D converter



## Watchdog Timer

The watchdog timer gives a means for returning to a reset status when the program fails to run on its normal loop due to a runaway. The watchdog timer consists of an 8-bit watchdog timer H and an 8-bit watchdog timer L, being a 16-bit counter.

### Standard operation of watchdog timer

The watchdog timer stops when the watchdog timer control register (address 0039<sub>16</sub>) is not set after reset. Writing an optional value to the watchdog timer control register (address 0039<sub>16</sub>) causes the watchdog timer to start to count down. When the watchdog timer H underflows, an internal reset occurs. Accordingly, it is programmed that the watchdog timer control register (address 0039<sub>16</sub>) can be set before an underflow occurs.

When the watchdog timer control register (address 0039<sub>16</sub>) is read, the values of the high-order 6-bit of the watchdog timer H, STP instruction disable bit and watchdog timer H count source selection bit are read.

### Initial value of watchdog timer

By a reset or writing to the watchdog timer control register (address 0039<sub>16</sub>), the watchdog timer H is set to "FF<sub>16</sub>" and the watchdog timer L is set to "FF<sub>16</sub>".

### Operation of watchdog timer H count source selection bit

A watchdog timer H count source can be selected by bit 7 of the watchdog timer control register (address 0039<sub>16</sub>). When this bit is "0", the count source becomes a watchdog timer L underflow signal. The detection time is 174.763 ms at  $f(X_{IN})=6$  MHz.

When this bit is "1", the count source becomes  $f(X_{IN})/16$ . In this case, the detection time is 683  $\mu$ s at  $f(X_{IN})=6$  MHz.

This bit is cleared to "0" after reset.

### Operation of STP instruction disable bit

When the watchdog timer is in operation, the STP instruction can be disabled by bit 6 of the watchdog timer control register (address 0039<sub>16</sub>).

When this bit is "0", the STP instruction is enabled.

When this bit is "1", the STP instruction is disabled, and an internal reset occurs if the STP instruction is executed.

Once this bit is set to "1", it cannot be changed to "0" by program.

This bit is cleared to "0" after reset.

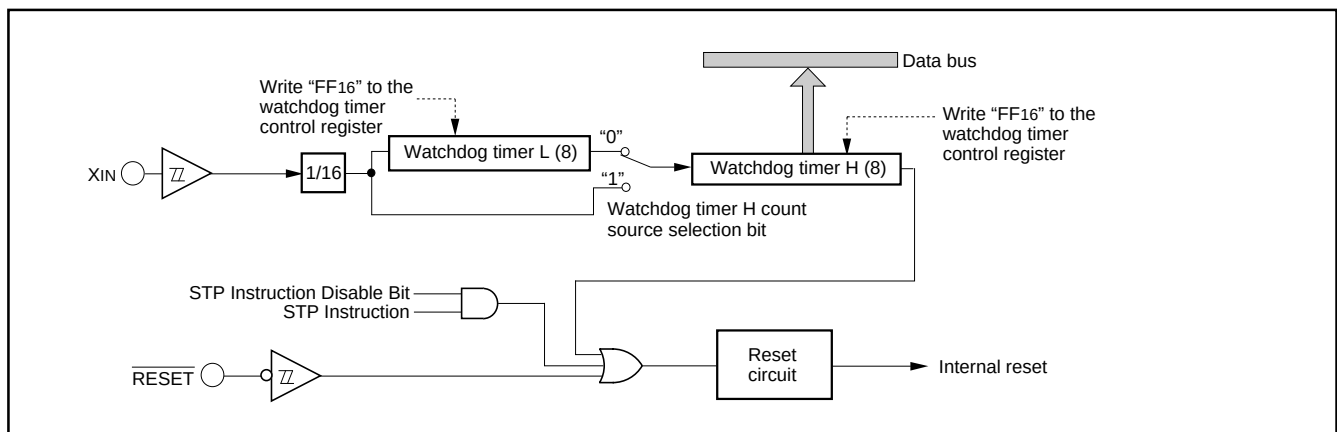


Fig. 38 Block diagram of watchdog timer

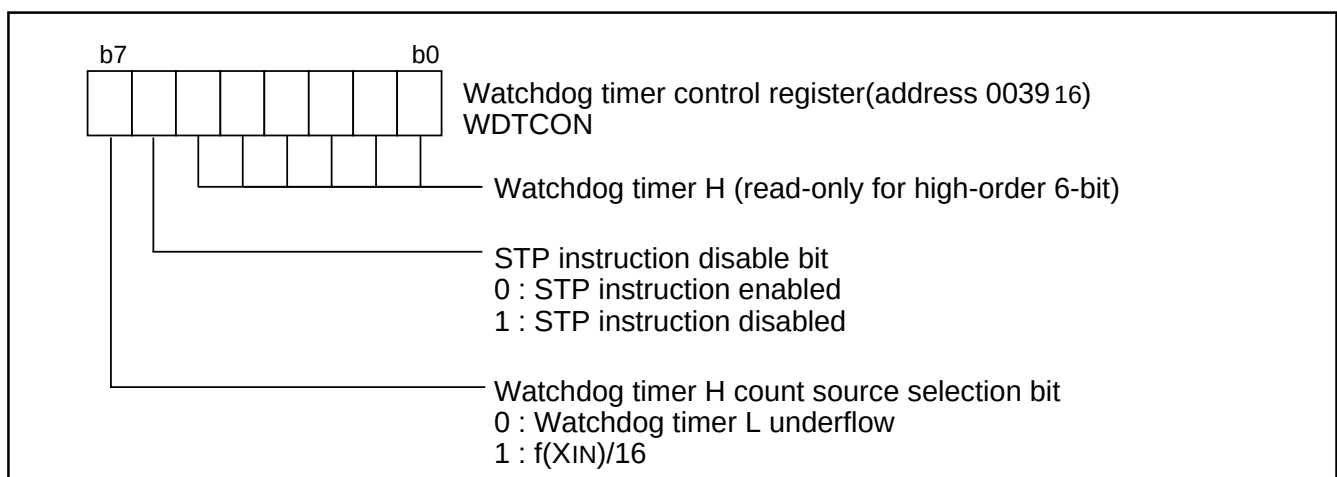


Fig. 39 Structure of watchdog timer control register

## Reset Circuit

The microcomputer is put into a reset status by holding the  $\overline{\text{RESET}}$  pin at the "L" level for 15  $\mu\text{s}$  or more when the power source voltage is 4.1 to 5.5 V and  $X_{\text{IN}}$  is in stable oscillation.

After that, this reset status is released by returning the  $\overline{\text{RESET}}$  pin to the "H" level. The program starts from the address having the contents of address  $\text{FFFD}_{16}$  as high-order address and the contents of address  $\text{FFFC}_{16}$  as low-order address.

Note that the reset input voltage should be 0.82 V or less when the power source voltage passes 4.1 V.

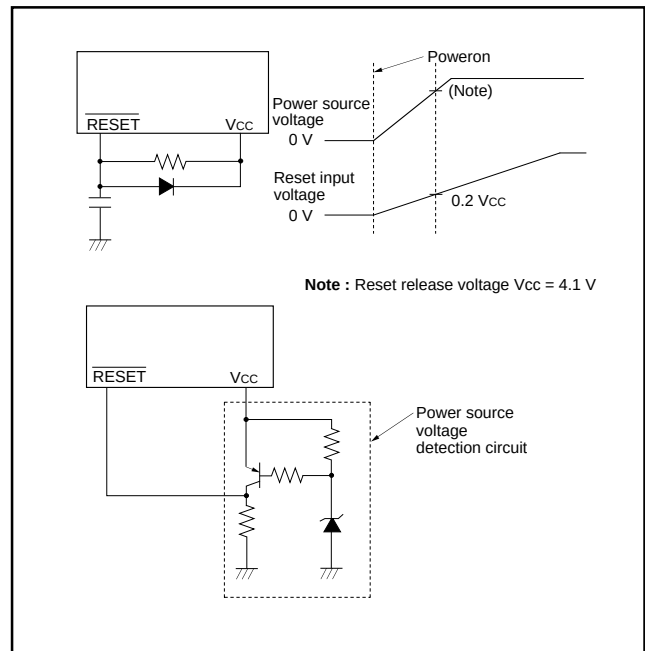


Fig. 40 Example of reset circuit

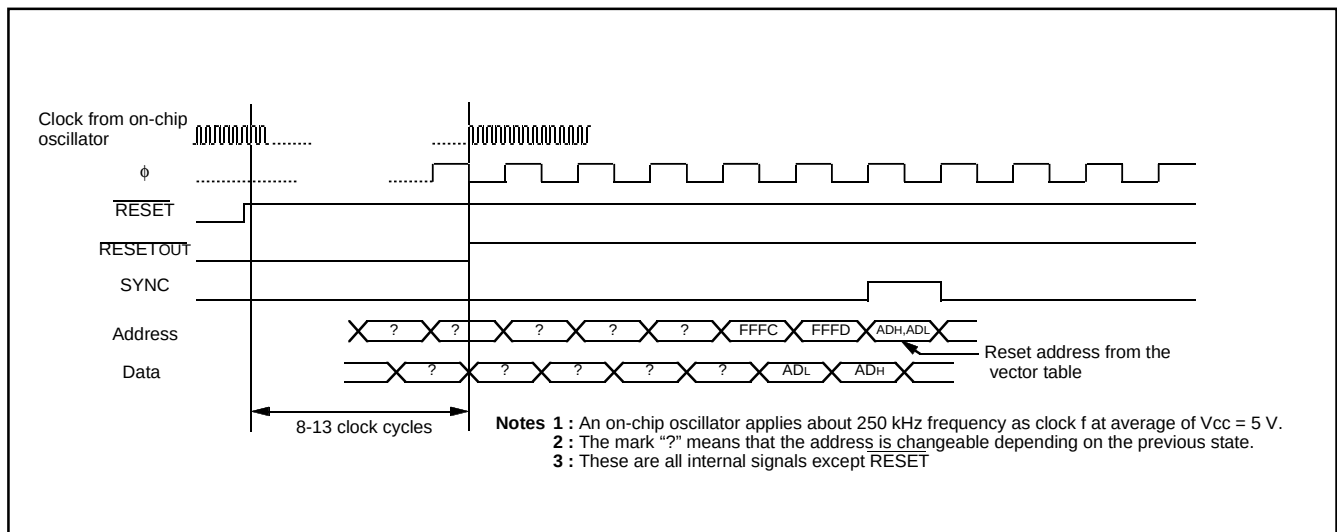


Fig. 41 Timing diagram at reset

|                                                     | Address            | Register contents                      |
|-----------------------------------------------------|--------------------|----------------------------------------|
| (1) Port P0 direction register                      | 0001 <sub>16</sub> | 00 <sub>16</sub>                       |
| (2) Port P1 direction register                      | 0003 <sub>16</sub> | X   0   0   0   0   0   0   0          |
| (3) Port P2 direction register                      | 0005 <sub>16</sub> | 00 <sub>16</sub>                       |
| (4) Port P3 direction register                      | 0007 <sub>16</sub> | 00 <sub>16</sub>                       |
| (5) Port P4 direction register                      | 0009 <sub>16</sub> | X   X   X   X   X   X   0   0          |
| (6) Pull-up control register                        | 0016 <sub>16</sub> | FF <sub>16</sub>                       |
| (7) USB/UART status register                        | 0019 <sub>16</sub> | 1   0   0   0   0   0   0   1          |
| (8) Serial I/O1 control register                    | 001A <sub>16</sub> | 02 <sub>16</sub>                       |
| (9) UART control register                           | 001B <sub>16</sub> | 1   1   1   0   0   0   0   0          |
| (10) USB data toggle synchronization register       | 001D <sub>16</sub> | 0   1   1   1   1   1   1   1          |
| (11) USB interrupt source discrimination register 1 | 001E <sub>16</sub> | 0   1   1   1   1   1   1   1          |
| (12) USB interrupt source discrimination register 2 | 001F <sub>16</sub> | 0   1   1   1   0   0   1   1          |
| (13) USB interrupt control register                 | 0020 <sub>16</sub> | 0   0   0   0   0   1   1   1          |
| (14) USB transmit data byte number set register 0   | 0021 <sub>16</sub> | 00 <sub>16</sub>                       |
| (15) USB transmit data byte number set register 1   | 0022 <sub>16</sub> | 00 <sub>16</sub>                       |
| (16) USBPID control register 0                      | 0023 <sub>16</sub> | 0   0   0   0   0   1   1   1          |
| (17) USBPID control register 1                      | 0024 <sub>16</sub> | 0   0   1   1   1   1   1   1          |
| (18) USB address register                           | 0025 <sub>16</sub> | 1   0   0   0   0   0   0   0          |
| (19) USB sequence bit initialization register       | 0026 <sub>16</sub> | 1   1   1   1   1   1   1   1          |
| (20) USB control register                           | 0027 <sub>16</sub> | 0   0   1   1   1   1   1   1          |
| (21) Prescaler 12                                   | 0028 <sub>16</sub> | FF <sub>16</sub>                       |
| (22) Timer 1                                        | 0029 <sub>16</sub> | 01 <sub>16</sub>                       |
| (23) Timer 2                                        | 002A <sub>16</sub> | 00 <sub>16</sub>                       |
| (24) Timer X mode register                          | 002B <sub>16</sub> | 00 <sub>16</sub>                       |
| (25) Prescaler X                                    | 002C <sub>16</sub> | FF <sub>16</sub>                       |
| (26) Timer X                                        | 002D <sub>16</sub> | FF <sub>16</sub>                       |
| (27) Timer count source set register                | 002E <sub>16</sub> | 00 <sub>16</sub>                       |
| (28) Serial I/O2 control register                   | 0030 <sub>16</sub> | 00 <sub>16</sub>                       |
| (29) A/D control register                           | 0034 <sub>16</sub> | 10 <sub>16</sub>                       |
| (30) MISRG                                          | 0038 <sub>16</sub> | 00 <sub>16</sub>                       |
| (31) Watchdog timer control register                | 0039 <sub>16</sub> | 0   0   1   1   1   1   1   1          |
| (32) Interrupt edge selection register              | 003A <sub>16</sub> | 00 <sub>16</sub>                       |
| (33) CPU mode register                              | 003B <sub>16</sub> | 1   0   0   0   0   0   0   0          |
| (34) Interrupt request register 1                   | 003C <sub>16</sub> | 00 <sub>16</sub>                       |
| (35) Interrupt control register 1                   | 003E <sub>16</sub> | 00 <sub>16</sub>                       |
| (36) Processor status register                      | (PS)               | X   X   X   X   X   1   X   X          |
| (37) Program counter                                | (PCH)              | Contents of address FFFD <sub>16</sub> |
|                                                     | (PCL)              | Contents of address FFFC <sub>16</sub> |

Note X : Undefined

Fig. 42 Internal status of microcomputer at reset

## Clock Generating Circuit

An oscillation circuit can be formed by connecting a resonator between  $X_{IN}$  and  $X_{OUT}$ .

Use the circuit constants in accordance with the resonator manufacturer's recommended values. No external resistor is needed between  $X_{IN}$  and  $X_{OUT}$  since a feed-back resistor exists on-chip.

## ●Oscillation control

### • Stop mode

When the STP instruction is executed, the internal clock  $\phi$  stops at an "H" level and the  $X_{IN}$  oscillator stops. At this time, timer 1 is set to "01<sub>16</sub>" and prescaler 12 is set to "FF<sub>16</sub>" when the oscillation stabilization time set bit after release of the STP instruction is "0". On the other hand, timer 1 and prescaler 12 are not set when the above bit is "1". Accordingly, set the wait time fit for the oscillation stabilization time of the oscillator to be used.

$f(X_{IN})/16$  is forcibly connected to the input of prescaler 12.

When an external interrupt is accepted, oscillation is restarted but the internal clock  $\phi$  remains at "H" until timer 1 underflows. As soon as timer 1 underflows, the internal clock  $\phi$  is supplied. This is because when a ceramic oscillator is used, some time is required until a start of oscillation.

In case oscillation is restarted by reset, no wait time is generated.

So apply an "L" level to the  $\overline{RESET}$  pin while oscillation becomes stable.

### • Wait mode

If the WIT instruction is executed, the internal clock  $\phi$  stops at an "H" level, but the oscillator does not stop. The internal clock restarts if a reset occurs or when an interrupt is received.

Since the oscillator does not stop, normal operation can be started immediately after the clock is restarted.

To ensure that interrupts will be received to release the STP or WIT state, interrupt enable bits must be set to "1" before the STP or WIT instruction is executed.

When the STP status is released, prescaler 12 and timer 1 will start counting clock which is  $X_{IN}$  divided by 16, so set the timer 1 interrupt enable bit to "0" before the STP instruction is executed.

### Note

For use with the oscillation stabilization set bit after release of the STP instruction set to "1", set values in timer 1 and prescaler 12 after fully appreciating the oscillation stabilization time of the oscillator to be used.

### • Clock mode

Operation is started by an on-chip oscillator after releasing reset. A division ratio (1/1, 1/2, 1/8) is selected by setting bits 7 and 6 of the CPU mode register after releasing it.

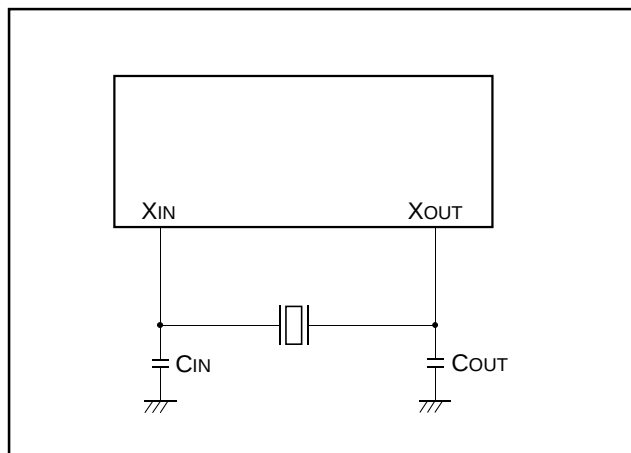


Fig. 43 External circuit of ceramic resonator

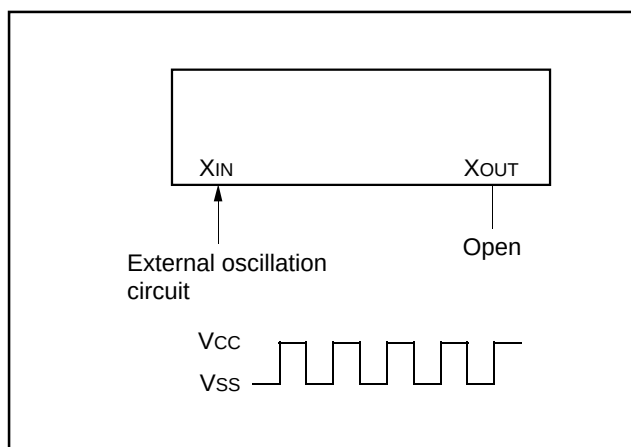


Fig. 44 External clock input circuit

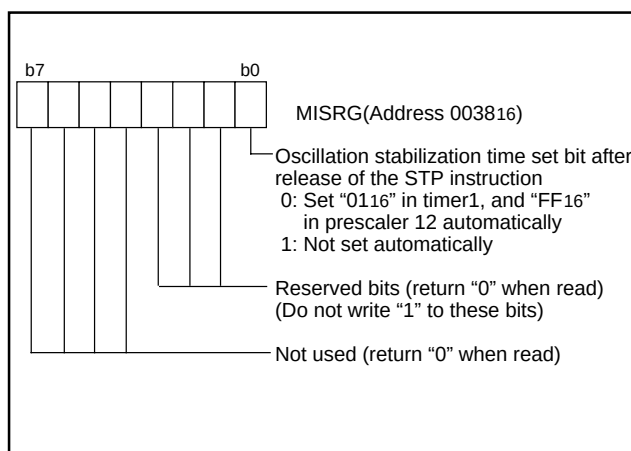


Fig. 45 Structure of MISRG

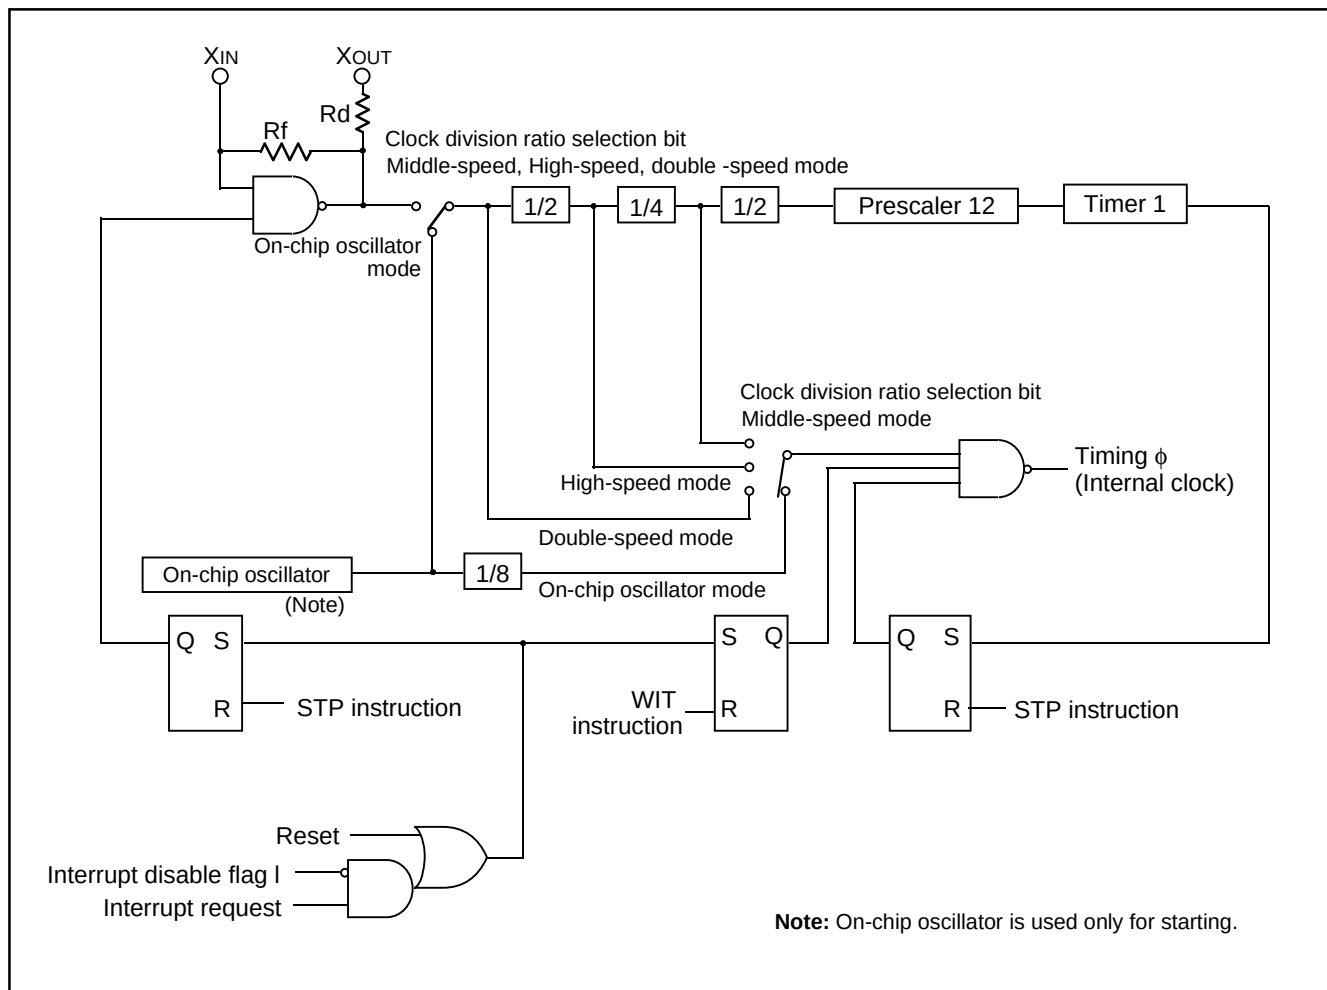


Fig. 46 Block diagram of system clock generating circuit (for ceramic resonator)

## NOTES ON PROGRAMMING

### Processor Status Register

The contents of the processor status register (PS) after reset are undefined except for the interrupt disable flag I which is "1". After reset, initialize flags which affect program execution. In particular, it is essential to initialize the T flag and the D flag because of their effect on calculations.

### Interrupts

The contents of the interrupt request bit do not change even if the BBC or BBS instruction is executed immediately after they are changed by program because this instruction is executed for the previous contents. For executing the instruction for the changed contents, execute one instruction before executing the BBC or BBS instruction.

### Decimal Calculations

- For calculations in decimal notation, set the decimal mode flag D to "1", then execute the ADC instruction or SBC instruction. In this case, execute SEC instruction, CLC instruction or CLD instruction after executing one instruction before the ADC instruction or SBC instruction.
- In the decimal mode, the values of the N (negative), V (overflow) and Z (zero) flags are invalid.

### Timers

- When n (0 to 255) is written to a timer latch, the frequency division ratio is  $1/(n+1)$ .
- When a count source of timer X is switched, stop a count of timer X.

### Ports

- The values of the port direction registers cannot be read.  
That is, it is impossible to use the LDA instruction, memory operation instruction when the T flag is "1", addressing mode using direction register values as qualifiers, and bit test instructions such as BBC and BBS.  
It is also impossible to use bit operation instructions such as CLB and SEB and read/modify/write instructions of direction registers for calculations such as ROR.  
For setting direction registers, use the LDM instruction, STA instruction, etc.
- As for the 36-pin version, set "1" to each bit 6 of the port P3 direction register and the port P3 register.
- As for the 32-pin version, set "1" to respective bits 5, 6, 7 of the port P3 direction register and port P3 register.

### A/D Converter

The comparator uses internal capacitors whose charge will be lost if the clock frequency is too low.  
Make sure that  $f(X_{IN})$  is 500kHz or more during A/D conversion.  
Do not execute the STP instruction during A/D conversion.

### Instruction Execution Timing

The instruction execution time can be obtained by multiplying the frequency of the internal clock  $\phi$  by the number of cycles mentioned in the machine-language instruction table.

The frequency of the internal clock f is the same as that of the XIN in double-speed mode, twice the XIN cycle in high-speed mode and 8 times the XIN cycle in middle-speed mode.

### Note on Stack Page

When 1 page is used as stack area by the stack page selection bit, the area which can be used as stack depends on RAM size. Especially, be careful that the RAM area varies in Mask ROM version, One Time PROM version and Emulator MCU.

## NOTES ON USE

### Handling of Power Source Pin

In order to avoid a latch-up occurrence, connect a capacitor suitable for high frequencies as bypass capacitor between power source pin (Vcc pin) and GND pin (Vss pin). Besides, connect the capacitor to as close as possible. For bypass capacitor which should not be located too far from the pins to be connected, an electrolytic or a ceramic capacitor of 1.0  $\mu$ F is recommended.

### Handling of USBVREFOUT Pin

In order to prevent the instability of the USBVREFOUT output due to external noise, connect a capacitor as bypass capacitor between USBVREFOUT pin and GND pin (Vss pin). Besides, connect the capacitor to as close as possible. For bypass capacitor, a ceramic or electrolytic capacitor of 0.22  $\mu$ F is recommended.

### One Time PROM Version

The CNVss pin is connected to the internal memory circuit block by a low-ohmic resistance, since it has the multiplexed function to be a programmable power source pin (VPP pin) as well.  
To improve the noise reduction, connect a track between CNVss pin and Vss pin with 1 to 10 k $\Omega$  resistance.  
The mask ROM version track of CNVss pin has no operational interference even if it is connected via a resistor.

### Electric Characteristic Differences Among Mask ROM and One Time PROM Version MCUs

There are differences in electric characteristics, operation margin, noise immunity, and noise radiation among mask ROM and One Time PROM version MCUs due to the differences in the manufacturing processes.

When manufacturing an application system with One Time PROM version and then switching to use of the mask ROM version, perform sufficient evaluations for the commercial samples of the mask ROM version.

### Note on Power Source Voltage

When the power source voltage value of a microcomputer is less than the value which is indicated as the recommended operating conditions, the microcomputer does not operate normally and may perform unstable operation.

In a system where the power source voltage drops slowly when the power source voltage drops or the power supply is turned off, reset a microcomputer when the supply voltage is less than the recommended operating conditions and design a system not to cause errors to the system by this unstable operation.

### DATA REQUIRED FOR MASK ORDERS

The following are necessary when ordering a mask ROM production:

- (1) Mask ROM Order Confirmation Form
- (2) Mask Specification Form
- (3) Data to be written to ROM, in EPROM form  
..... (three identical copies) or one floppy disk

\* For the mask ROM confirmation and the mask specifications, refer to the "Renesas Technology Corp." Homepage (<http://www.renesas.com/en/rom>).


### ROM PROGRAMMING METHOD

The built-in PROM of the blank One Time PROM version can be read or programmed with a general-purpose PROM programmer using a special programming adapter. Set the address of PROM programmer in the user ROM area.

**Table 6 Special programming adapter**

| Package | Name of Programming Adapter |
|---------|-----------------------------|
| 32P6U-A | PCA7435GPG03                |
| 36P2R-A | PCA7435FP, PCA7435FPG02     |
| 42P4B   | PCA7435SP, PCA7435SPG02     |

The PROM of the blank One Time PROM version is not tested or screened in the assembly process and following processes. To ensure proper operation after programming, the procedure shown in Figure 47 is recommended to verify programming.

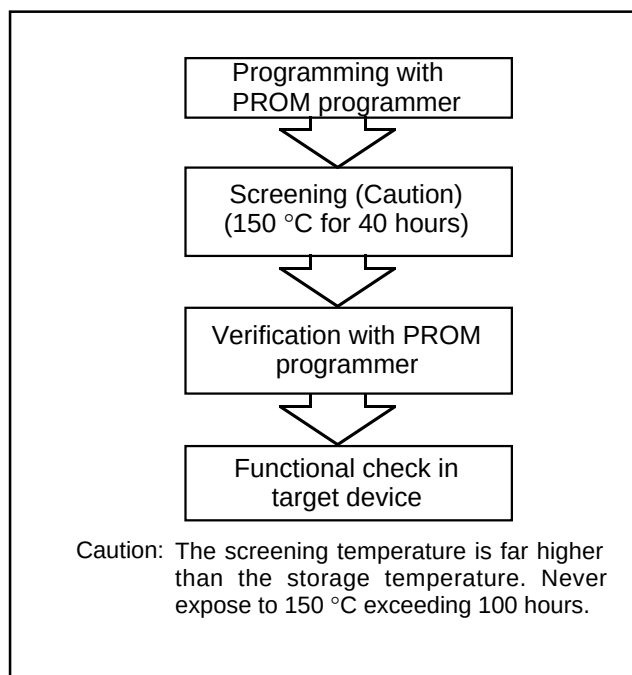

**Fig. 47 Programming and testing of One Time PROM version**

## ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings

Table 7 Absolute maximum ratings

| Symbol           | Parameter                                                                                               | Conditions                                                                  | Ratings                       | Unit |
|------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------------|------|
| V <sub>CC</sub>  | Power source voltage                                                                                    | All voltages are based on V <sub>SS</sub> . Output transistors are cut off. | –0.3 to 7.0                   | V    |
| V <sub>I</sub>   | Input voltage P00–P07, P10–P16, P20–P27, P30–P37, VREF, P40, P41                                        |                                                                             | –0.3 to V <sub>CC</sub> + 0.3 | V    |
| V <sub>I</sub>   | Input voltage $\overline{\text{RESET}}$ , X <sub>IN</sub>                                               |                                                                             | –0.3 to V <sub>CC</sub> + 0.3 | V    |
| V <sub>I</sub>   | Input voltage CNV <sub>SS</sub> (Note 1)                                                                |                                                                             | –0.3 to 13                    | V    |
| V <sub>O</sub>   | Output voltage P00–P07, P10–P16, P20–P27, P30–P37, X <sub>OUT</sub> , USBVREF <sub>OUT</sub> , P40, P41 |                                                                             | –0.3 to V <sub>CC</sub> + 0.3 | V    |
| P <sub>d</sub>   | Power dissipation (Note 2)                                                                              | T <sub>a</sub> = 25°C                                                       | 1000 (Note 3)                 | mW   |
| T <sub>opr</sub> | Operating temperature                                                                                   |                                                                             | –20 to 85                     | °C   |
| T <sub>stg</sub> | Storage temperature                                                                                     |                                                                             | –40 to 125                    | °C   |

**Notes 1:** It is a rating only for the One Time PROM version. Connect to V<sub>SS</sub> for mask ROM version.

**2:** The rating value depends on packages.

**3:** This is the value for 42-pin version.

The value of the 36-pin version is 300 mW.

The value of the 32-pin version is 200 mW.



## Recommended Operating Conditions

**Table 8 Recommended operating conditions**

(V<sub>CC</sub> = 4.1 to 5.5 V, T<sub>a</sub> = -20 to 85 °C, unless otherwise noted)

| Symbol                  | Parameter                                                                        |                                                     | Limits              |      |                     | Unit |
|-------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------|---------------------|------|---------------------|------|
|                         |                                                                                  |                                                     | Min.                | Typ. | Max.                |      |
| V <sub>CC</sub>         | Power source voltage                                                             | f(X <sub>IN</sub> ) = 6 MHz                         | 4.1                 | 5.0  | 5.5                 | V    |
| V <sub>SS</sub>         | Power source voltage                                                             |                                                     |                     | 0    |                     | V    |
| V <sub>REF</sub>        | Analog reference voltage                                                         |                                                     | 2.0                 |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>         | "H" input voltage                                                                | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        | 0.8 V <sub>CC</sub> |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>         | "H" input voltage (TTL input level selected)                                     | P10, P12, P13, P36, P37                             | 2.0                 |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>         | "H" input voltage                                                                | RESET, X <sub>IN</sub>                              | 0.8 V <sub>CC</sub> |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>         | "H" input voltage                                                                | D+, D-                                              | 2.0                 |      | 3.6                 | V    |
| V <sub>IL</sub>         | "L" input voltage                                                                | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        | 0                   |      | 0.3 V <sub>CC</sub> | V    |
| V <sub>IL</sub>         | "L" input voltage (TTL input level selected)                                     | P10, P12, P13, P36, P37                             | 0                   |      | 0.8                 | V    |
| V <sub>IL</sub>         | "L" input voltage                                                                | RESET, CNV <sub>SS</sub>                            | 0                   |      | 0.2 V <sub>CC</sub> | V    |
| V <sub>IL</sub>         | "L" input voltage                                                                | D+, D-                                              | 0                   |      | 0.8                 | V    |
| V <sub>IL</sub>         | "L" input voltage                                                                | X <sub>IN</sub>                                     | 0                   |      | 0.16V <sub>CC</sub> | V    |
| ΣI <sub>OH</sub> (peak) | "H" total peak output current (Note 1)                                           | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        |                     |      | –80                 | mA   |
| ΣI <sub>OL</sub> (peak) | "L" total peak output current (Note 1)                                           | P00–P07, P10–P16, P20–P27, P37, P40, P41            |                     |      | 80                  | mA   |
| ΣI <sub>OL</sub> (peak) | "L" total peak output current (Note 1)                                           | P30–P36                                             |                     |      | 60                  | mA   |
| ΣI <sub>OH</sub> (avg)  | "H" total average output current (Note 1)                                        | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        |                     |      | –40                 | mA   |
| ΣI <sub>OL</sub> (avg)  | "L" total average output current (Note 1)                                        | P00–P07, P10–P16, P20–P27, P37, P40, P41            |                     |      | 40                  | mA   |
| ΣI <sub>OL</sub> (avg)  | "L" total average output current (Note 1)                                        | P30–P36                                             |                     |      | 30                  | mA   |
| I <sub>OH</sub> (peak)  | "H" peak output current (Note 2)                                                 | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        |                     |      | –10                 | mA   |
| I <sub>OL</sub> (peak)  | "L" peak output current (Note 2)                                                 | P00–P07, P10–P16, P20–P27, P37, P40, P41            |                     |      | 10                  | mA   |
| I <sub>OL</sub> (peak)  | "L" peak output current (Note 2)                                                 | P30–P36                                             |                     |      | 30                  | mA   |
| I <sub>OH</sub> (avg)   | "H" average output current (Note 3)                                              | P00–P07, P10–P16, P20–P27, P30–P37, P40, P41        |                     |      | –5                  | mA   |
| I <sub>OL</sub> (avg)   | "L" average output current (Note 3)                                              | P00–P07, P10–P16, P20–P27, P37, P40, P41            |                     |      | 5                   | mA   |
| I <sub>OL</sub> (avg)   | "L" average output current (Note 3)                                              | P30–P36                                             |                     |      | 15                  | mA   |
| f(X <sub>IN</sub> )     | Oscillation frequency (Note 4)<br>at ceramic oscillation or external clock input | V <sub>CC</sub> = 4.1 to 5.5 V<br>Double-speed mode |                     |      | 6                   | MHz  |

**Note 1:** The total output current is the sum of all the currents flowing through all the applicable ports. The total average current is an average value measured over 100 ms. The total peak current is the peak value of all the currents.

**2:** The peak output current is the peak current flowing in each port.

**3:** The average output current I<sub>OL</sub> (avg), I<sub>OH</sub> (avg) in an average value measured over 100 ms.

**4:** When the oscillation frequency has a duty cycle of 50 %.

## Electrical Characteristics

**Table 9 Electrical characteristics (1) (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol                           | Parameter                                                                | Test conditions                                                                                                                                                        | Limits               |      |      | Unit |
|----------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------|------|------|
|                                  |                                                                          |                                                                                                                                                                        | Min.                 | Typ. | Max. |      |
| V <sub>OH</sub>                  | “H” output voltage P00–P07, P10–P16, P20–P27, P30–P37, P40, P41 (Note 1) | I <sub>OH</sub> = –5 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                              | V <sub>CC</sub> –1.5 |      |      | V    |
|                                  |                                                                          | I <sub>OH</sub> = –1.0 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                            | V <sub>CC</sub> –1.0 |      |      | V    |
| V <sub>OH</sub>                  | “H” output voltage D+, D-                                                | V <sub>CC</sub> = 4.4 to 5.25 V<br>Pull-down through 15kΩ ±5 % for D+, D-<br>Pull-up through 1.5kΩ ±5 % by USBV <sub>REFOUT</sub> for D- (T <sub>a</sub> = 0 to 70 °C) | 2.8                  |      | 3.6  | V    |
| V <sub>OL</sub>                  | “L” output voltage P00–P07, P10–P16, P20–P27, P37, P40, P41              | I <sub>OL</sub> = 5 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                               |                      |      | 1.5  | V    |
|                                  |                                                                          | I <sub>OL</sub> = 1.5 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                             |                      |      | 0.3  | V    |
| V <sub>OL</sub>                  | “L” output voltage D+, D-                                                | V <sub>CC</sub> = 4.4 to 5.25 V<br>Pull-down through 15kΩ ±5 % for D+, D-<br>Pull-up through 1.5kΩ ±5 % by USBV <sub>REFOUT</sub> for D- (T <sub>a</sub> = 0 to 70 °C) |                      |      | 0.3  | V    |
| V <sub>OL</sub>                  | “L” output voltage P30–P36                                               | I <sub>OL</sub> = 15 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                              |                      |      | 2.0  | V    |
|                                  |                                                                          | I <sub>OL</sub> = 1.5 mA<br>V <sub>CC</sub> = 4.1 to 5.5 V                                                                                                             |                      |      | 0.3  | V    |
| V <sub>T+</sub> –V <sub>T–</sub> | Hysteresis D+, D-                                                        |                                                                                                                                                                        |                      | 0.15 |      | V    |
| V <sub>T+</sub> –V <sub>T–</sub> | Hysteresis CNTR0, INT0, INT1 (Note 2), P00–P07 (Note 3)                  |                                                                                                                                                                        |                      | 0.4  |      | V    |
| V <sub>T+</sub> –V <sub>T–</sub> | Hysteresis RxD, SCLK, SData (Note 2)                                     |                                                                                                                                                                        |                      | 0.5  |      | V    |
| V <sub>T+</sub> –V <sub>T–</sub> | Hysteresis RESET                                                         |                                                                                                                                                                        |                      | 0.5  |      | V    |
| I <sub>IH</sub>                  | “H” input current P00–P07, P10–P16, P20–P27, P30–P37, P40, P41           | V <sub>I</sub> = V <sub>CC</sub><br>(Pin floating. Pull-up transistors “off”)                                                                                          |                      |      | 5.0  | μA   |
| I <sub>IH</sub>                  | “H” input current RESET                                                  | V <sub>I</sub> = V <sub>CC</sub>                                                                                                                                       |                      |      | 5.0  | μA   |
| I <sub>IH</sub>                  | “H” input current X <sub>IN</sub>                                        | V <sub>I</sub> = V <sub>CC</sub>                                                                                                                                       |                      | 4    |      | μA   |
| I <sub>IL</sub>                  | “L” input current P00–P07, P10–P16, P20–P27, P30–P37, P40, P41           | V <sub>I</sub> = V <sub>SS</sub><br>(Pin floating. Pull-up transistors “off”)                                                                                          |                      |      | –5.0 | μA   |
| I <sub>IL</sub>                  | “L” input current RESET, CNV <sub>SS</sub>                               | V <sub>I</sub> = V <sub>SS</sub>                                                                                                                                       |                      |      | –5.0 | μA   |
| I <sub>IL</sub>                  | “L” input current X <sub>IN</sub>                                        | V <sub>I</sub> = V <sub>SS</sub>                                                                                                                                       |                      | –4   |      | μA   |
| I <sub>IL</sub>                  | “L” input current P00–P07, P30–P37                                       | V <sub>I</sub> = V <sub>SS</sub><br>(Pull-up transistors “on”)                                                                                                         |                      | –0.2 | –0.5 | mA   |
| V <sub>RAM</sub>                 | RAM hold voltage                                                         | When clock stopped                                                                                                                                                     | 2.0                  |      | 5.5  | V    |

**Note 1:** P11 is measured when the P-channel output disable bit of the UART control register (bit 4 of address 001B16) is “0”.

**2:** RxD, SCLK, SData, INT0 and INT1 have hystereses only when bits 0, 1 and 2 of the port P1P3 control register are set to “0” (CMOS level).

**3:** It is available only when operating key-on wake-up.


**Table 10 Electrical characteristics (2)**(V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = -20 to 85 °C, unless otherwise noted)

| Symbol          | Parameter            | Test conditions                                                                                                                        |                 | Limits |      |      | Unit |
|-----------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------|------|------|------|
|                 |                      |                                                                                                                                        |                 | Min.   | Typ. | Max. |      |
| I <sub>CC</sub> | Power source current | Double-speed mode, f(X <sub>IN</sub> ) = 6 MHz,<br>Output transistors "off"                                                            |                 |        | 6    | 10   | mA   |
|                 |                      | f(X <sub>IN</sub> ) = 6 MHz, (in WIT state)<br>Output transistors "off"                                                                |                 |        | 1.6  | 3.2  | mA   |
|                 |                      | Increment when A/D conversion is executed<br>f(X <sub>IN</sub> ) = 6 MHz, V <sub>CC</sub> = 5 V                                        |                 |        | 0.8  |      | mA   |
|                 |                      | All oscillation stopped (in STP state)<br>Output transistors "off"                                                                     | Ta = 25 °C      |        | 0.1  | 1.0  | μA   |
|                 |                      |                                                                                                                                        | Ta = 85 °C      |        |      | 10   | μA   |
|                 |                      | V <sub>CC</sub> = 4.4 V to 5.25 V<br>Oscillation stopped in USB mode<br>USB (SUSPEND), (pull-up resistor<br>output included) (Fig. 48) | Ta = 0 to 70 °C |        |      |      | 300  |

## A/D Converter Characteristics

**Table 11 A/D Converter characteristics (1) (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = -20 to 85 °C, unless otherwise noted)**

| Symbol              | Parameter                            | Test conditions                                          | Limits |      |      | Unit                              |
|---------------------|--------------------------------------|----------------------------------------------------------|--------|------|------|-----------------------------------|
|                     |                                      |                                                          | Min.   | Typ. | Max. |                                   |
| —                   | Resolution                           |                                                          |        |      | 10   | Bits                              |
| —                   | Linearity error                      | V <sub>CC</sub> = 4.1 to 5.5 V<br>T <sub>a</sub> = 25 °C |        |      | ±3   | LSB                               |
| —                   | Differential nonlinear error         | V <sub>CC</sub> = 4.1 to 5.5 V<br>T <sub>a</sub> = 25 °C |        |      | ±0.9 | LSB                               |
| V <sub>OT</sub>     | Zero transition voltage              | V <sub>CC</sub> = V <sub>REF</sub> = 5.12 V              | 0      | 5    | 20   | mV                                |
| V <sub>FST</sub>    | Full scale transition voltage        | V <sub>CC</sub> = V <sub>REF</sub> = 5.12 V              | 5105   | 5115 | 5125 | mV                                |
| t <sub>CONV</sub>   | Conversion time                      |                                                          |        |      | 122  | t <sub>c</sub> (X <sub>IN</sub> ) |
| R <sub>LADDER</sub> | Ladder resistor                      |                                                          |        | 55   |      | kΩ                                |
| I <sub>VREF</sub>   | Reference power source input current | V <sub>REF</sub> = 5.0 V                                 | 50     | 150  | 200  | μA                                |
|                     |                                      | V <sub>REF</sub> = 3.0 V                                 | 30     | 70   | 120  |                                   |
| I <sub>I(AD)</sub>  | A/D port input current               |                                                          |        |      | 5.0  | μA                                |

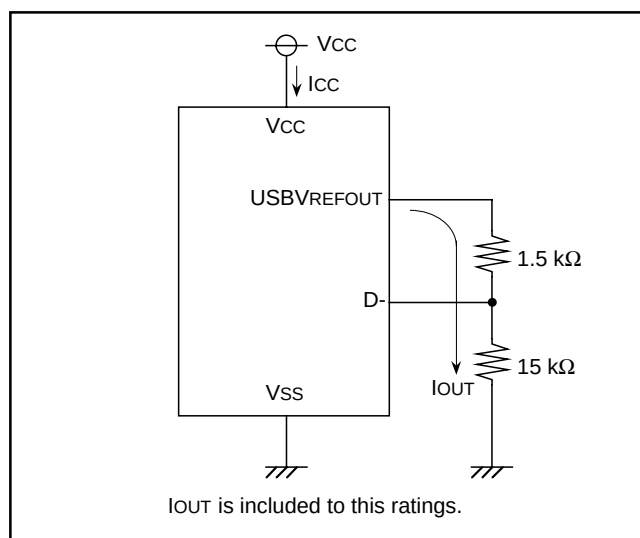**Fig. 48 Power source current measurement circuit in USB mode at oscillation stop**

## Timing Requirements

**Table 12 Timing requirements** ( $V_{CC} = 4.1$  to  $5.5$  V,  $V_{SS} = 0$  V,  $T_a = -20$  to  $85$  °C, unless otherwise noted)


| Symbol                      | Parameter                               | Limits |      |      | Unit          |
|-----------------------------|-----------------------------------------|--------|------|------|---------------|
|                             |                                         | Min.   | Typ. | Max. |               |
| $t_w(\text{RESET})$         | Reset input "L" pulse width             | 15     |      |      | $\mu\text{s}$ |
| $t_c(\text{XIN})$           | External clock input cycle time         | 166    |      |      | ns            |
| $t_{WH}(\text{XIN})$        | External clock input "H" pulse width    | 70     |      |      | ns            |
| $t_{WL}(\text{XIN})$        | External clock input "L" pulse width    | 70     |      |      | ns            |
| $t_c(\text{CNTR})$          | CNTR0 input cycle time                  | 200    |      |      | ns            |
| $t_{WH}(\text{CNTR})$       | CNTR0, INT0, INT1 input "H" pulse width | 80     |      |      | ns            |
| $t_{WL}(\text{CNTR})$       | CNTR0, INT0, INT1 input "L" pulse width | 80     |      |      | ns            |
| $t_c(\text{SCLK})$          | Serial I/O2 clock input cycle time      | 1000   |      |      | ns            |
| $t_{WH}(\text{SCLK})$       | Serial I/O2 clock input "H" pulse width | 400    |      |      | ns            |
| $t_{WL}(\text{SCLK})$       | Serial I/O2 clock input "L" pulse width | 400    |      |      | ns            |
| $t_{su}(\text{SDATA-SCLK})$ | Serial I/O2 input set up time           | 200    |      |      | ns            |
| $t_h(\text{SCLK-SDATA})$    | Serial I/O2 input hold time             | 200    |      |      | ns            |

## Switching Characteristics

**Table 13 Switching characteristics** ( $V_{CC} = 4.1$  to  $5.5$  V,  $V_{SS} = 0$  V,  $T_a = -20$  to  $85$  °C, unless otherwise noted)

| Symbol                           | Parameter                                                                                          | Limits                  |      |      | Unit |
|----------------------------------|----------------------------------------------------------------------------------------------------|-------------------------|------|------|------|
|                                  |                                                                                                    | Min.                    | Typ. | Max. |      |
| $t_{WH}(\text{SCLK})$            | Serial I/O2 clock output "H" pulse width                                                           | $t_c(\text{SCLK})/2-30$ |      |      | ns   |
| $t_{WL}(\text{SCLK})$            | Serial I/O2 clock output "L" pulse width                                                           | $t_c(\text{SCLK})/2-30$ |      |      | ns   |
| $t_d(\text{SCLK-SDATA})$         | Serial I/O2 output delay time                                                                      |                         |      | 140  | ns   |
| $t_v(\text{SCLK-SDATA})$         | Serial I/O2 output valid time                                                                      | 0                       |      |      | ns   |
| $t_r(\text{SCLK})$               | Serial I/O2 clock output rising time                                                               |                         |      | 30   | ns   |
| $t_f(\text{SCLK})$               | Serial I/O2 clock output falling time                                                              |                         |      | 30   | ns   |
| $t_r(\text{CMOS})$               | CMOS output rising time (Note)                                                                     |                         | 10   | 30   | ns   |
| $t_f(\text{CMOS})$               | CMOS output falling time (Note)                                                                    |                         | 10   | 30   | ns   |
| $t_r(\text{D+}), t_r(\text{D-})$ | USB output rising time, $C_L = 200$ to $450$ pF, $T_a = 0$ to $70$ °C, $V_{CC} = 4.4$ to $5.25$ V  | 75                      | 150  | 300  | ns   |
| $t_f(\text{D+}), t_f(\text{D-})$ | USB output falling time, $C_L = 200$ to $450$ pF, $T_a = 0$ to $70$ °C, $V_{CC} = 4.4$ to $5.25$ V | 75                      | 150  | 300  | ns   |

**Notes:** XOUT pin is excluded.

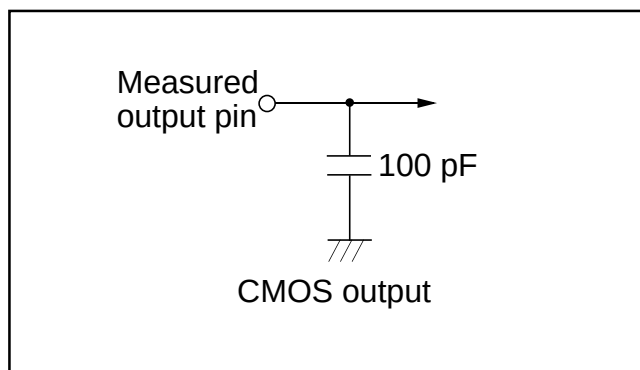

**Fig. 49 Output switching characteristics measurement circuit**

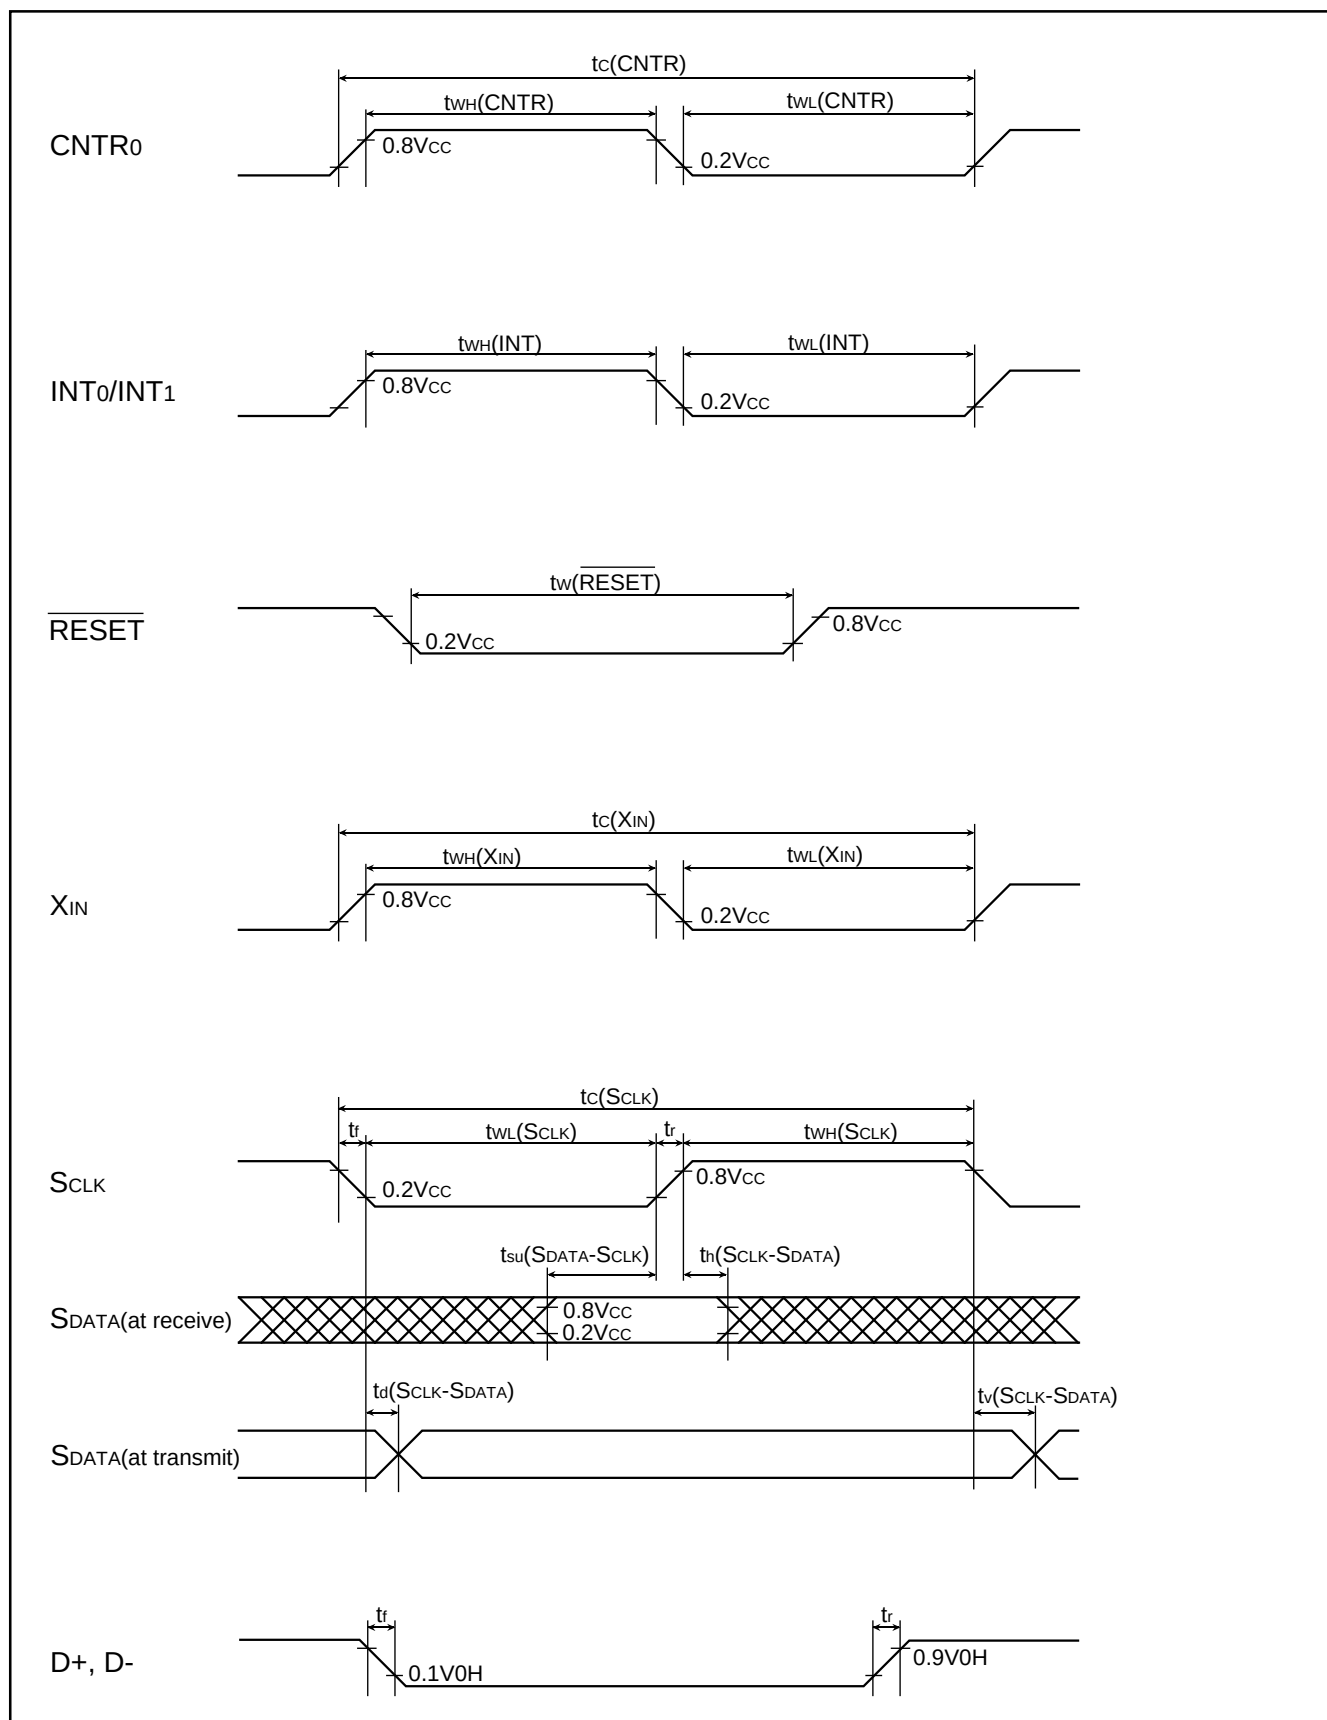


Fig. 50 Timing chart

## Description of improved USB function for 7534 Group

**Table 14 Description of improved USB function for 7534 Group**

| No. | Parameter                    | 7532/7536 Group                                                                                | 7534 Group                                                                                                                                                                                                   |
|-----|------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | Response at Control transfer | Not deal with the host which performs the Control transfer in parallel to plural device.       | Connectable to the host which performs the Control transfer in parallel to plural device.                                                                                                                    |
| 2   | D+/D- transceiver circuit    | USB function can be used only at the condition of $C_L = 150 \text{ pF}$ to $350 \text{ pF}$ . | Deal with the the following USB Specification Rev. 1.1.<br>$C_L = 200 \text{ pF}$ to $450 \text{ pF}$ ,<br>Trise and Tfall: 75 ns to 300 ns,<br>Tr/Tf: 80 % to 125 %,<br>Cross over Voltage: 1.3 V to 2.0 V. |
| 3   | Power dissipation at Suspend | Rating is Max. 300 $\mu\text{A}$ not including the output current of USBVREFOUT.               | Rating is Max. 300 $\mu\text{A}$ including the output current of USBVREFOUT, by low-power dissipation of D+/D- input circuit and 3.3 V-regulator.                                                            |
| 4   | STALL in Status stage        | ACK is returned once to OUT (DATA0) to be valid in Status stage.                               | STALL is set automatically by hardware when OUT (DATA0) is received in Status stage.                                                                                                                         |
| 5   | 6-bit decode of SYNC field   | SYNC is detected only when 8-bit full code (8016) is complete.                                 | SYNC is detected only the low-order 6 bits even if the high-order 2 bits are corrupted.                                                                                                                      |

## Differences among 32-pin, 36-pin and 42-pin

The 7534 Group has three package types, and each of the number of I/O ports are different. Accordingly, when the pins which have the function except a port function are eliminated, be careful that the functions are also eliminated.

**Table 15 Differences among 32-pin, 36-pin and 42-pin**

| I/O port | 42-pin SDIP                                            | 36-pin SSOP                                            | 32-pin LQFP                                               |
|----------|--------------------------------------------------------|--------------------------------------------------------|-----------------------------------------------------------|
| Port P1  | P10–P16 (7-bit structure)                              | P10–P14 (5-bit structure)                              | P10–P14 (5-bit structure)                                 |
| Port P2  | P20–P27 (8-bit structure)<br>(A/D converter 8-channel) | P20–P27 (8-bit structure)<br>(A/D converter 8-channel) | P20–P25 (6-bit structure)<br>(A/D converter 6-channel)    |
| Port P3  | P30–P37 (8-bit structure)<br>(INT0, INT1 available)    | P30–P35, P37 (7-bit structure)<br>(INT0 available)     | P30–P34 (5-bit structure)<br>(INT function not available) |
| Port P4  | P40, P41 (2-bit structure)                             | No port                                                | No port                                                   |

Additionally, there are differences of SFR usage and functional definitions.

**Table 16 Differences among 32-pin, 36-pin and 42-pin (SFR)**

| Register (Address)                 | 42-pin SDIP                                                                                                                                                               | 36-pin SSOP                                                                              | 32-pin LQFP                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Port P1/Direction<br>(0216/0316)   | Bit 7 not available                                                                                                                                                       | Bits 5 to 7 not available                                                                | Bits 5 to 7 not available                                                       |
| Port P2/Direction<br>(0416/0516)   | All bits available                                                                                                                                                        | All bits available                                                                       | Bits 6 and 7 not available                                                      |
| Port P3/Direction<br>(0616/0716)   | All bits available                                                                                                                                                        | Bit 6 not available                                                                      | Bits 5 to 7 not available                                                       |
| Port P4/Direction<br>(0816/0916)   | Bits 2 to 7 not available                                                                                                                                                 | All bits not available                                                                   | All bits not available                                                          |
| Pull-up control<br>(1616)          | Bit 6 definition:<br>"P35, P36 pull-up control"<br>Bit 7 definition:<br>"P37 pull-up control"                                                                             | Bit 6 definition:<br>"P35 pull-up control"<br>Bit 7 definition:<br>"P37 pull-up control" | Bits 6 and 7 not available                                                      |
| Port P1P3 control<br>(1716)        | Bit 0 definition:<br>"P37/INT0 input level selection"<br>Bit 1 definition:<br>"P36/INT1 input level selection"                                                            | Bit 0 definition:<br>"P37/INT0 input level selection"<br>Bit 1 not available             | Bits 0 and 1 not available                                                      |
| A/DControl<br>(3416)               | Bits 0 to 2<br>"Input pins selected by setting these bits to 000 to 111"                                                                                                  | Bits 0 to 2<br>"Input pins selected by setting these bits to 000 to 111"                 | Bits 0 to 2<br>"Input pins selected by setting these bits to 000 to 101"        |
| Interrupt edge selection<br>(3A16) | Bit 0 definition<br>"INT0 interrupt edge selection"<br>Bit 1 definition<br>"INT1 interrupt edge selection"<br>Bit 4 definition<br>"Serial I/O1, INT1 interrupt selection" | Bit 0 definition<br>"INT0 interrupt edge selection"<br>Bits 1 and 4 not available        | Bits 0, 1 and 4 not available                                                   |
| Interrupt request<br>(3C16)        | Bit 1 definition<br>"UART transmission, USB (except IN), INT1"<br>Bit 2 definition<br>"INT0"                                                                              | Bit 1 definition<br>"UART transmission, USB (except IN)"<br>Bit 2 definition<br>"INT0"   | Bit 1 definition<br>"UART transmission, USB (except IN)"<br>Bit 2 not available |
| Interrupt control<br>(3E16)        | Bit 1 definition<br>"UART transmission, USB (except IN), INT1"<br>Bit 2 definition<br>"INT0"                                                                              | Bit 1 definition<br>"UART transmission, USB (except IN)"<br>Bit 2 definition<br>"INT0"   | Bit 1 definition<br>"UART transmission, USB (except IN)"<br>Bit 2 not available |

## Description supplement for use of USB function stably

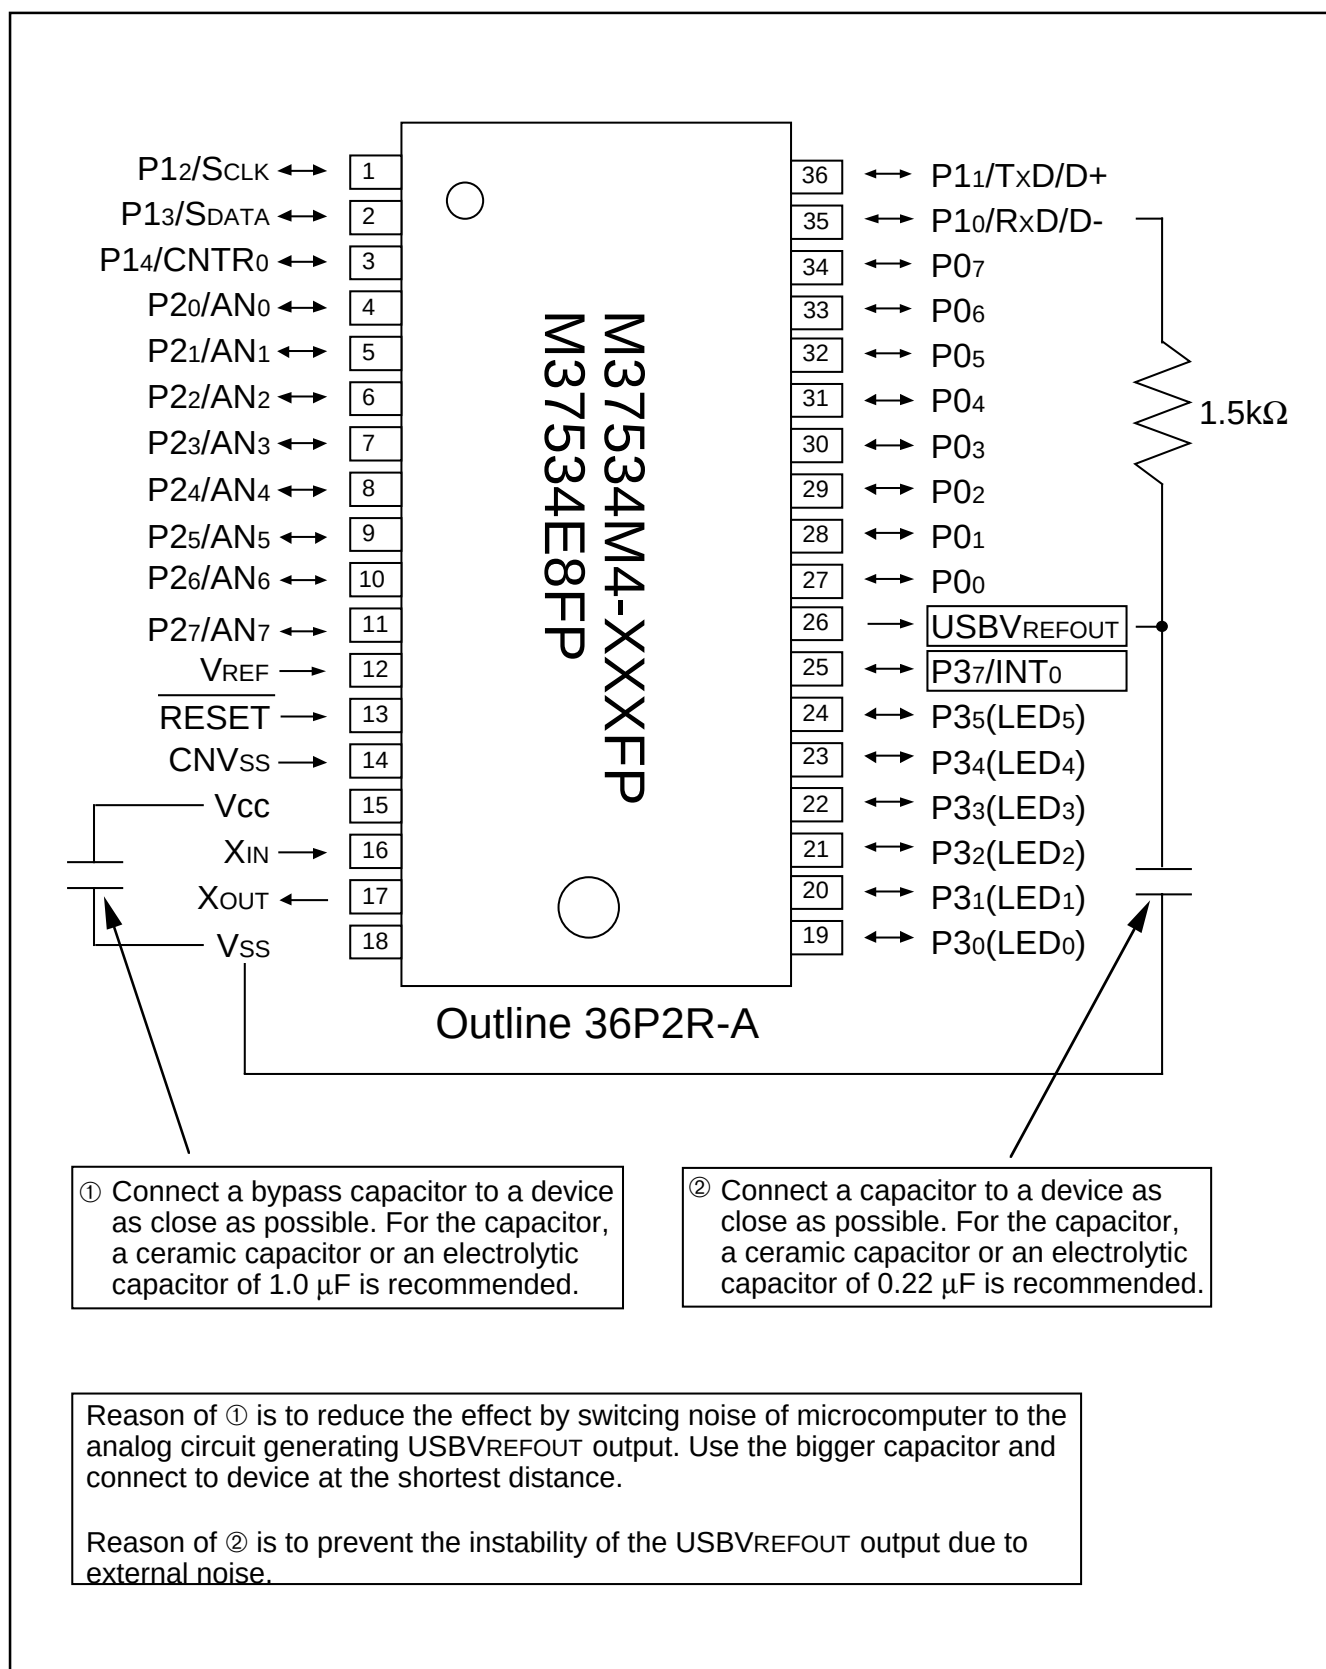


Fig. 51 Handling of VCC, USBVREFOUT pins of M37534M4-XXXXFP, M37534E8FP




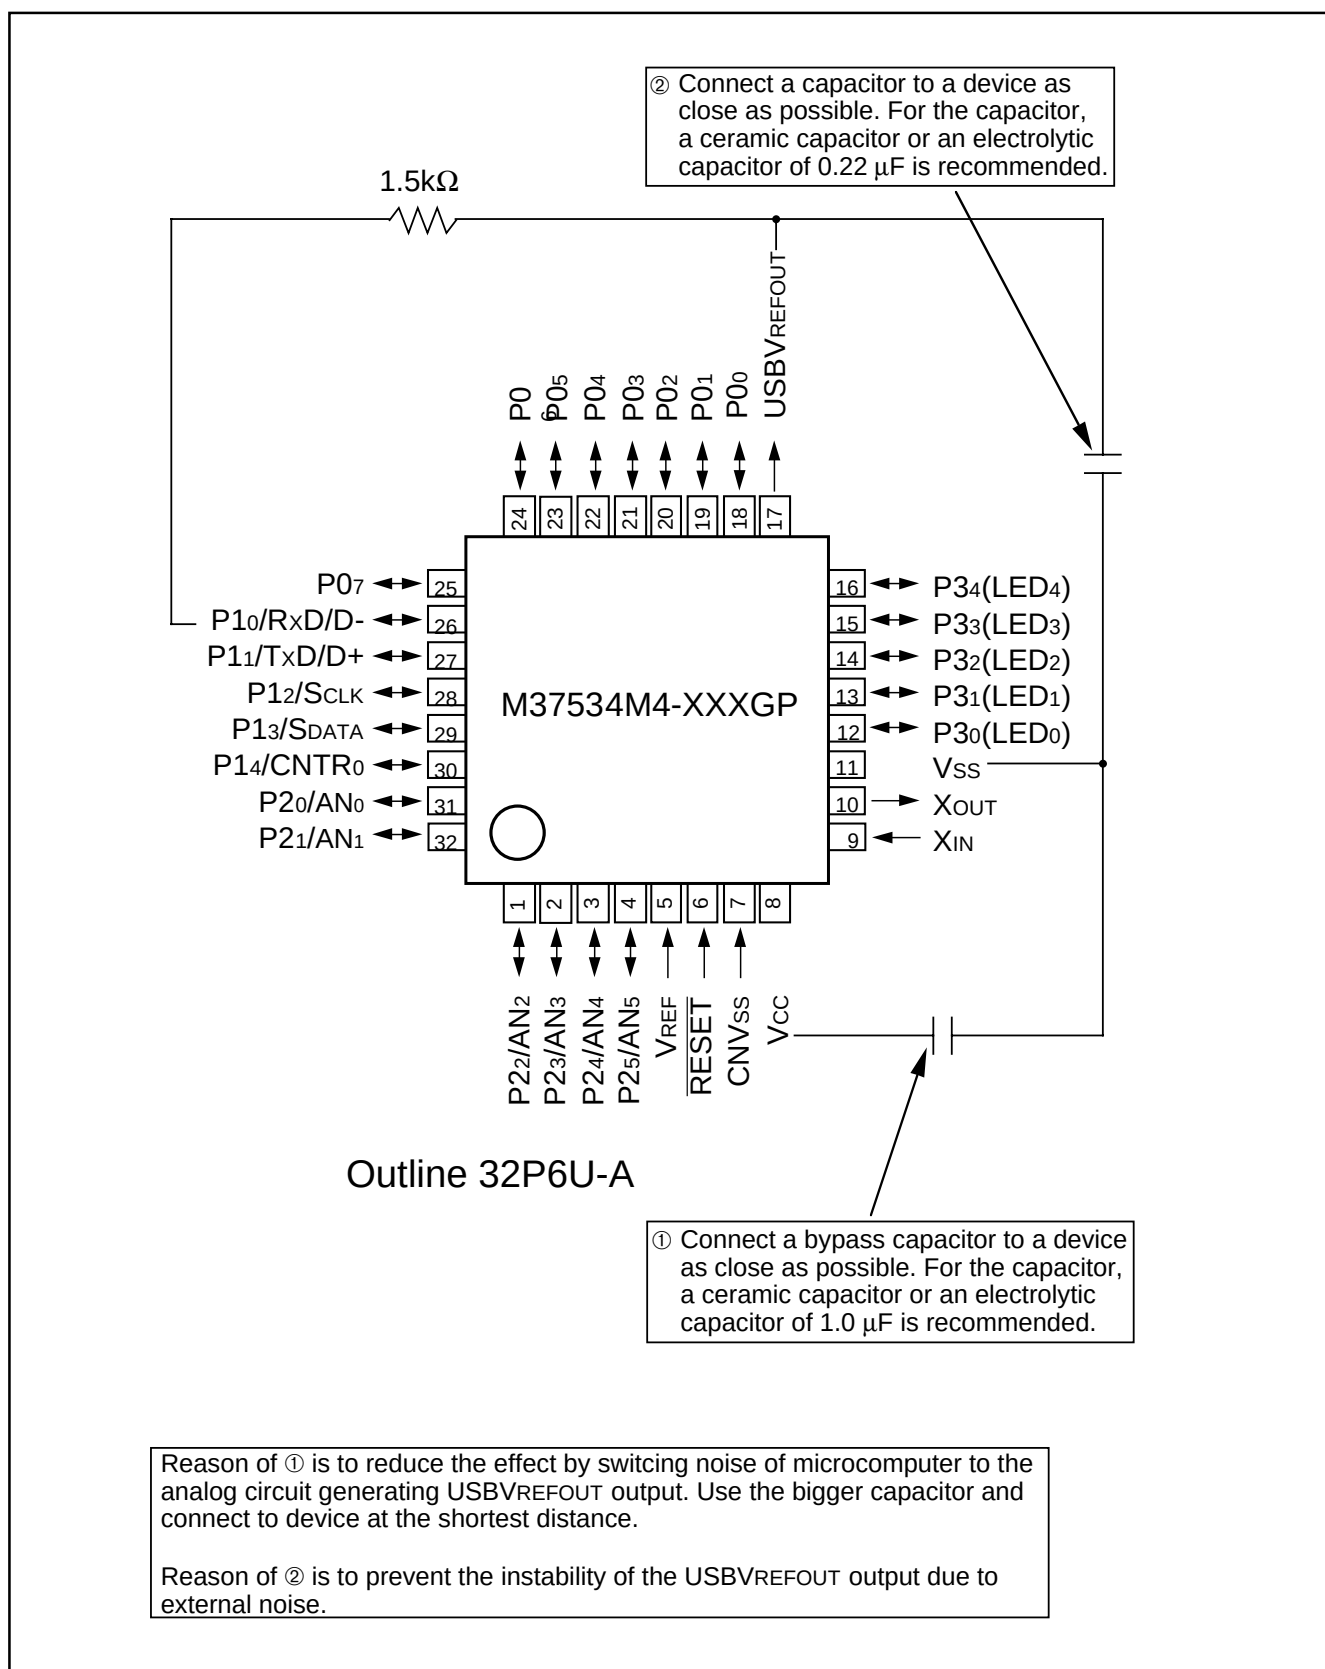


Fig. 52 Handling of VCC, USBVREFOUT pins of M37534M4-XXXGP

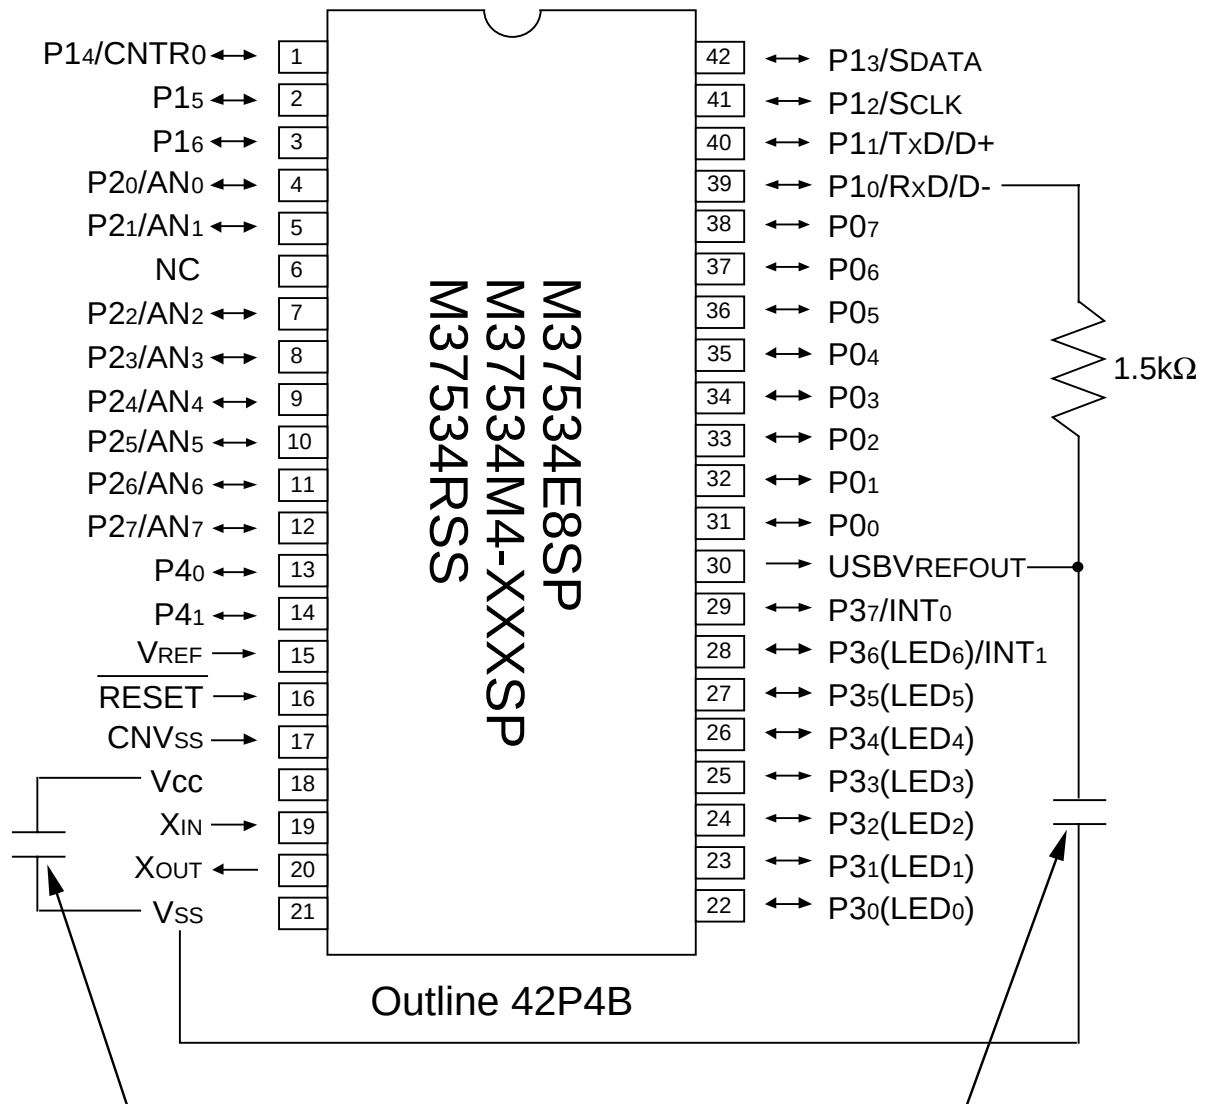

① Connect a bypass capacitor to a device as close as possible. For the capacitor, a ceramic capacitor or an electrolytic capacitor of 1.0  $\mu\text{F}$  is recommended.

② Connect a capacitor to a device as close as possible. For the capacitor, a ceramic capacitor or an electrolytic capacitor of 0.22  $\mu\text{F}$  is recommended.

Reason of ① is to reduce the effect by switching noise of microcomputer to the analog circuit generating USBVREFOUT output. Use the bigger capacitor and connect to device at the shortest distance.

Reason of ② is to prevent the instability of the USBVREFOUT output due to external noise.


Fig. 53 Handling of VCC, USBVREFOUT pins of M37534E8SP, M37534M4-XXXSP, M37534RSS

## PACKAGE OUTLINE

## 32P6U-A

Recommended


Plastic 32pin 7X7mm body LQFP

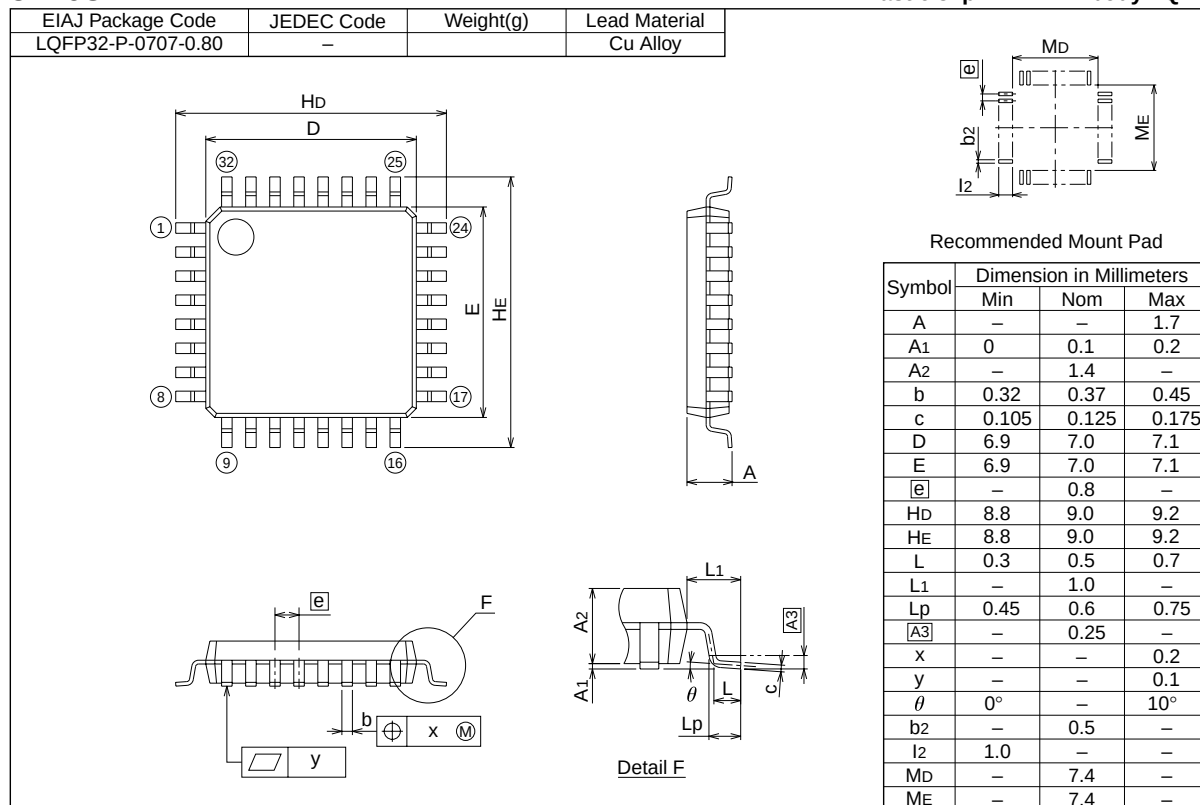

## 36P2R-A

Recommended


Plastic 36pin 450mil SSOP

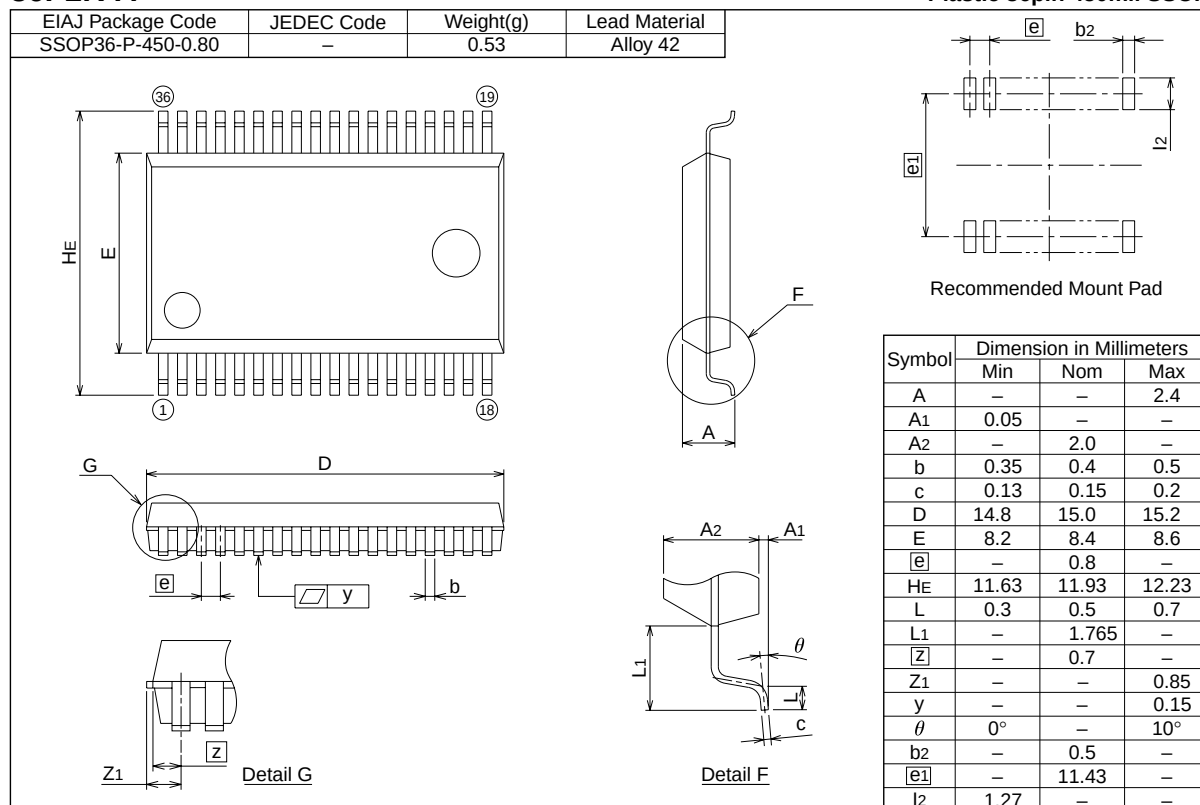

**42P4B**

Recommended

Plastic 42pin 600mil SDIP

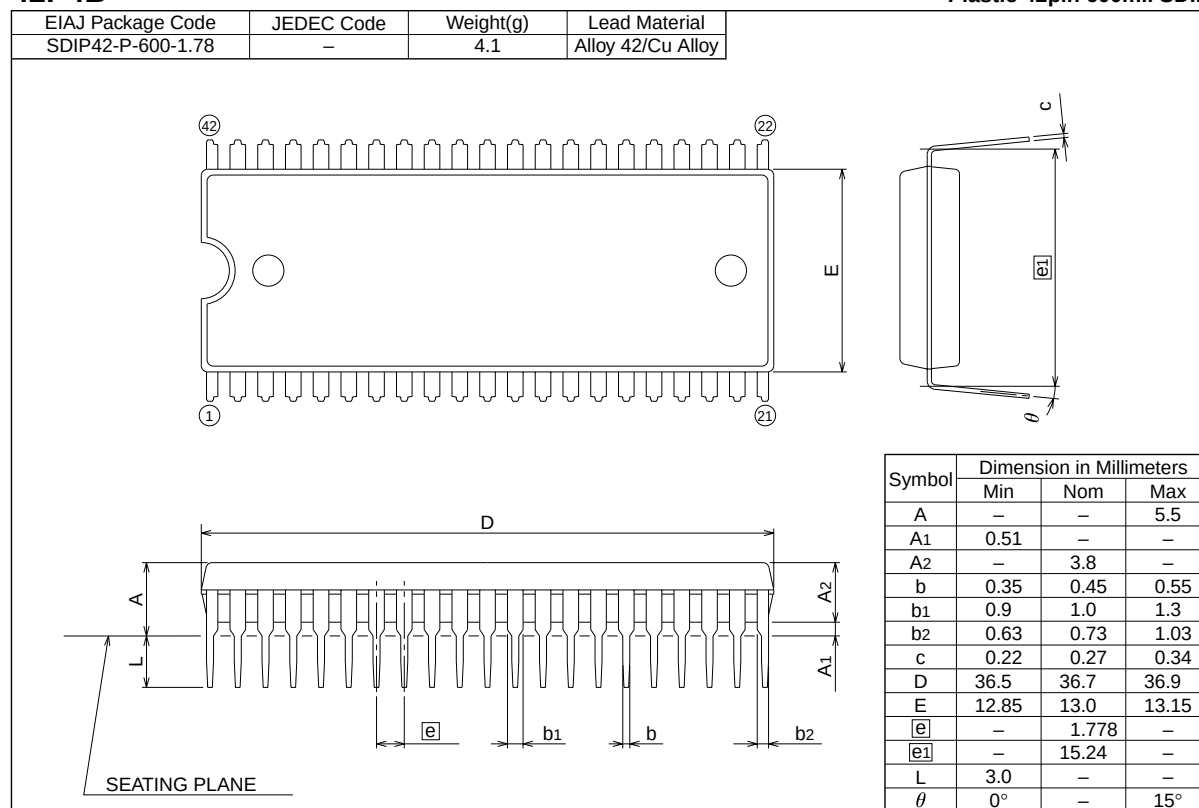

## Renesas Technology Corp. Sales Strategic Planning Div. Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Keep safety first in your circuit designs!

1. Renesas Technology Corp. puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corp. product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corp. or a third party.
2. Renesas Technology Corp. assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corp. without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors.  
Renesas Technology Corp. assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corp. by various means, including the Renesas Technology Corp. Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corp. assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corp. semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corp. or an authorized Renesas Technology Corp. product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corp. is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corp. for further details on these materials or the products contained therein.



### RENESAS SALES OFFICES

<http://www.renesas.com>

#### Renesas Technology America, Inc.

450 Holger Way, San Jose, CA 95134-1368, U.S.A  
Tel: <1> (408) 382-7500 Fax: <1> (408) 382-7501

#### Renesas Technology Europe Limited.

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, United Kingdom  
Tel: <44> (1628) 585 100, Fax: <44> (1628) 585 900

#### Renesas Technology Europe GmbH

Dornacher Str. 3, D-85622 Feldkirchen, Germany  
Tel: <49> (89) 380 70 0, Fax: <49> (89) 929 30 11

#### Renesas Technology Hong Kong Ltd.

7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Hong Kong  
Tel: <852> 2265-6688, Fax: <852> 2375-6836

#### Renesas Technology Taiwan Co., Ltd.

FL 10, #99, Fu-Hsing N. Rd., Taipei, Taiwan  
Tel: <886> (2) 2715-2888, Fax: <886> (2) 2713-2999

#### Renesas Technology (Shanghai) Co., Ltd.

26/F., Ruijin Building, No.205 Maoming Road (S), Shanghai 200020, China  
Tel: <86> (21) 6472-1001, Fax: <86> (21) 6415-2952

#### Renesas Technology Singapore Pte. Ltd.

1, Harbour Front Avenue, #06-10, Keppel Bay Tower, Singapore 098632  
Tel: <65> 6213-0200, Fax: <65> 6278-8001

# REVISION DESCRIPTION LIST

# 7534 Group DATA SHEET

| Rev. No. | Revision Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Rev. date |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 1.0      | First Edition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 000118    |
| 1.1      | <p>Page 2: package type revised; 32P6B-A → 32P6U-A</p> <p>Page 5: package type revised; 32P6B-A → 32P6U-A</p> <p>Page 8 package type revised; 32P6B-A → 32P6U-A</p> <p>Page 34: Description revised; <math>\overline{\text{RESET}}</math> "L" pulse width 2 <math>\mu\text{s}</math> → 15 <math>\mu\text{s}</math></p> <p>Page 43: Table 11 revised; Absolute accuracy (excluding quantization error) → Linearity error</p> <p>Page 44: Table 12 revised; <math>\text{tw}(\overline{\text{RESET}})</math>: 2 → 15</p> <p>Page 48: Fig. 51 Description ①, ② revised</p> <p>Page 49: Fig. 52 Description ①, ② and package type revised; 32P6B-A → 32P6U-A</p> <p>Page 50: Fig. 53 Description ①, ② revised</p> <p>Page 51: Package outline revised; 32P6B-A → 32P6U-A</p>                                                                                                                                                                                                                                                                                                                                                                                                                    | 000614    |
| 1.2      | Page 34: Character fonts errors revised                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 000905    |
| 1.3      | <p>All pages: The following caution is eliminated;</p> <p>"PRELIMINARY Notice: This is not a final specification. Some parametric limits are subject to change."</p> <p>Page 7: Table 1 Function description of <math>V_{SS}</math>, <math>V_{CC}</math> revised.</p> <p>Page 8: Fig. 7 "M37534E4" added, "Under development" eliminated. Table 2 M37534E4GP added.</p> <p>Page 9: "Note on stack page" added.</p> <p>Page 15: Fig. 15 Ports P36, P37 revised.</p> <p>Page 23: Description revised; 5 sources → 6 sources, "setup token receive" added.</p> <p>Page 29: <math>\mu\text{ sec.}</math> → <math>\mu\text{s}</math></p> <p>Page 38: NOTES ON PROGRAMMING "Note on Stack Page" added.</p> <p>Handling of Power Source Pin;</p> <p>0.1 <math>\mu\text{F}</math> → 1.0 <math>\mu\text{F}</math>, a ceramic capacitor → an electrolytic or a ceramic capacitor</p> <p>Handling of USBVREFout Pin; 0.1 <math>\mu\text{F}</math> → 0.22 <math>\mu\text{F}</math></p> <p>Page 39: DATA REQUIRED FOR MASK ORDERS revised.</p> <p>Table 6 32P6U-A added. Name of Programming Adapter revised.</p> <p>Page 40: Note 3 revised.</p> <p>Page 46: Table 14 7532 Group → 7532/7536 Group</p> | 010915    |

