


# LM7171 Very High Speed, High Output Current, Voltage Feedback Amplifier

## 1 Features

- Typical values unless otherwise noted
- Easy-to-use voltage-feedback topology
- Very high slew rate: 4100V/μs
- Wide unity-gain bandwidth: 200MHz
- -3dB frequency at  $A_V = +2$ : 220MHz
- Low supply current: 6.5mA
- High open-loop gain: 85dB
- High output current: 100mA
- Differential gain and phase: 0.01%, 0.02°
- Specified for ±15V and ±5V operation

## 2 Applications

- HDSL and ADSL drivers
- Multimedia broadcast systems
- Professional video cameras
- Video amplifiers
- Copiers, scanners, fax
- HDTV amplifiers
- Pulse amplifiers and peak detectors
- CATV and fiber optics signal processing

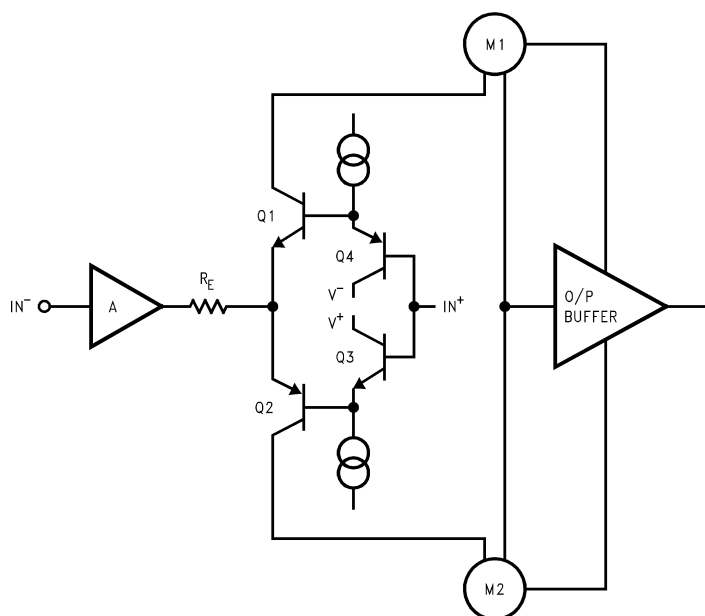

**Note:** M1 and M2 are current mirrors.

**Simplified Schematic Diagram**

## 3 Description

The LM7171 is a high-speed voltage-feedback amplifier that has the slewing characteristic of a current-feedback amplifier, but can be used in all traditional voltage-feedback amplifier configurations. The LM7171 is stable for gains as low as +2 or -1. The device provides a very high slew rate at 4100V/μs and a wide unity-gain bandwidth of 200MHz, while consuming only 6.5mA of supply current. The LM7171 is an excellent choice for video and high-speed signal processing applications, such as HDSL and pulse amplifiers. With 100mA of output current, the LM7171 is used for video distribution, as a transformer driver, or as a laser diode driver.


Operation on ±15V power supplies allows for large signal swings and provides greater dynamic range and signal-to-noise ratio. The LM7171 offers low SFDR and THD, which is excellent for ADC/DAC systems. In addition, the LM7171 is specified for ±5V operation for portable applications.

### Package Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> |
|-------------|------------------------|-----------------------------|
| LM7171      | D (SOIC, 8)            | 4.90mm × 6mm                |
|             | P (PDIP, 8)            | 9.81mm × 9.43mm             |

(1) For more information, see [Section 9](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.

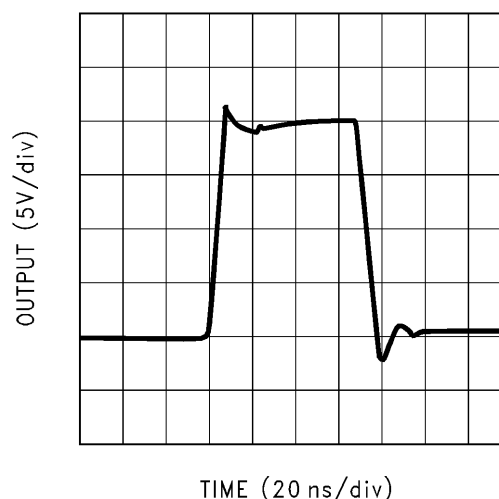

**Large-Signal Pulse Response  $A_V = +2$ ,  $V_S = \pm 15V$**



## Table of Contents

|                                                 |          |                                                              |           |
|-------------------------------------------------|----------|--------------------------------------------------------------|-----------|
| <b>1 Features</b> .....                         | <b>1</b> | <b>6 Application and Implementation</b> .....                | <b>24</b> |
| <b>2 Applications</b> .....                     | <b>1</b> | 6.1 Application Information.....                             | 24        |
| <b>3 Description</b> .....                      | <b>1</b> | 6.2 Typical Applications.....                                | 25        |
| <b>4 Pin Configuration and Functions</b> .....  | <b>2</b> | 6.3 Power Supply Recommendations.....                        | 26        |
| <b>5 Specifications</b> .....                   | <b>3</b> | 6.4 Layout.....                                              | 29        |
| 5.1 Absolute Maximum Ratings.....               | 3        | <b>7 Device and Documentation Support</b> .....              | <b>30</b> |
| 5.2 ESD Ratings.....                            | 3        | 7.1 Receiving Notification of Documentation Updates... 30    |           |
| 5.3 Recommended Operating Conditions.....       | 3        | 7.2 Support Resources.....                                   | 30        |
| 5.4 Thermal Information.....                    | 3        | 7.3 Trademarks.....                                          | 30        |
| 5.5 Electrical Characteristics: $\pm 15V$ ..... | 4        | 7.4 Electrostatic Discharge Caution.....                     | 30        |
| 5.6 Electrical Characteristics: $\pm 5V$ .....  | 6        | 7.5 Glossary.....                                            | 30        |
| 5.7 Typical Characteristics: LM7171A.....       | 8        | <b>8 Revision History</b> .....                              | <b>30</b> |
| 5.8 Typical Characteristics: LM7171B.....       | 15       | <b>9 Mechanical, Packaging, and Orderable Information</b> .. | <b>31</b> |

## 4 Pin Configuration and Functions

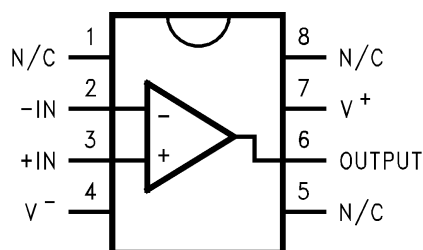


Figure 4-1. D Package, 8-Pin SOIC (Top View)

Table 4-1. Pin Functions

| PIN |        | TYPE   | DESCRIPTION               |
|-----|--------|--------|---------------------------|
| NO. | NAME   |        |                           |
| 1   | NC     | —      | No connection             |
| 2   | –IN    | Input  | Inverting power supply    |
| 3   | +IN    | Input  | Noninverting power supply |
| 4   | V–     | Input  | Supply voltage            |
| 5   | NC     | —      | No connection             |
| 6   | OUTPUT | Output | Output                    |
| 7   | V+     | Input  | Supply voltage            |
| 8   | NC     | —      | No connection             |

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                 |                                                   | MIN | MAX        | UNIT |
|-----------------|---------------------------------------------------|-----|------------|------|
| V <sub>S</sub>  | Supply voltage (V <sup>+</sup> – V <sup>–</sup> ) |     | 36         | V    |
| V <sub>I</sub>  | Differential input voltage <sup>(2)</sup>         |     | ±10        | V    |
| I <sub>SC</sub> | Output current short to ground <sup>(3)</sup>     |     | Continuous | A    |
| T <sub>J</sub>  | Junction temperature <sup>(4)</sup>               |     | 150        | °C   |

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) Input differential voltage is applied at V<sub>S</sub> = ±15V.
- (3) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.
- (4) The maximum power dissipation is a function of T<sub>J(MAX)</sub>, R<sub>θJA</sub>, and T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is P<sub>D</sub> = (T<sub>J(MAX)</sub> – T<sub>A</sub>)/R<sub>θJA</sub>. All numbers apply for packages soldered directly into a PC board.

### 5.2 ESD Ratings

|                    |                         |                                                                        | VALUE | UNIT |
|--------------------|-------------------------|------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001 <sup>(1)</sup>     | ±2500 | V    |
|                    |                         | Charged device model (CDM), per ANSI/ESDA/ JEDEC JS-002 <sup>(2)</sup> | ±1500 | V    |

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP155 states that 2500V HBM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                |                     | MIN | TYP | MAX | UNIT |
|----------------|---------------------|-----|-----|-----|------|
| V <sub>S</sub> | Supply voltage      | 5.5 |     | 36  | V    |
| T <sub>A</sub> | Ambient temperature | –40 |     | 85  | °C   |

### 5.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | LM7171             |                    |          | UNIT |
|-------------------------------|----------------------------------------------|--------------------|--------------------|----------|------|
|                               |                                              | D (SOIC) A Version | D (SOIC) B Version | P (PDIP) |      |
|                               |                                              | 8 PINS             | 8 PINS             | 8 PINS   |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 122.5              | 172                | 108      | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 64.7               | 62.4               | 52.4     | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 65.9               | 55.7               | 51.9     | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 17.6               | 16.5               | 6.8      | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 65.1               | 55.1               | 51.1     | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | N/A                | N/A                | N/A      | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 5.5 Electrical Characteristics: $\pm 15V$

over operating free-air temperature range (unless otherwise noted)

| PARAMETER  |                                    | TEST CONDITIONS   |                                                                                                 | MIN   | TYP         | MAX | UNIT                           |
|------------|------------------------------------|-------------------|-------------------------------------------------------------------------------------------------|-------|-------------|-----|--------------------------------|
| $V_{OS}$   | Input offset voltage               | LM7171A           |                                                                                                 |       | 0.2         | 1   | mV                             |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             |       |             | 4   |                                |
|            |                                    | LM7171B           |                                                                                                 |       | 0.2         | 3   |                                |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             |       |             | 7   |                                |
| $TCV_{OS}$ | Input offset voltage average drift |                   |                                                                                                 |       | 35          |     | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$      | Input bias current                 |                   |                                                                                                 |       | 2.7         | 10  | $\mu\text{A}$                  |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             |       |             | 12  |                                |
| $I_{OS}$   | Input offset current               |                   |                                                                                                 |       | 0.1         | 4   | $\mu\text{A}$                  |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             |       |             | 6   |                                |
| $R_{IN}$   | Input resistance                   | Common mode       |                                                                                                 |       | 320         |     | M $\Omega$                     |
|            |                                    | Differential mode |                                                                                                 |       | 18          |     |                                |
| $R_O$      | Open-loop output resistance        |                   |                                                                                                 |       | 19          |     | $\Omega$                       |
| CMRR       | Common-mode rejection ratio        | LM7171A           | $V_{CM} = \pm 10V$                                                                              | 85    | 105         |     | dB                             |
|            |                                    |                   | $V_{CM} = \pm 10V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                     | 80    |             |     |                                |
|            |                                    | LM7171B           | $V_{CM} = \pm 10V$                                                                              | 75    | 105         |     |                                |
|            |                                    |                   | $V_{CM} = \pm 10V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                     | 70    |             |     |                                |
| PSRR       | Power supply rejection ratio       | LM7171A           | $V_S = \pm 15V$                                                                                 | 85    | 90          |     | dB                             |
|            |                                    |                   | $V_S = \pm 15V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                        | 80    |             |     |                                |
|            |                                    | LM7171B           | $V_S = \pm 15V$                                                                                 |       |             |     |                                |
|            |                                    |                   | $V_S = \pm 15V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                        |       |             |     |                                |
| $V_{CM}$   | Input common-mode voltage          | CMRR > 60dB       |                                                                                                 |       | $\pm 13.35$ |     | V                              |
| $A_V$      | Large-signal voltage gain          | LM7171A           | $R_L = 1k\Omega$ , $V_{OUT} = \pm 5V$                                                           | 80    | 85          |     | dB                             |
|            |                                    |                   | $R_L = 1k\Omega$ , $V_{OUT} = \pm 5V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$  | 75    |             |     |                                |
|            |                                    |                   | $R_L = 100\Omega$ , $V_{OUT} = \pm 5V$                                                          | 75    | 81          |     |                                |
|            |                                    |                   | $R_L = 100\Omega$ , $V_{OUT} = \pm 5V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ | 70    |             |     |                                |
|            |                                    | LM7171B           | $R_L = 1k\Omega$ , $V_{OUT} = \pm 5V$                                                           | 75    | 85          |     |                                |
|            |                                    |                   | $R_L = 1k\Omega$ , $V_{OUT} = \pm 5V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$  | 70    |             |     |                                |
|            |                                    |                   | $R_L = 100\Omega$ , $V_{OUT} = \pm 5V$                                                          | 70    | 81          |     |                                |
|            |                                    |                   | $R_L = 100\Omega$ , $V_{OUT} = \pm 5V$ ,<br>$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ | 66    |             |     |                                |
| $V_O$      | Output swing                       | $R_L = 1k\Omega$  |                                                                                                 | 13    | 13.3        |     | V                              |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             | 12.7  |             |     |                                |
|            |                                    | $R_L = 1k\Omega$  |                                                                                                 | -13   | -13.2       |     |                                |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             | -12.7 |             |     |                                |
|            |                                    | $R_L = 100\Omega$ |                                                                                                 | 10.5  | 11.8        |     |                                |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             | 9.5   |             |     |                                |
|            |                                    | $R_L = 100\Omega$ |                                                                                                 | -9.5  | -10.5       |     |                                |
|            |                                    |                   | $T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$                                             | -9    |             |     |                                |

## 5.5 Electrical Characteristics: $\pm 15V$ (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                   | TEST CONDITIONS                                        |                                                 | MIN | TYP  | MAX | UNIT                   |
|-----------|-----------------------------------|--------------------------------------------------------|-------------------------------------------------|-----|------|-----|------------------------|
|           | Output current (open loop)        | Sourcing,<br>$R_L = 100\Omega$                         | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ | 105 | 118  |     | mA                     |
|           |                                   |                                                        |                                                 | 95  |      |     |                        |
|           |                                   | Sinking,<br>$R_L = 100\Omega$                          | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ | 95  | 105  |     |                        |
|           |                                   |                                                        |                                                 | 90  |      |     |                        |
|           | Output current (in linear region) | Sourcing, $R_L = 100\Omega$                            |                                                 |     | 100  |     |                        |
|           |                                   | Sinking, $R_L = 100\Omega$                             |                                                 |     | 100  |     |                        |
| $I_{SC}$  | Output short-circuit current      | Sourcing                                               |                                                 |     | 140  |     |                        |
|           |                                   | Sinking                                                |                                                 |     | 135  |     |                        |
| $I_S$     | Supply current                    |                                                        |                                                 |     | 6.5  | 8.5 |                        |
|           |                                   |                                                        |                                                 |     |      | 9.5 |                        |
| SR        | Slew rate                         | $A_V = +2$ , $V_{IN} = 13V_{PP}$                       |                                                 |     | 4100 |     | V/ $\mu\text{s}$       |
|           |                                   | $A_V = +2$ , $V_{IN} = 10V_{PP}$                       |                                                 |     | 3100 |     |                        |
|           | Unity-gain bandwidth              | LM7171A                                                |                                                 |     | 160  |     | MHz                    |
|           |                                   | LM7171B                                                |                                                 |     | 200  |     |                        |
|           | -3dB frequency                    | $A_V = +2$                                             |                                                 |     | 220  |     | MHz                    |
| $\phi_m$  | Phase margin                      |                                                        |                                                 |     | 50   |     | Deg                    |
| $t_s$     | Settling time (0.1%)              | $A_V = -1$ , $V_{OUT} = \pm 5V$ ,<br>$R_L = 500\Omega$ | LM7171A                                         |     | 16   |     | ns                     |
|           |                                   |                                                        | LM7171B                                         |     | 42   |     | ns                     |
| $t_p$     | Propagation delay                 | $A_V = -2$ , $V_{IN} = \pm 1V$ ,<br>$R_L = 500\Omega$  |                                                 |     | 5    |     | ns                     |
| HD2       | Second harmonic distortion        | LM7171A                                                | $f_{IN} = 10\text{kHz}$                         |     | -123 |     | dBc                    |
|           |                                   |                                                        | $f_{IN} = 5\text{MHz}$                          |     | -75  |     |                        |
|           |                                   | LM7171B                                                | $f_{IN} = 10\text{kHz}$                         |     | -110 |     |                        |
|           |                                   |                                                        | $f_{IN} = 5\text{MHz}$                          |     | -75  |     |                        |
| HD3       | Third harmonic distortion         | LM7171A                                                | $f_{IN} = 10\text{kHz}$                         |     | -133 |     | dBc                    |
|           |                                   |                                                        | $f_{IN} = 5\text{MHz}$                          |     | -88  |     |                        |
|           |                                   | LM7171B                                                | $f_{IN} = 10\text{kHz}$                         |     | -115 |     |                        |
|           |                                   |                                                        | $f_{IN} = 5\text{MHz}$                          |     | -55  |     |                        |
| $e_n$     | Input-referred voltage noise      | $f = 10\text{kHz}$                                     | LM7171A                                         |     | 8.5  |     | nV/ $\sqrt{\text{Hz}}$ |
|           |                                   |                                                        | LM7171B                                         |     | 14   |     |                        |
| $i_n$     | Input-referred current noise      | $f = 10\text{kHz}$                                     | LM7171A                                         |     | 1    |     | pA/ $\sqrt{\text{Hz}}$ |
|           |                                   |                                                        | LM7171B                                         |     | 1.5  |     |                        |

## 5.6 Electrical Characteristics: $\pm 5V$

over operating free-air temperature range (unless otherwise noted)

| PARAMETER  |                                    | TEST CONDITIONS         |                                                                                                     | MIN  | TYP       | MAX | UNIT                           |
|------------|------------------------------------|-------------------------|-----------------------------------------------------------------------------------------------------|------|-----------|-----|--------------------------------|
| $V_{OS}$   | Input offset voltage               | LM7171A                 |                                                                                                     |      | 0.3       | 1.5 | mV                             |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |      |           | 4   |                                |
|            |                                    | LM7171B                 |                                                                                                     |      | 0.3       | 3.5 |                                |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |      |           | 7   |                                |
| $TCV_{OS}$ | Input offset voltage average drift |                         |                                                                                                     |      | 35        |     | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$      | Input bias current                 |                         |                                                                                                     |      | 3.3       | 10  | $\mu\text{A}$                  |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |      |           | 12  |                                |
| $I_{OS}$   | Input offset current               |                         |                                                                                                     |      | 0.1       | 4   | $\mu\text{A}$                  |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                |      |           | 6   |                                |
| $R_{IN}$   | Input resistance                   | Common mode             |                                                                                                     |      | 250       |     | $\text{M}\Omega$               |
|            |                                    | Differential mode       |                                                                                                     |      | 18        |     |                                |
| $R_O$      | Open-loop output resistance        |                         |                                                                                                     |      | 18        |     | $\Omega$                       |
| CMRR       | Common-mode rejection ratio        | LM7171A                 | $V_{CM} = \pm 2.5V$                                                                                 | 80   | 104       |     | dB                             |
|            |                                    |                         | $V_{CM} = \pm 2.5V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                          | 75   |           |     |                                |
|            |                                    | LM7171B                 | $V_{CM} = \pm 2.5V$                                                                                 | 70   | 104       |     |                                |
|            |                                    |                         | $V_{CM} = \pm 2.5V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                          | 65   |           |     |                                |
| PSRR       | Power supply rejection ratio       | LM7171A                 | $V_S = \pm 5V$                                                                                      | 85   | 90        |     | dB                             |
|            |                                    |                         | $V_S = \pm 5V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                               | 80   |           |     |                                |
|            |                                    | LM7171B                 | $V_S = \pm 5V$                                                                                      | 75   | 90        |     |                                |
|            |                                    |                         | $V_S = \pm 5V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                               | 70   |           |     |                                |
| $V_{CM}$   | Input common-mode voltage range    | CMRR > 60dB             |                                                                                                     |      | $\pm 3.2$ |     | V                              |
| $A_V$      | Large-signal voltage gain          | LM7171A                 | $R_L = 1\text{k}\Omega$ , $V_{OUT} = \pm 1V$                                                        | 75   | 78        |     | dB                             |
|            |                                    |                         | $R_L = 1\text{k}\Omega$ , $V_{OUT} = \pm 1V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | 70   |           |     |                                |
|            |                                    |                         | $R_L = 100\Omega$ , $V_{OUT} = \pm 1V$                                                              | 72   | 76        |     |                                |
|            |                                    |                         | $R_L = 100\Omega$ , $V_{OUT} = \pm 1V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$       | 67   |           |     |                                |
|            |                                    | LM7171B                 | $R_L = 1\text{k}\Omega$ , $V_{OUT} = \pm 1V$                                                        | 70   | 78        |     |                                |
|            |                                    |                         | $R_L = 1\text{k}\Omega$ , $V_{OUT} = \pm 1V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | 65   |           |     |                                |
|            |                                    |                         | $R_L = 100\Omega$ , $V_{OUT} = \pm 1V$                                                              | 68   | 76        |     |                                |
|            |                                    |                         | $R_L = 100\Omega$ , $V_{OUT} = \pm 1V$ , $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$       | 63   |           |     |                                |
| $V_O$      | Output swing                       | $R_L = 1\text{k}\Omega$ |                                                                                                     | 3.2  | 3.4       |     | V                              |
|            |                                    |                         |                                                                                                     | -3.2 | -3.4      |     |                                |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                | 3    |           |     |                                |
|            |                                    |                         |                                                                                                     | -3   |           |     |                                |
|            |                                    | $R_L = 100\Omega$       |                                                                                                     | 2.9  | 3.1       |     |                                |
|            |                                    |                         |                                                                                                     | -2.9 | -3        |     |                                |
|            |                                    |                         | $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                | 2.8  |           |     |                                |
|            |                                    |                         |                                                                                                     | -2.8 |           |     |                                |

## 5.6 Electrical Characteristics: $\pm 5V$ (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER       |                                   | TEST CONDITIONS                                                       |                                 | MIN  | TYP | MAX    | UNIT |
|-----------------|-----------------------------------|-----------------------------------------------------------------------|---------------------------------|------|-----|--------|------|
|                 | Output current (open loop)        | Sourcing,<br>R <sub>L</sub> = 100Ω                                    |                                 | 29   | 31  | mA     |      |
|                 |                                   |                                                                       | T <sub>A</sub> = −40°C to +85°C | 28   |     |        |      |
|                 |                                   | Sinking,<br>R <sub>L</sub> = 100Ω                                     |                                 | 29   | 30  |        |      |
|                 |                                   |                                                                       | T <sub>A</sub> = −40°C to +85°C | 28   |     |        |      |
|                 | Output current (in linear region) | Sourcing, R <sub>L</sub> = 100Ω                                       |                                 | 30   |     | mA     |      |
|                 |                                   | Sinking, R <sub>L</sub> = 100Ω                                        |                                 | 31   |     |        |      |
| I <sub>SC</sub> | Output short-circuit current      | Sourcing                                                              |                                 | 135  |     | mA     |      |
|                 |                                   | Sinking                                                               |                                 | 100  |     |        |      |
| I <sub>S</sub>  | Supply current                    |                                                                       |                                 | 6.2  | 8   | mA     |      |
|                 |                                   | T <sub>A</sub> = −40°C to +85°C                                       |                                 | 9    |     |        |      |
| SR              | Slew rate                         | A <sub>V</sub> = +2,<br>V <sub>IN</sub> = 3.2V <sub>PP</sub>          | LM7171A                         | 1200 |     | V/μs   |      |
|                 |                                   |                                                                       | LM7171B                         | 950  |     |        |      |
|                 | Unity-gain bandwidth              | LM7171A                                                               |                                 | 125  |     | MHz    |      |
|                 |                                   | LM7171B                                                               |                                 | 125  |     |        |      |
|                 | −3dB frequency                    | A <sub>V</sub> = +2                                                   | LM7171A                         | 140  |     | MHz    |      |
|                 |                                   |                                                                       | LM7171B                         | 140  |     |        |      |
| φ <sub>m</sub>  | Phase margin                      | LM7171A                                                               |                                 | 68   |     | Deg    |      |
|                 |                                   | LM7171B                                                               |                                 | 57   |     |        |      |
| t <sub>s</sub>  | Settling time (0.1%)              | A <sub>V</sub> = −1, V <sub>OUT</sub> = ±1V,<br>R <sub>L</sub> = 500Ω | LM7171A                         | 15   |     | ns     |      |
|                 |                                   |                                                                       | LM7171B                         | 56   |     |        |      |
| t <sub>p</sub>  | Propagation delay                 | A <sub>V</sub> = −2, V <sub>IN</sub> = ±1V,<br>R <sub>L</sub> = 500Ω  | LM7171A                         | 2.5  |     | ns     |      |
|                 |                                   |                                                                       | LM7171B                         | 6    |     |        |      |
| HD2             | Second harmonic distortion        | LM7171A                                                               | f <sub>IN</sub> = 10kHz         | −125 |     | dBc    |      |
|                 |                                   |                                                                       | f <sub>IN</sub> = 5MHz          | −72  |     |        |      |
|                 |                                   | LM7171B                                                               | f <sub>IN</sub> = 10kHz         | −102 |     |        |      |
|                 |                                   |                                                                       | f <sub>IN</sub> = 5MHz          | −70  |     |        |      |
| HD3             | Third harmonic distortion         | LM7171A                                                               | f <sub>IN</sub> = 10kHz         | −129 |     | dBc    |      |
|                 |                                   |                                                                       | f <sub>IN</sub> = 5MHz          | −81  |     |        |      |
|                 |                                   | LM7171B                                                               | f <sub>IN</sub> = 10kHz         | −110 |     |        |      |
|                 |                                   |                                                                       | f <sub>IN</sub> = 5MHz          | −51  |     |        |      |
| e <sub>n</sub>  | Input-referred voltage noise      | f = 10kHz                                                             | LM7171A                         | 8.5  |     | nV/√Hz |      |
|                 |                                   |                                                                       | LM7171B                         | 14   |     |        |      |
| i <sub>n</sub>  | Input-referred current noise      | f = 10kHz                                                             | LM7171A                         | 1    |     | pA/√Hz |      |
|                 |                                   |                                                                       | LM7171B                         | 1.8  |     |        |      |

## 5.7 Typical Characteristics: LM7171A

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

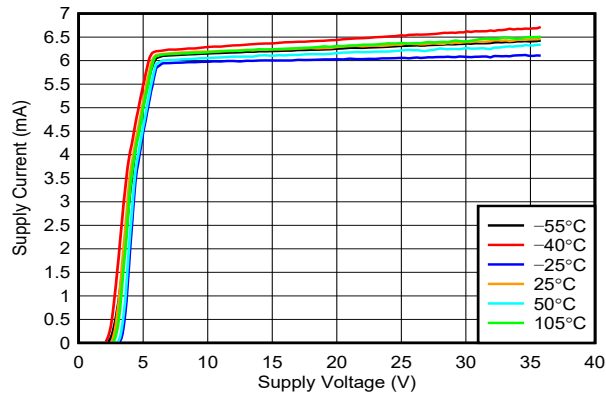


Figure 5-1. Supply Current vs Supply Voltage

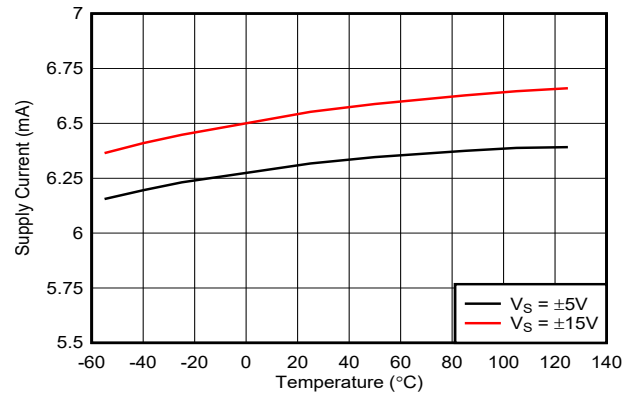


Figure 5-2. Supply Current vs Temperature

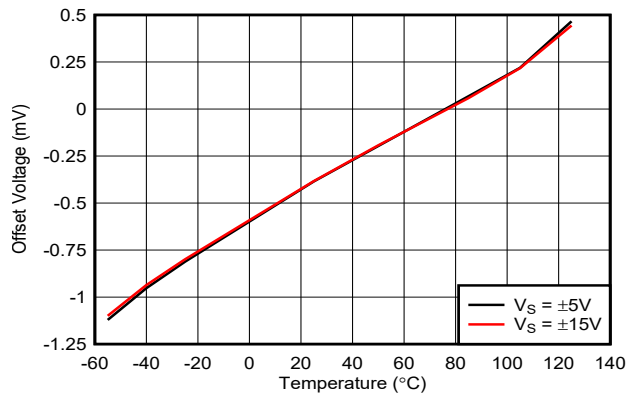


Figure 5-3. Input Offset Voltage vs Temperature

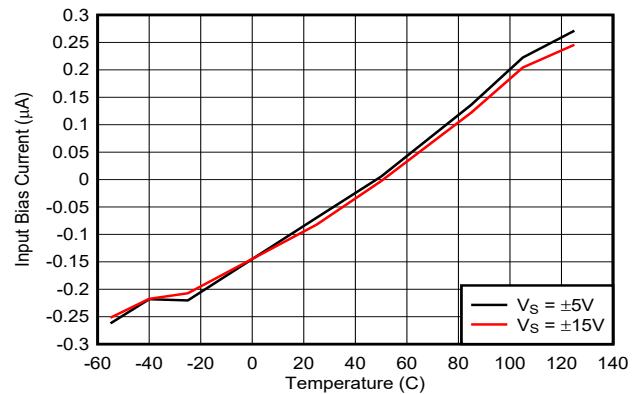


Figure 5-4. Input Bias Current vs Temperature

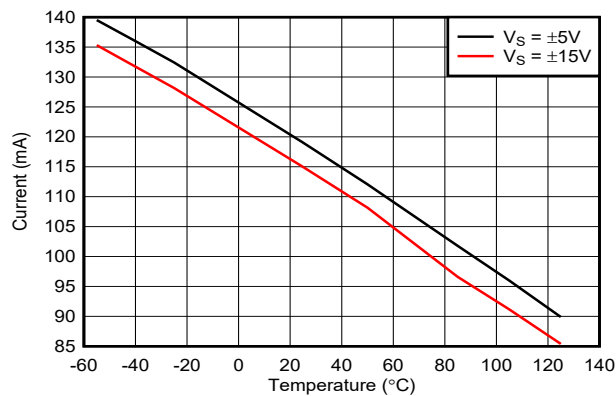


Figure 5-5. Short Circuit Current vs Temperature (Sourcing)

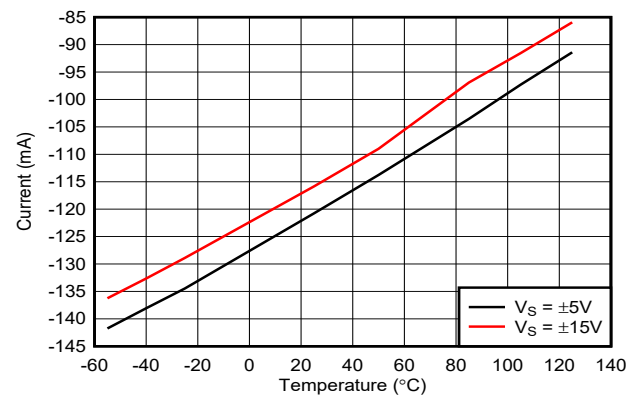


Figure 5-6. Short Circuit Current vs Temperature (Sinking)



## 5.7 Typical Characteristics: LM7171A (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

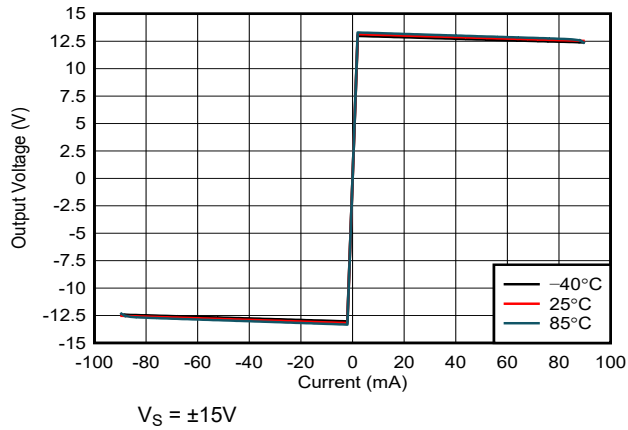


Figure 5-7. Output Voltage vs Output Current

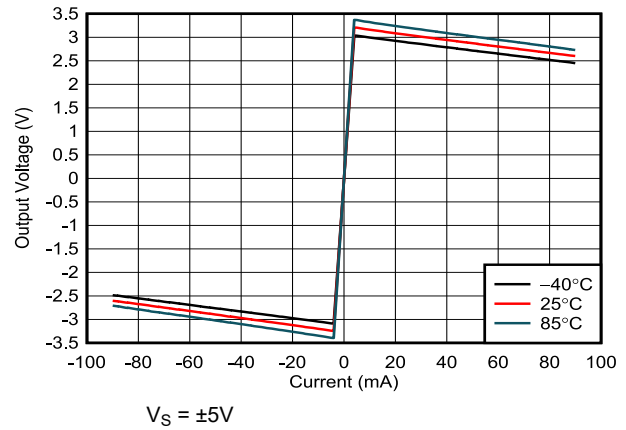


Figure 5-8. Output Voltage vs Output Current



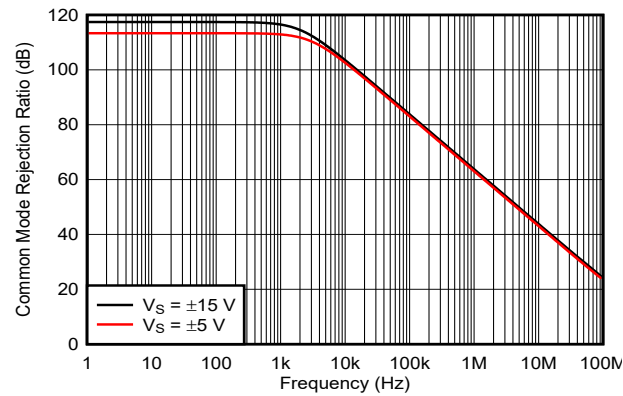


Figure 5-9. CMRR vs Frequency

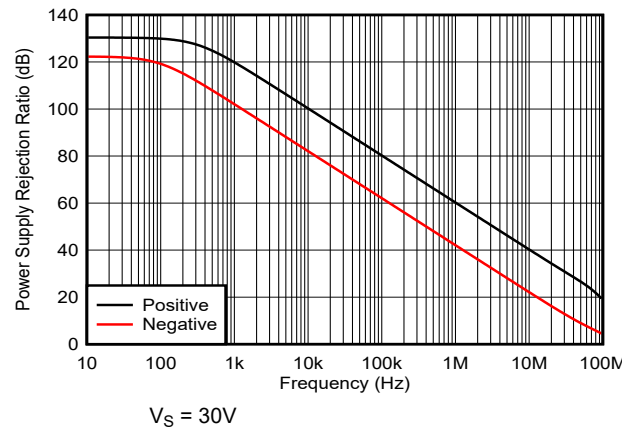


$V_S = 30\text{V}$

Figure 5-10. PSRR vs Frequency

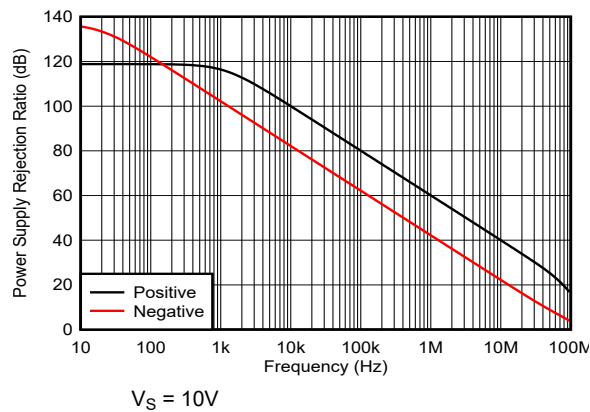

$V_S = 10\text{V}$

Figure 5-11. PSRR vs Frequency

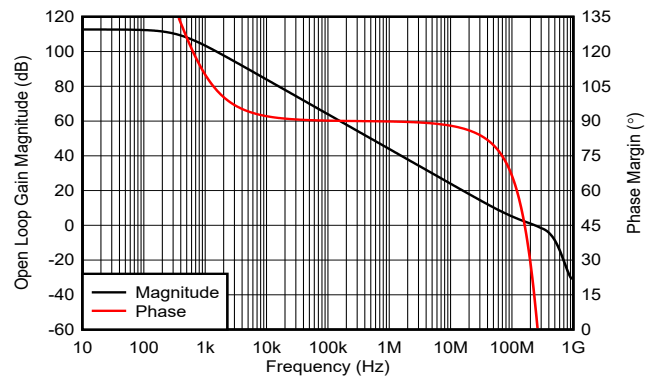

$V_S = \pm 15\text{V}$

Figure 5-12. Open Loop Frequency Response

## 5.7 Typical Characteristics: LM7171A (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

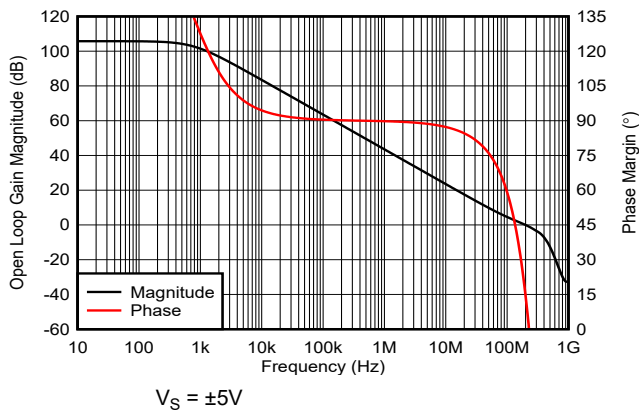


Figure 5-13. Open Loop Frequency Response

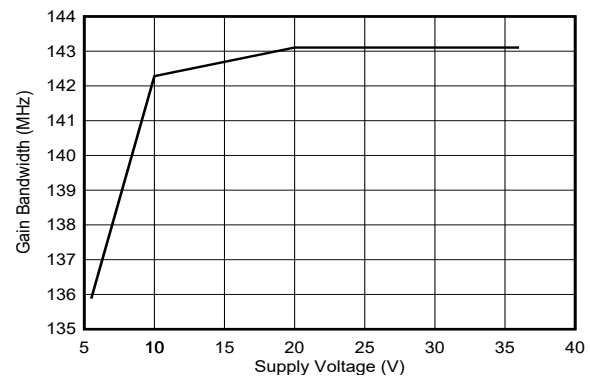


Figure 5-14. Gain-Bandwidth Product vs Supply Voltage

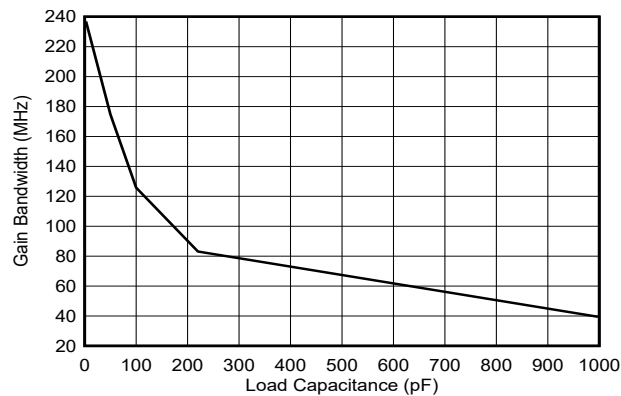


Figure 5-15. Gain-Bandwidth Product vs Load Capacitance

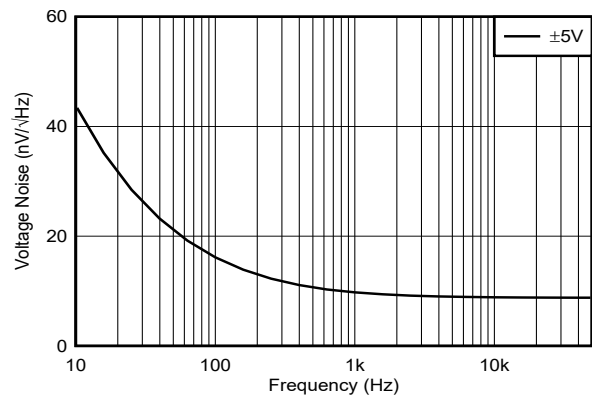


Figure 5-16. Input Voltage Noise vs Frequency

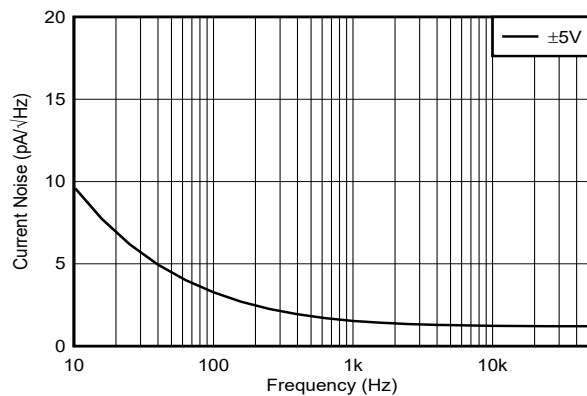


Figure 5-17. Input Current Noise vs Frequency

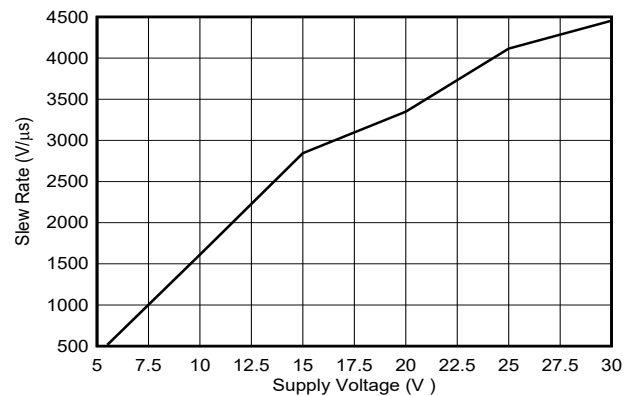


Figure 5-18. Slew Rate vs Supply Voltage

## 5.7 Typical Characteristics: LM7171A (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

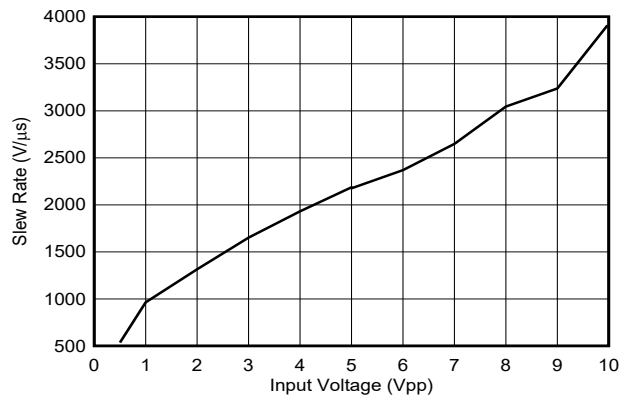


Figure 5-19. Slew Rate vs Input Voltage

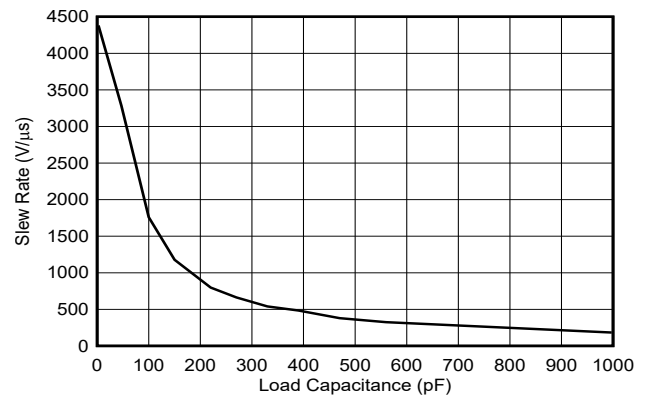


Figure 5-20. Slew Rate vs Load Capacitance

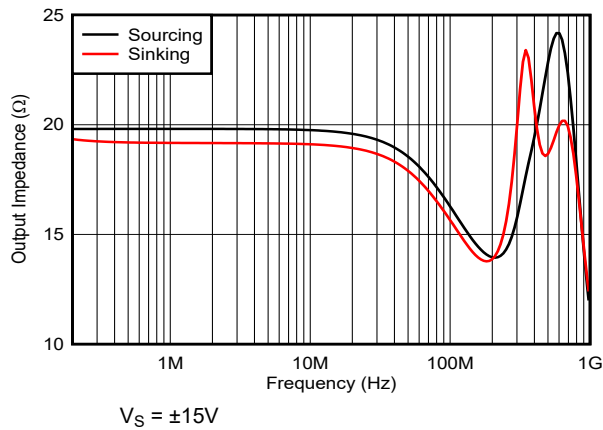


Figure 5-21. Open Loop Output Impedance vs Frequency

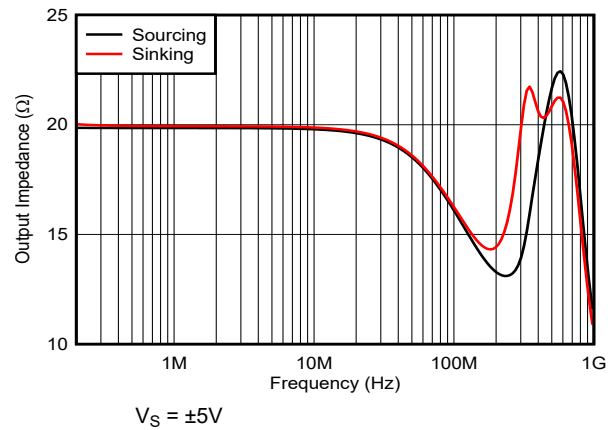


Figure 5-22. Open Loop Output Impedance vs Frequency

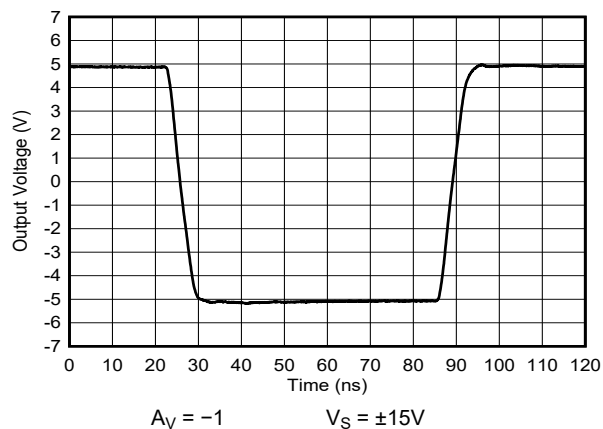


Figure 5-23. Large-Signal Pulse Response

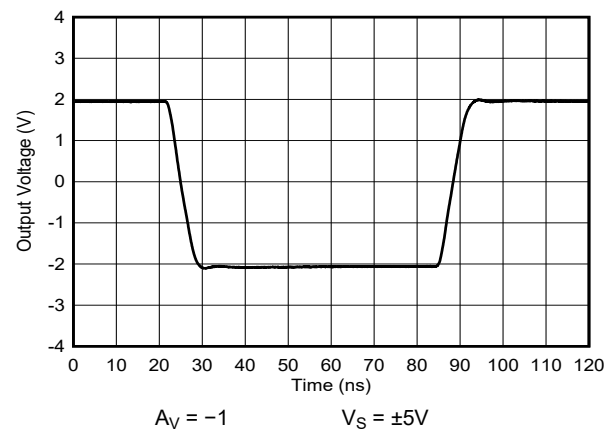


Figure 5-24. Large-Signal Pulse Response

## 5.7 Typical Characteristics: LM7171A (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

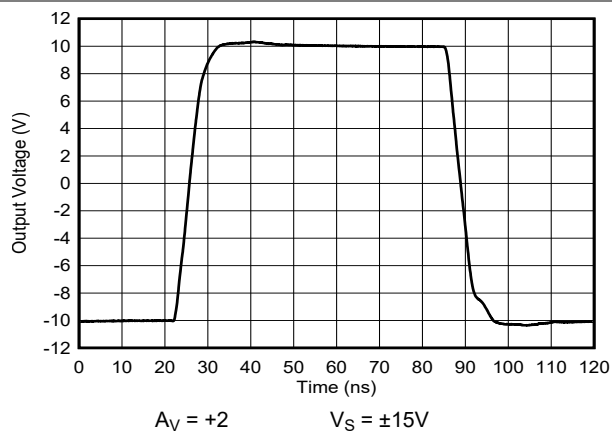


Figure 5-25. Large-Signal Pulse Response

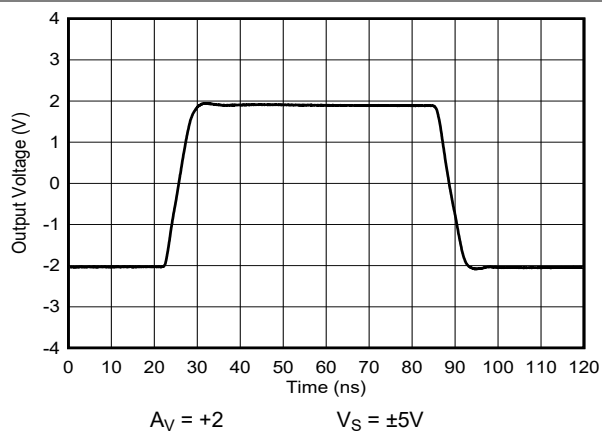


Figure 5-26. Large-Signal Pulse Response

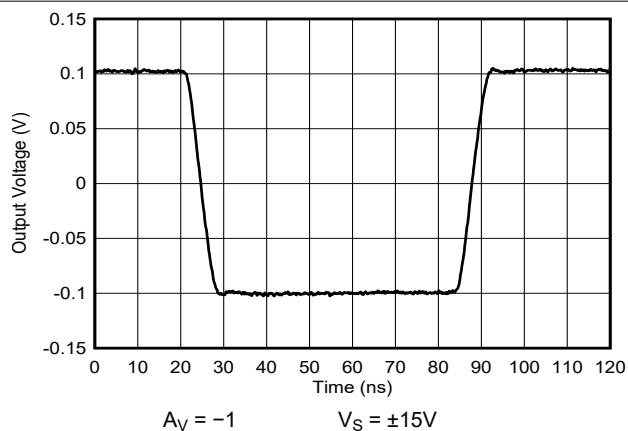


Figure 5-27. Small-Signal Pulse Response

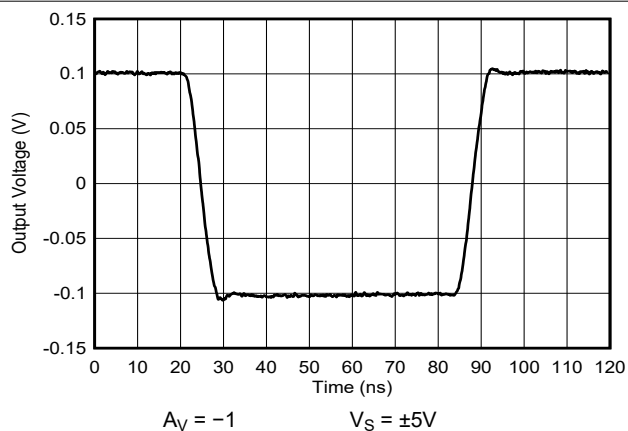


Figure 5-28. Small-Signal Pulse Response

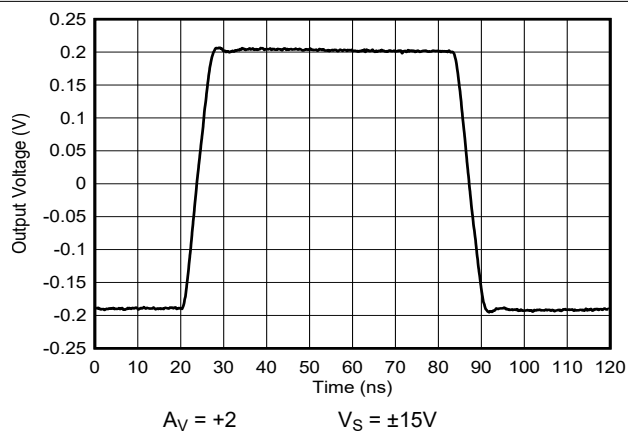


Figure 5-29. Small-Signal Pulse Response


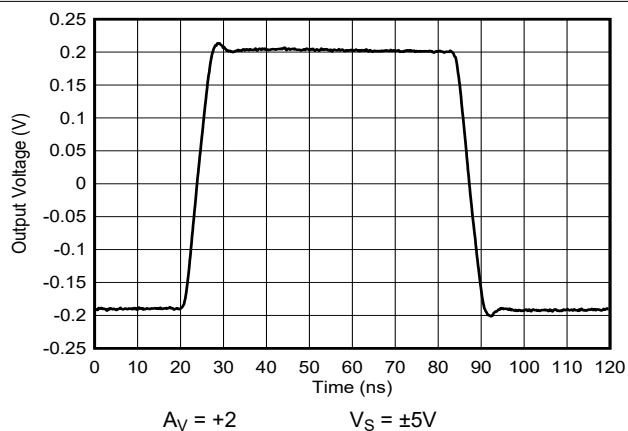



Figure 5-30. Small-Signal Pulse Response

## 5.7 Typical Characteristics: LM7171A (continued)


at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

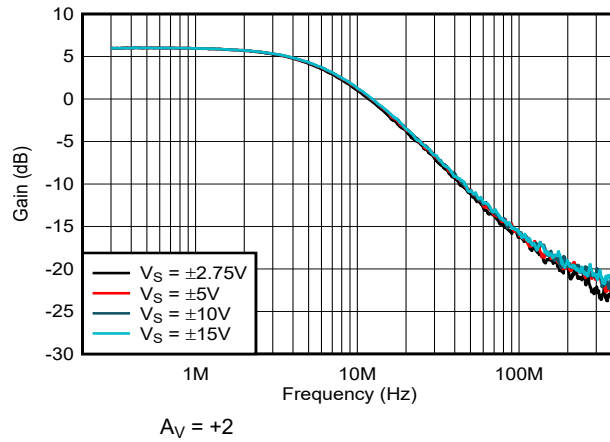


**Figure 5-31. Closed-Loop Frequency Response vs Supply Voltage**

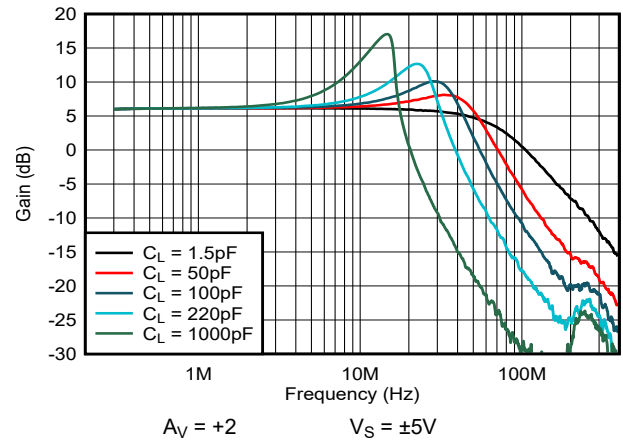


**Figure 5-32. Closed-Loop Frequency Response vs Capacitive Load**

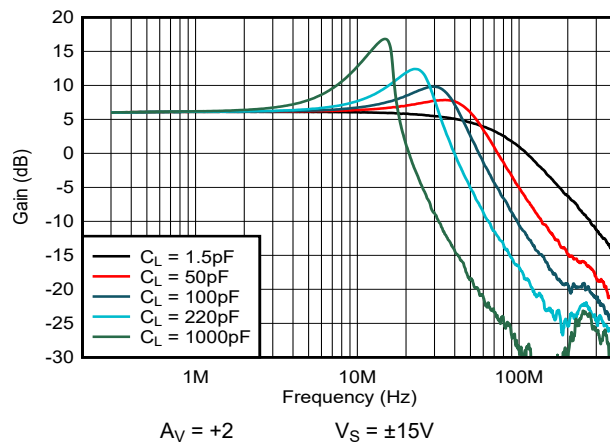


**Figure 5-33. Closed-Loop Frequency Response vs Capacitive Load**

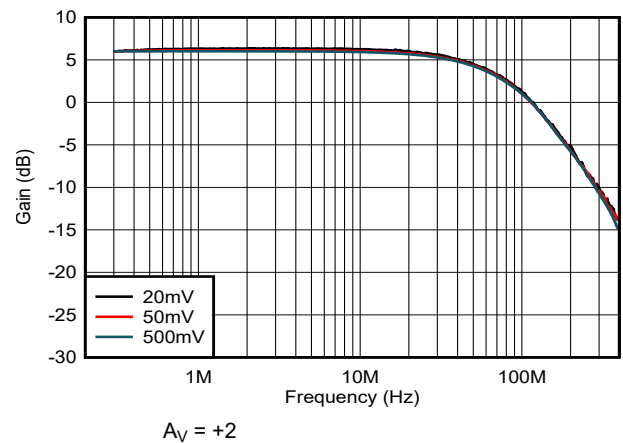

**Figure 5-34. Closed-Loop Frequency Response vs Input Signal Level**

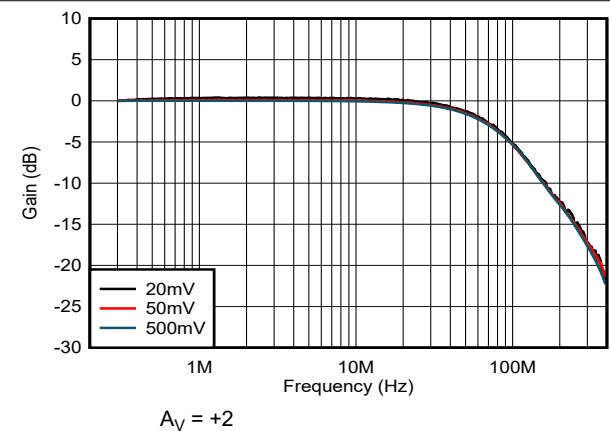

**Figure 5-35. Closed-Loop Frequency Response vs Input Signal Level**

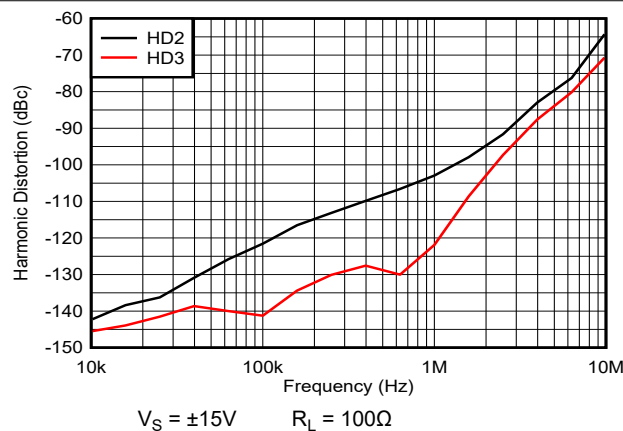

**Figure 5-36. Total Harmonic Distortion vs Frequency**

## 5.7 Typical Characteristics: LM7171A (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

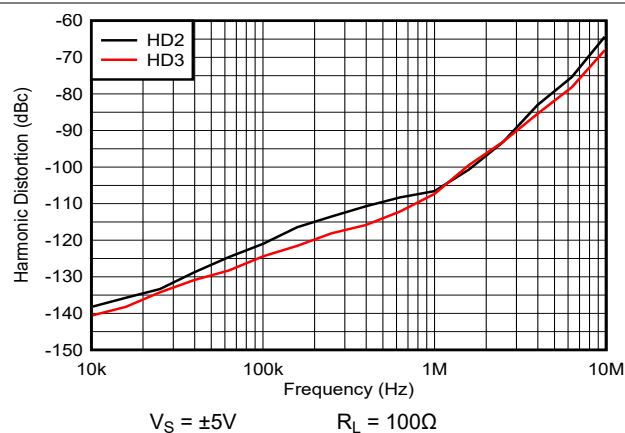


Figure 5-37. Total Harmonic Distortion vs Frequency

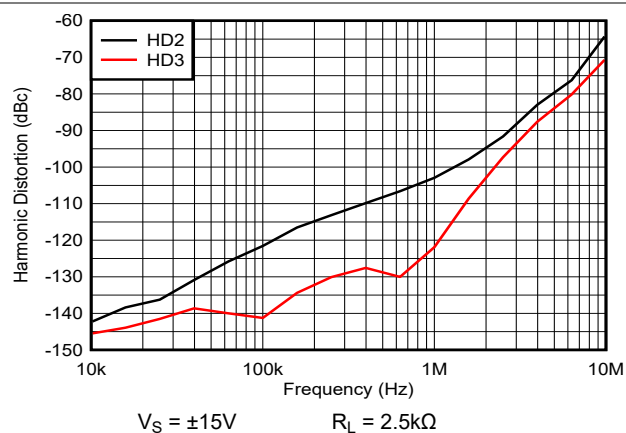


Figure 5-38. Harmonic Distortion vs Frequency

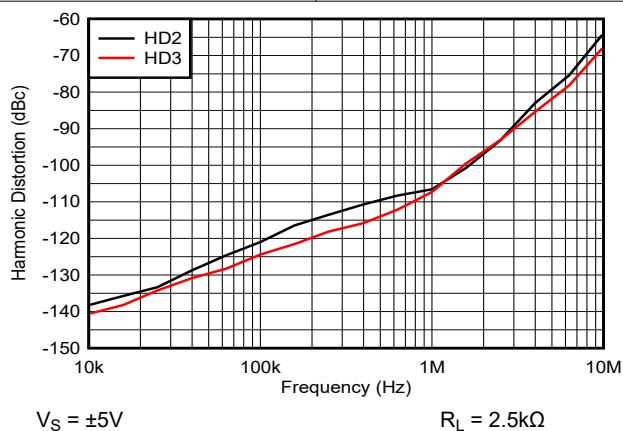


Figure 5-39. Harmonic Distortion vs Frequency

## 5.8 Typical Characteristics: LM7171B

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

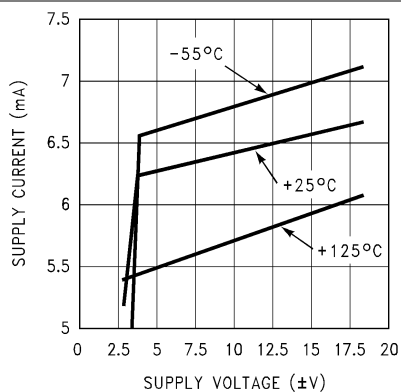


Figure 5-40. Supply Current vs Supply Voltage

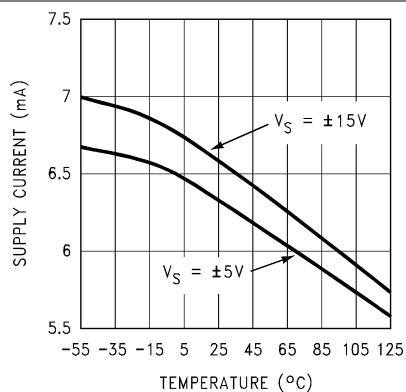


Figure 5-41. Supply Current vs Temperature

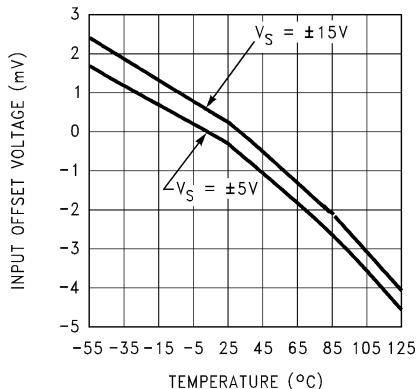


Figure 5-42. Input Offset Voltage vs Temperature

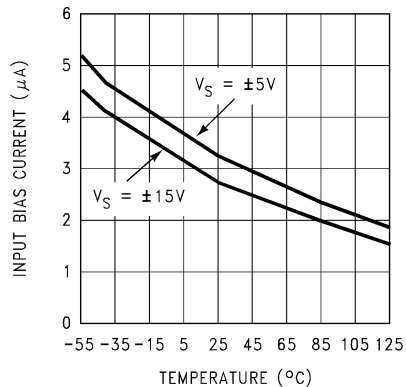


Figure 5-43. Input Bias Current vs Temperature

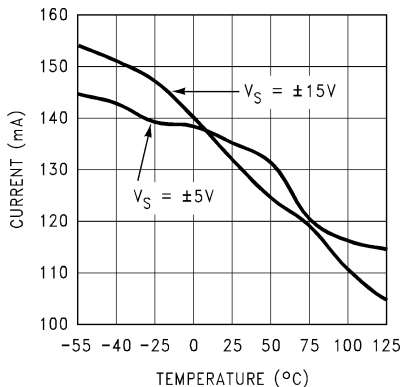


Figure 5-44. Short Circuit Current vs Temperature (Sourcing)

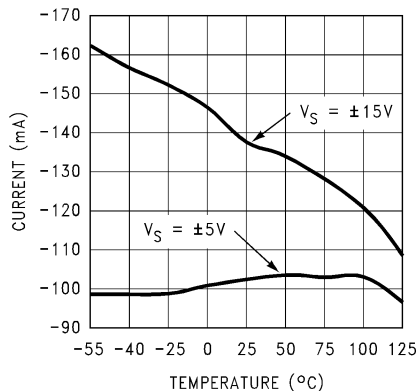


Figure 5-45. Short Circuit Current vs Temperature (Sinking)

## 5.8 Typical Characteristics: LM7171B (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

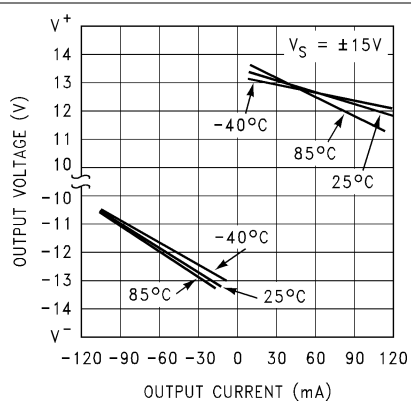


Figure 5-46. Output Voltage vs Output Current

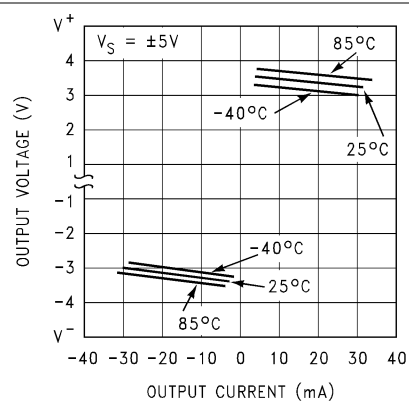


Figure 5-47. Output Voltage vs Output Current

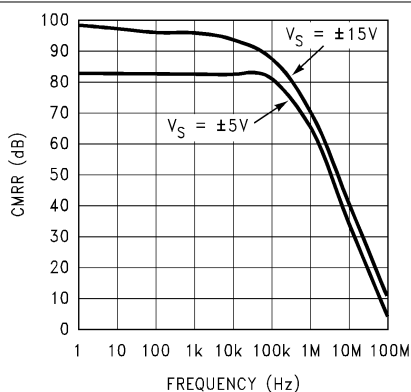


Figure 5-48. CMRR vs Frequency

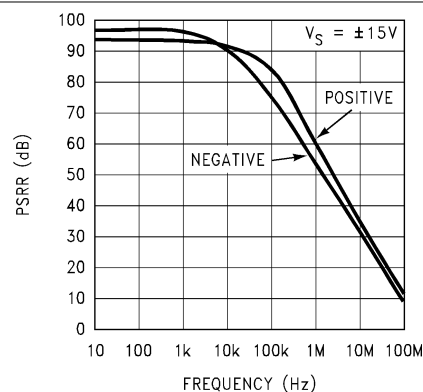


Figure 5-49. PSRR vs Frequency

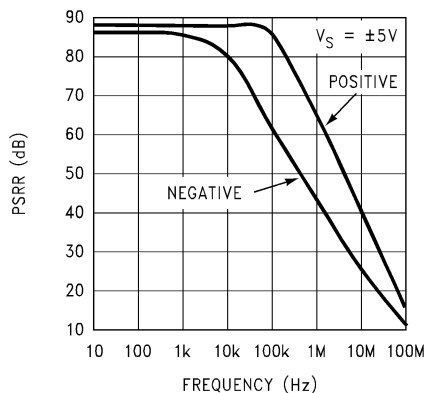


Figure 5-50. PSRR vs Frequency

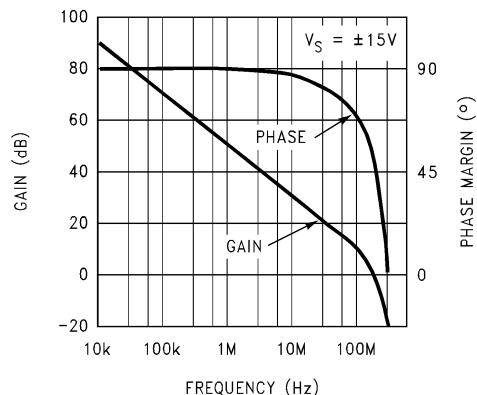


Figure 5-51. Open Loop Frequency Response



## 5.8 Typical Characteristics: LM7171B (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

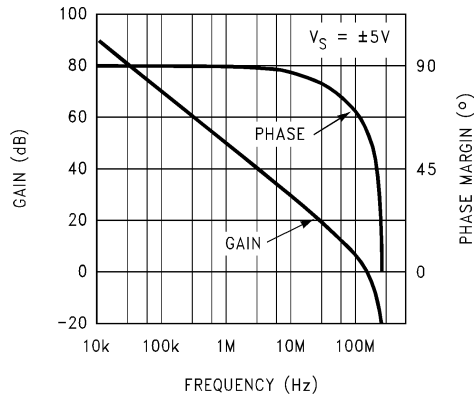


Figure 5-52. Open Loop Frequency Response

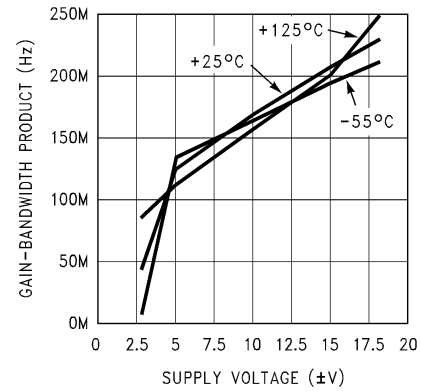


Figure 5-53. Gain-Bandwidth Product vs Supply Voltage

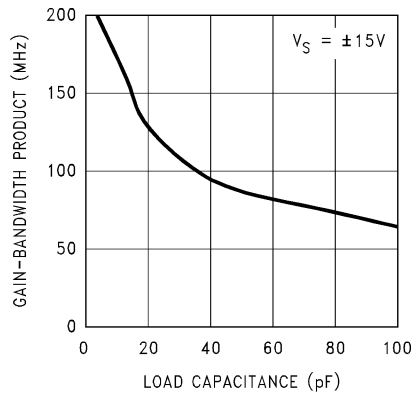


Figure 5-54. Gain-Bandwidth Product vs Load Capacitance

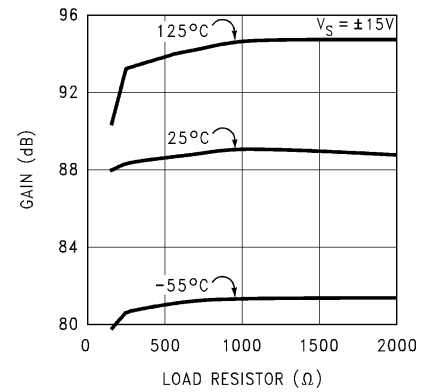


Figure 5-55. Large Signal Voltage Gain vs Load

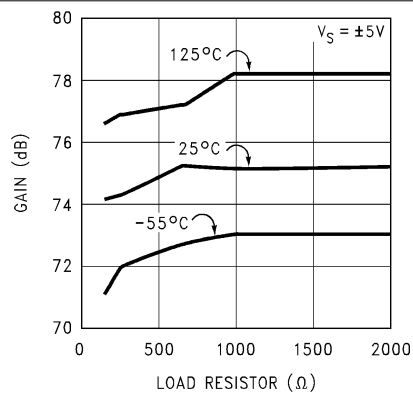


Figure 5-56. Large Signal Voltage Gain vs Load

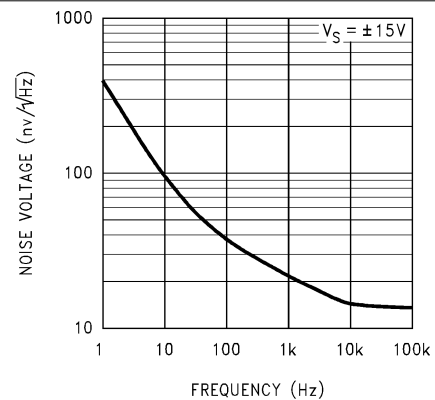


Figure 5-57. Input Voltage Noise vs Frequency

## 5.8 Typical Characteristics: LM7171B (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

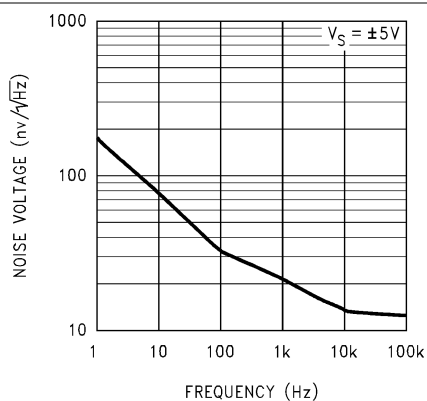


Figure 5-58. Input Voltage Noise vs Frequency

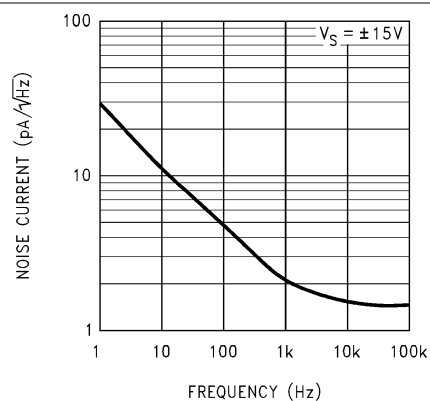


Figure 5-59. Input Current Noise vs Frequency

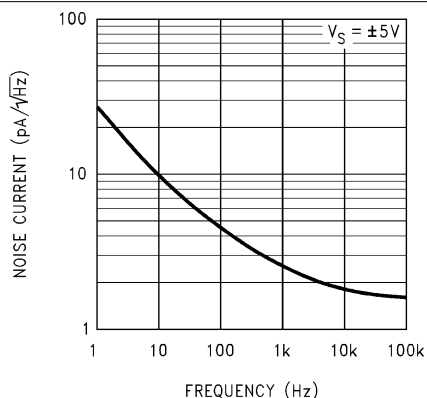


Figure 5-60. Input Current Noise vs Frequency

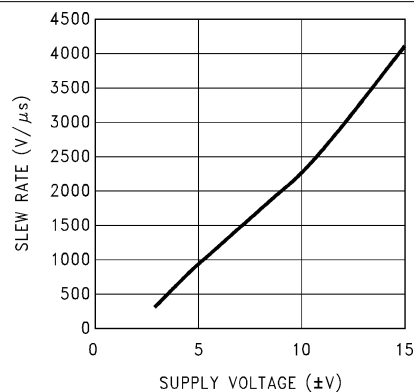


Figure 5-61. Slew Rate vs Supply Voltage

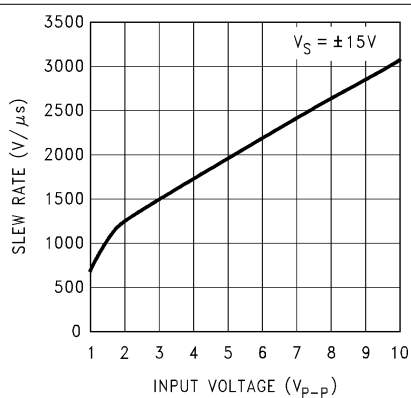


Figure 5-62. Slew Rate vs Input Voltage

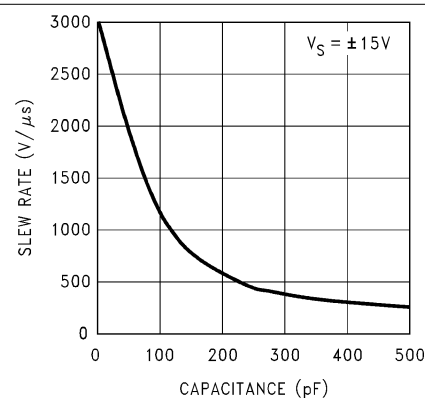


Figure 5-63. Slew Rate vs Load Capacitance

## 5.8 Typical Characteristics: LM7171B (continued)

at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

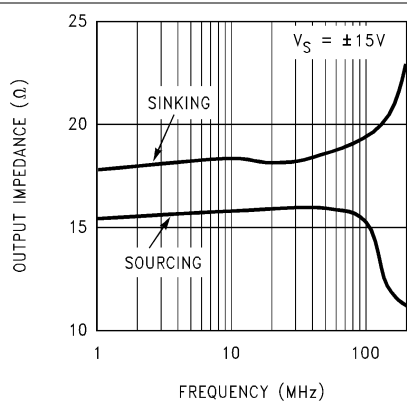


Figure 5-64. Open Loop Output Impedance vs Frequency

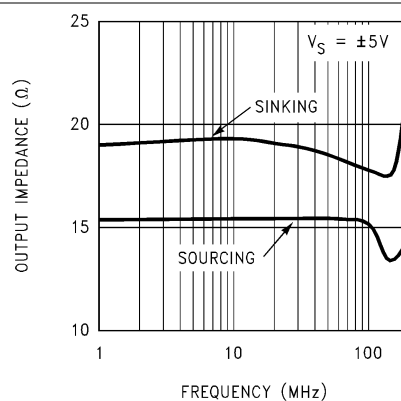


Figure 5-65. Open Loop Output Impedance vs Frequency

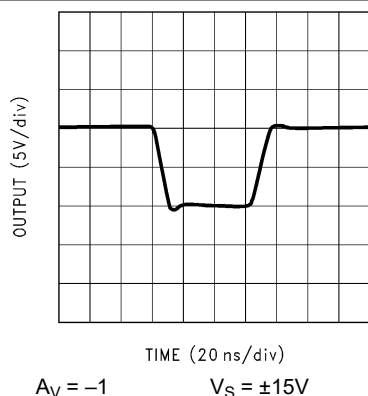


Figure 5-66. Large-Signal Pulse Response

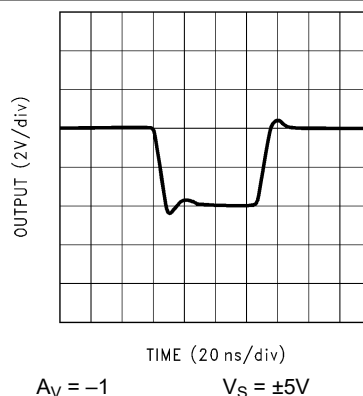


Figure 5-67. Large-Signal Pulse Response

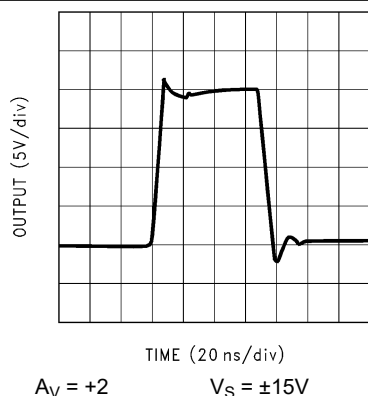


Figure 5-68. Large-Signal Pulse Response


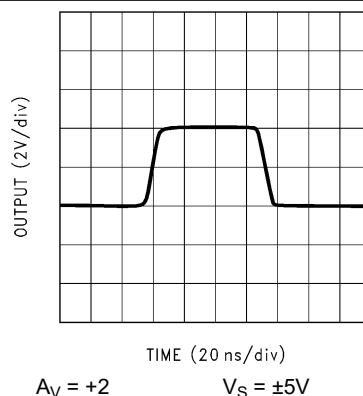



Figure 5-69. Large-Signal Pulse Response

## 5.8 Typical Characteristics: LM7171B (continued)


at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

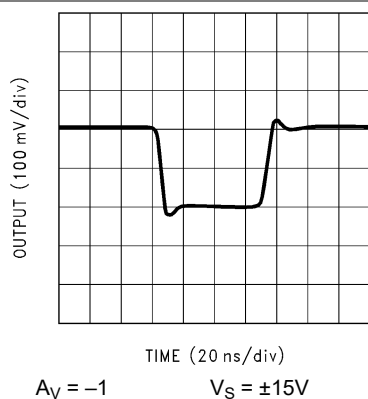


**Figure 5-70. Small-Signal Pulse Response**

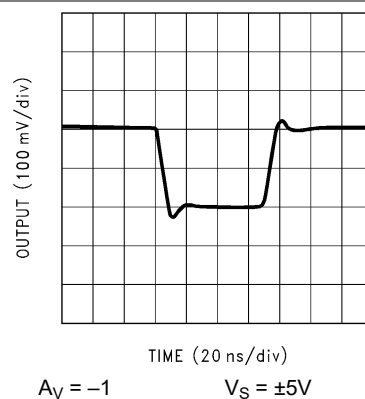


**Figure 5-71. Small-Signal Pulse Response**

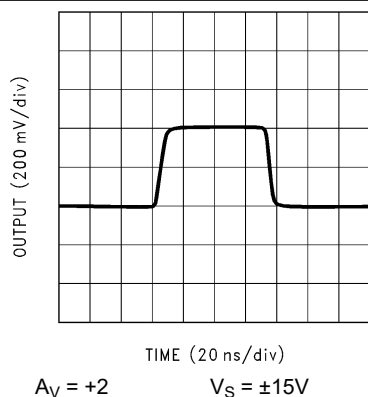


**Figure 5-72. Small-Signal Pulse Response**

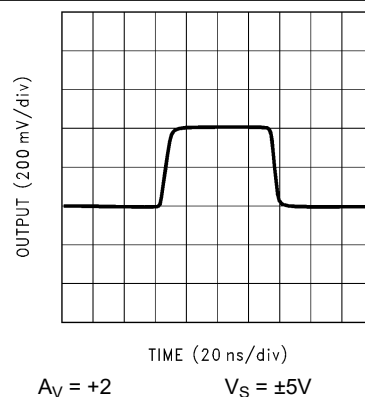

**Figure 5-73. Small-Signal Pulse Response**

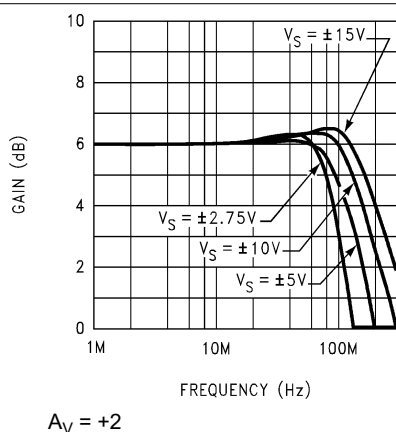


**Figure 5-74. Closed-Loop Frequency Response vs Supply Voltage**

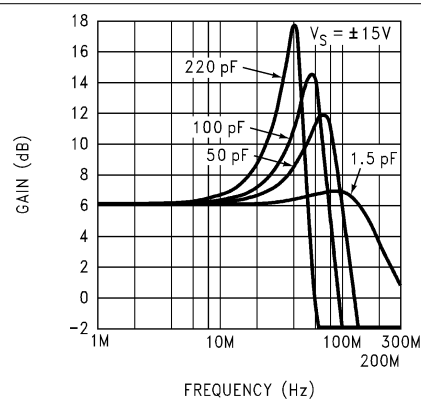


**Figure 5-75. Closed-Loop Frequency Response vs Capacitive Load**

## 5.8 Typical Characteristics: LM7171B (continued)


at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

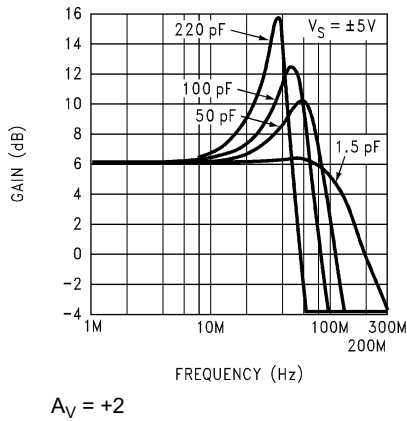


**Figure 5-76. Closed-Loop Frequency Response vs Capacitive Load**

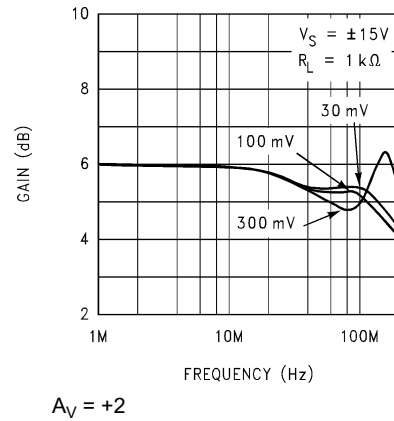


**Figure 5-77. Closed-Loop Frequency Response vs Input Signal Level**

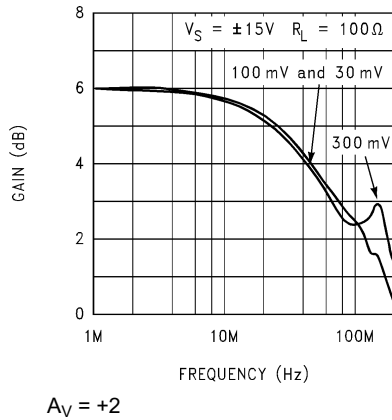


**Figure 5-78. Closed-Loop Frequency Response vs Input Signal Level**

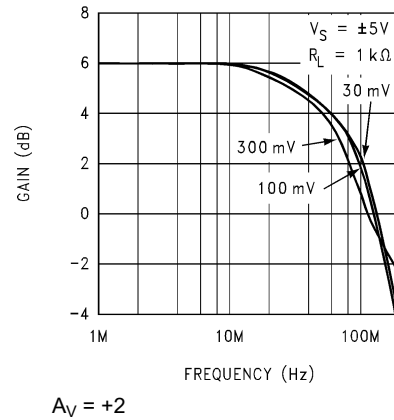

**Figure 5-79. Closed-Loop Frequency Response vs Input Signal Level**

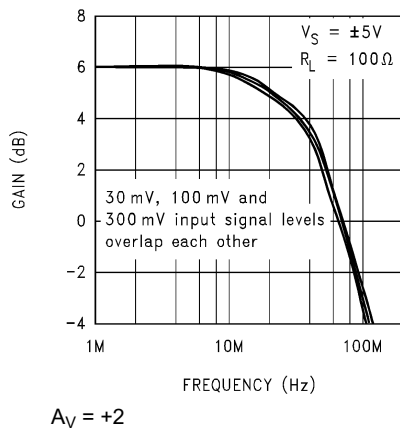


**Figure 5-80. Closed-Loop Frequency Response vs Input Signal Level**

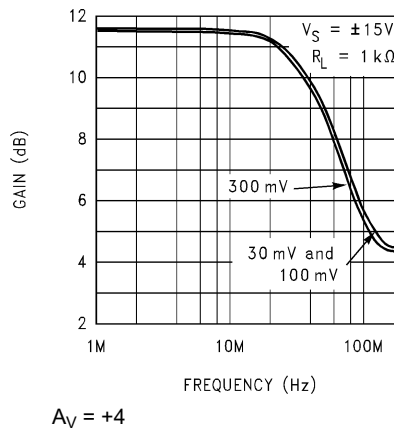


**Figure 5-81. Closed-Loop Frequency Response vs Input Signal Level**

## 5.8 Typical Characteristics: LM7171B (continued)


at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

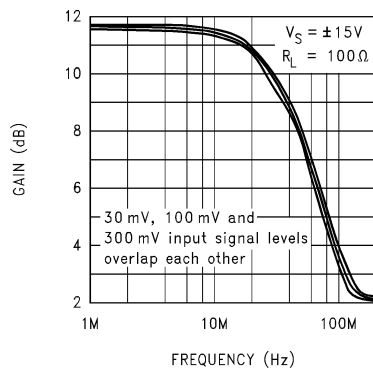


**Figure 5-82. Closed-Loop Frequency Response vs Input Signal Level**

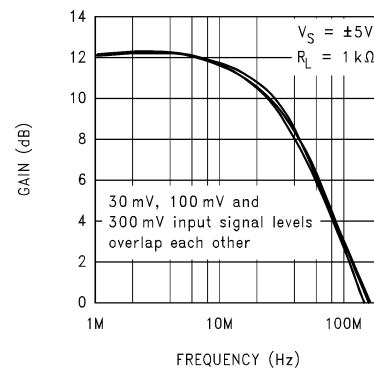


**Figure 5-83. Closed-Loop Frequency Response vs Input Signal Level**

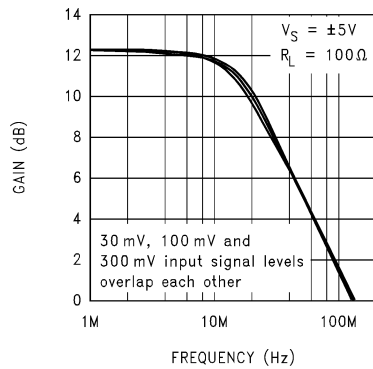


**Figure 5-84. Closed-Loop Frequency Response vs Input Signal Level**

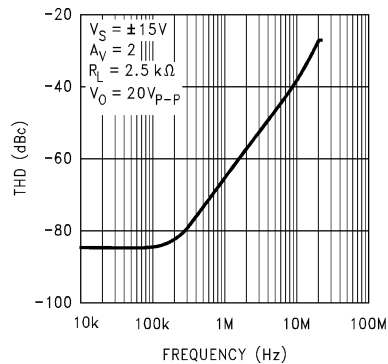

**Figure 5-85. Total Harmonic Distortion vs Frequency**

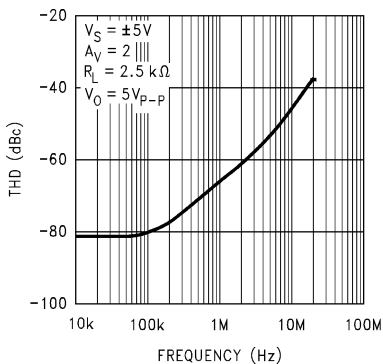


**Figure 5-86. Total Harmonic Distortion vs Frequency**

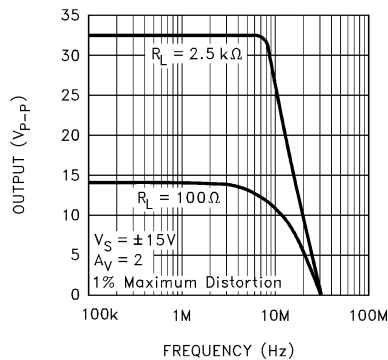


**Figure 5-87. Undistorted Output Swing vs Frequency**

## 5.8 Typical Characteristics: LM7171B (continued)


at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

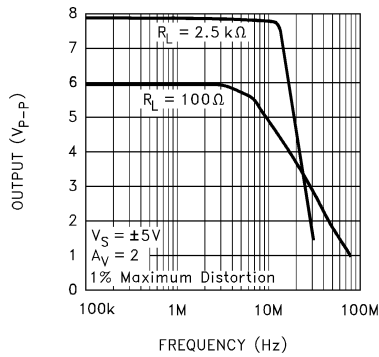

**Figure 5-88. Undistorted Output Swing vs Frequency**

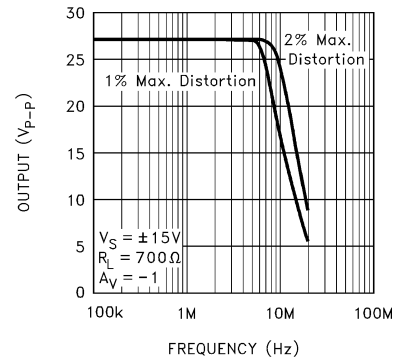


**Figure 5-89. Undistorted Output Swing vs Frequency**

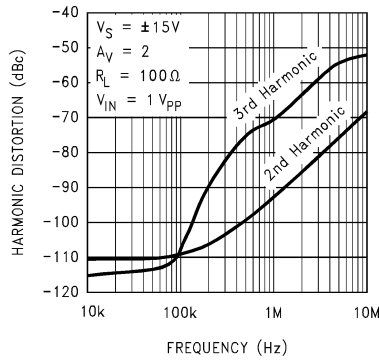


THD measurement at low frequency limited by test instrument

**Figure 5-90. Harmonic Distortion vs Frequency**

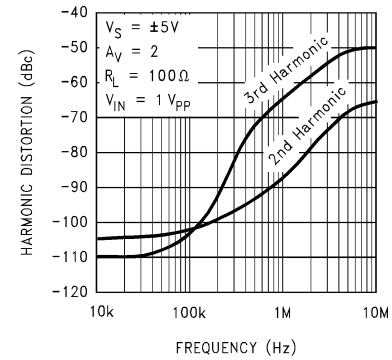

THD measurement at low frequency limited by test instrument

**Figure 5-91. Harmonic Distortion vs Frequency**

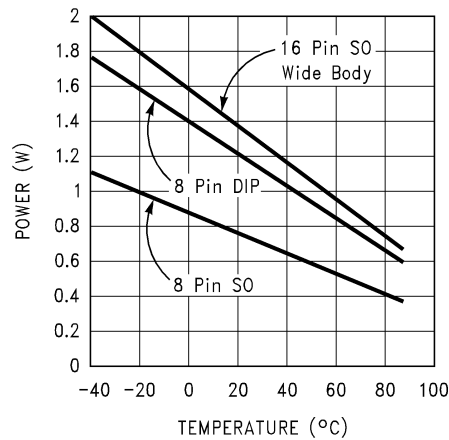

**Figure 5-92. Maximum Power Dissipation vs Ambient Temperature**

## 6 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 6.1 Application Information

The LM7171 is a very high-speed, voltage-feedback amplifier (VFA). This device consumes only 6.5mA of supply current while providing a unity-gain bandwidth of 200MHz and a slew rate of 4100V/ $\mu$ s. The LM7171 also has other great features such as low differential gain and phase and high output current.

The LM7171 is a true VFA. Unlike a current-feedback amplifier (CFA) with a low inverting input impedance and a high noninverting input impedance, both inputs of a VFA have high-impedance nodes. The low-impedance inverting input of a CFA and a feedback capacitor create an additional pole that leads to instability. As a result, CFAs cannot be used in traditional op-amp circuits such as photodiode amplifiers, I-to-V converters, and integrators, where a feedback capacitor is required.

#### 6.1.1 Circuit Operation

The class AB input stage in LM7171 is fully symmetrical and has a similar slewing characteristic to a CFA. In the LM7171 simplified schematic, Q1 through Q4 form the equivalent of the current-feedback input buffer,  $R_E$  the equivalent of the feedback resistor, and stage A buffers the inverting input. The triple-buffered output stage isolates the gain stage from the load to provide low output impedance.

#### 6.1.2 Slew Rate Characteristic

The slew rate of LM7171 is determined by the current available to charge and discharge an internal high impedance node capacitor. This current is the differential input voltage divided by the total degeneration resistor  $R_E$ . Therefore, the slew rate is proportional to the input voltage level, and the higher slew rates are achievable in the lower gain configurations. A curve of slew rate versus input voltage level is provided in [Section 5.8](#).

When a very fast large signal pulse is applied to the input of an amplifier, some overshoot or undershoot occurs. By placing an external resistor such as 1k $\Omega$  in series with the input of LM7171, the bandwidth is reduced to help lower the overshoot.

##### 6.1.2.1 Slew-Rate Limitation

If the amplifier input signal amplitude is too large and the frequency too high, the amplifier is slew-rate limited. This limiting can cause ringing in the time domain and peaking in the frequency domain at the output of the amplifier.

For the  $A_V = +2$  curves, slight peaking occurs. This peaking at high frequency ( $> 100$ MHz) is due to a large input signal at a high enough frequency that exceeds the amplifier slew rate. The peaking in the frequency response does not limit the pulse response in the time domain, and the LM7171 is stable with a noise gain of  $\geq +2$ .




### 6.1.3 Compensation for Input Capacitance

The combination of an amplifier input capacitance with the gain setting resistors adds a pole that can cause peaking or oscillation. To solve this problem, a feedback capacitor with a value of


$$C_F > (R_G \times C_{IN}) / R_F \quad (1)$$

can be used to cancel that pole. For LM7171, a feedback capacitor of 2pF is recommended. [Figure 6-1](#) illustrates the compensation circuit.

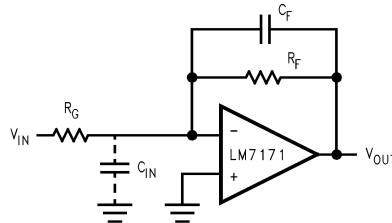

**Figure 6-1. Compensating for Input Capacitance**

## 6.2 Typical Applications

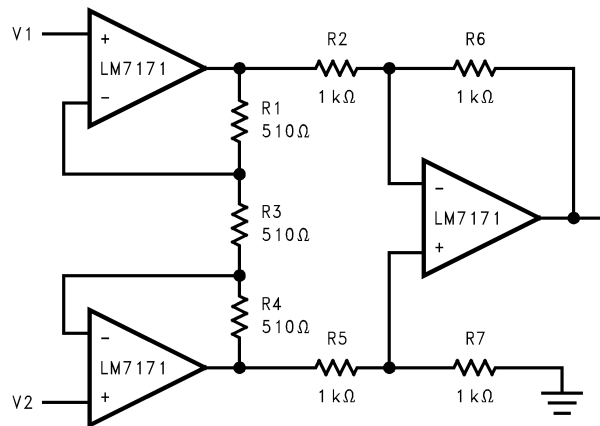


**Figure 6-2. Fast Instrumentation Amplifier**

$$V_{IN} = V_2 - V_1$$

if  $R_6 = R_2$ ,  $R_7 = R_5$ , and  $R_1 = R_4$

$$\frac{V_{OUT}}{V_{IN}} = \frac{R_6}{R_2} \left( 1 + 2 \frac{R_1}{R_3} \right) = 3$$

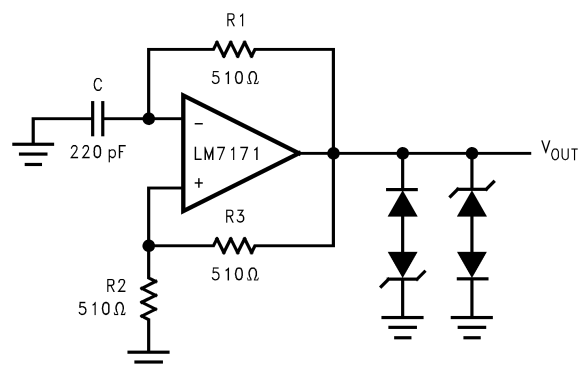

**Figure 6-3. Multivibrator**

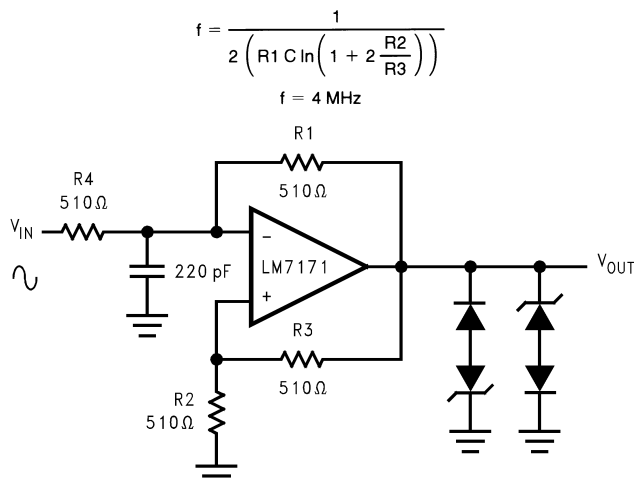


Figure 6-4. Pulse Width Modulator

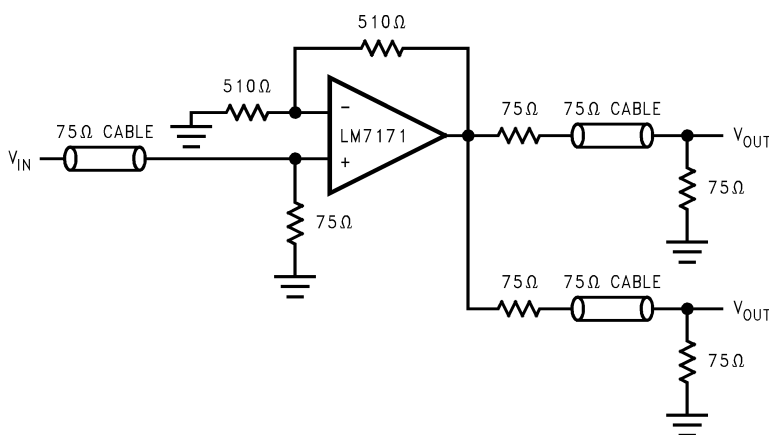


Figure 6-5. Video Line Driver

## 6.3 Power Supply Recommendations

### 6.3.1 Power-Supply Bypassing

Bypassing the power supply is necessary to maintain low power-supply impedance across frequency. To bypass both positive and negative power supplies individually, place 0.01μF ceramic capacitors directly to the power-supply pins, and 2.2μF tantalum capacitors close to the power-supply pins.



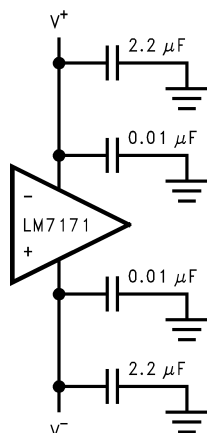


Figure 6-6. Power-Supply Bypassing

### 6.3.2 Termination


In high-frequency applications, reflections occur if signals are not properly terminated. [Figure 6-7](#) shows a properly terminated signal while [Figure 6-8](#) shows an improperly terminated signal.

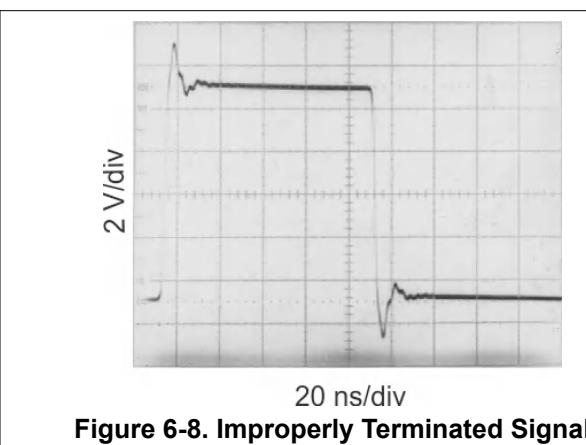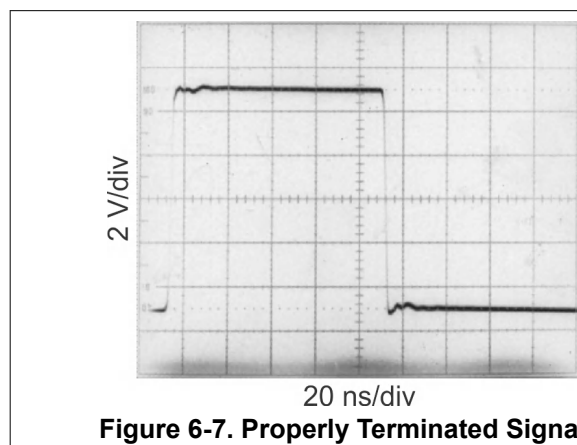


To minimize reflection, use coaxial cable with matching characteristic impedance to the signal source. Terminate the other end of the cable with the same-value terminator or resistor. For commonly used cables, RG59 has a 75Ω characteristic impedance, and RG58 has a 50Ω characteristic impedance.

### 6.3.3 Driving Capacitive Loads

Amplifiers driving capacitive loads can oscillate or have ringing at the output. To eliminate oscillation or reduce ringing, place an isolation resistor as shown in [Figure 6-9](#). The combination of the isolation resistor and the load capacitor forms a pole to increase stability by adding more phase margin to the overall system. The desired performance depends on the value of the isolation resistor; the bigger the isolation resistor, the more damped the pulse response becomes. For LM7171, a 50Ω isolation resistor is recommended for initial evaluation. [Figure 6-10](#) shows the LM7171 driving a 150pF load with the 50Ω isolation resistor.

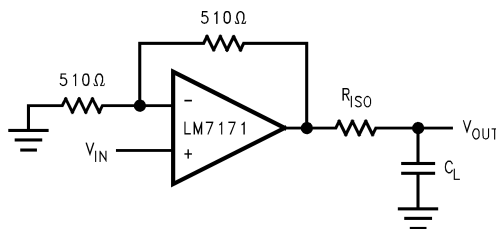

**Figure 6-9. Isolation Resistor Used to Drive Capacitive Load**

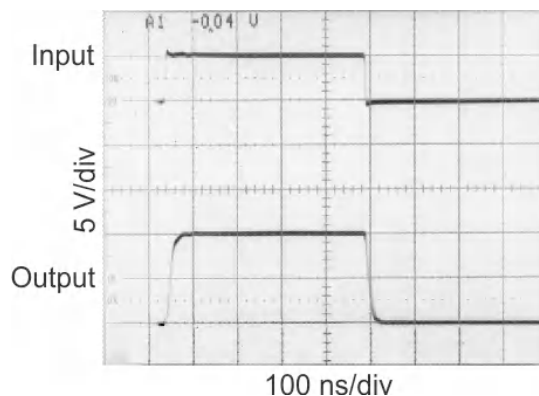

### 6.3.4 Power Dissipation

The maximum power allowed to dissipate in a device is defined as:

$$P_D = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (2)$$

where

- $P_D$  is the power dissipation in a device
- $T_{J(max)}$  is the maximum junction temperature
- $T_A$  is the ambient temperature
- $R_{\theta JA}$  is the thermal resistance of a particular package

For example, for the LM7171 in a SOIC-8 package, the maximum power dissipation at 25°C ambient temperature is 730mW.

Thermal resistance,  $R_{\theta JA}$ , depends on parameters such as die size, package size and package material. The smaller the die size and package, the higher  $R_{\theta JA}$  becomes. The 8-pin DIP package has a lower thermal resistance (108°C/W) than that of 8-pin SOIC (172°C/W). Therefore, for higher dissipation capability, use an 8-pin DIP package.

The total power dissipated in a device can be calculated as:

$$P_D = P_Q + P_L \quad (3)$$

where

- $P_Q$  is the quiescent power dissipated in a device with no load connected at the output.  $P_L$  is the power dissipated in the device with a load connected at the output;  $P_L$  is not the power dissipated by the load.

Furthermore,

- $P_Q$  is the supply current  $\times$  total supply voltage with no load
- $P_L$  is the output current  $\times$  (voltage difference between supply voltage and output voltage of the same side of supply voltage)

For example, the total power dissipated by the LM7171 with  $V_S = \pm 15V$  and output voltage of 10V into 1k $\Omega$  is

$$P_D = P_Q + P_L \quad (4)$$

$$= (6.5mA) \times (30V) + (10mA) \times (15V - 10V) \quad (5)$$

$$= 195mW + 50mW \quad (6)$$

$$= 245mW \quad (7)$$

## 6.4 Layout

### 6.4.1 Layout Guidelines

#### 6.4.1.1 Printed Circuit Board and High-Speed Op Amps

There are many things to consider when designing printed circuit boards (PCBs) for high-speed op amps. Without proper caution, excessive ringing, oscillation, and other degraded ac performance can easily occur in high-speed circuits. As a rule, keep signal traces short and wide to provide low inductance and low impedance paths. Ground any unused board space to reduce stray signal pickup. Ground critical components at a common point to eliminate voltage drop. Sockets add capacitance to the board and can affect high-frequency performance. Soldering the amplifier directly into the PCB without using any socket is better.

#### 6.4.1.2 Using Probes

Active (FET) probes are an excellent choice for taking high-frequency measurements because of the wide bandwidth, high input impedance, and low input capacitance. However, the probe ground leads provide a long ground loop that produces errors in measurement. Instead, ground the probes directly by removing the ground leads and probe jackets and using scope probe jacks.

#### 6.4.1.3 Component Selection and Feedback Resistor

In high-speed applications, keep all component leads short. For discrete components, choose carbon composition-type resistors and mica-type capacitors. Surface-mount components are preferred over discrete components for minimum inductive effect.

Large values of feedback resistors can couple with parasitic capacitance and cause undesirable effects, such as ringing or oscillation in high-speed amplifiers. For LM7171, a feedback resistor of 510Ω gives optimized performance.

## 7 Device and Documentation Support

### 7.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 7.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 7.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

### 7.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 7.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 8 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision C (September 2014) to Revision D (February 2024)                                | Page |
|-------------------------------------------------------------------------------------------------------|------|
| • Updated the numbering format for tables, figures, and cross-references throughout the document..... | 1    |
| • Updated <i>Package Information</i> .....                                                            | 1    |
| • Deleted footnote from <i>Recommended Operating Conditions</i> .....                                 | 3    |
| • Changed DC and AC specifications tables to <i>Electrical Characteristics: ±15V</i> .....            | 4    |
| • Changed LM7171A unity-gain bandwidth from 200MHz to 160MHz.....                                     | 4    |
| • Changed LM7171A settling time from 42ns to 16ns.....                                                | 4    |
| • Changed LM7171 A Input-referred voltage noise from 14nV/√Hz to 8.5nV/√Hz.....                       | 4    |
| • Changed LM7171 A Input-referred current noise from 1.5pA/√Hz to 1pA/√Hz.....                        | 4    |
| • Changed DC and AC specifications tables to <i>Electrical Characteristics: ±5V</i> .....             | 6    |
| • Changed LM7171A slew rate from 950V/μs to 1200V/μs.....                                             | 6    |
| • Changed LM7171A phase margin from 57° to 68° .....                                                  | 6    |
| • Changed LM7171A settling time from 56ns to 15ns.....                                                | 6    |
| • Changed LM7171A propagation delay from 6ns to 2.5ns.....                                            | 6    |
| • Changed LM7171A input-referred voltage noise from 14nV/√Hz to 8.5nV/√Hz.....                        | 6    |
| • Changed LM7171A input-referred current noise from 1.8pA/√Hz to 1pA/√Hz.....                         | 6    |
| • Added new <i>Typical Characteristics</i> section for LM7171A.....                                   | 8    |
| • Deleted second paragraph in <i>Slew-Rate Limitation</i> .....                                       | 24   |

| <b>Changes from Revision B (March 2013) to Revision C (September 2014)</b>                                                                                                                                                                                     | <b>Page</b> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Changed data sheet flow and layout to conform with new TI standards. Added the following sections: Device Information Table, Application and Implementation; Layout; Device and Documentation Support; Mechanical, Packaging, and Ordering Information ..... | <b>1</b>    |

| <b>Changes from Revision A (March 2013) to Revision B (March 2013)</b> | <b>Page</b> |
|------------------------------------------------------------------------|-------------|
| • Changed layout of National Data Sheet to TI format.....              | <b>25</b>   |

## 9 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6)     |
|---------------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|-------------------------|
| <a href="#">LM7171AIM/NOPB</a>  | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | LM71<br>71AIM           |
| <a href="#">LM7171AIMX/NOPB</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | (L71AIM, LM71)<br>71AIM |
| LM7171AIMX/NOPB.B               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | (L71AIM, LM71)<br>71AIM |
| <a href="#">LM7171BIM/NOPB</a>  | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | LM71<br>71BIM           |
| <a href="#">LM7171BIMX/NOPB</a> | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 85    | LM71<br>71BIM           |
| <a href="#">LM7171BIN/NOPB</a>  | Active        | Production           | PDIP (P)   8   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-NA-UNLIM                  | -40 to 85    | LM7171<br>BIN           |
| LM7171BIN/NOPB.A                | Active        | Production           | PDIP (P)   8   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-NA-UNLIM                  | -40 to 85    | LM7171<br>BIN           |
| LM7171BIN/NOPB.B                | Active        | Production           | PDIP (P)   8   | 40   TUBE             | Yes         | NIPDAU                               | Level-1-NA-UNLIM                  | -40 to 85    | LM7171<br>BIN           |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.




Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

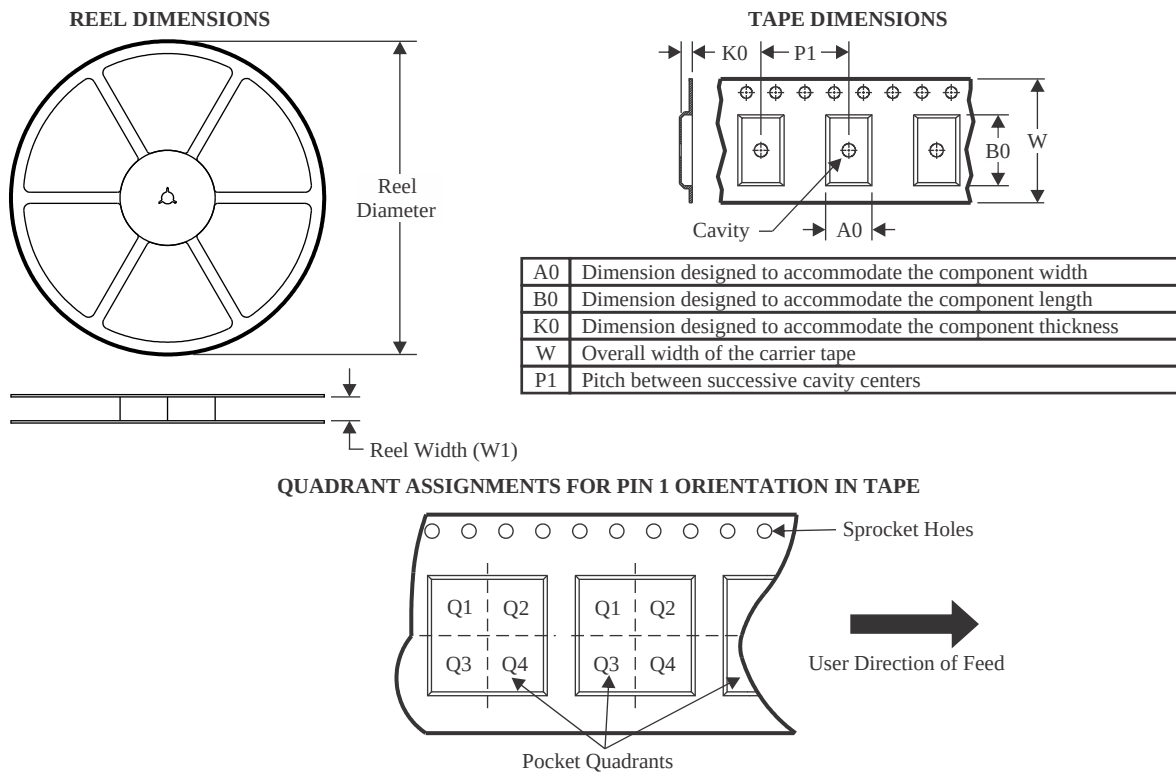

\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM7171AIMX/NOPB | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |


## TAPE AND REEL BOX DIMENSIONS

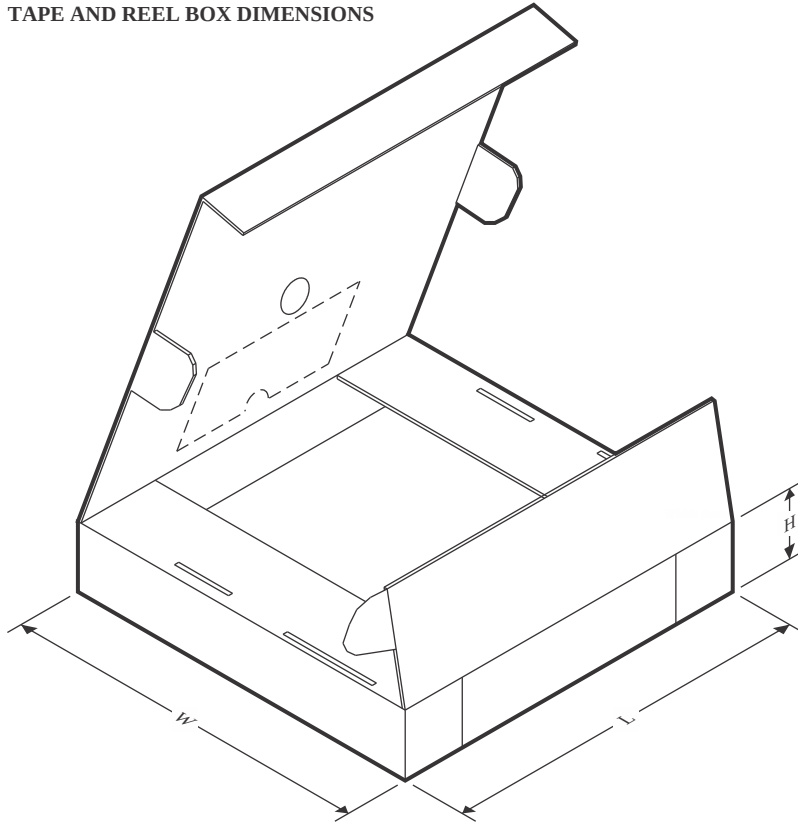

\*All dimensions are nominal


| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM7171AIMX/NOPB | SOIC         | D               | 8    | 2500 | 353.0       | 353.0      | 32.0        |

## TUBE

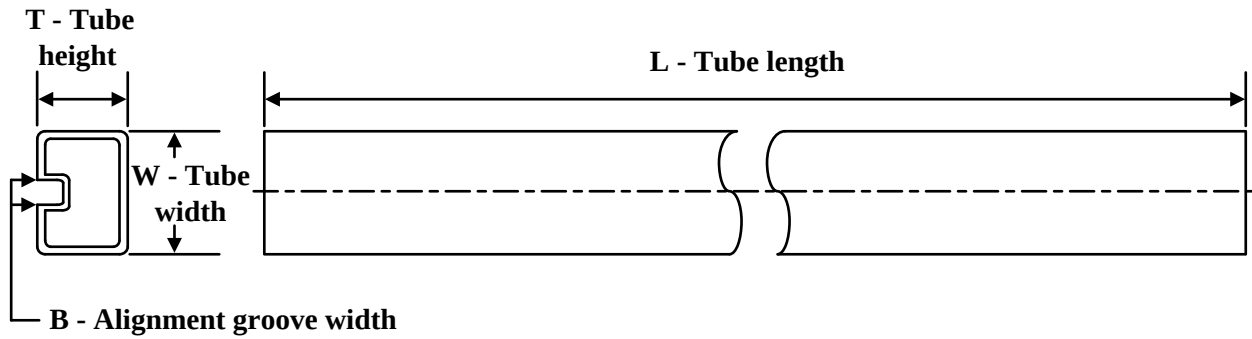

\*All dimensions are nominal

| Device           | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| LM7171BIN/NOPB   | P            | PDIP         | 8    | 40  | 502    | 14     | 11938  | 4.32   |
| LM7171BIN/NOPB.A | P            | PDIP         | 8    | 40  | 502    | 14     | 11938  | 4.32   |
| LM7171BIN/NOPB.B | P            | PDIP         | 8    | 40  | 502    | 14     | 11938  | 4.32   |




**D0008A**

# PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

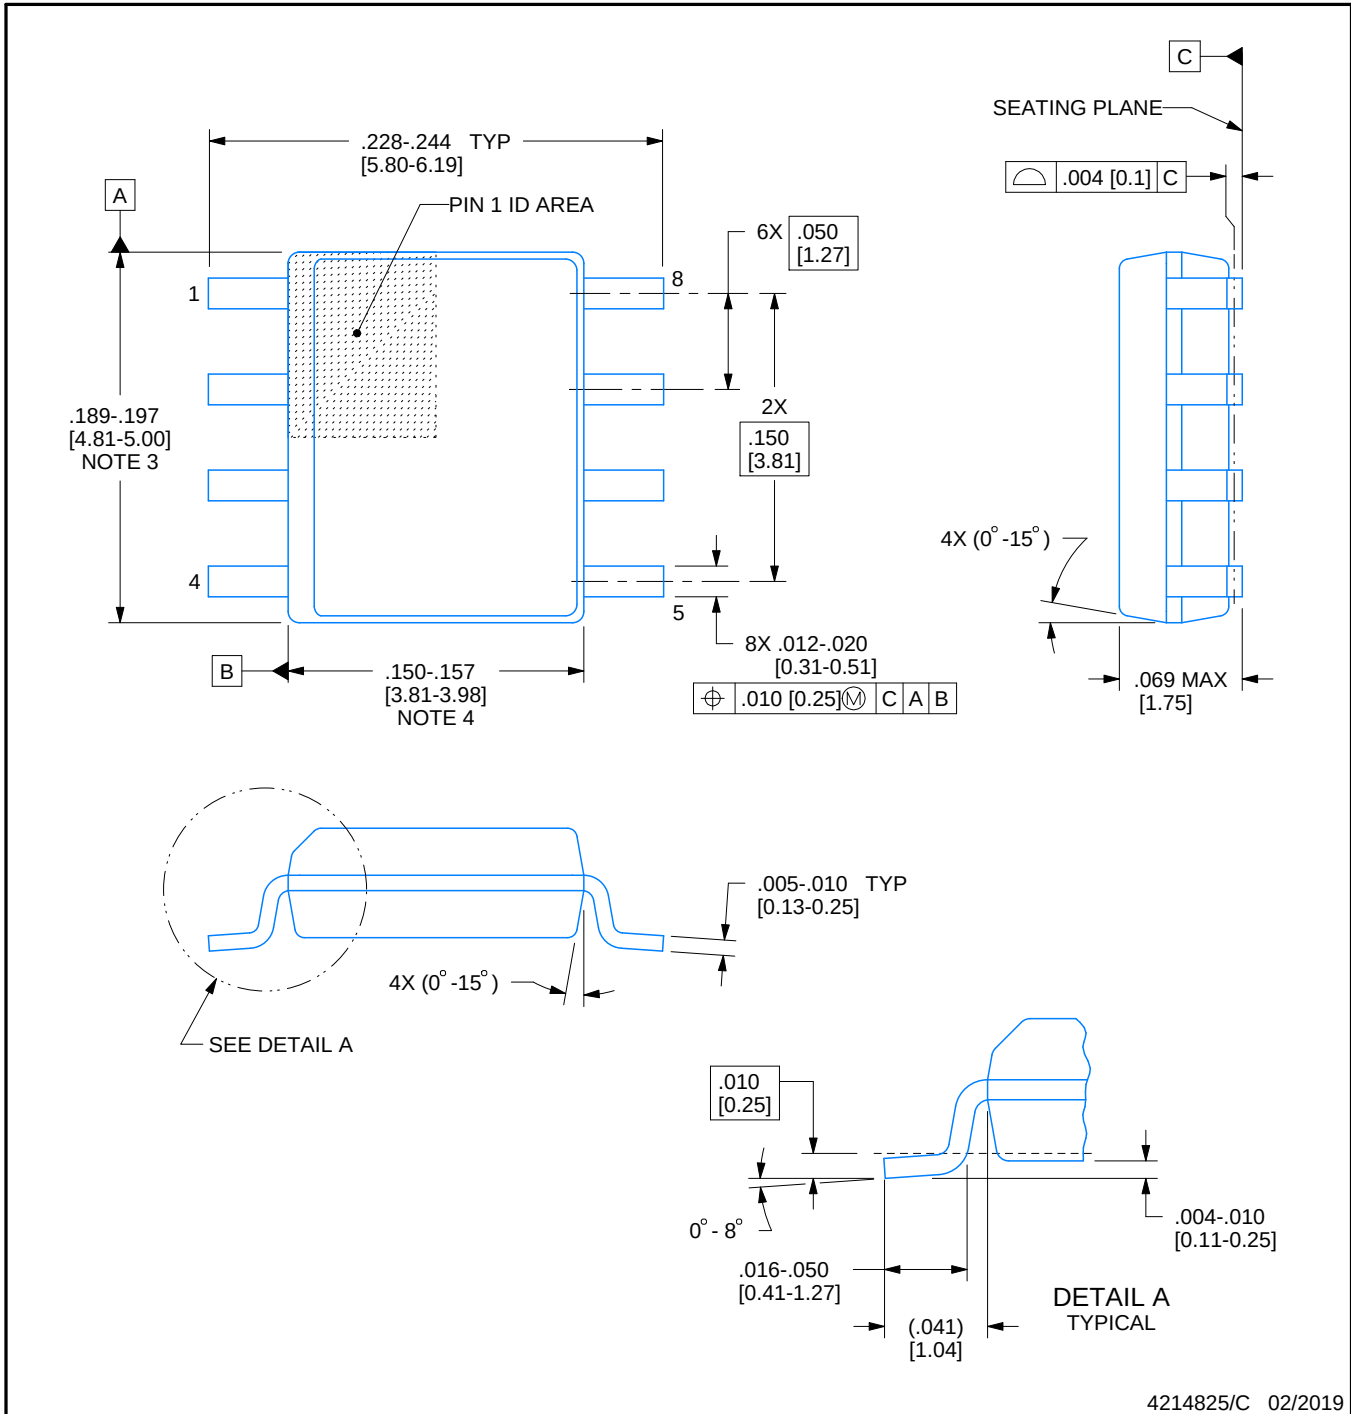

4214825/C 02/2019

## NOTES:



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

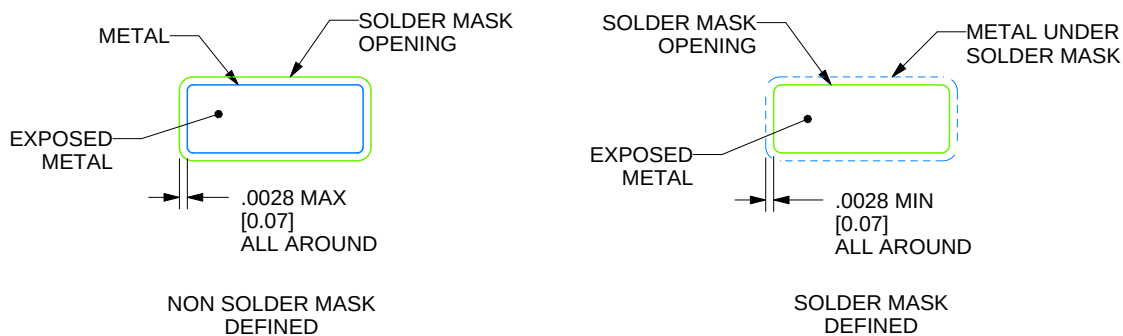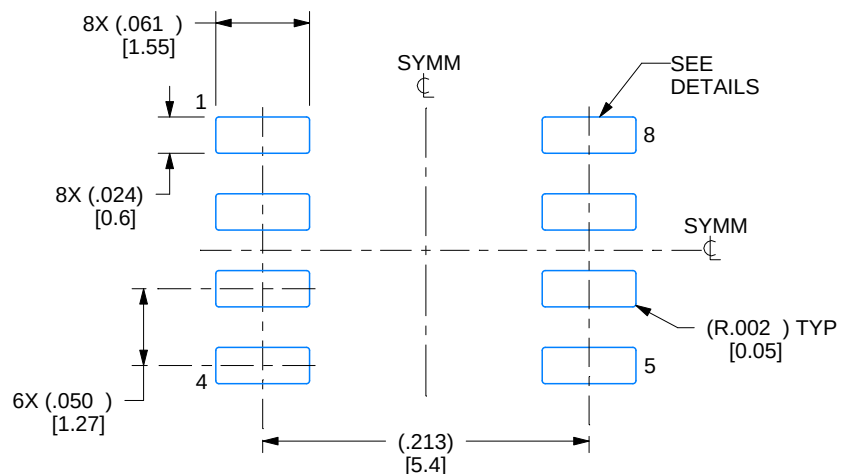

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

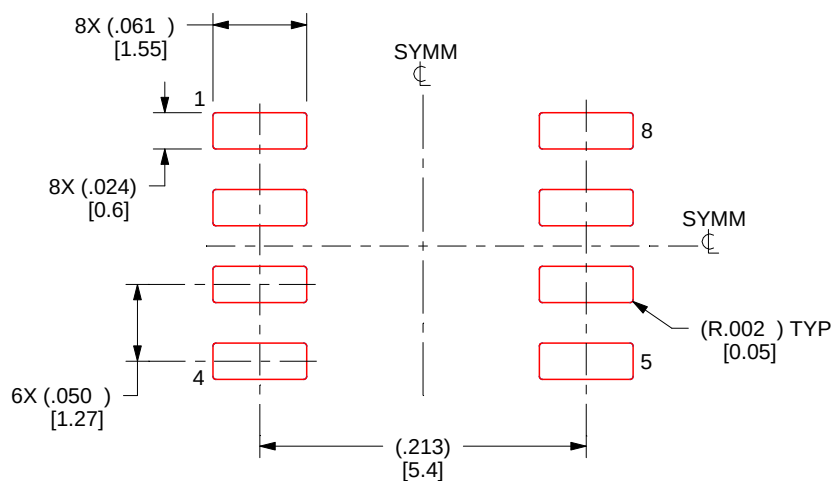

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X


4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

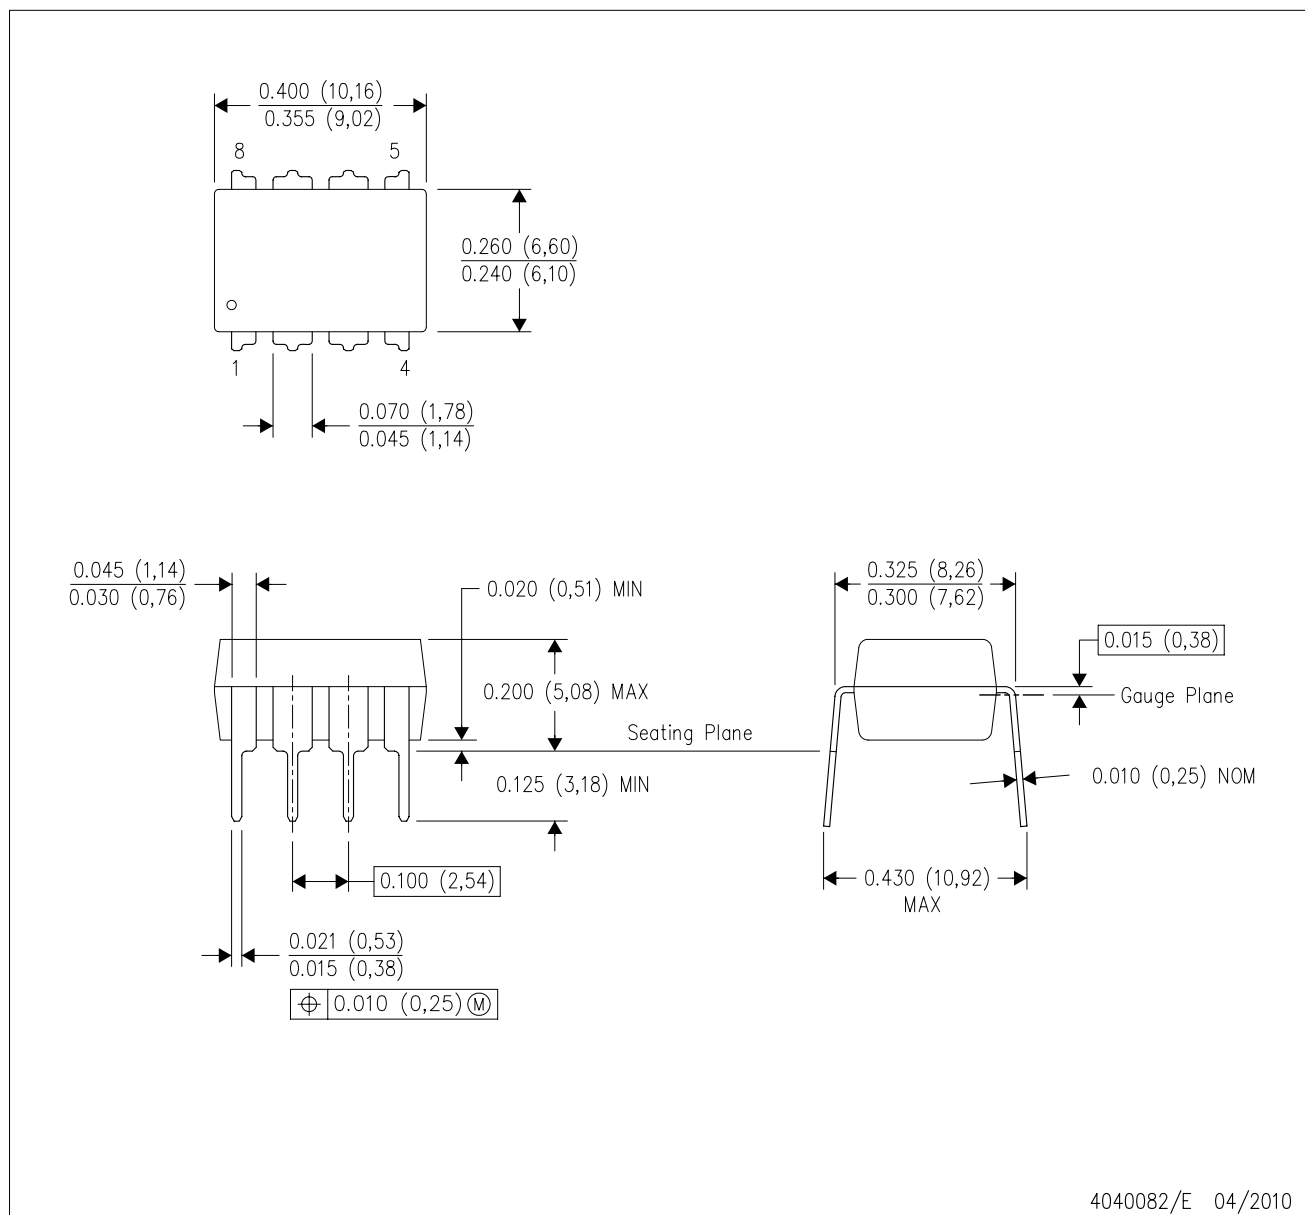

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated