

8-bit, serial IN, parallel OUT driver

BA823 / BA823F

The BA823 and BA823F are 8-bit serial input, parallel output drivers. These monolithic ICs were developed as drivers for thermal printing heads, LED character displays, and other similar applications.

●Applications


Thermal printing head drivers

LED character display drivers

●Features

- 1) Can drive up to 200 mA.
- 2) Controlling the strobe terminal with the drive timing pulse enables current to be reduced when drive is not being carried out.
- 3) Using the data output terminal for the next data input enables cascade connections.
- 4) The digital ground and power ground are separated.
- 5) TTL and CMOS drive possible.

●Block diagram

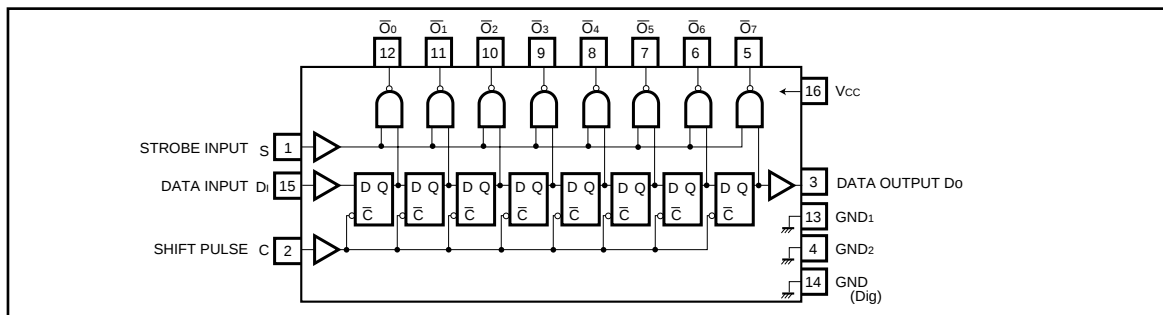

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	7.0* ¹	V
Power dissipation	BA823	550* ²	mW
	BA823F	500* ³	
Input voltage	V _{IN Max.}	+ 0.3 ~ + 6.0	V
Operating temperature	T _{opr}	- 20 ~ + 75	°C
Storage temperature	T _{stg}	- 55 ~ + 125	°C

*1 $\bar{O}_0$ to $\bar{O}_7$ output pins are 34V (max.).

*2 Reduced by 5.5mW for each increase in Ta of 1°C over 25°C.

*3 Reduced by 5mW for each increase in Ta of 1°C over 25°C.

● Usage conditions range

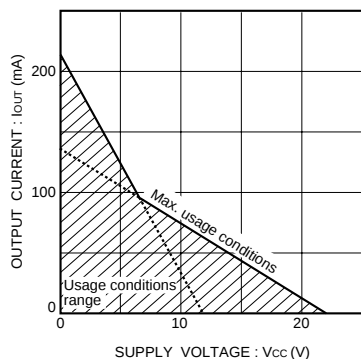


Fig. 1 Power supply voltage and output current usage conditions


Fig. 1 Power supply voltage and output current usage conditions (Per Circuit)

The maximum usage conditions, shown on the left, indicate the absolute maximums for power supply voltage and IC output current. Never exceed these usage conditions, under any circumstances.


● Electrical characteristics (unless otherwise noted, $T_a = 25^\circ\text{C}$, $V_{CC} = +5.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement circuit
Power supply voltage	V_{CC}	4.5	5.0	5.5	V	V_{CC} pin	Fig.2
Quiescent current 1	I_{Q1}	—	4	6	mA	When all data values are "0"	Fig.2
Quiescent current 2	I_{Q2}	—	8	11	mA	When all data values are "0"	Fig.2
Input low level voltage	V_{IL}	—	—	0.8	V	—	Fig.2
Input high level voltage	V_{IH}	2	—	—	V	—	Fig.2
Input high level current	I_{IH}	—	—	0.4	mA	$V_{IN} = 4.5\text{ V}$	Fig.2
Input high level current	I_{IH}	—	—	100	μA	$V_{IN} = 2.0\text{ V}$	Fig.2
Maximum output voltage	$V_{O\text{ OFF}}$	—	—	21.8	V	$\overline{O_0}$ to $\overline{O_7}$ pins, $I_O = 10\mu\text{A}$	Fig.3
Output saturation voltage	$V_{O\text{ ON}}$	—	0.8	1.3	V	When $I_O = 100\text{mA}$ sink	Fig.3
Output current	I_{OL}	—	—	207	mA	Applied voltage $V = 11.8\text{V}$	Fig.3
"H" level data output voltage	V_{DOH}	2.4	—	—	V	$R_L = 10\text{k}\Omega$	Fig.3
"L" level data output voltage	V_{DOL}	—	—	0.8	V	—	Fig.3
Minimum setup time	t_1	—	—	300	ns	$V_{IH} = 2.0\text{V}$, $V_{IL} = 0.8\text{V}$	—
Minimum shift pulse width	t_2	—	—	1	μs	$V_{IH} = 2.0\text{V}$, $V_{IL} = 0.8\text{V}$	—
Minimum timing time	t_3	—	—	1	μs	$V_{IH} = 2.0\text{V}$, $V_{IL} = 0.8\text{V}$	—
Maximum data transfer speed	$f_{\text{Max.}}$	500	—	—	kHz	$V_{IH} = 2.0\text{V}$, $V_{IL} = 0.8\text{V}$	—

● Measurement circuits

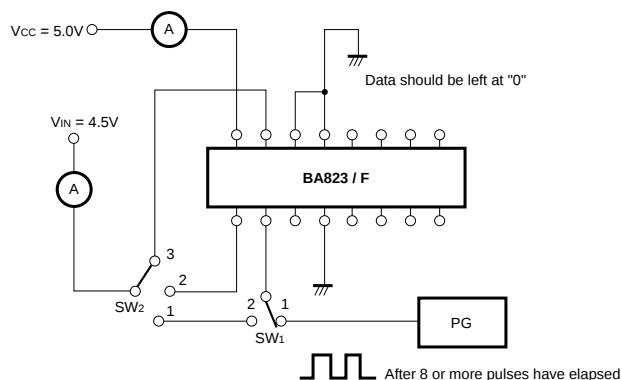Fig. 2 I_{CC} and I_{IH} measurement circuit

Item	SW_1	SW_2
I_{CC}	1	1
I_{IH}	2	1 ~ 3

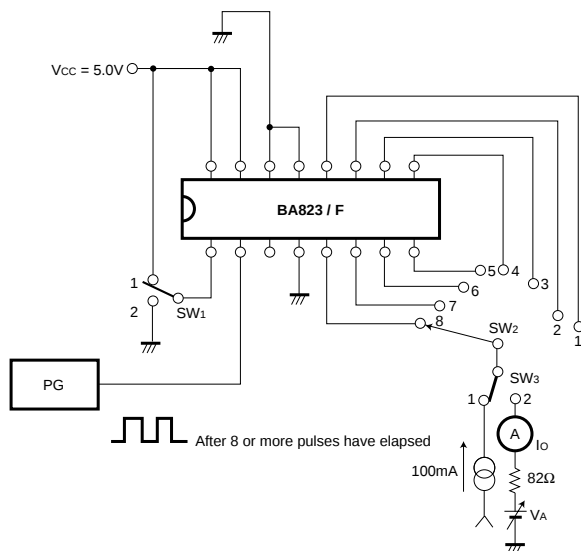Fig. 3 V_O ON, V_O OFF and I_{OL} measurement circuit

Item	SW_1	SW_2	SW_3
V_O ON	1	1 ~ 8	1
I_{OL}	1	1 ~ 8	2
V_O OFF	2	1 ~ 8	2

When tested at V_O OFF : $I_O = 10\mu A$ When tested at I_O ON : $V_A = 30V$

● Input conditions


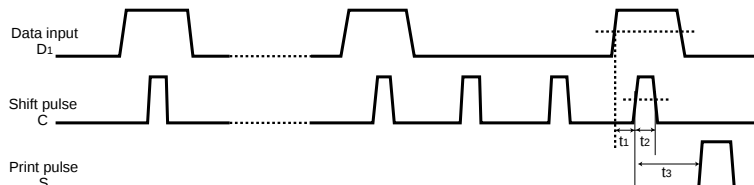



Fig. 4

● Input / output circuits

(a) Input circuit

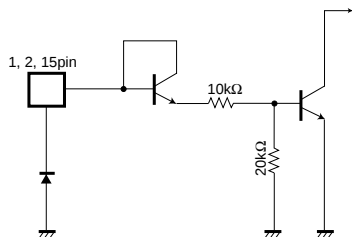

(b) Output circuit

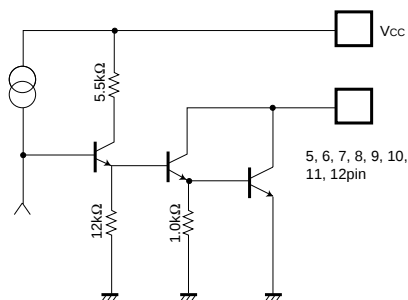

(c) Data output circuit

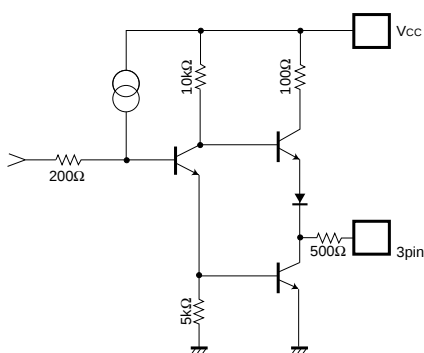


Fig.5

● Electrical characteristic curves

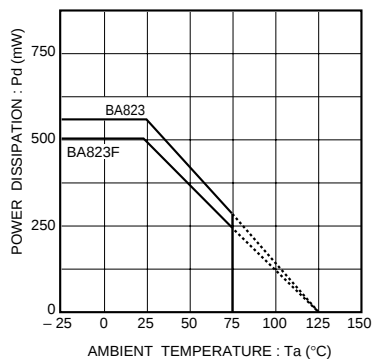


Fig. 6 Power dissipation vs. ambient temperature

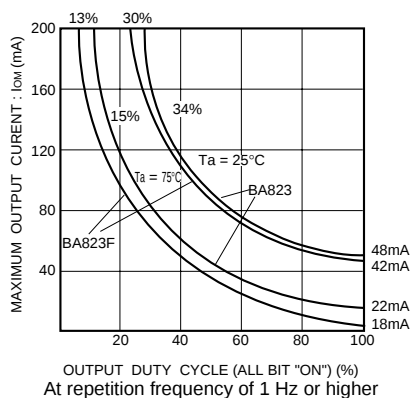


Fig. 7 Output conditions

●Pin descriptions

Pin No.	Pin name	Code	Function
2	SHIFT PULSE	C	Shift pulse of shift register
15	DATA INPUT	D _I	Data input of shift pulse registered using shift pulse rise
1	STROBE	S	When "1", the content of the shift register is output
12	OUTPUT	$\overline{O}_0$	"0" when the content of the register is "1" on the 1st bit
11	OUTPUT	$\overline{O}_1$	"0" when the content of the register is "1" on the 2nd bit
10	OUTPUT	$\overline{O}_2$	"0" when the content of the register is "1" on the 3rd bit
9	OUTPUT	$\overline{O}_3$	"0" when the content of the register is "1" on the 4th bit
8	OUTPUT	$\overline{O}_4$	"0" when the content of the register is "1" on the 5th bit
7	OUTPUT	$\overline{O}_5$	"0" when the content of the register is "1" on the 6th bit
6	OUTPUT	$\overline{O}_6$	"0" when the content of the register is "1" on the 7th bit
5	OUTPUT	$\overline{O}_7$	"0" when the content of the register is "1" on the 8th bit
3	DATA OUTPUT	D _O	Has passed the $\overline{O}_7$ output circuit and becomes the input for the next step
16	V _{CC}	V _{CC}	Normally 5.0V used ($\pm 10\%$)
13	GND	GND ₁	$\overline{O}_0$ to $\overline{O}_3$ output circuit GND
4	GND	GND ₂	$\overline{O}_4$ to $\overline{O}_7$ output circuit GND
14	GND	GND (Dig)	Logic circuit GND

●Timing chart

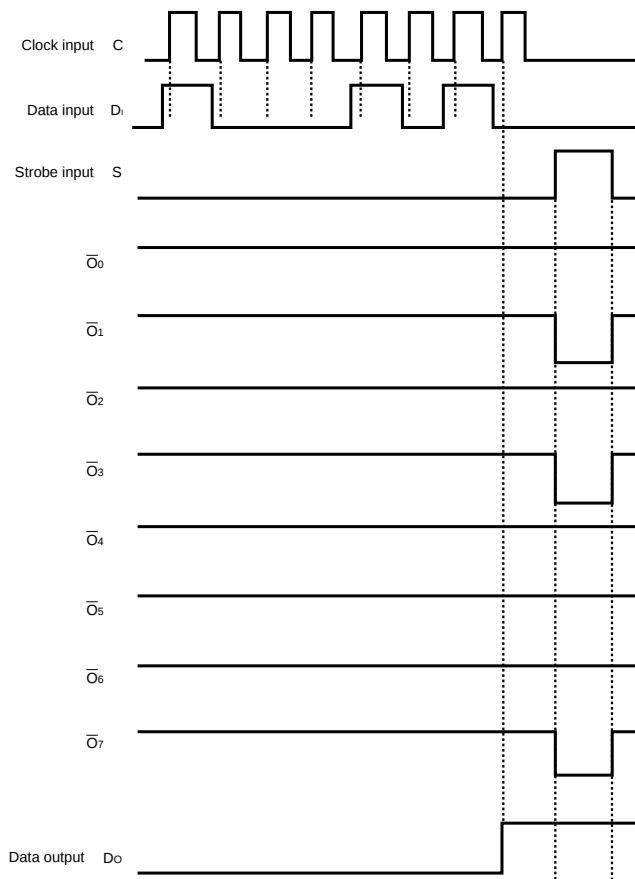


Fig.8

●Application example

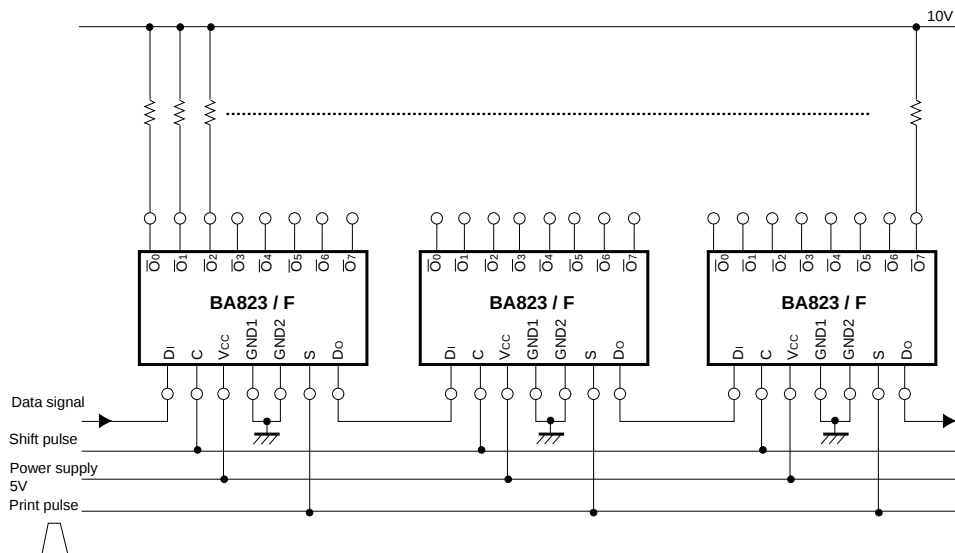


Fig.9

Example of printing using a strobe pulse
This offers the advantage that the common line (large

current) of the heat element does not need to be switched.

●Circuit operation

The BA823 has the internal configuration shown in the logic diagram, with the following three input pins: clock C, data DI, and strobe S. Data input is synchronized to the clock, with data being read serially at the rising edge. The content of the set shift register appears at output terminals $\overline{O}_0$ to $\overline{O}_7$, as shown in the timing chart in Figure 8, depending on the strobe input, with that

pulse width being the same as that of the strobe input. The data output pin $\overline{O}_0$ is used when ICs are connected in cascade format, and when the output for the last stage of the shift register appears, is connected to the next data input pin $\overline{D}_i$. When these clock and strobe latches and power switch are used in common, the output pins can be increased by eight bits each.

●External dimensions (Units: mm)

