

- Electrical construction possible at 100V power.
- The built-in magnet safeguards checking of the facility cover and gate.
- Built-in switch with accurate ON/OFF detection.
- Combination of magnet (support) and limit switch (detection) saves on both construction and space.
- Two types of contact: 1 Form A (ON when gate is closed)
1 Form B (ON when gate is open.)
- The unit case is available in three colors: Yellow, brown, and gray.
- The product comes with three different types of weight sustainability: 1kg, 3kg and 5kg.

PRODUCT TYPE

| Product name | Specifications | | | | Part No. |
|----------------------|--------------------------------|---|--------------------------------------|-----------|-----------|
| | Contact construction | Case color | Sustainable weight sustainability | Packaging | |
| Magnetlimit 1 Form A | 1a (ON when gate is closed) | Yellow | 3kg type (29.4N {3kgf}) (Note: 1) | — | AZC11013Y |
| | | Brown | | — | AZC11013A |
| | | Gray | | — | AZC11013H |
| Magnetlimit 1 Form B | 1b (ON when gate is open) | Yellow | | — | AZC11113Y |
| | | Brown | | — | AZC11113A |
| | | Gray | | — | AZC11113H |
| Options | Metal plate | Metal plate (13mm × 60mm × 1.6mm .512inch × 2.362inch × .063inch) | | | AZC1801 |

Notes: 1. The unit comes with an metal plate enclosed.

2. The blister pack type comes with 1 metal plate and 4 screws (2 long, 2 short) enclosed.

3. Weight sustainability also comes in 1kg and 5kg types. Specify when ordering by replacing "3" with "1" for the 1kg type, and "5" for the 5kg type at the end of the part No.

SPECIFICATIONS

1. Ratings

| Rated voltage | Load type | Resistance load | Lamp load | Guidance load |
|---------------|-----------|-----------------|-----------|---------------|
| 125V AC | | 5A | 1.5A | 3A |
| 250V AC | | 5A | — | 3A |
| 30V DC | | 5A | — | 1.5A |

Notes: 1. Inductive load is a minimum 0.4 (AC) and time duration is maximum 7ms (DC).

2. Lamp load has 10 times the inrush current.

3. Minute load ratings: 5mA 6V DC, 1mA 24V DC.


2. Switch operating features

| | |
|--------------------------------|---------------------|
| Operating force (O.F.) (N{gf}) | 3.43 {350} max. |
| Return force (R.F.) (N{gf}) | 0.49 {50} min. |
| Pretravel (P.T.) | 1.8mm .071inch max. |
| Movement differential (M.D.) | 0.2 to 0.8 |
| Release position (R.P.) | 4.0mm .157inch max. |


3. Capabilities overview

| | | |
|--|---------------------------------|---|
| Electrical capabilities | Insulation resistance (initial) | Min. 100 \rightarrow (measured at 500V DC insulation resistance) |
| | Voltage resistance | Contact distance: AC 1000V/1 min. (initial) Distance between each pin and uncharged metal parts: AC 2100V/1 min. Distance between each pin and earth: AC 2100V/1 min. |
| Life | Mechanical life | Min. 100 thousand times (ON/OFF frequency 60 times/min.) |
| | Electrical life | Min. 50 thousand times (resistance load AC 250V 5A) Min. 30 thousand times (lamp load AC 125V 1.5V) ON/OFF frequency 20 times/min. |
| Protective capabilities | | IP40 |
| Usage conditions | Ambient temperature | -20 to +80°C -4 to 176°F (but not in a frozen environment.) |
| | Ambient humidity | Max. 95% RH |
| | Tolerable operating frequency | Mechanical: 60 times/min. Electrical: 20 times/min. |
| Sustainability (when using the enclosed metal plate) | | 1kg (9.8N {1kgf}), 3kg (29.4N {3kgf}), 5kg (49N {5kgf}) |

OUTPUT CIRCUIT DIAGRAM

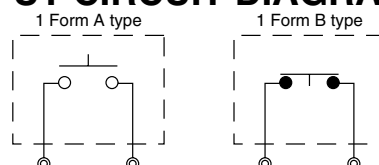


DIMENSIONS

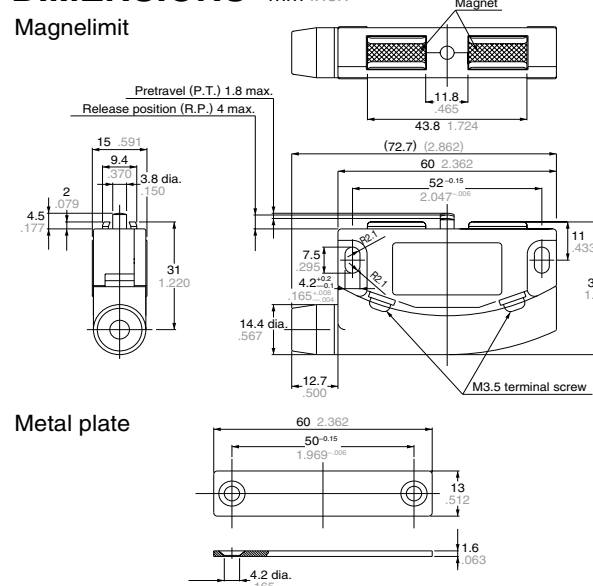

METAL PLATE ATTACHMENT


• Attaching the main unit

1. Using an M4 screw, attach firmly remembering to employ a washer, etc. The appropriate torque is 1.18 to 1.47N (12 to 15kg/cm.)
2. When moveable parts such as the gate are closed, ensure that the yoke and metal plate are flush with each other.

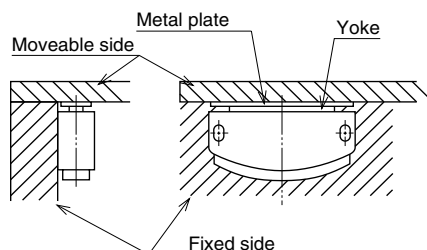


• Attaching the metal plate


1. Using an M3 dish screw, attach to the side opposite from the yoke. Pay particular attention that the head of the attached screw does not protrude further than the surface of the metal plate (if using wooden screws, a call of 2.7 is optimum.)
2. If the adhesive side is magnetic (metal plate), the adhesion may prove ineffective. Further, since the sustainability varies depending on the board thickness and the surface processing (paint, etc.), it is best to check beforehand.

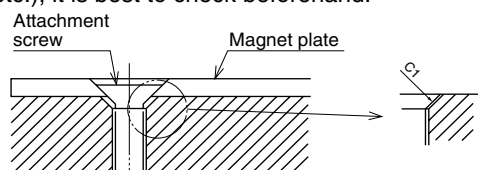


Unit attachment hole processing dimensions



Unless the metal plate and the yoke are flush with each other, adhesive power will be lost, and there is a risk that the switch will not operate.



Adhesion board hole processing dimensions



(Fit a C1 panel to the inlet vent)



SUITABLE WIRING

• Maximum external dimensions upon completion

Circular: 8mm dia. .315 inch dia. max.
Flat: Lengthwise 9.4mm .370inch max.
(VVF 2 cores, conductor radius 1.6 dia.)

• Wiring processing dimensions


Refer to the diagram below for the wiring processing dimensions

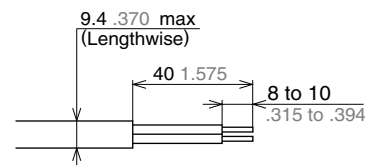


Flat (VVF 2 cores, conductor radius 1.6 .063 dia)

WIRING


- Terminal uses a M3.5 angle washer attachment.
 - During wiring work, do not connect the lead wire directly to the terminal, but via a crimp contact. However, this excludes single wiring.
 - Wiring by solder should be avoided.
1. Wiring method
Insert a flat screwdriver into the indentation of the product side, and remove the terminal cover.



2. Slide the rubber cap and the terminal cover over the wire, as shown in the illustration then attach a crimp contact to the terminal. The torque applied to the terminal screw should be within the range of 0.39-0.59 Nm (4-6 kg/cm).

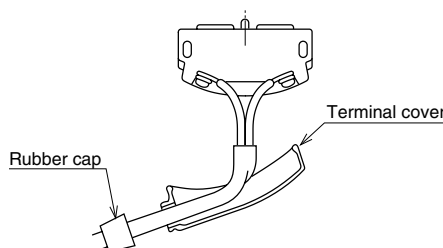

3. If using a VVF wire, bend the wire towards the unit, and once it has taken the proper shape, install the terminal cover. After installing the terminal cover, attach the rubber cap.



CAUTIONS FOR USE

- Because the magnelimit is not water-proof, avoid using in areas where it may be splashed with either water or oil. Also, avoid using in locations where dust may accumulate.
- Do not use in atmospheres where the unit may directly come into contact with any kind of organic solvent, strong acid or alkaline liquids, or combustible or corrosive gasses.
- Avoid using in silicon environments such as organic silicon-based rubber, solvents, sealants, oil, grease, or wiring.
- The moveable parts on the magnelimit such as the gates are equipped with a stopper, so avoid attachments that require them to bear the full load.
- In order to improve reliability under actual working conditions, check the quality under as close to actual working conditions as possible.
- This magnelimit has a built-in electro-magnet. For this reason, take care not to place floppy disks, magnetic cards, or other magnetic recording mediums near the unit, as the data may be corrupted or lost.