
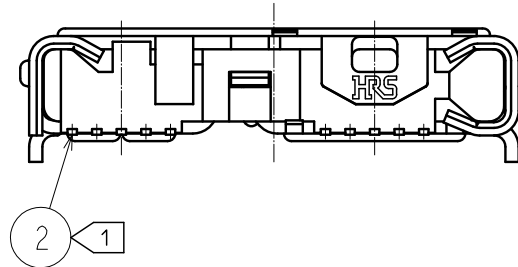
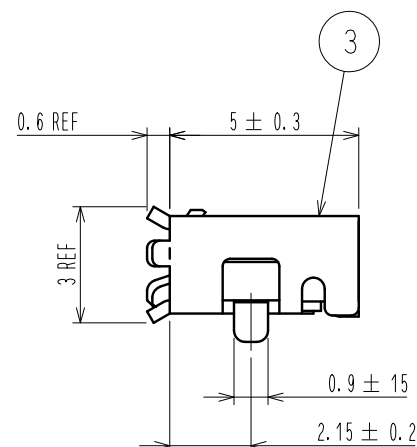
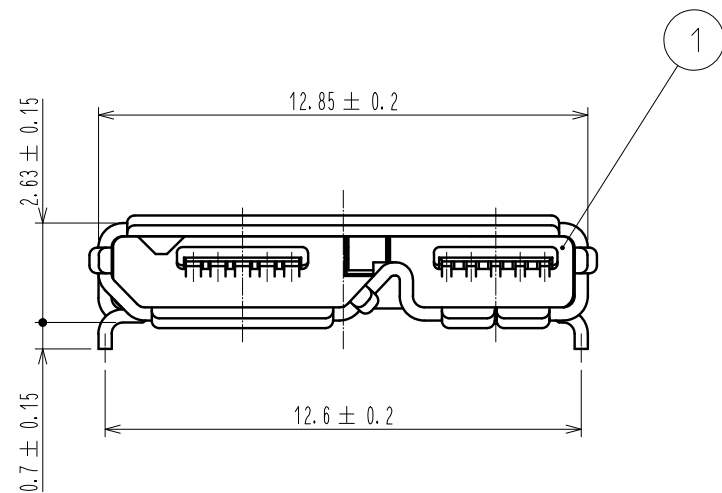
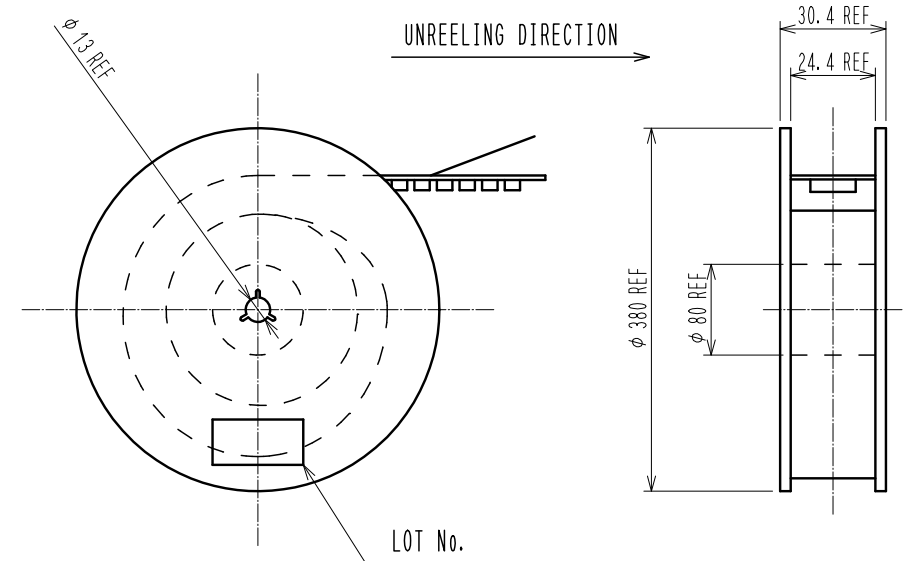
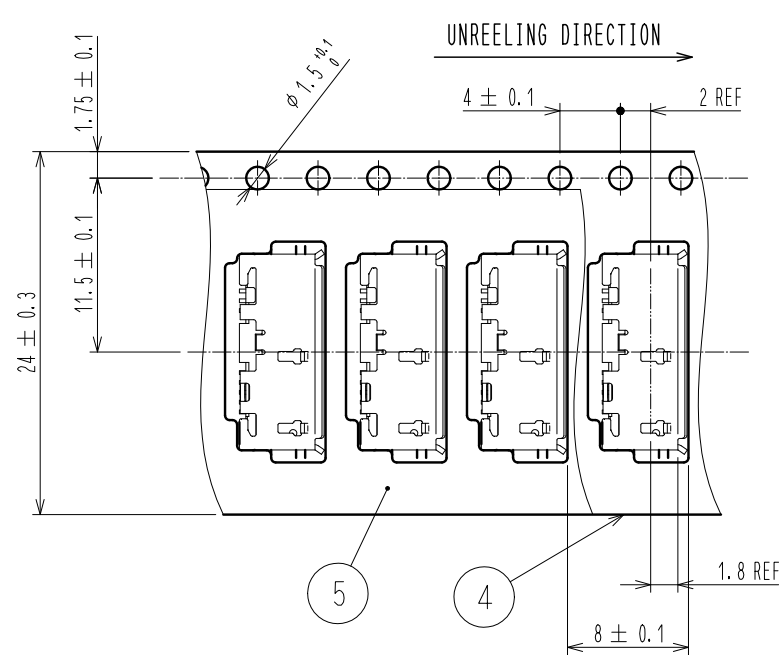


3 DRAWING FOR PACKAGING (FREE)

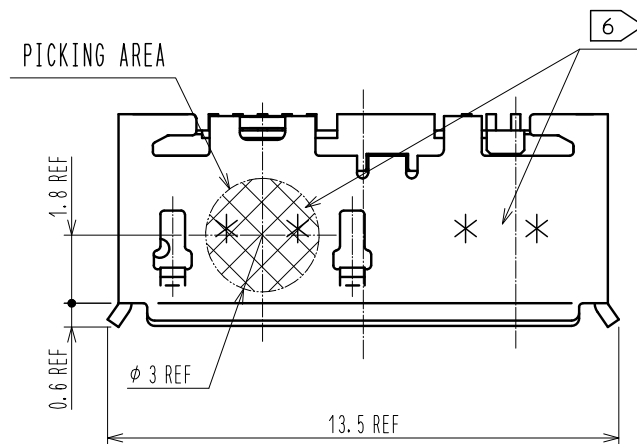

6 LOT NUMBER (4 DIGITS)

YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
2009	9	Jan.	A	1	1	11	B	21	M	1	A
2010	0	Feb.	B	2	2	12	C	22	N	2	B
2011	1	Mar.	C	3	3	13	D	23	P	3	C
2012	2	Apr.	D	4	4	14	E	24	Q	4	D
2013	3	May.	E	5	5	15	F	25	R	5	E
		Jun.	F	6	6	16	G	26	S	6	F
		Jul.	G	7	7	17	H	27	T	7	G
		Aug.	H	8	8	18	J	28	U	8	H
		Sep.	I	9	9	19	K	29	V	9	I
		Oct.	J	10	A	20	L	30	W	10	J
		Nov.	K					31	X	11	K
		Dec.	L								

注 1 CO-PLANARITY IS WITHIN 0.08 mm.

2 THE PLATING SPECIFICATION


CONTACT AREA : PALLADIUM PLATING 0.75 μm MIN. + GOLD PLATING 0.05 μm MIN.
MOUNTING AREA : GOLD PLATING 0.05 μm MIN.
UNDERPLATING : NICKEL PLATING 2 μm MIN.

3 3000 PCS PER REEL.



4 . CONNECTOR OPENING CONFIGURATION SATISFIES USB3.0 SPECIFICATIONS.

5 . SCRATCH MARK COULD BE MADE ON THE SURFACE OF REF NO. 3 DURING ASSEMBLY PROCESS, WHICH DOES NOT AFFECT THE PERFORMANCE.
LEVEL OF PLATING BRIGHTNESS COULD VARY, WHICH DOSE NOT AFFECT THE PERFORMANCE.


6 INDICATE THE LOT NO. WITH 4 DIGITS AT THE SPECIFIED POSITION.

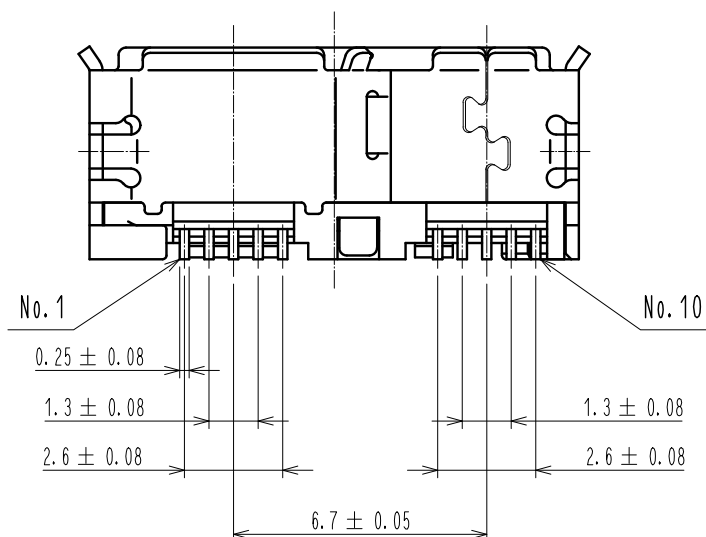

2	COPPER ALLOY	2	5	PE	
1	LCP	UL94V-0, BLACK	4	PS	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	5 : 1	COUNT	DESCRIPTION OF REVISIONS
DESIGNED	10.08.07	APPROVED	A0. SUZUKI	10.08.07	DRAWING NO.
CHECKED	10.08.07	CHECKED	KN. ICHIKAWA	10.08.07	PART NO.
DESIGNED	10.08.06	DESIGNED	AH. KODAMA	10.08.06	CODE NO.
DRAWN	09.06.15	DRAWN	TS. SAKAIZAWA	09.06.15	CL242-0500-1-00
					EDC3-127028-00
					ZX360D-B-10P
					1/2

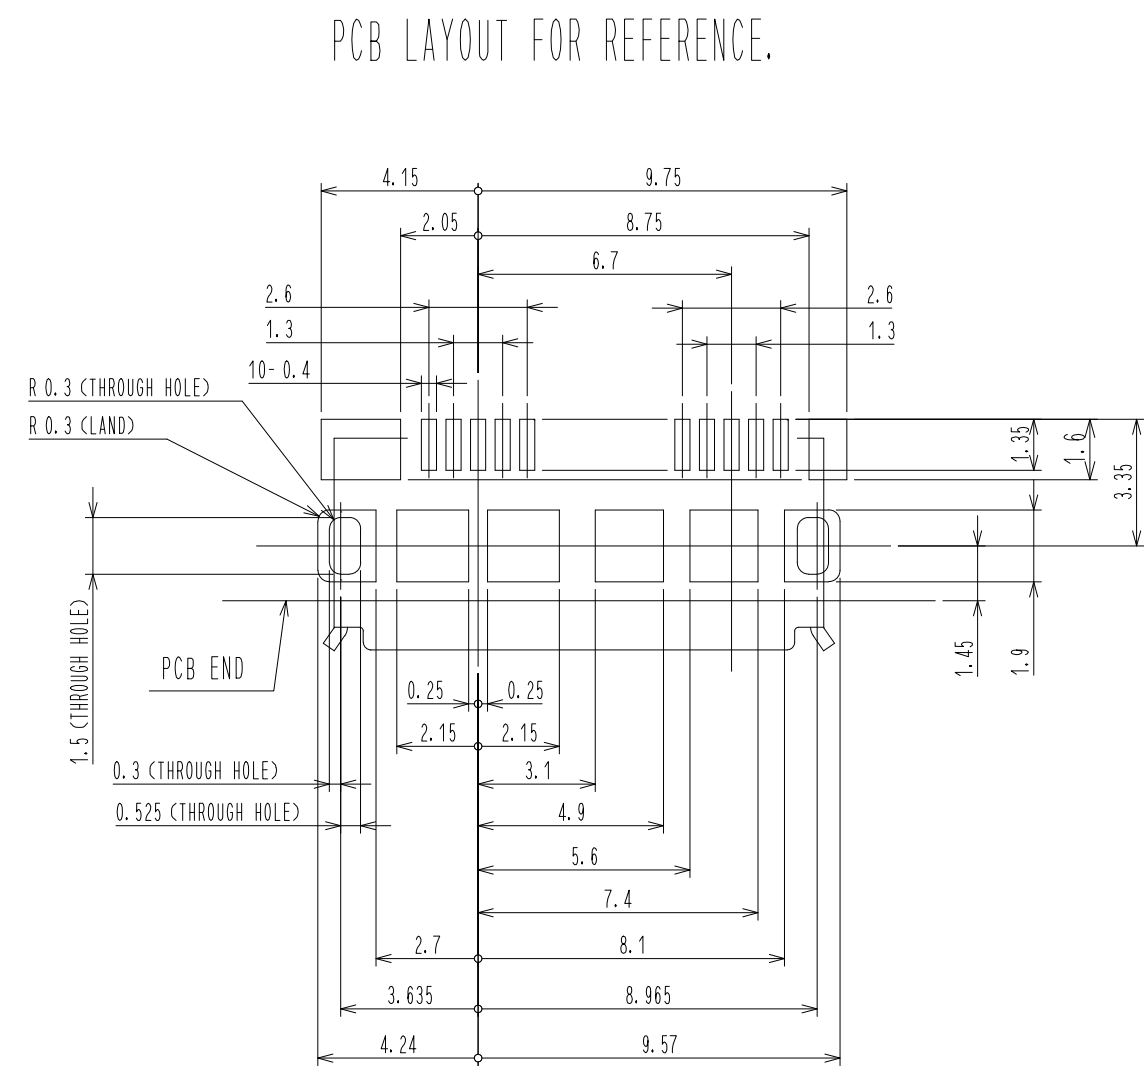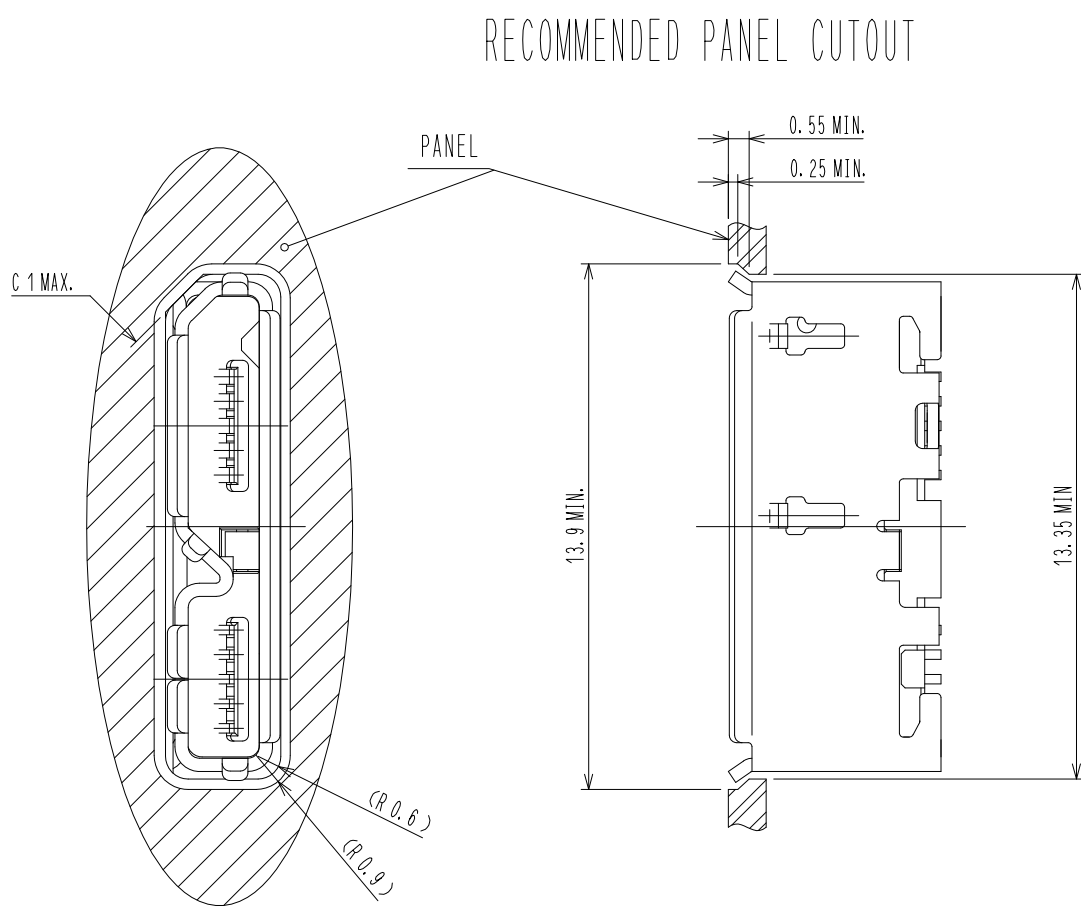

KEEP THE TOLERANCE WITHIN $\pm 0.05\text{mm}$

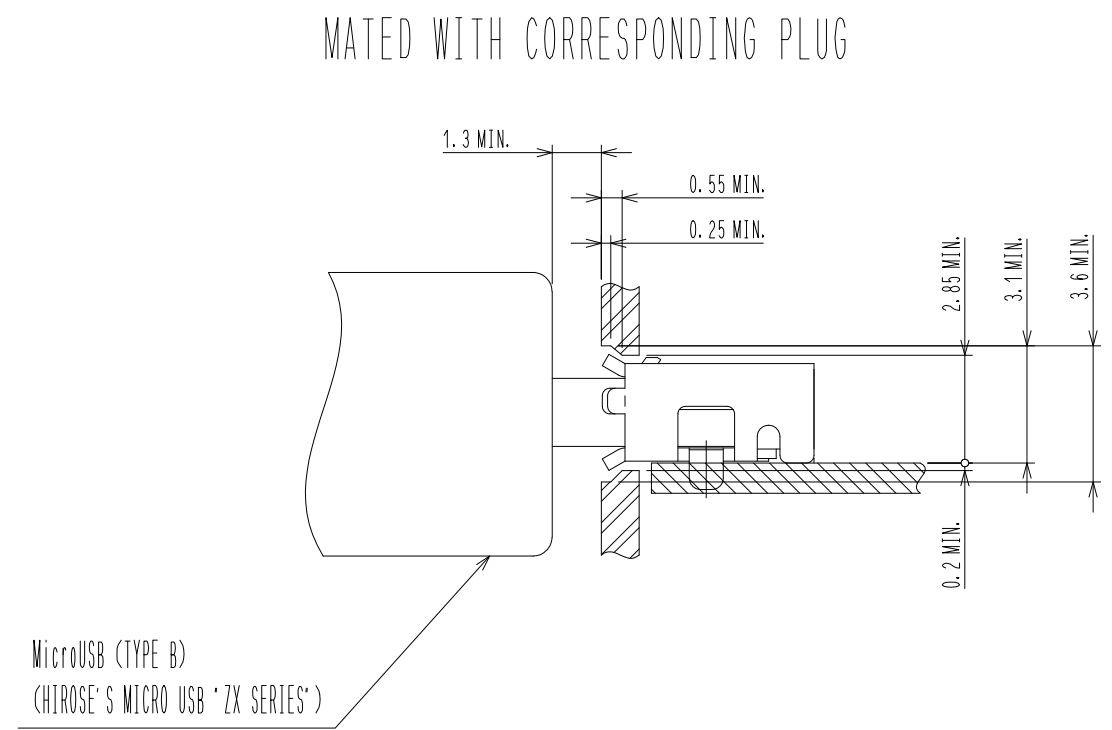

HRS	DRAWING NO.	EDC3-127028-00	2/2
	PART NO.	ZX360D-B-10P	
	CODE NO.	CL242-0500-1-00	