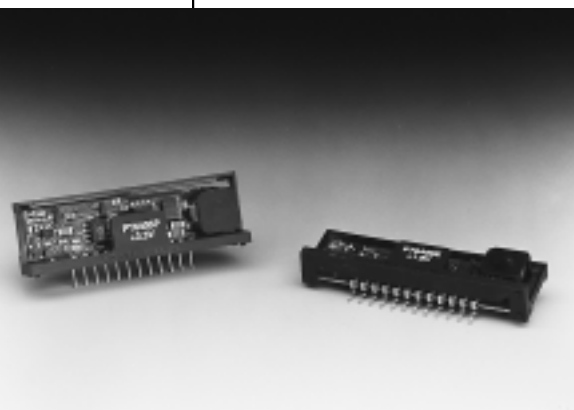


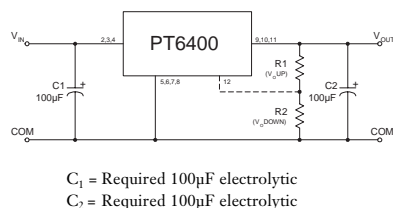
PT6400 Series**3 AMP ADJUSTABLE
INTEGRATED SWITCHING REGULATOR****Revised 5/15/98**

- Single-Device 5V to 3V Power
- 85% Efficiency
- Small SIP Footprint
- Adjustable Output Voltage

The PT6400 is a high performance +5V to +3.3V, 3 Amp, 12-Pin SIP (Single In-line Package) Integrated Switching Regulator (ISR) designed for stand alone (not parallelable) operation. This high-performance ISR allows easy integration

of low-power 3.3V logic IC's into existing 5V systems without redesigning the central power supply. Only two external capacitors are required for proper operation. The output voltage is easily adjustable with one external resistor. The PT6406,7,8 can be used to terminate high-speed data buses such as Futurebus (+2.1V) or the new GTL (+1.2V) logic buses.

Please note that this product does not include short circuit protection.

Standard Application**Pin-Out Information**


Pin	Function
1	Do not connect
2	V_{in}
3	V_{in}
4	V_{in}
5	GND
6	GND
7	GND
8	GND
9	V_{out}
10	V_{out}
11	V_{out}
12	V_{out} Adjust

Ordering Information

PT6404□ = +1.5 Volts
 PT6405□ = +3.3 Volts
 PT6406□ = +1.8 Volts
 PT6407□ = +2.1 Volts
 PT6408□ = +1.2 Volts
 PT6409□ = +2.5 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration	
Vertical Through-Hole	P
Horizontal Through-Hole	D
Horizontal Surface Mount	E



Note: Back surface of product is conducting metal.

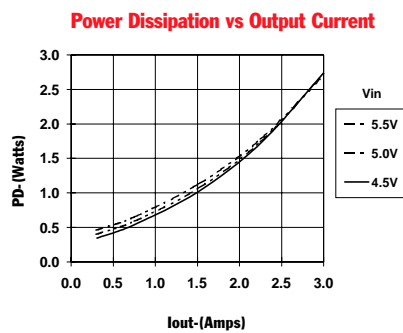
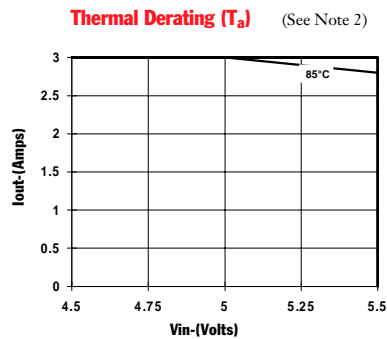
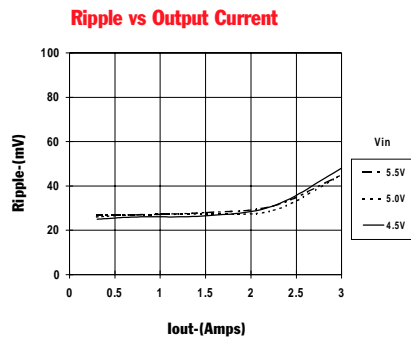
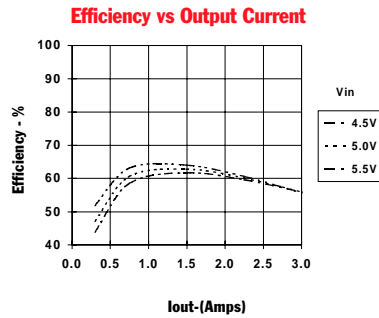
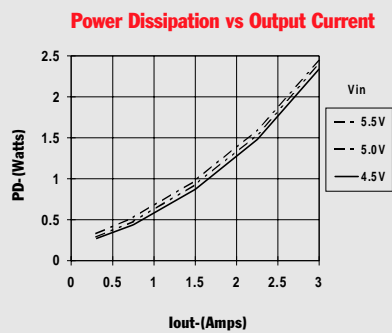
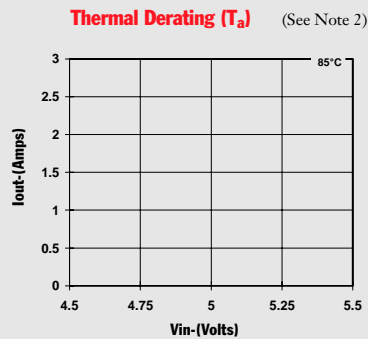
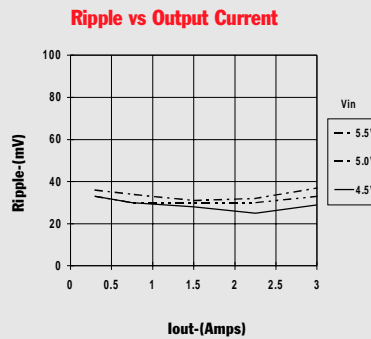
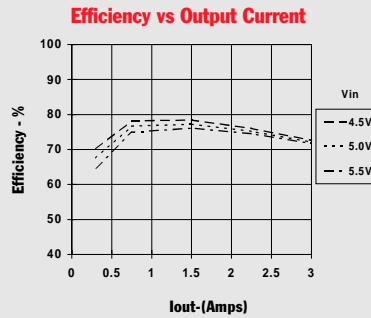
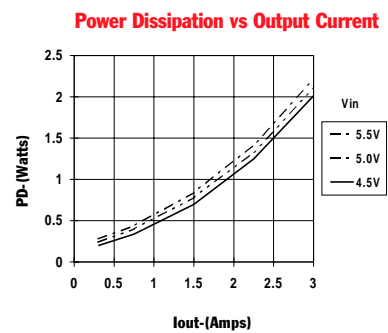
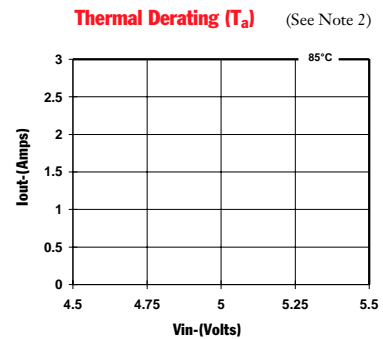
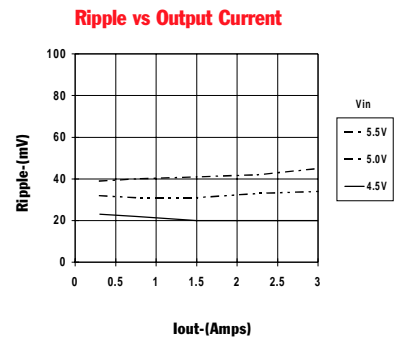
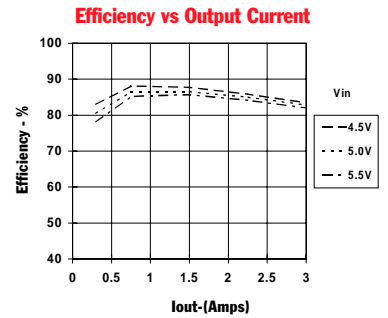
Specifications

Characteristics ($T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6400 SERIES			
			Min	Typ	Max	Units
Output Current	I_o	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$	0.1*	—	3.0	A
Current Limit	I_{cl}	$V_{in} = +5\text{V}$	—	3.6	5.0	A
Input Voltage Range	V_{in}	$0.1\text{A} \leq I_o \leq 3.0\text{A}$	4.5	—	5.5	V
Output Voltage Tolerance	ΔV_o	$V_{in} = +5\text{V}$, $I_o = 3.0\text{A}$ $0^\circ\text{C} \leq T_a \leq +70^\circ\text{C}$	$V_o - 0.05$	—	$V_o + 0.05$	V
Line Regulation	Reg_{line}	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$, $I_o = 3.0\text{A}$	—	± 10	± 25	mV
Load Regulation	Reg_{load}	$V_{in} = +5\text{V}$, $0.3 \leq I_o \leq 3.0\text{A}$	—	± 10	± 25	mV
V_o Ripple/Noise	V_n	$V_{in} = 5\text{V}$, $I_o = 3.0\text{A}$	—	66	165	mV
Transient Response with $C_2 = 100\mu\text{F}$	t_{tr} V_{os}	I_o step between 1.5A and 3.0A V_o over/undershoot	— —	200 200	— —	μSec mV
Efficiency	η	$V_{in} = +5\text{V}$, $I_o = 1.5\text{A}$ $V_o = 3.3\text{V}$ $V_o = 1.8\text{V}$ $V_o = 2.1\text{V}$ $V_o = 1.2\text{V}$	— — — —	85 74 77 63	— — — —	% % % %
Switching Frequency	f_o	$4.5\text{V} \leq V_{in} \leq 5.5\text{V}$ $0.3\text{A} \leq I_o \leq 3.0\text{A}$	500	650	800	kHz
Absolute Maximum Operating Temperature Range	T_a		0	—	+85	$^\circ\text{C}$
Recommended Operating Temperature Range	T_a	Free Air Convection (40-60 LFM) At $V_{in} = 5\text{V}$, $I_o = 2.5\text{A}$	0	—	+70**	$^\circ\text{C}$
Thermal Resistance	θ_{ja}	Free Air Convection (40-60 LFM)	—	25	—	$^\circ\text{C}/\text{W}$
Storage Temperature	T_s	—	-40	—	+125	$^\circ\text{C}$
Mechanical Shock		Per Mil-STD-883D, Method 2002.3, 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, Soldered in a PC board	—	15	—	G's
Weight	—	—	—	6.5	—	grams

*ISR will operate down to no load with reduced specifications

**See Thermal Derating chart.

Note: The PT6400 Series requires two 100µF electrolytic or tantalum capacitors for proper operation in all applications.

CHARACTERISTIC DATA**PT6400 Series****PT6408, 1.2 VDC** (See Note 1)**PT6407, 2.1 VDC** (See Note 1)**PT6405, 3.3 VDC** (See Note 1)

Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Note 2: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

Adjusting the Output Voltage of the PT6400 Series 3AMP 5V Bus Converters

The output voltage of the Power Trends PT6400 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as V_a (min) and V_a (max).

Adjust Up: (See note 1)

An increase in the output voltage is obtained by adding a resistor $R1$, between pin 12 (V_o adjust) and pins 9-11 (V_{out}).

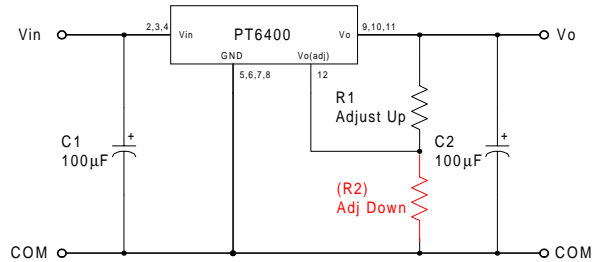
Adjust Down: (See note 1)

Add a resistor **(R2)**, between pin 12 (V_o adjust) and pins 5-8 (GND).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor; either $R1$ or **(R2)** as appropriate.

Notes:

1. The direction in which each resistor adjusts the output of the PT6400 series differs from many other Power Trends products. These output voltage adjustment notes are therefore specific only to the PT6400 models.
2. Use only a single 1% resistor in either the $R1$ or **(R2)** location. Place the resistor as close to the ISR as possible.
3. Never connect capacitors from V_o adjust to either GND or V_{out} . Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
4. An increase in the output voltage may place additional limits on the input voltage range of the part. The revised minimum input voltage will be ($V_{out} + 1.2$) or 4.5V, whichever is higher. Do not exceed 5.5Vdc.

Figure 1

The values of $R1$ [adjust up], and **(R2)** [adjust down], can also be calculated using the following formulae.

$$R1 = \frac{12.45 V_o}{(V_a - V_o)} - 49.9 \quad k\Omega$$

$$\textbf{(R2)} = \frac{12.45 (2V_a - V_o)}{V_o - V_a} - 49.9 \quad k\Omega$$

Where: V_o = Original output voltage
 V_a = Adjusted output voltage

Table 1**PT6400 ADJUSTMENT RANGE**

Series Pt #	PT6408	PT6404	PT6406	PT6407	PT6409	PT6405
V_o (nom)	1.2	1.5	1.8	2.1	2.5	3.3
V_a (min)	1.1	1.3	1.5	1.8	2.1	2.8
V_a (max)	1.4	1.8	2.2	2.6	3.1	3.8

PT6400 Series**Application****Notes****Table 2****PT6400 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6408	PT6404	PT6406	PT6407	PT6409	PT6405
V _o (nom)	1.2	1.5	1.8	2.1	2.5	3.3
V _a (req'd)						
1.1	(74.6)kΩ					
1.15	(224.0)kΩ					
1.2						
1.25	249.0kΩ					
1.3	99.5kΩ	(18.6)kΩ				
1.35	49.7kΩ	(49.7)kΩ				
1.4	24.8kΩ	(112.0)kΩ				
1.45		(299.0)kΩ				
1.5			(0.0)kΩ			
1.55		324.0kΩ	(14.8)kΩ			
1.6		137.0kΩ	(37.3)kΩ			
1.65		74.6kΩ	(74.6)kΩ			
1.7		43.5kΩ	(149.0)kΩ			
1.75		24.8kΩ	(373.0)kΩ			
1.8		12.4kΩ		(12.4)kΩ		
1.85			398.0kΩ	(29.8)kΩ		
1.9			174.0kΩ	(55.9)kΩ		
1.95			99.5kΩ	(99.5)kΩ		
2.0			62.2kΩ	(187.0)kΩ		
2.05			39.7kΩ	(448.0)kΩ		
2.1			24.8kΩ		(3.0)kΩ	
2.15			14.1kΩ	473.0kΩ	(14.1)kΩ	
2.2			6.1kΩ	212.0kΩ	(29.0)kΩ	
2.25				124.0kΩ	(49.7)kΩ	
2.3				80.8kΩ	(80.8)kΩ	
2.35				54.7kΩ	(133.0)kΩ	
2.4				37.3kΩ	(236.0)kΩ	
2.45				24.8kΩ	(548.0)kΩ	
2.5				15.5kΩ		
2.55				8.2kΩ	573.0kΩ	
2.6				2.4kΩ	261.0kΩ	
2.65					158.0kΩ	
2.7					106.0kΩ	
2.75					74.6kΩ	
2.8					53.9kΩ	(7.4)kΩ
2.85					39.0kΩ	(16.5)kΩ
2.9					27.9kΩ	(27.9)kΩ
2.95					19.3kΩ	(42.6)kΩ
3.0					12.4kΩ	(62.2)kΩ
3.1					2.0kΩ	(131.0)kΩ
3.2						(336.0)kΩ
3.3						
3.4						361.0kΩ
3.5						156.0kΩ
3.6						87.0kΩ
3.7						52.8kΩ
3.8						32.3kΩ

R1 = Black R2 = (Red)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.