


TA75070P

SINGLE OPERATIONAL AMPLIFIER

The TA75070P is a Low-Noise J-FET input operational amplifier with low input bias and offset current, fast slew rate and wide bandwidth. The TA75070P is pin compatible with the TA7506P and 301A allowing designers to immediately upgrade the overall performance of existing designs. The TA75070P is an excellent choice for active filters, integrators and sample-and-hold circuits.


FEATURES

- Low Input Bias Current : 200pA Max.
- Low Input Offset Current : 50pA Max.
- High Slew Rate : $13\text{V} / \mu\text{s}$ ($A_V = 1$)
- Low Noise : $18\text{nV} / \sqrt{\text{Hz}}$
- Wide Supply Voltage Range : $\pm 4 \sim \pm 18\text{V}$
- Output Short Circuit Protection
- Offset Null Capability

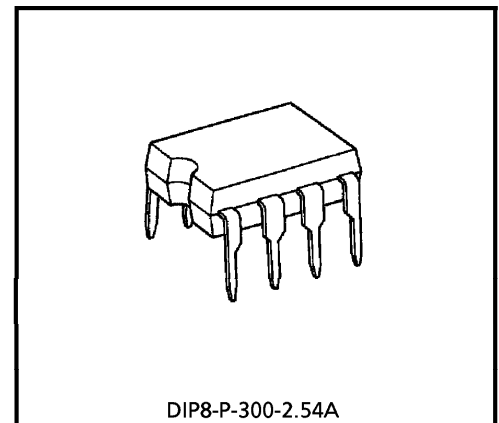


Weight : 0.5g (Typ.)

PIN CONNECTION (TOP VIEW)

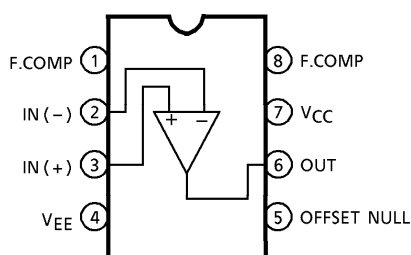

EQUIVALENT CIRCUIT

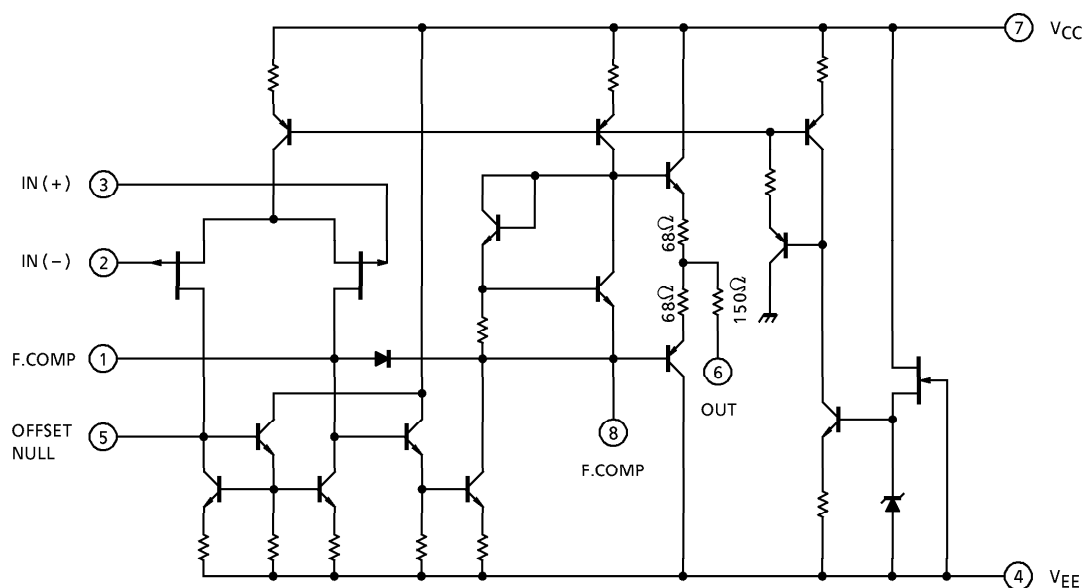

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	+ 18	V
	V_{EE}	- 18	V
Differential Input Voltage	DV_{IN}	± 30	V
Input Voltage	V_{IN}	± 15	V
Power Dissipation	P_D	500	mW
Operating Temperature	T_{opr}	- 40~85	°C
Storage Temperature	T_{stg}	- 55~125	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 15V$, $V_{EE} = -15V$, $T_a = 25^\circ C$)


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	—	$R_g \leq 10k\Omega$	—	3	10	mV
TC of Input Offset Voltage	TCV_{IO}	—	—	—	10	—	$\mu V / ^\circ C$
Input Offset Current	I_{IO}	—	—	—	5	50	pA
Input Bias Current	I_I	—	—	—	30	200	pA
Common Mode Input Voltage	CMV_{IN}	—	—	± 11	± 12	—	V
Maximum Output Voltage	V_{OM}	—	$R_L = 10k\Omega$	24	—	—	V_{p-p}
	V_{OMR}	—	$R_L = 2k\Omega$	20	24	—	
Voltage Gain (Open Loop)	G_V	—	$V_{OUT} = \pm 10V$, $R_L = 2k\Omega$	25	200	—	V / mV
Unity Gain Cross Frequency	f_T	—	Open Loop, $R_L = 10k\Omega$	—	3	—	MHz
Input Resistance	R_{IN}	—	—	—	10^{12}	—	Ω
Common Mode Input Signal Rejection Ratio	CMRR	—	$R_g \leq 10k\Omega$	70	76	—	dB
Supply Voltage Rejection Ratio	SVRR	—	$R_g \leq 10k\Omega$	70	76	—	dB
Supply Current	I_{CC} , I_{EE}	—	Non Load	—	1.4	2.5	mA

OPERATING CHARACTERISTICS ($V_{CC} = 15V$, $V_{EE} = -15V$, $T_a = 25^\circ C$)


CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	—	$V_{IN} = 10V_{p-p}$, $R_L = 2k\Omega$, $C_L = 100pF$	—	13	—	V / μs
Equivalent Input Noise Voltage	V_{NI}	—	$R_S = 100\Omega$	$f = 1kHz$	18	—	$nV \sqrt{Hz}$
				$f = 10Hz \sim 10kHz$	4	—	μV_{rms}
Equivalent Input Noise Current	I_{NI}	—	$R_S = 100\Omega$, $f = 1kHz$	—	0.01	—	$pA \sqrt{Hz}$
Total Harmonic Distortion	THD	—	$V_{OUT} = 10V_{rms}$, $R_S \leq 1k\Omega$, $R_L \geq 2k\Omega$, $f = 1kHz$	—	0.01	—	%

TYPICAL APPLICATION


(1) UNITY-GAIN BUFFER



(2) OFFSET NULL CIRCUIT



(3) FEED FORWARD COMPENSATION

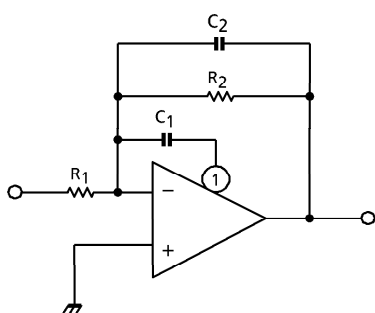


$$C_1 = 500\text{pF}$$

$$C_2 = \frac{1}{2\pi f_o R_2}$$

$$f_o \approx 3\text{MHz}$$

(4) TWO POLE COMPENSATION











$$C_1 > \frac{R_1}{R_1 + R_2} C_S$$

$$C_S = 18\text{pF}$$

$$C_2 = 10C_1$$


CHARACTERISTICS

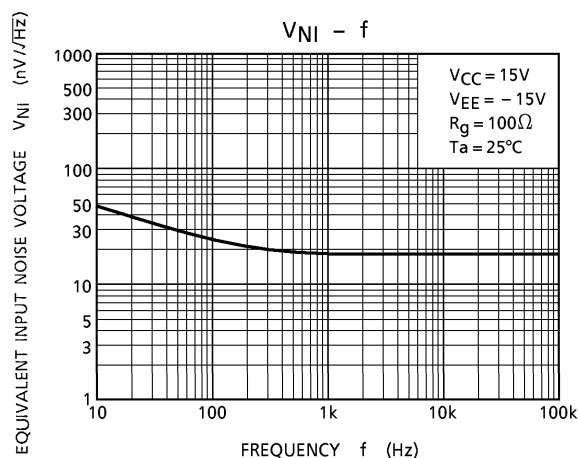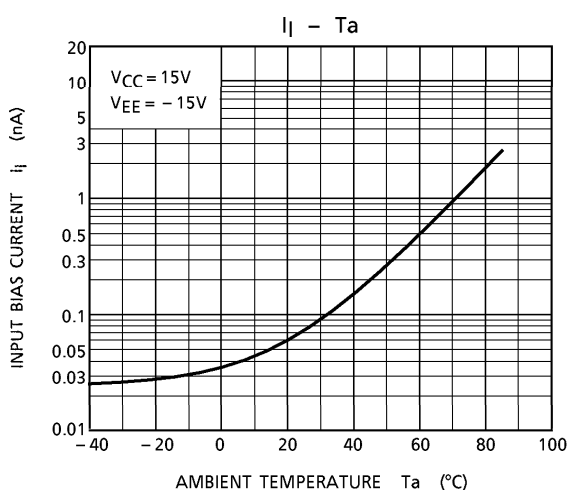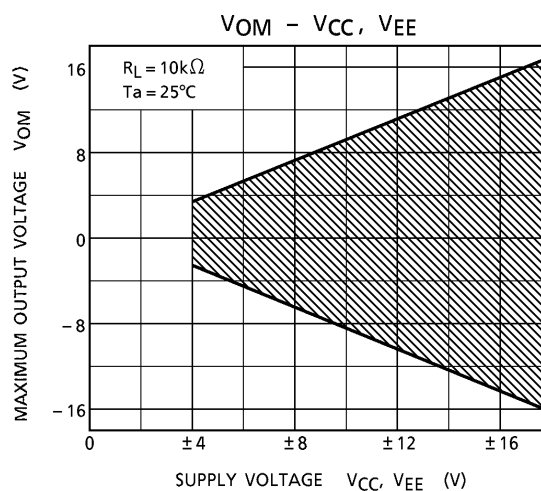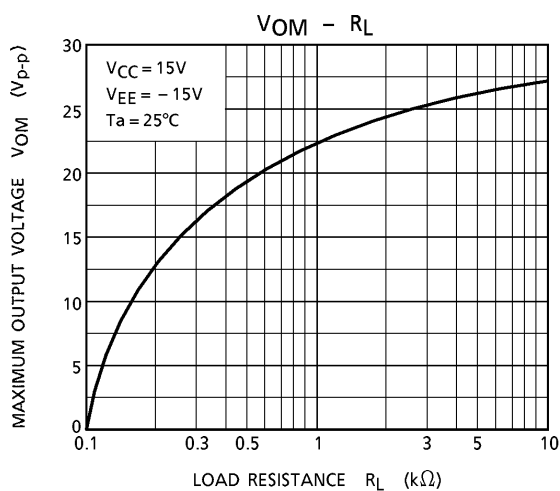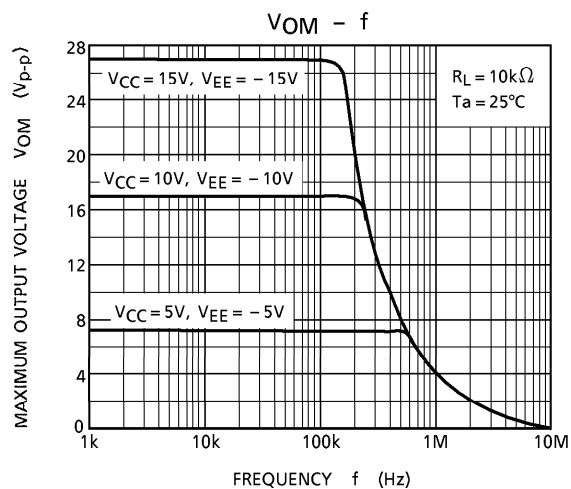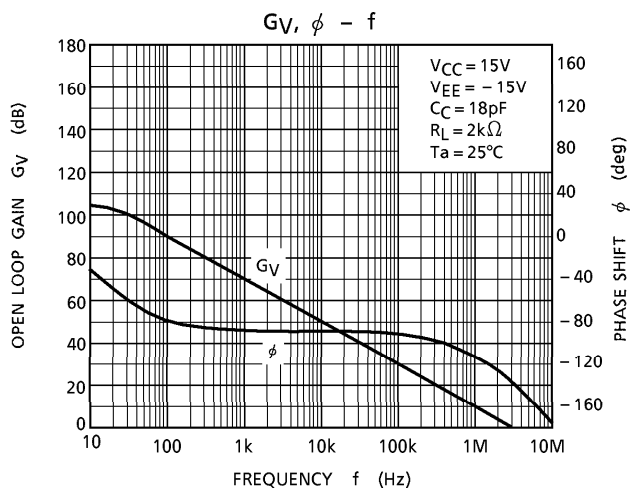

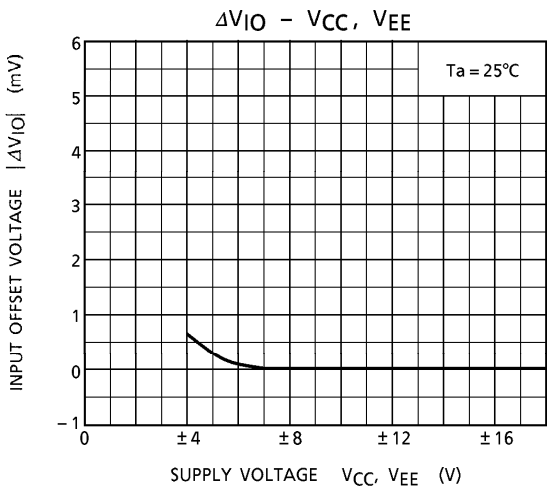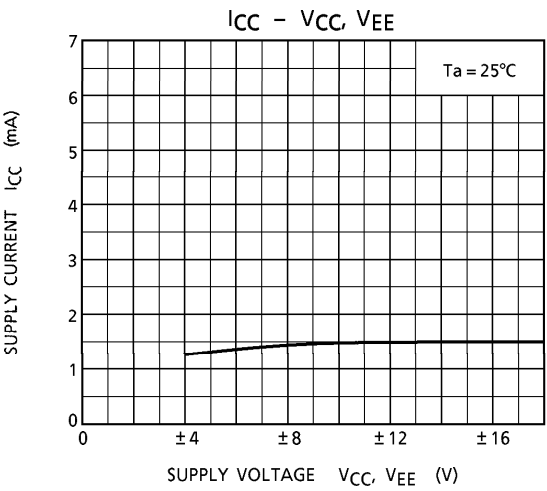

PACKAGE DIMENSIONS
DIP8-P-300-2.54A

Unit : mm

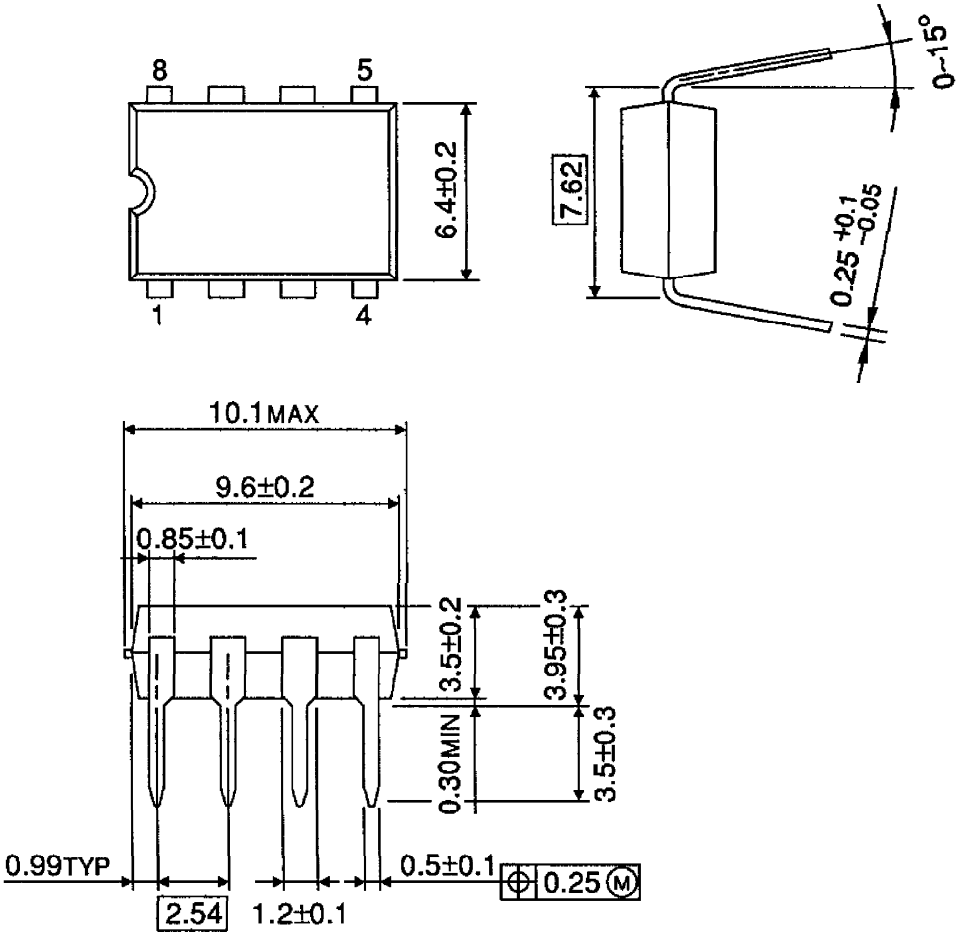

Weight : 0.5g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.