



***Z8 GP™ Microcontrollers***

## ***ZGP323L OTP MCU Family***

**Preliminary Product Specification**

PS023702-1004



This publication is subject to replacement by a later edition. To determine whether a later edition exists, or to request copies of publications, contact:

**ZiLOG Worldwide Headquarters**

532 Race Street

San Jose, CA 95126-3432

Telephone: 408.558.8500

Fax: 408.558.8300

[www.zilog.com](http://www.zilog.com)

ZiLOG is a registered trademark of ZiLOG Inc. in the United States and in other countries. All other products and/or service names mentioned herein may be trademarks of the companies with which they are associated.

**Document Disclaimer**

©2004 by ZiLOG, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZiLOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZiLOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. Devices sold by ZiLOG, Inc. are covered by warranty and limitation of liability provisions appearing in the ZiLOG, Inc. Terms and Conditions of Sale. ZiLOG, Inc. makes no warranty of merchantability or fitness for any purpose. Except with the express written approval of ZiLOG, use of information, devices, or technology as critical components of life support systems is not authorized. No licenses are conveyed, implicitly or otherwise, by this document under any intellectual property rights.



# Table of Contents

|                                                     |    |
|-----------------------------------------------------|----|
| Development Features .....                          | 1  |
| General Description .....                           | 2  |
| Pin Description .....                               | 4  |
| Absolute Maximum Ratings .....                      | 10 |
| Standard Test Conditions .....                      | 10 |
| DC Characteristics .....                            | 11 |
| AC Characteristics .....                            | 14 |
| Pin Functions .....                                 | 16 |
| XTAL1 Crystal 1 (Time-Based Input) .....            | 16 |
| XTAL2 Crystal 2 (Time-Based Output) .....           | 16 |
| Port 0 (P07–P00) .....                              | 16 |
| Port 1 (P17–P10) .....                              | 17 |
| Port 2 (P27–P20) .....                              | 18 |
| Port 3 (P37–P30) .....                              | 19 |
| RESET (Input, Active Low) .....                     | 23 |
| Functional Description .....                        | 23 |
| Program Memory .....                                | 23 |
| RAM .....                                           | 23 |
| Expanded Register File .....                        | 24 |
| Register File .....                                 | 28 |
| Stack .....                                         | 29 |
| Timers .....                                        | 30 |
| Counter/Timer Functional Blocks .....               | 38 |
| Expanded Register File Control Registers (0D) ..... | 64 |
| Expanded Register File Control Registers (0F) ..... | 69 |
| Standard Control Registers .....                    | 73 |
| Package Information .....                           | 80 |
| Ordering Information .....                          | 89 |
| Precharacterization Product .....                   | 95 |



# List of Figures

|                                                                  |    |
|------------------------------------------------------------------|----|
| Figure 1. Functional Block Diagram .....                         | 3  |
| Figure 2. Counter/Timers Diagram .....                           | 4  |
| Figure 3. 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration .....    | 5  |
| Figure 4. 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Configuration .....    | 6  |
| Figure 5. 40-Pin PDIP/CDIP* Pin Configuration .....              | 7  |
| Figure 6. 48-Pin SSOP Pin Configuration .....                    | 8  |
| Figure 7. Test Load Diagram .....                                | 10 |
| Figure 8. AC Timing Diagram .....                                | 14 |
| Figure 9. Port 0 Configuration .....                             | 17 |
| Figure 10. Port 1 Configuration .....                            | 18 |
| Figure 11. Port 2 Configuration .....                            | 19 |
| Figure 12. Port 3 Configuration .....                            | 20 |
| Figure 13. Port 3 Counter/Timer Output Configuration .....       | 22 |
| Figure 14. Program Memory Map (32K OTP) .....                    | 24 |
| Figure 15. Expanded Register File Architecture .....             | 26 |
| Figure 16. Register Pointer .....                                | 27 |
| Figure 17. Register Pointer—Detail .....                         | 29 |
| Figure 18. Glitch Filter Circuitry .....                         | 38 |
| Figure 19. Transmit Mode Flowchart .....                         | 39 |
| Figure 20. 8-Bit Counter/Timer Circuits .....                    | 40 |
| Figure 21. T8_OUT in Single-Pass Mode .....                      | 41 |
| Figure 22. T8_OUT in Modulo-N Mode .....                         | 41 |
| Figure 23. Demodulation Mode Count Capture Flowchart .....       | 42 |
| Figure 24. Demodulation Mode Flowchart .....                     | 43 |
| Figure 25. 16-Bit Counter/Timer Circuits .....                   | 44 |
| Figure 26. T16_OUT in Single-Pass Mode .....                     | 45 |
| Figure 27. T16_OUT in Modulo-N Mode .....                        | 45 |
| Figure 28. Ping-Pong Mode Diagram .....                          | 47 |
| Figure 29. Output Circuit .....                                  | 47 |
| Figure 30. Interrupt Block Diagram .....                         | 49 |
| Figure 31. Oscillator Configuration .....                        | 51 |
| Figure 32. Port Configuration Register (PCON) (Write Only) ..... | 53 |
| Figure 33. STOP Mode Recovery Register .....                     | 55 |
| Figure 34. SCLK Circuit .....                                    | 56 |

|                                                                                               |    |
|-----------------------------------------------------------------------------------------------|----|
| Figure 35. Stop Mode Recovery Source . . . . .                                                | 57 |
| Figure 36. Stop Mode Recovery Register 2 ((0F)DH:D2–D4, D6 Write Only) . . .                  | 59 |
| Figure 37. Watch-Dog Timer Mode Register (Write Only) . . . . .                               | 60 |
| Figure 38. Resets and WDT . . . . .                                                           | 61 |
| Figure 39. TC8 Control Register ((0D)00H: Read/Write Except Where Noted) . . .                | 64 |
| Figure 40. T8 and T16 Common Control Functions ((0D)01H: Read/Write) . . .                    | 65 |
| Figure 41. T16 Control Register ((0D) 2H: Read/Write Except Where Noted) . . .                | 67 |
| Figure 42. T8/T16 Control Register (0D)03H: Read/Write<br>(Except Where Noted) . . . . .      | 68 |
| Figure 43. Voltage Detection Register . . . . .                                               | 69 |
| Figure 44. Port Configuration Register (PCON)(0F)00H: Write Only) . . . . .                   | 70 |
| Figure 45. Stop Mode Recovery Register ((0F)0BH: D6–D0=Write Only,<br>D7=Read Only) . . . . . | 71 |
| Figure 46. Stop Mode Recovery Register 2 ((0F)0DH:D2–D4, D6 Write Only) . . .                 | 72 |
| Figure 47. Watch-Dog Timer Register ((0F) 0FH: Write Only) . . . . .                          | 73 |
| Figure 48. Port 2 Mode Register (F6H: Write Only) . . . . .                                   | 73 |
| Figure 49. Port 3 Mode Register (F7H: Write Only) . . . . .                                   | 74 |
| Figure 50. Port 0 and 1 Mode Register (F8H: Write Only) . . . . .                             | 75 |
| Figure 51. Interrupt Priority Register (F9H: Write Only) . . . . .                            | 76 |
| Figure 52. Interrupt Request Register (FAH: Read/Write) . . . . .                             | 77 |
| Figure 53. Interrupt Mask Register (FBH: Read/Write) . . . . .                                | 77 |
| Figure 54. Flag Register (FCH: Read/Write) . . . . .                                          | 78 |
| Figure 55. Register Pointer (FDH: Read/Write) . . . . .                                       | 78 |
| Figure 56. Stack Pointer High (FEH: Read/Write) . . . . .                                     | 79 |
| Figure 57. Stack Pointer Low (FFH: Read/Write) . . . . .                                      | 79 |
| Figure 58. 20-Pin CDIP Package . . . . .                                                      | 80 |
| Figure 59. 20-Pin PDIP Package Diagram . . . . .                                              | 81 |
| Figure 60. 20-Pin SOIC Package Diagram . . . . .                                              | 81 |
| Figure 61. 20-Pin SSOP Package Diagram . . . . .                                              | 82 |
| Figure 62. 28-Pin CDIP Package . . . . .                                                      | 83 |
| Figure 63. 28-Pin SOIC Package Diagram . . . . .                                              | 84 |
| Figure 64. 28-Pin PDIP Package Diagram . . . . .                                              | 85 |
| Figure 65. 28-Pin SSOP Package Diagram . . . . .                                              | 86 |
| Figure 66. 40-Pin CDIP Package . . . . .                                                      | 87 |
| Figure 67. 40-Pin PDIP Package Diagram . . . . .                                              | 87 |
| Figure 68. 48-Pin SSOP Package Design . . . . .                                               | 88 |



# List of Tables

|           |                                                     |    |
|-----------|-----------------------------------------------------|----|
| Table 1.  | Features .....                                      | 1  |
| Table 2.  | Power Connections .....                             | 3  |
| Table 3.  | 20-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification..... | 5  |
| Table 4.  | 28-Pin PDIP/SOIC/SSOP/CDIP* Pin Identification..... | 6  |
| Table 5.  | 40- and 48-Pin Configuration .....                  | 8  |
| Table 6.  | Absolute Maximum Ratings .....                      | 10 |
| Table 7.  | Capacitance .....                                   | 11 |
| Table 8.  | DC Characteristics .....                            | 11 |
| Table 9.  | EPROM/OTP Characteristics .....                     | 13 |
| Table 10. | AC Characteristics .....                            | 15 |
| Table 11. | Port 3 Pin Function Summary .....                   | 21 |
| Table 12. | CTR0(D)00H Counter/Timer8 Control Register .....    | 31 |
| Table 13. | CTR1(0D)01H T8 and T16 Common Functions.....        | 33 |
| Table 14. | CTR2(D)02H: Counter/Timer16 Control Register.....   | 36 |
| Table 15. | CTR3 (D)03H: T8/T16 Control Register .....          | 37 |
| Table 16. | Interrupt Types, Sources, and Vectors.....          | 50 |
| Table 17. | IRQ Register .....                                  | 50 |
| Table 18. | SMR2(F)0DH:Stop Mode Recovery Register 2* .....     | 56 |
| Table 19. | Stop Mode Recovery Source .....                     | 58 |
| Table 20. | Watch-Dog Timer Time Select .....                   | 61 |
| Table 21. | EPROM Selectable Options .....                      | 62 |

## Development Features

Table 1 lists the features of ZiLOG®'s Z8 GP™ OTP MCU Family family members.

**Table 1. Features**

| Device                 | OTP (KB)     | RAM (Bytes) | I/O Lines    | Voltage Range |
|------------------------|--------------|-------------|--------------|---------------|
| ZGP323L OTP MCU Family | 4, 8, 16, 32 | 237         | 32, 24 or 16 | 2.0V–3.6V     |

- Low power consumption—6mW (typical)
- T = Temperature  
S = Standard 0° to +70°C  
E = Extended -40° to +105°C  
A = Automotive -40° to +125°C
- Three standby modes:
  - STOP—2μA (typical)
  - HALT—0.8mA (typical)
  - Low voltage reset
- Special architecture to automate both generation and reception of complex pulses or signals:
  - One programmable 8-bit counter/timer with two capture registers and two load registers
  - One programmable 16-bit counter/timer with one 16-bit capture register pair and one 16-bit load register pair
  - Programmable input glitch filter for pulse reception
- Six priority interrupts
  - Three external
  - Two assigned to counter/timers
  - One low-voltage detection interrupt
- Low voltage detection and high voltage detection flags
- Programmable Watch-Dog Timer/Power-On Reset (WDT/POR) circuits
- Two independent comparators with programmable interrupt polarity
- Programmable EPROM options
  - Port 0: 0–3 pull-up transistors
  - Port 0: 4–7 pull-up transistors

- Port 1: 0–3 pull-up transistors
- Port 1: 4–7 pull-up transistors
- Port 2: 0–7 pull-up transistors
- EPROM Protection
- WDT enabled at POR

► **Note:** The mask option pull-up transistor has a *typical* equivalent resistance of 200 K $\Omega$   $\pm$ 50% at  $V_{CC}$ =3 V and 450 K $\Omega$   $\pm$ 50% at  $V_{CC}$ =2 V.

## General Description

The Z8 GP™ OTP MCU Family is an OTP-based member of the MCU family of infrared microcontrollers. With 237B of general-purpose RAM and up to 32KB of OTP, ZiLOG®'s CMOS microcontrollers offer fast-executing, efficient use of memory, sophisticated interrupts, input/output bit manipulation capabilities, automated pulse generation/reception, and internal key-scan pull-up transistors.

The Z8 GP™ OTP MCU Family architecture (Figure 1) is based on ZiLOG's 8-bit microcontroller core with an Expanded Register File allowing access to register-mapped peripherals, input/output (I/O) circuits, and powerful counter/timer circuitry. The Z8® offers a flexible I/O scheme, an efficient register and address space structure, and a number of ancillary features that are useful in many consumer, automotive, computer peripheral, and battery-operated hand-held applications.

There are three basic address spaces available to support a wide range of configurations: Program Memory, Register File and Expanded Register File. The register file is composed of 256 Bytes (B) of RAM. It includes 4 I/O port registers, 16 control and status registers, and 236 general-purpose registers. The Expanded Register File consists of two additional register groups (F and D).

To unburden the program from coping with such real-time problems as generating complex waveforms or receiving and demodulating complex waveform/pulses, the Z8 GP OTP MCU offers a new intelligent counter/timer architecture with 8-bit and 16-bit counter/timers (see Figure 2). Also included are a large number of user-selectable modes and two on-board comparators to process analog signals with separate reference voltages.


► **Note:** All signals with an overline, " $\overline{\phantom{x}}$ ", are active Low. For example,  $\overline{B/W}$ , in which WORD is active Low, and  $\overline{B/W}$ , in which BYTE is active Low.

Power connections use the conventional descriptions listed in Table 2.



**Table 2. Power Connections**

| Connection | Circuit         | Device          |
|------------|-----------------|-----------------|
| Power      | V <sub>CC</sub> | V <sub>DD</sub> |
| Ground     | GND             | V <sub>SS</sub> |

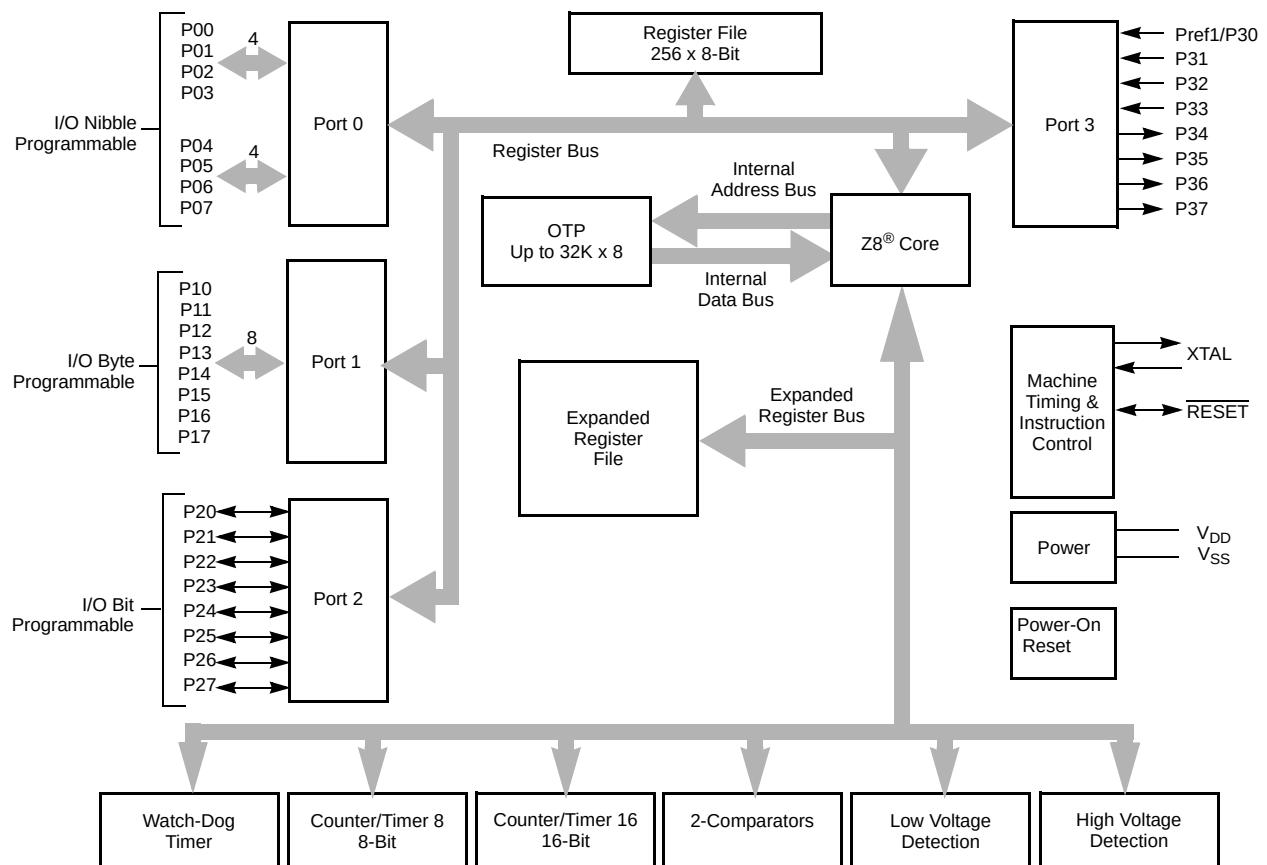

Note: Refer to the specific package for available pins.

**Figure 1. Functional Block Diagram**

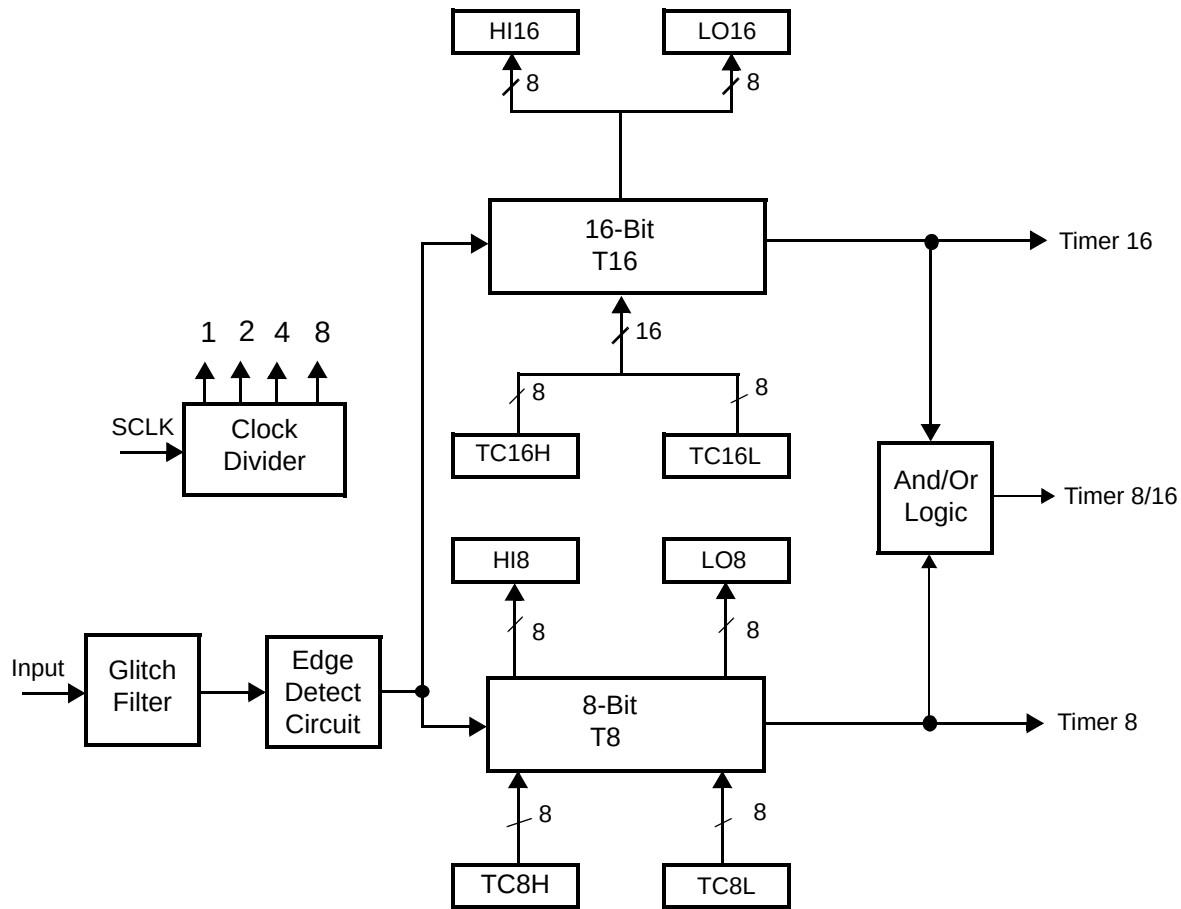


Figure 2. Counter/Timers Diagram

## Pin Description

The pin configuration for the 20-pin PDIP/SOIC/SSOP is illustrated in Figure 3 and described in Table 3. The pin configuration for the 28-pin PDIP/SOIC/SSOP are depicted in Figure 4 and described in Table 4. The pin configurations for the 40-pin PDIP and 48-pin SSOP versions are illustrated in Figure 5, Figure 6, and described in Table 5.

For customer engineering code development, a UV eraseable windowed cerdip packaging is offered in 20-pin, 28-pin, and 40-pin configurations. ZILOG does not recommend nor guarantee these packages for use in production.

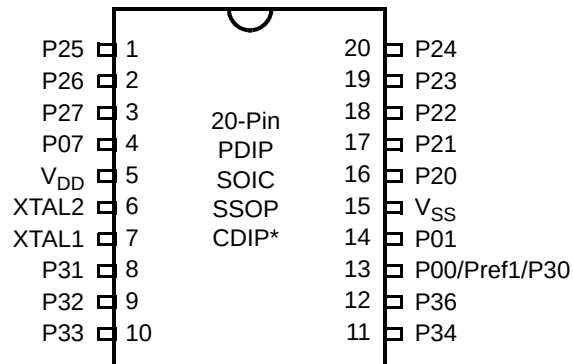


Figure 3. 20-Pin PDIP/SOIC/SSOP/CDIP\* Pin Configuration

Table 3. 20-Pin PDIP/SOIC/SSOP/CDIP\* Pin Identification

| Pin # | Symbol          | Function                                             | Direction                                   |
|-------|-----------------|------------------------------------------------------|---------------------------------------------|
| 1–3   | P25–P27         | Port 2, Bits 5,6,7                                   | Input/Output                                |
| 4     | P07             | Port 0, Bit 7                                        | Input/Output                                |
| 5     | V <sub>DD</sub> | Power Supply                                         |                                             |
| 6     | XTAL2           | Crystal Oscillator Clock                             | Output                                      |
| 7     | XTAL1           | Crystal Oscillator Clock                             | Input                                       |
| 8–10  | P31–P33         | Port 3, Bits 1,2,3                                   | Input                                       |
| 11,12 | P34, P36        | Port 3, Bits 4,6                                     | Output                                      |
| 13    | P00/Pref1/P30   | Port 0, Bit 0/Analog reference input<br>Port 3 Bit 0 | Input/Output for P00<br>Input for Pref1/P30 |
| 14    | P01             | Port 0, Bit 1                                        | Input/Output                                |
| 15    | V <sub>SS</sub> | Ground                                               |                                             |
| 16–20 | P20–P24         | Port 2, Bits 0,1,2,3,4                               | Input/Output                                |

► **Note:** \*Windowed Cerdip. These units are intended to be used for engineering code development only. ZiLOG does not recommend/guarantee this package for production use.


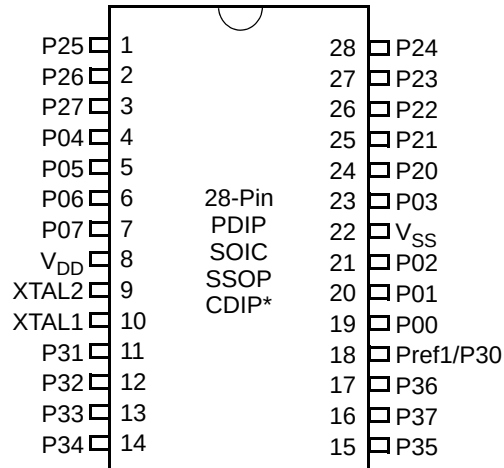


Figure 4. 28-Pin PDIP/SOIC/SSOP/CDIP\* Pin Configuration

Table 4. 28-Pin PDIP/SOIC/SSOP/CDIP\* Pin Identification

| Pin   | Symbol                    | Direction    | Description                                                                     |
|-------|---------------------------|--------------|---------------------------------------------------------------------------------|
| 1-3   | P25-P27                   | Input/Output | Port 2, Bits 5,6,7                                                              |
| 4-7   | P04-P07                   | Input/Output | Port 0, Bits 4,5,6,7                                                            |
| 8     | V <sub>DD</sub>           |              | Power supply                                                                    |
| 9     | XTAL2                     | Output       | Crystal, oscillator clock                                                       |
| 10    | XTAL1                     | Input        | Crystal, oscillator clock                                                       |
| 11-13 | P31-P33                   | Input        | Port 3, Bits 1,2,3                                                              |
| 14    | P34                       | Output       | Port 3, Bit 4                                                                   |
| 15    | P35                       | Output       | Port 3, Bit 5                                                                   |
| 16    | P37                       | Output       | Port 3, Bit 7                                                                   |
| 17    | P36                       | Output       | Port 3, Bit 6                                                                   |
| 18    | Pref1/P30<br>Port 3 Bit 0 | Input        | Analog ref input; connect to V <sub>CC</sub> if not used<br>Input for Pref1/P30 |
| 19-21 | P00-P02                   | Input/Output | Port 0, Bits 0,1,2                                                              |
| 22    | V <sub>SS</sub>           |              | Ground                                                                          |
| 23    | P03                       | Input/Output | Port 0, Bit 3                                                                   |
| 24-28 | P20-P24                   | Input/Output | Port 2, Bits 0-4                                                                |

► **Note:** \*Windowed Cerdip. These units are intended to be used for engineering code development only. ZiLOG does not recommend/guarantee this package for production use.

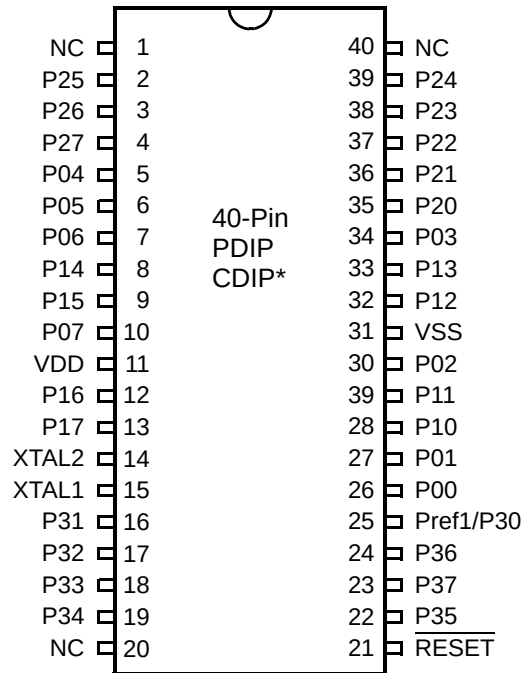

**Figure 5. 40-Pin PDIP/CDIP\* Pin Configuration**

► **Note:** \*Windowed Cerdip. These units are intended to be used for engineering code development only. ZiLOG does not recommend/guarantee this package for production use.

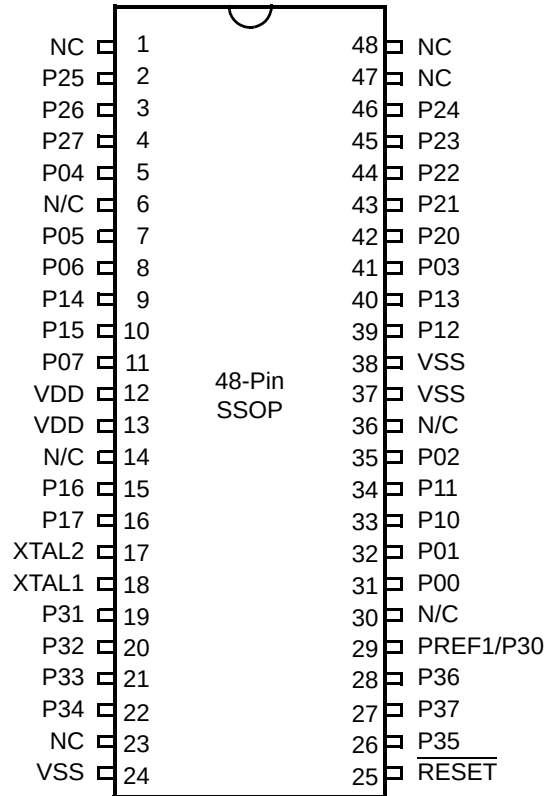


Figure 6. 48-Pin SSOP Pin Configuration

Table 5. 40- and 48-Pin Configuration

| 40-Pin PDIP/CDIP* # | 48-Pin SSOP # | Symbol |
|---------------------|---------------|--------|
| 26                  | 31            | P00    |
| 27                  | 32            | P01    |
| 30                  | 35            | P02    |
| 34                  | 41            | P03    |
| 5                   | 5             | P04    |
| 6                   | 7             | P05    |
| 7                   | 8             | P06    |
| 10                  | 11            | P07    |
| 28                  | 33            | P10    |
| 29                  | 34            | P11    |
| 32                  | 39            | P12    |

**Table 5. 40- and 48-Pin Configuration (Continued)**

| 40-Pin PDIP/CDIP* # | 48-Pin SSOP # | Symbol          |
|---------------------|---------------|-----------------|
| 33                  | 40            | P13             |
| 8                   | 9             | P14             |
| 9                   | 10            | P15             |
| 12                  | 15            | P16             |
| 13                  | 16            | P17             |
| 35                  | 42            | P20             |
| 36                  | 43            | P21             |
| 37                  | 44            | P22             |
| 38                  | 45            | P23             |
| 39                  | 46            | P24             |
| 2                   | 2             | P25             |
| 3                   | 3             | P26             |
| 4                   | 4             | P27             |
| 16                  | 19            | P31             |
| 17                  | 20            | P32             |
| 18                  | 21            | P33             |
| 19                  | 22            | P34             |
| 22                  | 26            | P35             |
| 24                  | 28            | P36             |
| 23                  | 27            | P37             |
| 20                  | 23            | NC              |
| 40                  | 47            | NC              |
| 1                   | 1             | NC              |
| 21                  | 25            | RESET           |
| 15                  | 18            | XTAL1           |
| 14                  | 17            | XTAL2           |
| 11                  | 12, 13        | V <sub>DD</sub> |
| 31                  | 24, 37, 38    | V <sub>SS</sub> |
| 25                  | 29            | Pref1/P30       |
|                     | 48            | NC              |

## Absolute Maximum Ratings

Stresses greater than those listed in Table 7 might cause permanent damage to the device. This rating is a stress rating only. Functional operation of the device at any condition above those indicated in the operational sections of these specifications is not implied. Exposure to absolute maximum rating conditions for an extended period might affect device reliability.


**Table 6. Absolute Maximum Ratings**

| Parameter                                           | Minimum | Maximum | Units   | Notes |
|-----------------------------------------------------|---------|---------|---------|-------|
| Ambient temperature under bias                      | 0       | +70     | C       |       |
| Storage temperature                                 | -65     | +150    | C       |       |
| Voltage on any pin with respect to $V_{SS}$         | -0.3    | +5.5    | V       | 1     |
| Voltage on $V_{DD}$ pin with respect to $V_{SS}$    | -0.3    | +3.6    | V       |       |
| Maximum current on input and/or inactive output pin | -5      | +5      | $\mu$ A |       |
| Maximum output current from active output pin       | -25     | +25     | mA      |       |
| Maximum current into $V_{DD}$ or out of $V_{SS}$    |         | 75      | mA      |       |

Notes:  
This voltage applies to all pins except the following:  $V_{DD}$ , P32, P33 and  $\overline{\text{RESET}}$ .

## Standard Test Conditions

The characteristics listed in this product specification apply for standard test conditions as noted. All voltages are referenced to GND. Positive current flows into the referenced pin (see Figure 7).

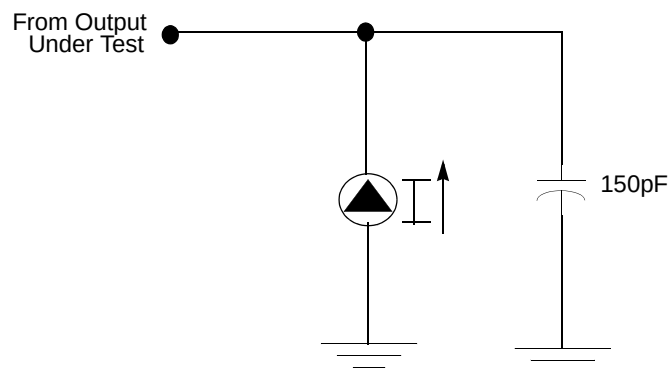

**Figure 7. Test Load Diagram**



## Capacitance

Table 7 lists the capacitances.

**Table 7. Capacitance**

| Parameter                                                                                                                  | Maximum |
|----------------------------------------------------------------------------------------------------------------------------|---------|
| Input capacitance                                                                                                          | 12pF    |
| Output capacitance                                                                                                         | 12pF    |
| I/O capacitance                                                                                                            | 12pF    |
| Note: $T_A = 25^\circ\text{C}$ , $V_{CC} = \text{GND} = 0\text{V}$ , $f = 1.0\text{MHz}$ , unmeasured pins returned to GND |         |

## DC Characteristics

**Table 8. DC Characteristics**

| Symbol       | Parameter                                | $V_{CC}$ | $T_A = 0^\circ\text{C to } +70^\circ\text{C}$ |     |                   | Units         | Conditions                                           | Notes |
|--------------|------------------------------------------|----------|-----------------------------------------------|-----|-------------------|---------------|------------------------------------------------------|-------|
|              |                                          |          | Min                                           | Typ | Max               |               |                                                      |       |
| $V_{CC}$     | Supply Voltage                           |          | 2.0                                           |     | 3.6               | V             | See Note 5                                           | 5     |
| $V_{CH}$     | Clock Input High Voltage                 | 2.0-3.6  | 0.8                                           |     | $V_{CC}+0.3$      | V             | Driven by External Clock Generator                   |       |
| $V_{CL}$     | Clock Input Low Voltage                  | 2.0-3.6  | $V_{SS}-0.3$                                  |     | 0.5               | V             | Driven by External Clock Generator                   |       |
| $V_{IH}$     | Input High Voltage                       | 2.0-3.6  | $0.7 V_{CC}$                                  |     | $V_{CC}+0.3$      | V             |                                                      |       |
| $V_{IL}$     | Input Low Voltage                        | 2.0-3.6  | $V_{SS}-0.3$                                  |     | $0.2 V_{CC}$      | V             |                                                      |       |
| $V_{OH1}$    | Output High Voltage                      | 2.0-3.6  | $V_{CC}-0.4$                                  |     |                   | V             | $I_{OH} = -0.5\text{mA}$                             |       |
| $V_{OH2}$    | Output High Voltage (P36, P37, P00, P01) | 2.0-3.6  | $V_{CC}-0.8$                                  |     |                   | V             | $I_{OH} = -7\text{mA}$                               |       |
| $V_{OL1}$    | Output Low Voltage                       | 2.0-3.6  |                                               |     | 0.4               | V             | $I_{OL} = 1.0\text{mA}$<br>$I_{OL} = 4.0\text{mA}$   |       |
| $V_{OL2}$    | Output Low Voltage (P00, P01, P36, P37)  | 2.0-3.6  |                                               |     | 0.8               | V             | $I_{OL} = 10\text{mA}$                               |       |
| $V_{OFFSET}$ | Comparator Input Offset Voltage          | 2.0-3.6  |                                               |     | 25                | mV            |                                                      |       |
| $V_{REF}$    | Comparator Reference Voltage             | 2.0-3.6  | 0                                             |     | $V_{DD}$<br>-1.75 | V             |                                                      |       |
| $I_{IL}$     | Input Leakage                            | 2.0-3.6  | -1                                            |     | 1                 | $\mu\text{A}$ | $V_{IN} = 0\text{V}$ , $V_{CC}$<br>Pull-ups disabled |       |
| $I_{OL}$     | Output Leakage                           | 2.0-3.6  | -1                                            |     | 1                 | $\mu\text{A}$ | $V_{IN} = 0\text{V}$ , $V_{CC}$                      |       |
| $I_{CC}$     | Supply Current                           | 2.0      |                                               |     | 10                | mA            | at 8.0 MHz                                           | 1, 2  |
|              |                                          | 3.6      |                                               |     | 15                | mA            | at 8.0 MHz                                           | 1, 2  |

Table 8. DC Characteristics (Continued)

| Symbol           | Parameter                              | V <sub>CC</sub> | T <sub>A</sub> = 0°C to +70°C |     |     | Units | Conditions                                                | Notes |
|------------------|----------------------------------------|-----------------|-------------------------------|-----|-----|-------|-----------------------------------------------------------|-------|
|                  |                                        |                 | Min                           | Typ | Max |       |                                                           |       |
| I <sub>CC1</sub> | Standby Current (HALT Mode)            | 2.0             |                               |     | 3   | mA    | V <sub>IN</sub> = 0V, V <sub>CC</sub> at 8.0MHz           | 1, 2  |
|                  |                                        | 3.6             |                               |     | 5   |       | Same as above                                             | 1, 2  |
|                  |                                        | 2.0             |                               |     | 2   |       | Clock Divide-by-16 at 8.0MHz                              | 1, 2  |
|                  |                                        | 3.6             |                               |     | 4   |       | Same as above                                             | 1, 2  |
| I <sub>CC2</sub> | Standby Current (Stop Mode)            | 2.0             |                               |     | 8   | μA    | V <sub>IN</sub> = 0 V, V <sub>CC</sub> WDT is not Running | 3     |
|                  |                                        | 3.6             |                               |     | 10  | μA    | Same as above                                             | 3     |
|                  |                                        | 2.0             |                               |     | 500 | μA    | V <sub>IN</sub> = 0 V, V <sub>CC</sub> WDT is Running     | 3     |
|                  |                                        | 3.6             |                               |     | 800 | μA    | Same as above                                             | 3     |
| I <sub>LV</sub>  | Standby Current (Low Voltage)          |                 |                               |     | 10  | μA    | Measured at 1.3V                                          | 4     |
| V <sub>BO</sub>  | V <sub>CC</sub> Low Voltage Protection |                 |                               |     | 2.0 | V     | 8MHz maximum Ext. CLK Freq.                               |       |
| V <sub>LVD</sub> | V <sub>CC</sub> Low Voltage Detection  |                 |                               | 2.4 |     | V     |                                                           |       |
| V <sub>HVD</sub> | V <sub>CC</sub> High Voltage Detection |                 |                               | 2.7 |     | V     |                                                           |       |

**Notes:**

1. All outputs unloaded, inputs at rail.
2. CL1 = CL2 = 100 pF.
3. Oscillator stopped.
4. Oscillator stops when V<sub>CC</sub> falls below V<sub>BO</sub> limit.
5. It is strongly recommended to add a filter capacitor (minimum 0.1 μF), physically close to the V<sub>DD</sub> and V<sub>SS</sub> pins if operating voltage fluctuations are anticipated, such as those resulting from driving an Infrared LED.

**Table 9. EPROM/OTP Characteristics**

| Symbol | Parameter                  | Min. | Typ. | Max. | Unit    | Notes |
|--------|----------------------------|------|------|------|---------|-------|
|        | Erase Time                 | 15   |      |      | Minutes | 1,3   |
|        | Data Retention @ use years |      | 10   |      | Years   | 2     |
|        | Program/Erase Endurance    | 25   |      |      | Cycles  | 1     |

Notes:

1. For windowed cerdip package only.
2. Standard: 0°C to 70°C; Extended: -40°C to +105°C; Automotive: -40°C to +125°C.  
Determined using the Arrhenius model, which is an industry standard for estimating data retention of floating gate technologies:

$$AF = \exp[(Ea/k)*(1/Tuse - 1/TStress)]$$

Where:

Ea is the intrinsic activation energy (eV; typ. 0.8)

k is Boltzman's constant (8.67 x 10<sup>-5</sup> eV/°K)

°K = -273.16°C


Tuse = Use Temperature in °K

TStress = Stress Temperature in °K

3. At a stable UV Lamp output of 20mW/CM<sup>2</sup>

## AC Characteristics

Figure 8 and Table 10 describe the Alternating Current (AC) characteristics.

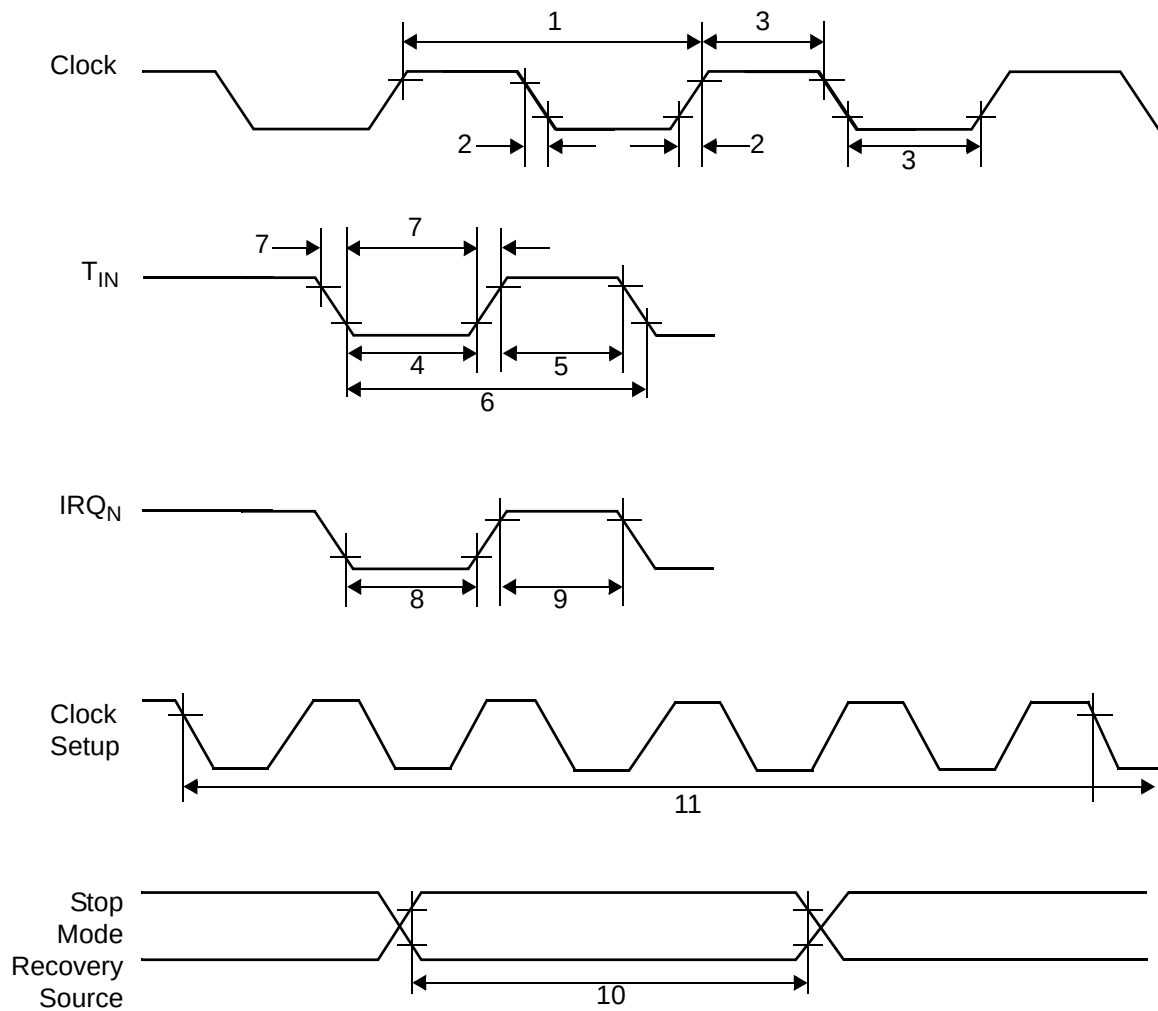

**Figure 8. AC Timing Diagram**

Table 10. AC Characteristics

| T <sub>A</sub> =0°C to +70°C<br>8.0MHz |                  |                                   |                                          |                     |         |                      | Watch-Dog<br>Timer<br>Mode<br>Register<br>(D1, D0) |
|----------------------------------------|------------------|-----------------------------------|------------------------------------------|---------------------|---------|----------------------|----------------------------------------------------|
| No                                     | Symbol           | Parameter                         | V <sub>CC</sub>                          | Minimum             | Maximum | Units                | Notes                                              |
| 1                                      | TpC              | Input Clock Period                | 2.0–3.6                                  | 121                 | DC      | ns                   | 1                                                  |
| 2                                      | TrC,TfC          | Clock Input Rise and Fall Times   | 2.0–3.6                                  |                     | 25      | ns                   | 1                                                  |
| 3                                      | TwC              | Input Clock Width                 | 2.0–3.6                                  | 37                  |         | ns                   | 1                                                  |
| 4                                      | TwTinL           | Timer Input Low Width             | 2.0<br>3.6                               | 100<br>70           |         | ns                   | 1                                                  |
| 5                                      | TwTinH           | Timer Input High Width            | 2.0–3.6                                  | 3TpC                |         |                      | 1                                                  |
| 6                                      | TpTin            | Timer Input Period                | 2.0–3.6                                  | 8TpC                |         |                      | 1                                                  |
| 7                                      | TrTin,TfTin      | Timer Input Rise and Fall Timers  | 2.0–3.6                                  |                     | 100     | ns                   | 1                                                  |
| 8                                      | TwIL             | Interrupt Request Low Time        | 2.0<br>3.6                               | 100<br>70           |         | ns                   | 1, 2                                               |
| 9                                      | TwIH             | Interrupt Request Input High Time | 2.0–3.6                                  | 5TpC                |         |                      | 1, 2                                               |
| 10                                     | Twsm             | Stop-Mode Recovery Width Spec     | 2.0–3.6                                  | 12<br>10TpC         |         | ns                   | 3<br>4                                             |
| 11                                     | Tost             | Oscillator Start-Up Time          | 2.0–3.6                                  |                     | 5TpC    |                      | 4                                                  |
| 12                                     | Twdt             | Watch-Dog Timer Delay Time        | 2.0–3.6<br>2.0–3.6<br>2.0–3.6<br>2.0–3.6 | 5<br>10<br>20<br>80 |         | ms<br>ms<br>ms<br>ms | 0, 0<br>0, 1<br>1, 0<br>1, 1                       |
| 13                                     | T <sub>POR</sub> | Power-On Reset                    | 2.0–3.6                                  | 2.5                 | 10      | ms                   |                                                    |

Notes:

1. Timing Reference uses 0.9 V<sub>CC</sub> for a logic 1 and 0.1 V<sub>CC</sub> for a logic 0.
2. Interrupt request through Port 3 (P33–P31).
3. SMR – D5 = 1.
4. SMR – D5 = 0.

## Pin Functions

### XTAL1 Crystal 1 (Time-Based Input)

This pin connects a parallel-resonant crystal or ceramic resonator to the on-chip oscillator input. Additionally, an optional external single-phase clock can be coded to the on-chip oscillator input.

### XTAL2 Crystal 2 (Time-Based Output)

This pin connects a parallel-resonant crystal or ceramic resonator to the on-chip oscillator output.

### Port 0 (P07–P00)

Port 0 is an 8-bit, bidirectional, CMOS-compatible port. These eight I/O lines are configured under software control as a nibble I/O port. The output drivers are push-pull or open-drain controlled by bit D2 in the PCON register.

If one or both nibbles are needed for I/O operation, they must be configured by writing to the Port 0 mode register. After a hardware reset, Port 0 is configured as an input port.

An optional pull-up transistor is available as a mask option on all Port 0 bits with nibble select.

- **Notes:** Internal pull-ups are disabled on any given pin or group of port pins when programmed into output mode.

The Port 0 direction is reset to be input following an SMR.


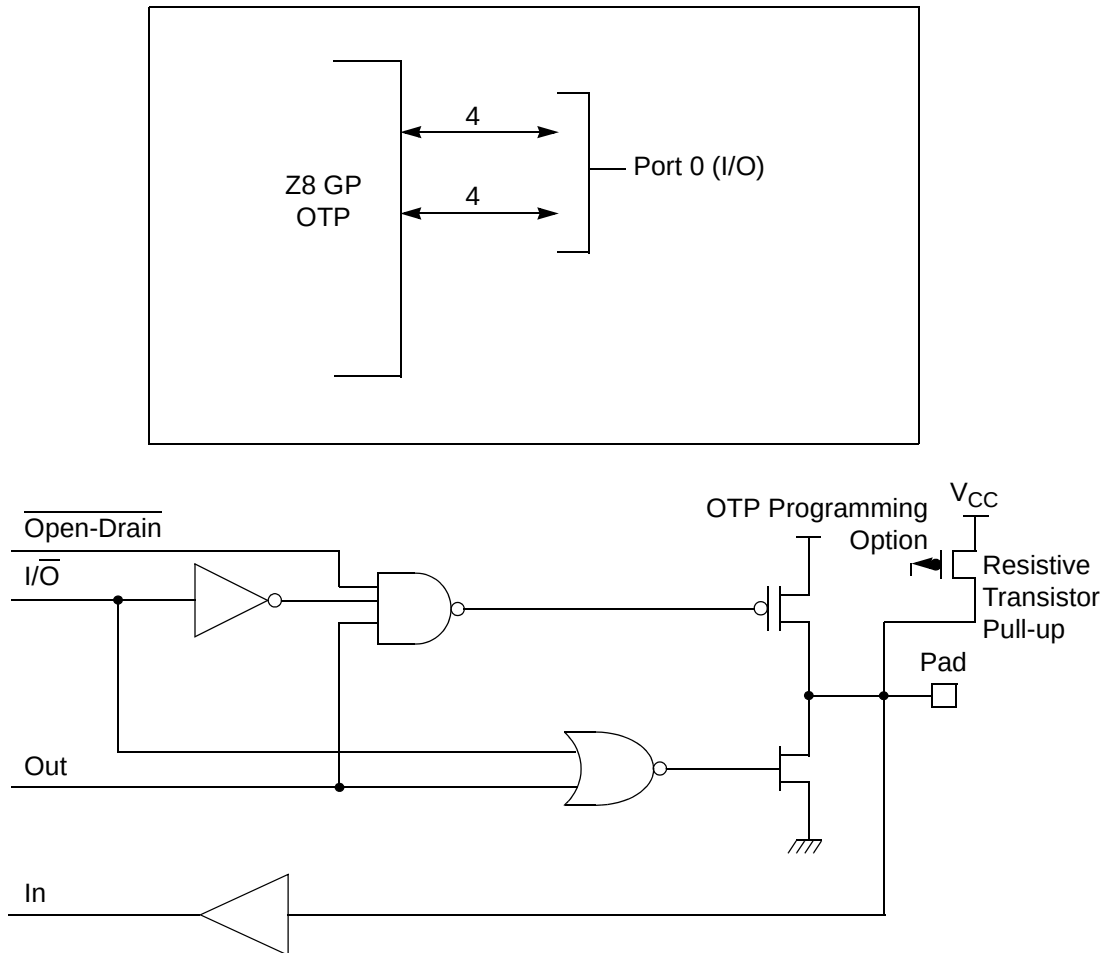


Figure 9. Port 0 Configuration

### Port 1 (P17–P10)

Port 1 (see Figure 10) Port 1 can be configured for standard port input or output mode. After POR, Port 1 is configured as an input port. The output drivers are either push-pull or open-drain and are controlled by bit D1 in the PCON register.

► **Note:** The Port 1 direction is reset to be input following an SMR.

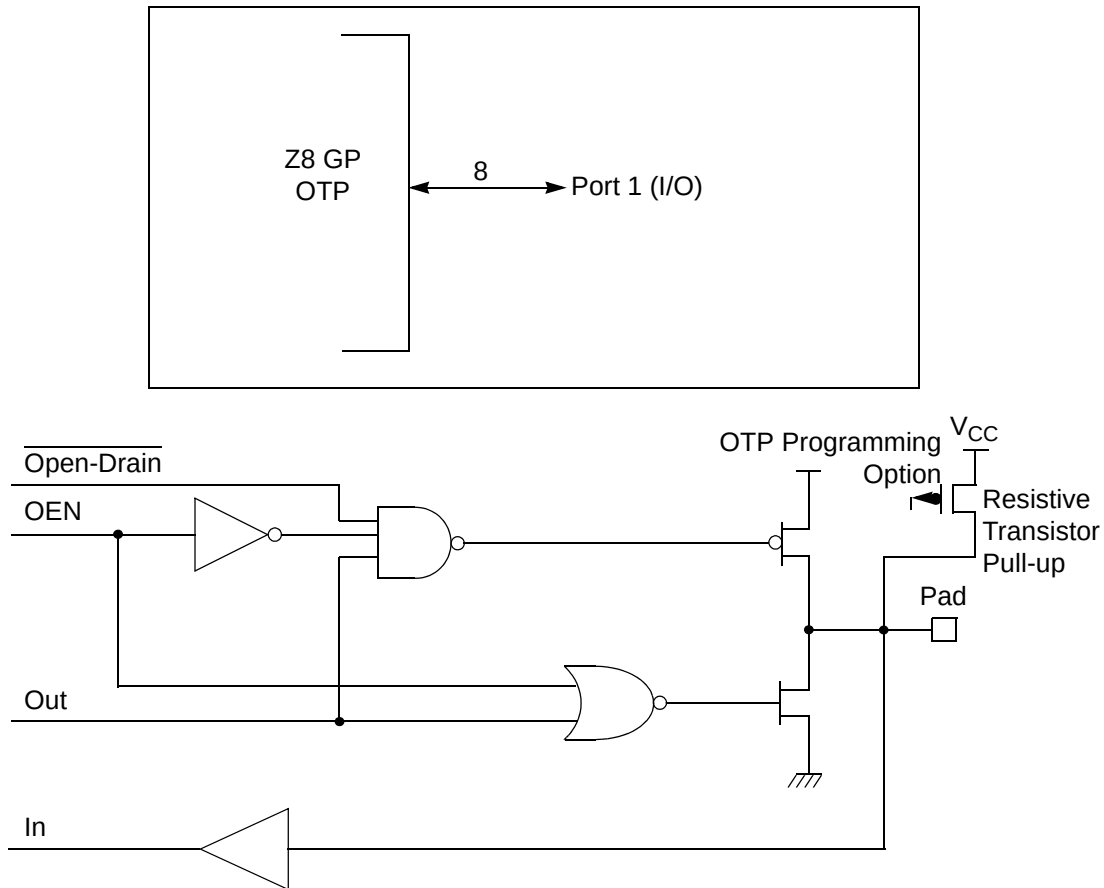

**Figure 10. Port 1 Configuration**

## Port 2 (P27–P20)

Port 2 is an 8-bit, bidirectional, CMOS-compatible I/O port (see Figure 11). These eight I/O lines can be independently configured under software control as inputs or outputs. Port 2 is always available for I/O operation. A mask option is available to connect eight pull-up transistors on this port. Bits programmed as outputs are globally programmed as either push-pull or open-drain. The POR resets with the eight bits of Port 2 configured as inputs.

Port 2 also has an 8-bit input OR and AND gate, which can be used to wake up the part. P20 can be programmed to access the edge-detection circuitry in demodulation mode.




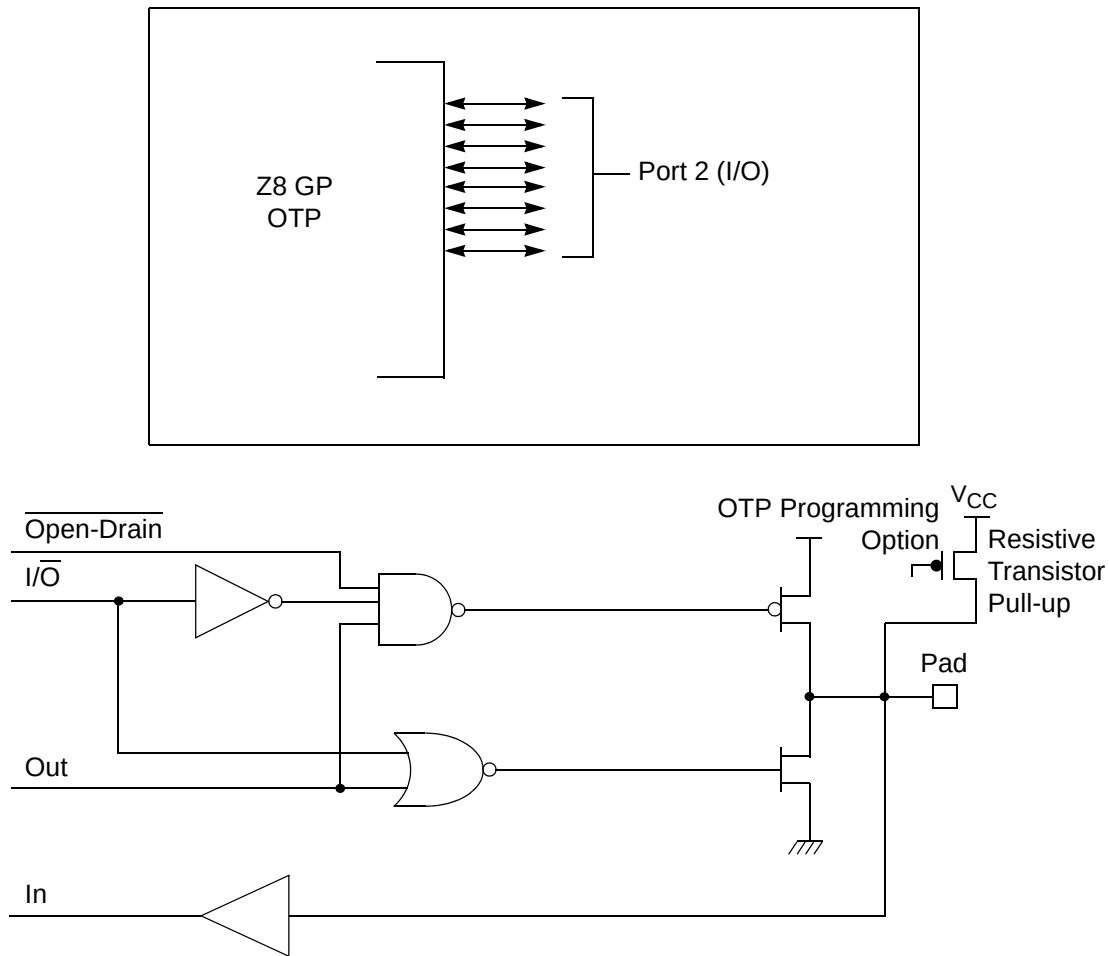


Figure 11. Port 2 Configuration

### Port 3 (P37–P30)

Port 3 is a 8-bit, CMOS-compatible fixed I/O port (see Figure 12). Port 3 consists of four fixed input (P33–P30) and four fixed output (P37–P34), which can be configured under software control for interrupt and as output from the counter/timers. P30, P31, P32, and P33 are standard CMOS inputs; P34, P35, P36, and P37 are push-pull outputs.

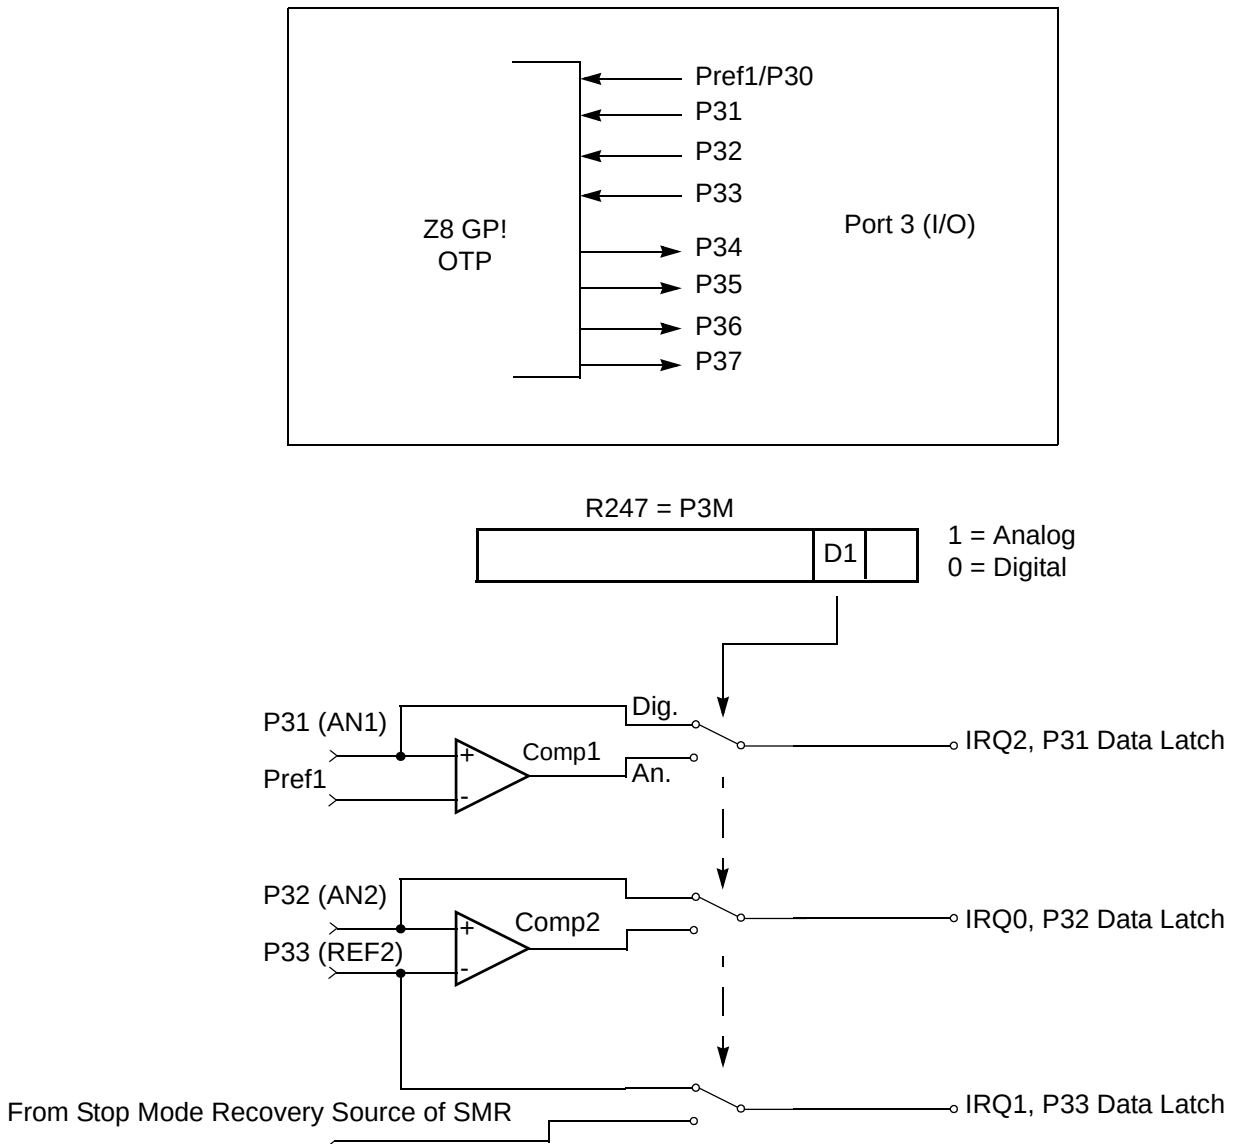

**Figure 12. Port 3 Configuration**

Two on-board comparators process analog signals on P31 and P32, with reference to the voltage on Pref1 and P33. The analog function is enabled by programming the Port 3 Mode Register (bit 1). P31 and P32 are programmable as rising, falling, or both edge triggered interrupts (IRQ register bits 6 and 7). Pref1 and P33 are the comparator reference voltage inputs. Access to the Counter Timer edge-detection circuit is through P31 or P20 (see “T8 and T16 Common Functions—


CTR1(0D)01H" on page 33). Other edge detect and IRQ modes are described in Table 11.

- **Note:** Comparators are powered down by entering Stop Mode. For P31–P33 to be used in a Stop Mode Recovery (SMR) source, these inputs must be placed into digital mode.

**Table 11. Port 3 Pin Function Summary**

| Pin       | I/O | Counter/Timers | Comparator | Interrupt |
|-----------|-----|----------------|------------|-----------|
| Pref1/P30 | IN  |                | RF1        |           |
| P31       | IN  | IN             | AN1        | IRQ2      |
| P32       | IN  |                | AN2        | IRQ0      |
| P33       | IN  |                | RF2        | IRQ1      |
| P34       | OUT | T8             | AO1        |           |
| P35       | OUT | T16            |            |           |
| P36       | OUT | T8/16          |            |           |
| P37       | OUT |                | AO2        |           |
| P20       | I/O | IN             |            |           |

Port 3 also provides output for each of the counter/timers and the AND/OR Logic (see Figure 13). Control is performed by programming bits D5–D4 of CTR1, bit 0 of CTR0, and bit 0 of CTR2.

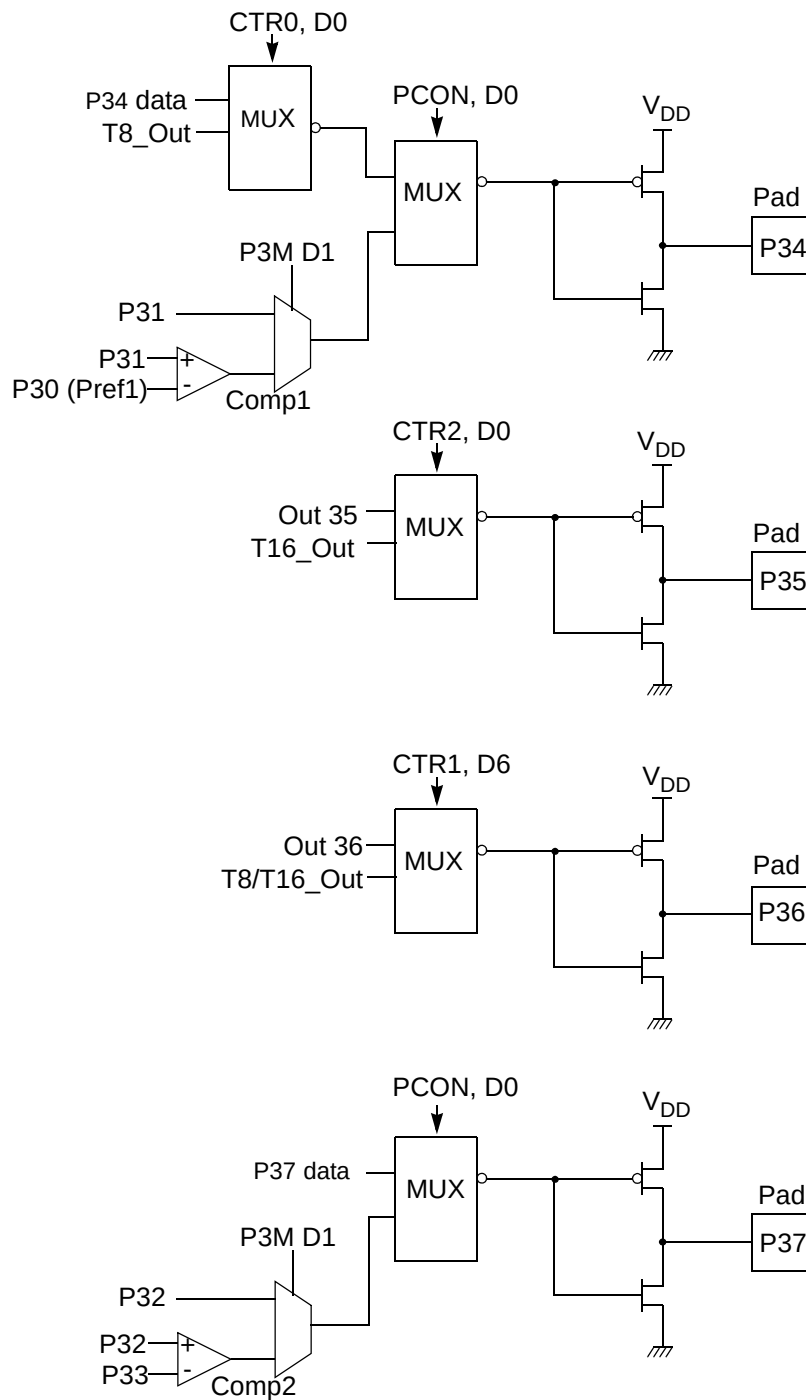

**Figure 13. Port 3 Counter/Timer Output Configuration**

### Comparator Inputs

In analog mode, P31 and P32 have a comparator front end. The comparator reference is supplied to P33 and Pref1. In this mode, the P33 internal data latch and its corresponding IRQ1 are diverted to the SMR sources (excluding P31, P32, and P33) as indicated in Figure 12 on page 20. In digital mode, P33 is used as D3 of the Port 3 input register, which then generates IRQ1.

- **Note:** Comparators are powered down by entering Stop Mode. For P31–P33 to be used in a Stop Mode Recovery source, these inputs must be placed into digital mode.

### Comparator Outputs

These channels can be programmed to be output on P34 and P37 through the PCON register.

## RESET (Input, Active Low)

Reset initializes the MCU and is accomplished either through Power-On, Watch-Dog Timer, Stop Mode Recovery, Low-Voltage detection, or external reset. During Power-On Reset and Watch-Dog Timer Reset, the internally generated reset drives the reset pin Low for the POR time. Any devices driving the external reset line must be open-drain to avoid damage from a possible conflict during reset conditions. Pull-up is provided internally.

When the Z8 GP™ asserts (Low) the RESET pin, the internal pull-up is disabled. The Z8 GP™ does not assert the RESET pin when under VBO.

- **Note:** The external Reset does not initiate an exit from STOP mode.

## Functional Description

This device incorporates special functions to enhance the Z8®, functionality in consumer and battery-operated applications.

### Program Memory

This device addresses up to 32KB of OTP memory. The first 12 Bytes are reserved for interrupt vectors. These locations contain the six 16-bit vectors that correspond to the six available interrupts.

### RAM

This device features 256B of RAM. See Figure 14.

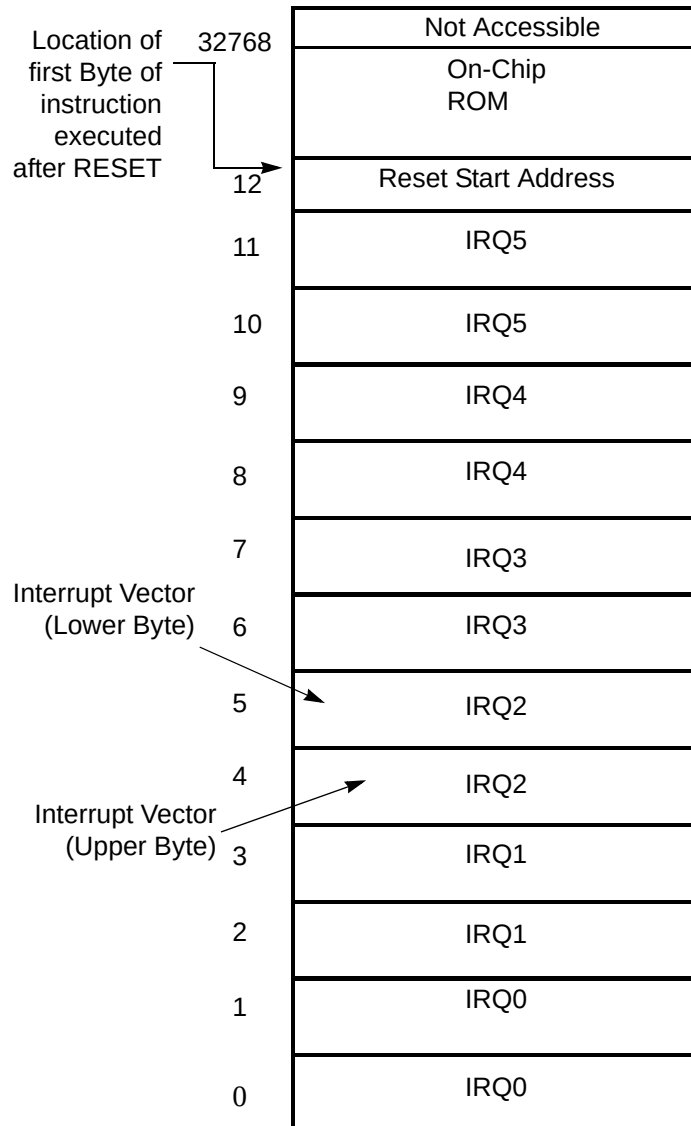


Figure 14. Program Memory Map (32K OTP)

## Expanded Register File


The register file has been expanded to allow for additional system control registers and for mapping of additional peripheral devices into the register address area. The Z8® register address space (R0 through R15) has been implemented as 16 banks, with 16 registers per bank. These register groups are known as the



ERF (Expanded Register File). Bits 7–4 of register RP select the working register group. Bits 3–0 of register RP select the expanded register file bank.

- **Note:** An expanded register bank is also referred to as an expanded register group (see Figure 15).

## Z8<sup>®</sup> Standard Control Registers

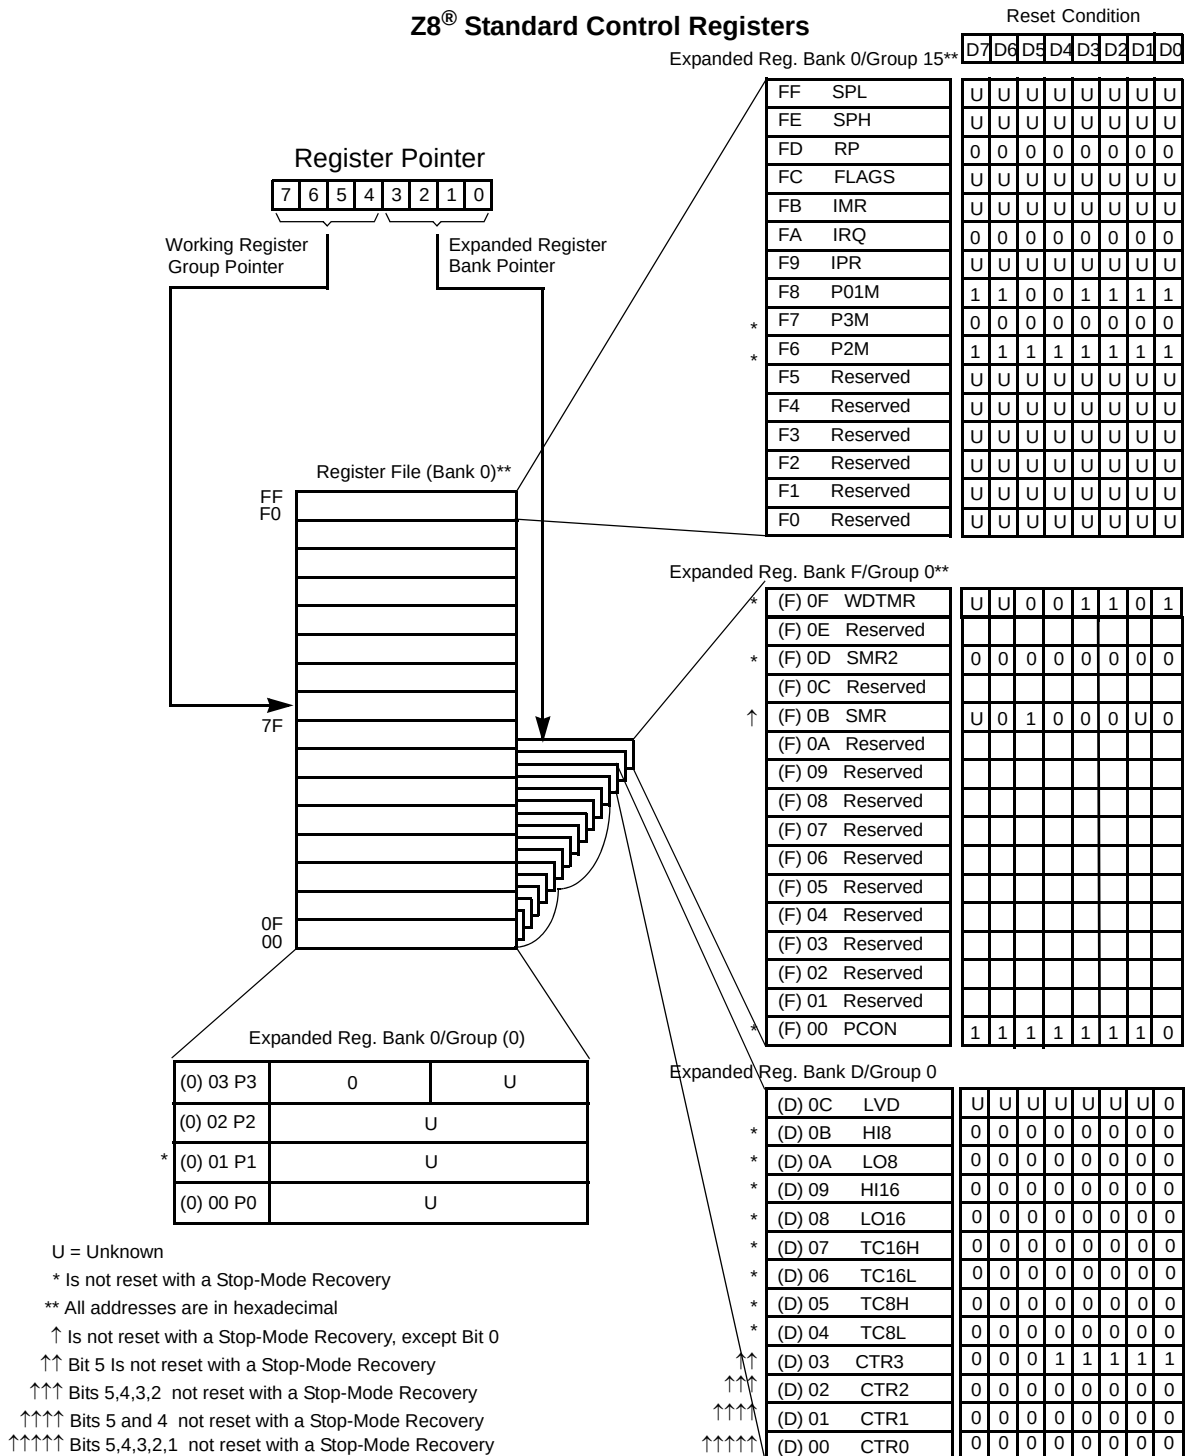


### Figure 15. Expanded Register File Architecture



The upper nibble of the register pointer (see Figure 16) selects which working register group, of 16 bytes in the register file, is accessed out of the possible 256. The lower nibble selects the expanded register file bank and, in the case of the Z8 GP family, banks 0, F, and D are implemented. A 0H in the lower nibble allows the normal register file (bank 0) to be addressed. Any other value from 1H to FH exchanges the lower 16 registers to an expanded register bank.

R253 RP

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

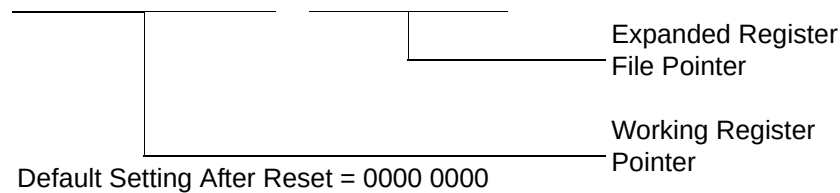

**Figure 16. Register Pointer**

**Example: Z8 GP: (See Figure 15 on page 26)**

R253 RP = 00h

R0 = Port 0

R1 = Port 1

R2 = Port 2

R3 = Port 3

But if:

R253 RP = 0Dh

R0 = CTRL0

R1 = CTRL1

R2 = CTRL2

R3 = Reserved

The counter/timers are mapped into ERF group D. Access is easily performed using the following:

```

LD          RP, #0Dh          ; Select ERF D
for access to bank D

                                ; (working
                                ; register group 0)
LD          R0, #xx          ; load CTRL0
LD          1, #xx          ; load CTRL1
LD          R1, 2            ; CTRL2→CTRL1

LD          RP, #0Dh          ; Select ERF D
for access to bank D


                                ; (working
                                ; register group 0)
LD          RP, #7Dh          ; Select
expanded register bank D and working ; register
group 7 of bank 0 for access.
LD          71h, 2
; CTRL2→register 71h
LD          R1, 2
; CTRL2→register 71h

```

## Register File

The register file (bank 0) consists of 4 I/O port registers, 237 general-purpose registers, 16 control and status registers (R0–R3, R4–R239, and R240–R255, respectively), and two expanded registers groups in Banks D (see Table 12) and F. Instructions can access registers directly or indirectly through an 8-bit address field, thereby allowing a short, 4-bit register address to use the Register Pointer (Figure 17). In the 4-bit mode, the register file is divided into 16 working register groups, each occupying 16 continuous locations. The Register Pointer addresses the starting location of the active working register group.

- **Note:** Working register group E0–EF can only be accessed through working registers and indirect addressing modes.

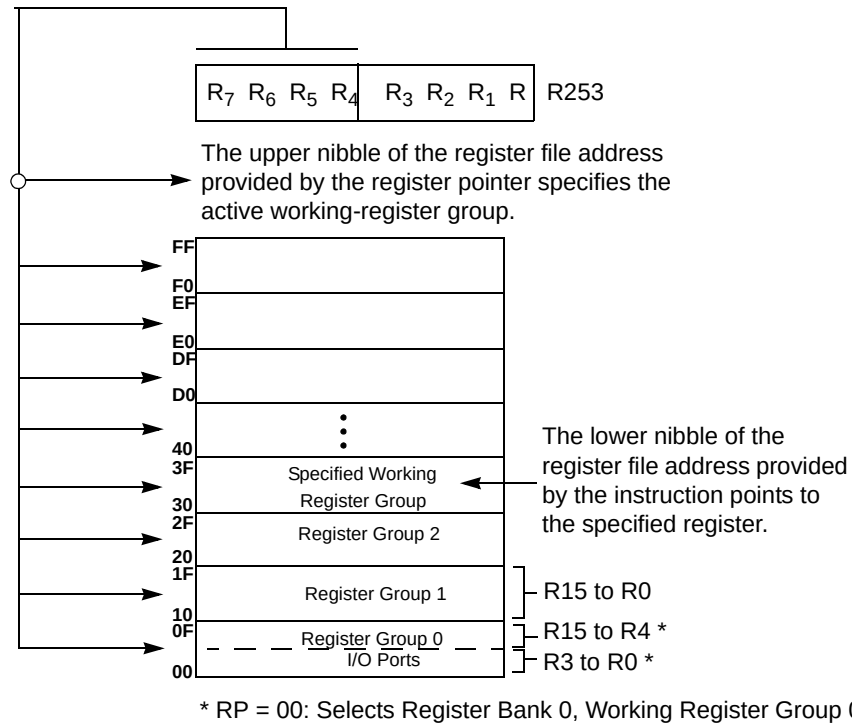

**Figure 17. Register Pointer—Detail**

## Stack

The internal register file is used for the stack. An 8-bit Stack Pointer SPL (R255) is used for the internal stack that resides in the general-purpose registers (R4–R239). SPH (R254) can be used as a general-purpose register.

## Timers

### T8\_Capture\_HI—HI8(D)0BH

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 1.

| Field         | Bit Position | Description                   |
|---------------|--------------|-------------------------------|
| T8_Capture_HI | [7:0]        | R/W Captured Data - No Effect |

### T8\_Capture\_LO—L08(D)0AH

This register holds the captured data from the output of the 8-bit Counter/Timer0. Typically, this register holds the number of counts when the input signal is 0.

| Field         | Bit Position | Description                   |
|---------------|--------------|-------------------------------|
| T8_Capture_LO | [7:0]        | R/W Captured Data - No Effect |

### T16\_Capture\_HI—HI16(D)09H

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the MS-Byte of the data.

| Field          | Bit Position | Description                   |
|----------------|--------------|-------------------------------|
| T16_Capture_HI | [7:0]        | R/W Captured Data - No Effect |

### T16\_Capture\_LO—L016(D)08H

This register holds the captured data from the output of the 16-bit Counter/Timer16. This register holds the LS-Byte of the data.

| Field          | Bit Position | Description                   |
|----------------|--------------|-------------------------------|
| T16_Capture_LO | [7:0]        | R/W Captured Data - No Effect |

### Counter/Timer2 MS-Byte Hold Register—TC16H(D)07H

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_HI | [7:0]        | R/W Data    |

### Counter/Timer2 LS-Byte Hold Register—TC16L(D)06H

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T16_Data_LO | [7:0]        | R/W Data    |

### Counter/Timer8 High Hold Register—TC8H(D)05H

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_HI | [7:0]        | R/W Data    |

### Counter/Timer8 Low Hold Register—TC8L(D)04H

| Field       | Bit Position | Description |
|-------------|--------------|-------------|
| T8_Level_LO | [7:0]        | R/W Data    |

### CTR0 Counter/Timer8 Control Register—CTR0(D)00H

Table 12 lists and briefly describes the fields for this register.

**Table 12. CTR0(D)00H Counter/Timer8 Control Register**

| Field            | Bit Position |     | Value | Description                    |
|------------------|--------------|-----|-------|--------------------------------|
| T8_Enable        | 7-----       | R/W | 0*    | Counter Disabled               |
|                  |              |     | 1     | Counter Enabled                |
|                  |              |     | 0     | Stop Counter                   |
|                  |              |     | 1     | Enable Counter                 |
| Single/Modulo-N  | -6-----      | R/W | 0     | Modulo-N                       |
|                  |              |     | 1     | Single Pass                    |
| Time_Out         | --5-----     | R/W | 0     | No Counter Time-Out            |
|                  |              |     | 1     | Counter Time-Out Occurred      |
|                  |              |     | 0     | No Effect                      |
|                  |              |     | 1     | Reset Flag to 0                |
| T8_Clock         | ---43---     | R/W | 0 0   | SCLK                           |
|                  |              |     | 0 1   | SCLK/2                         |
|                  |              |     | 1 0   | SCLK/4                         |
|                  |              |     | 1 1   | SCLK/8                         |
| Capture_INT_Mask | ----2--      | R/W | 0     | Disable Data Capture Interrupt |
|                  |              |     | 1     | Enable Data Capture Interrupt  |

Table 12. CTR0(D)00H Counter/Timer8 Control Register (Continued)

| Field            | Bit Position |     | Value | Description                |
|------------------|--------------|-----|-------|----------------------------|
| Counter_INT_Mask | -----1-      | R/W | 0     | Disable Time-Out Interrupt |
|                  |              |     | 1     | Enable Time-Out Interrupt  |
| P34_Out          | -----0       | R/W | 0*    | P34 as Port Output         |
|                  |              |     | 1     | T8 Output on P34           |

**Note:**

\*Indicates the value upon Power-On Reset.

**T8 Enable**

This field enables T8 when set (written) to 1.

**Single/Modulo-N**

When set to 0 (Modulo-N), the counter reloads the initial value when the terminal count is reached. When set to 1 (single-pass), the counter stops when the terminal count is reached.

**Timeout**

This bit is set when T8 times out (terminal count reached). To reset this bit, write a 1 to its location.



**Caution:** Writing a 1 is the only way to reset the Terminal Count status condition. Reset this bit before using/enabling the counter/timers.

The first clock of T8 might not have complete clock width and can occur any time when enabled.



**Note:** Take care when using the OR or AND commands to manipulate CTR0, bit 5 and CTR1, bits 0 and 1 (Demodulation Mode). These instructions use a Read-Modify-Write sequence in which the current status from the CTR0 and CTR1 registers is ORed or ANDed with the designated value and then written back into the registers.

**T8 Clock**

This bit defines the frequency of the input signal to T8.

**Capture\_INT\_Mask**

Set this bit to allow an interrupt when data is captured into either LO8 or HI8 upon a positive or negative edge detection in demodulation mode.

**Counter\_INT\_Mask**

Set this bit to allow an interrupt when T8 has a timeout.

**P34\_Out**

This bit defines whether P34 is used as a normal output pin or the T8 output.

**T8 and T16 Common Functions—CTR1(0D)01H**

This register controls the functions in common with the T8 and T16.

Table 13 lists and briefly describes the fields for this register.

**Table 13. CTR1(0D)01H T8 and T16 Common Functions**

| Field                         | Bit Position |     | Value                                                | Description                                                                                                             |
|-------------------------------|--------------|-----|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Mode                          | 7-----       | R/W | 0*                                                   | Transmit Mode<br>Demodulation Mode                                                                                      |
| P36_Out/<br>Demodulator_Input | -6-----      | R/W | 0*<br>1<br><br>0<br>1                                | Transmit Mode<br>Port Output<br>T8/T16 Output<br>Demodulation Mode<br>P31<br>P20                                        |
| T8/T16_Logic/<br>Edge_Detect  | --54----     | R/W | 00**<br>01<br>10<br>11<br><br>00**<br>01<br>10<br>11 | Transmit Mode<br>AND<br>OR<br>NOR<br>NAND<br>Demodulation Mode<br>Falling Edge<br>Rising Edge<br>Both Edges<br>Reserved |

Table 13. CTR1(0D)01H T8 and T16 Common Functions (Continued)

| Field                              | Bit Position |     | Value | Description            |
|------------------------------------|--------------|-----|-------|------------------------|
| Transmit_Submode/<br>Glitch_Filter | ----32--     | R/W |       | Transmit Mode          |
|                                    |              |     | 00*   | Normal Operation       |
|                                    |              |     | 01    | Ping-Pong Mode         |
|                                    |              |     | 10    | T16_Out = 0            |
|                                    |              |     | 11    | T16_Out = 1            |
|                                    |              |     |       | Demodulation Mode      |
|                                    |              |     | 00*   | No Filter              |
|                                    |              |     | 01    | 4 SCLK Cycle           |
|                                    |              |     | 10    | 8 SCLK Cycle           |
|                                    |              |     | 11    | Reserved               |
| Initial_T8_Out/<br>Rising Edge     | -----1-      | R/W | 0*    | Transmit Mode          |
|                                    |              |     | 1     | T8_OUT is 0 Initially  |
|                                    |              | R   | 0*    | T8_OUT is 1 Initially  |
|                                    |              |     | 1     | Demodulation Mode      |
|                                    |              | W   | 0     | No Rising Edge         |
|                                    |              |     | 1     | Rising Edge Detected   |
|                                    |              |     | 0     | No Effect              |
|                                    |              |     | 1     | Reset Flag to 0        |
| Initial_T16_Out/<br>Falling_Edge   | -----0       | R/W | 0*    | Transmit Mode          |
|                                    |              |     | 1     | T16_OUT is 0 Initially |
|                                    |              | R   | 0*    | T16_OUT is 1 Initially |
|                                    |              |     | 1     | Demodulation Mode      |
|                                    |              | W   | 0     | No Falling Edge        |
|                                    |              |     | 1     | Falling Edge Detected  |
|                                    |              |     | 0     | No Effect              |
|                                    |              |     | 1     | Reset Flag to 0        |

**Note:**

\*Default at Power-On Reset.

\*\*Default at Power-On Reset. Not reset with Stop Mode recovery.

**Mode**

If the result is 0, the counter/timers are in TRANSMIT mode; otherwise, they are in DEMODULATION mode.

**P36\_Out/Demodulator\_Input**

In TRANSMIT Mode, this bit defines whether P36 is used as a normal output pin or the combined output of T8 and T16.

In DEMODULATION Mode, this bit defines whether the input signal to the Counter/Timers is from P20 or P31.

If the input signal is from Port 31, a capture event may also generate an IRQ2 interrupt. To prevent generating an IRQ2, either disable the IRQ2 interrupt by clearing its IMR bit D2 or use P20 as the input.



### T8/T16\_Logic/Edge \_Detect

In TRANSMIT Mode, this field defines how the outputs of T8 and T16 are combined (AND, OR, NOR, NAND).

In DEMODULATION Mode, this field defines which edge should be detected by the edge detector.

### Transmit\_Submode/Glitch Filter

In Transmit Mode, this field defines whether T8 and T16 are in the PING-PONG mode or in independent normal operation mode. Setting this field to “NORMAL OPERATION Mode” terminates the “PING-PONG Mode” operation. When set to 10, T16 is immediately forced to a 0; a setting of 11 forces T16 to output a 1.

In DEMODULATION Mode, this field defines the width of the glitch that must be filtered out.

### Initial\_T8\_Out/Rising\_Edge

In TRANSMIT Mode, if 0, the output of T8 is set to 0 when it starts to count. If 1, the output of T8 is set to 1 when it starts to count. When the counter is not enabled and this bit is set to 1 or 0, T8\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D1.

In DEMODULATION Mode, this bit is set to 1 when a rising edge is detected in the input signal. In order to reset the mode, a 1 should be written to this location.

### Initial\_T16 Out/Falling \_Edge

In TRANSMIT Mode, if it is 0, the output of T16 is set to 0 when it starts to count. If it is 1, the output of T16 is set to 1 when it starts to count. This bit is effective only in Normal or PING-PONG Mode (CTR1, D3; D2). When the counter is not enabled and this bit is set, T16\_OUT is set to the opposite state of this bit. This ensures that when the clock is enabled, a transition occurs to the initial state set by CTR1, D0.

In DEMODULATION Mode, this bit is set to 1 when a falling edge is detected in the input signal. In order to reset it, a 1 should be written to this location.

- **Note:** Modifying CTR1 (D1 or D0) while the counters are enabled causes unpredictable output from T8/T16\_OUT.

### CTR2 Counter/Timer 16 Control Register—CTR2(D)02H

Table 14 lists and briefly describes the fields for this register.

Table 14. CTR2(D)02H: Counter/Timer16 Control Register

| Field            | Bit Position |     | Value | Description                 |
|------------------|--------------|-----|-------|-----------------------------|
| T16_Enable       | 7-----       | R   | 0*    | Counter Disabled            |
|                  |              |     | 1     | Counter Enabled             |
|                  |              | W   | 0     | Stop Counter                |
|                  |              |     | 1     | Enable Counter              |
| Single/Modulo-N  | -6-----      | R/W | 0*    | Transmit Mode               |
|                  |              |     | 1     | Modulo-N                    |
|                  |              |     | 0     | Single Pass                 |
|                  |              |     | 1     | Demodulation Mode           |
| Time_Out         | --5-----     | R   | 0*    | T16 Recognizes Edge         |
|                  |              |     | 1     | T16 Does Not Recognize Edge |
|                  |              | W   | 0     | No Counter Timeout          |
|                  |              |     | 1     | Counter Timeout Occurred    |
| T16_Clock        | ---43---     | R/W | 00**  | No Effect                   |
|                  |              |     | 01    | Reset Flag to 0             |
|                  |              |     | 10    | SCLK                        |
|                  |              |     | 11    | SCLK/2                      |
| Capture_INT_Mask | -----2--     | R/W | 0**   | SCLK/4                      |
|                  |              |     | 1     | SCLK/8                      |
| Counter_INT_Mask | -----1-      | R/W | 0     | Disable Data Capture Int.   |
|                  |              |     | 1     | Enable Data Capture Int.    |
| P35_Out          | -----0       | R/W | 0*    | Disable Timeout Int.        |
|                  |              |     | 1     | Enable Timeout Int.         |

**Note:**

\*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with Stop Mode recovery.

**T16\_Enable**

This field enables T16 when set to 1.

**Single/Modulo-N**

In TRANSMIT Mode, when set to 0, the counter reloads the initial value when it reaches the terminal count. When set to 1, the counter stops when the terminal count is reached.

In Demodulation Mode, when set to 0, T16 captures and reloads on detection of all the edges. When set to 1, T16 captures and detects on the first edge but ignores the subsequent edges. For details, see the description of T16 Demodulation Mode on page 45.

#### Time\_Out

This bit is set when T16 times out (terminal count reached). To reset the bit, write a 1 to this location.

#### T16\_Clock

This bit defines the frequency of the input signal to Counter/Timer16.

#### Capture\_INT\_Mask

This bit is set to allow an interrupt when data is captured into LO16 and HI16.

#### Counter\_INT\_Mask

Set this bit to allow an interrupt when T16 times out.

#### P35\_Out

This bit defines whether P35 is used as a normal output pin or T16 output.

#### CTR3 T8/T16 Control Register—CTR3(D)03H

Table 15 lists and briefly describes the fields for this register. This register allows the T<sub>8</sub> and T<sub>16</sub> counters to be synchronized.

**Table 15. CTR3 (D)03H: T8/T16 Control Register**

| Field                  | Bit Position |     | Value | Description       |
|------------------------|--------------|-----|-------|-------------------|
| T <sub>16</sub> Enable | 7-----       | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| T <sub>8</sub> Enable  | -6-----      | R   | 0*    | Counter Disabled  |
|                        |              | R   | 1     | Counter Enabled   |
|                        |              | W   | 0     | Stop Counter      |
|                        |              | W   | 1     | Enable Counter    |
| Sync Mode              | --5-----     | R/W | 0**   | Disable Sync Mode |
|                        |              |     | 1     | Enable Sync Mode  |

**Table 15. CTR3 (D)03H: T8/T16 Control Register (Continued)**

| Field    | Bit Position |   | Value | Description        |
|----------|--------------|---|-------|--------------------|
| Reserved | ---43210     | R | 1     | Always reads 11111 |
|          |              | W | x     | No Effect          |


Note: \*Indicates the value upon Power-On Reset.

\*\*Indicates the value upon Power-On Reset. Not reset with Stop Mode recovery.

## Counter/Timer Functional Blocks

### Input Circuit

The edge detector monitors the input signal on P31 or P20. Based on CTR1 D5–D4, a pulse is generated at the Pos Edge or Neg Edge line when an edge is detected. Glitches in the input signal that have a width less than specified (CTR1 D3, D2) are filtered out (see Figure 18).

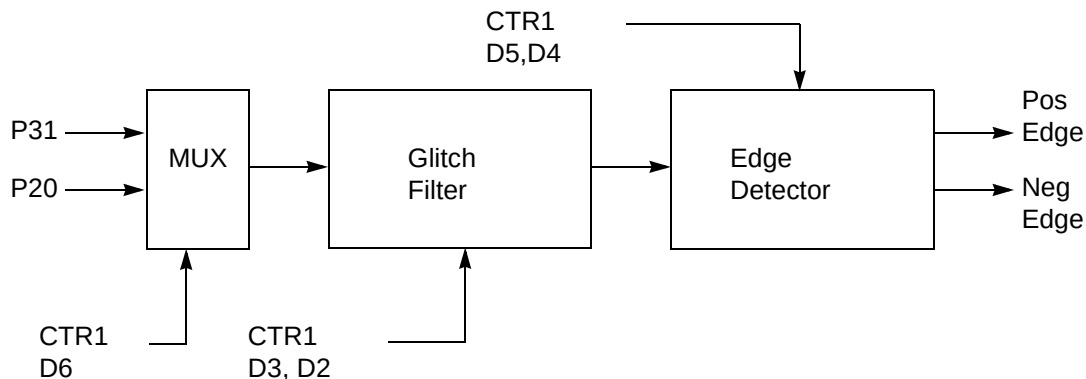

**Figure 18. Glitch Filter Circuitry**

### T8 Transmit Mode

Before T8 is enabled, the output of T8 depends on CTR1, D1. If it is 0, T8\_OUT is 1; if it is 1, T8\_OUT is 0. See Figure 19.


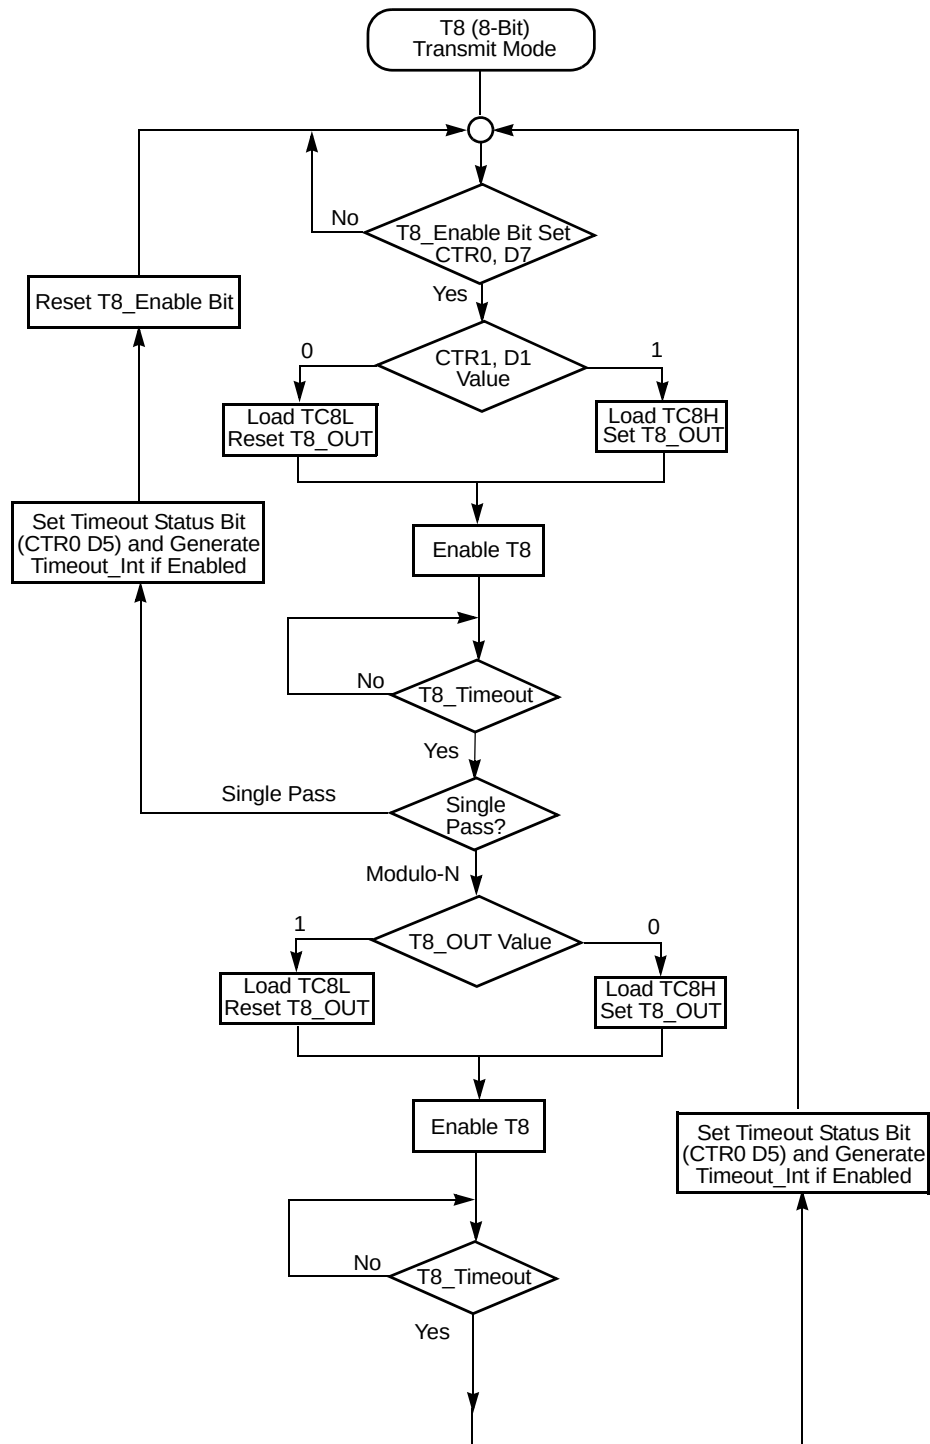


Figure 19. Transmit Mode Flowchart

When T8 is enabled, the output T8\_OUT switches to the initial value (CTR1, D1). If the initial value (CTR1, D1) is 0, TC8L is loaded; otherwise, TC8H is loaded into the counter. In SINGLE-PASS Mode (CTR0, D6), T8 counts down to 0 and stops, T8\_OUT toggles, the timeout status bit (CTR0, D5) is set, and a timeout interrupt can be generated if it is enabled (CTR0, D1). In Modulo-N Mode, upon reaching terminal count, T8\_OUT is toggled, but no interrupt is generated. From that point, T8 loads a new count (if the T8\_OUT level now is 0), TC8L is loaded; if it is 1, TC8H is loaded. T8 counts down to 0, toggles T8\_OUT, and sets the timeout status bit (CTR0, D5), thereby generating an interrupt if enabled (CTR0, D1). One cycle is thus completed. T8 then loads from TC8H or TC8L according to the T8\_OUT level and repeats the cycle. See Figure 20.

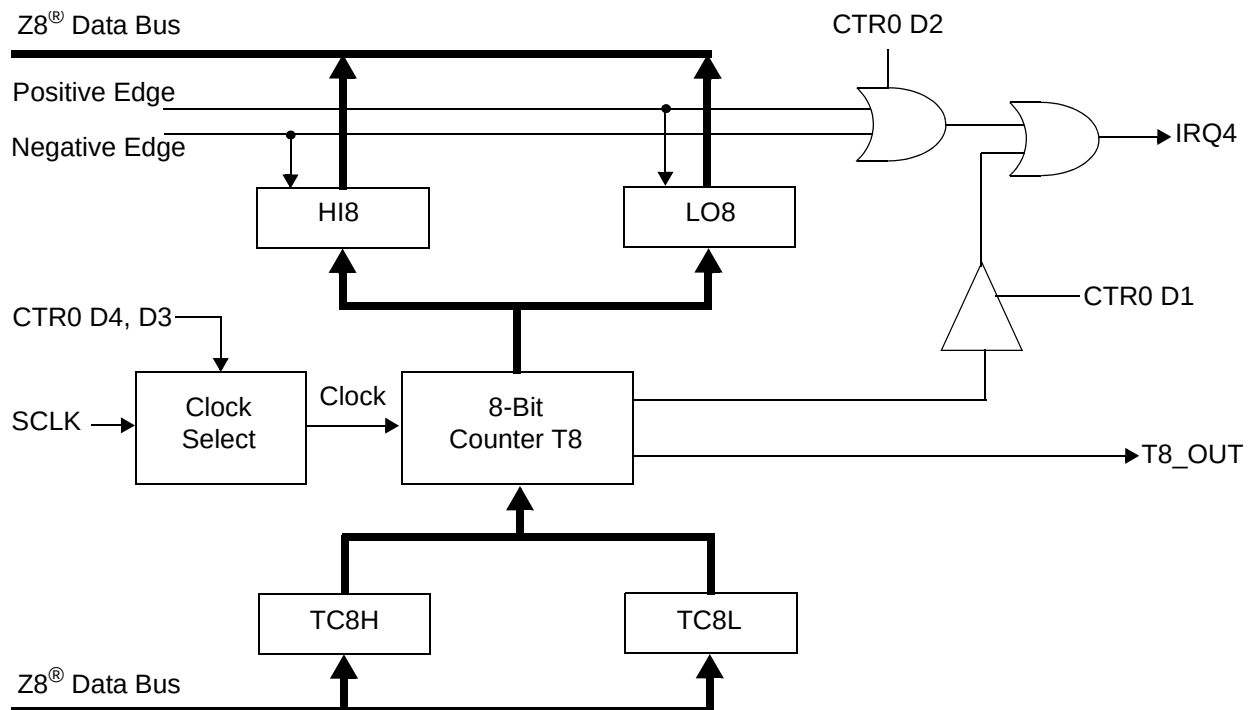

**Figure 20. 8-Bit Counter/Timer Circuits**

You can modify the values in TC8H or TC8L at any time. The new values take effect when they are loaded.



**Caution:** To ensure known operation do not write these registers at the time the values are to be loaded into the counter/timer. An initial count of 1 is not allowed (a non-function occurs). An initial count of 0 causes TC8 to count from 0 to FFH to FEH.


► **Note:** The letter *h* denotes hexadecimal values.

Transition from 0 to FF<sub>h</sub> is not a timeout condition.




**Caution:** Using the same instructions for stopping the counter/timers and setting the status bits is not recommended.

Two successive commands are necessary. First, the counter/timers must be stopped. Second, the status bits must be reset. These commands are required because it takes one counter/timer clock interval for the initiated event to actually occur. See Figure 21 and Figure 22.

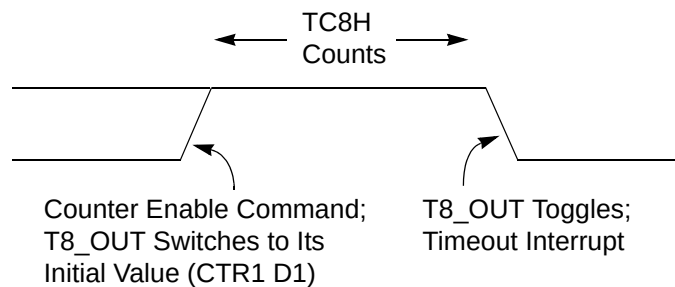

**Figure 21. T8\_OUT in Single-Pass Mode**

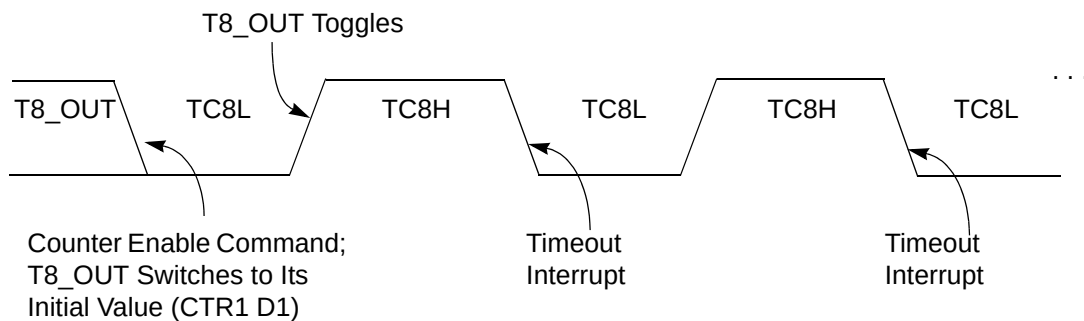

**Figure 22. T8\_OUT in Modulo-N Mode**

### T8 Demodulation Mode

The user must program TC8L and TC8H to FF<sub>h</sub>. After T8 is enabled, when the first edge (rising, falling, or both depending on CTR1, D5; D4) is detected, it starts to count down. When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current value of T8 is complemented and put into one of the capture registers. If it is a positive edge, data is put

into LO8; if it is a negative edge, data is put into HI8. From that point, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt can be generated if enabled (CTR0, D2). Meanwhile, T8 is loaded with FFh and starts counting again. If T8 reaches 0, the timeout status bit (CTR0, D5) is set, and an interrupt can be generated if enabled (CTR0, D1). T8 then continues counting from FFh (see Figure 23 and Figure 24).

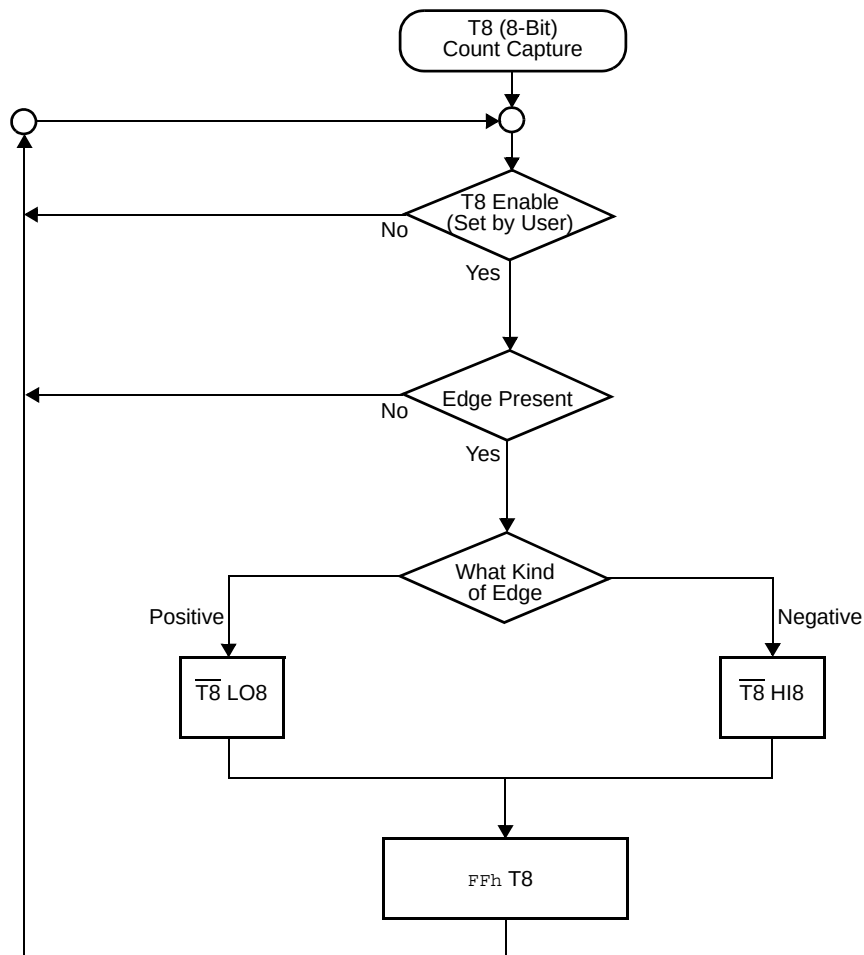


Figure 23. Demodulation Mode Count Capture Flowchart




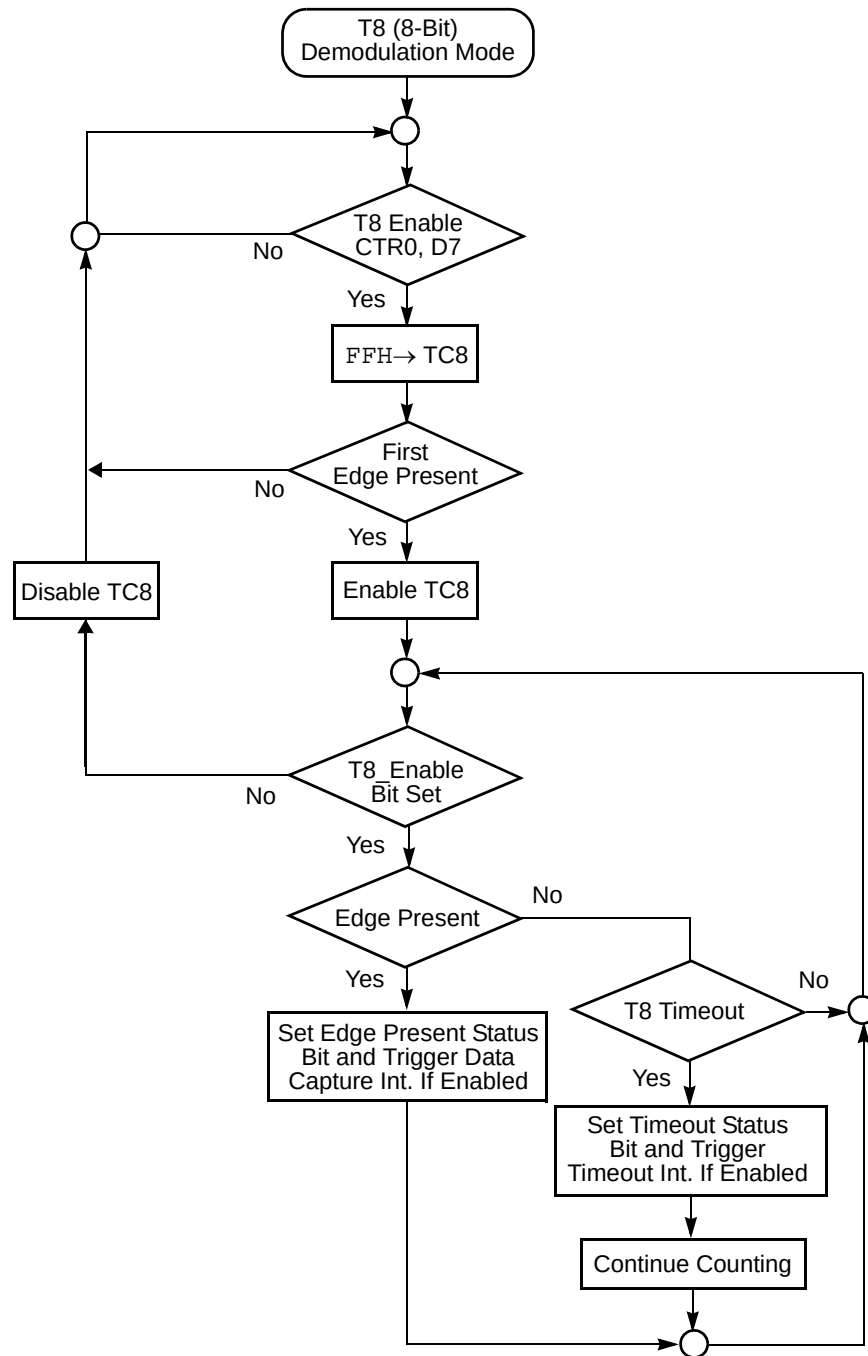


Figure 24. Demodulation Mode Flowchart

### T16 Transmit Mode

In NORMAL or PING-PONG mode, the output of T16 when not enabled, is dependent on CTR1, D0. If it is a 0, T16\_OUT is a 1; if it is a 1, T16\_OUT is 0. You can force the output of T16 to either a 0 or 1 whether it is enabled or not by programming CTR1 D3; D2 to a 10 or 11.

When T16 is enabled, TC16H \* 256 + TC16L is loaded, and T16\_OUT is switched to its initial value (CTR1, D0). When T16 counts down to 0, T16\_OUT is toggled (in NORMAL or PING-PONG mode), an interrupt (CTR2, D1) is generated (if enabled), and a status bit (CTR2, D5) is set. See Figure 25.

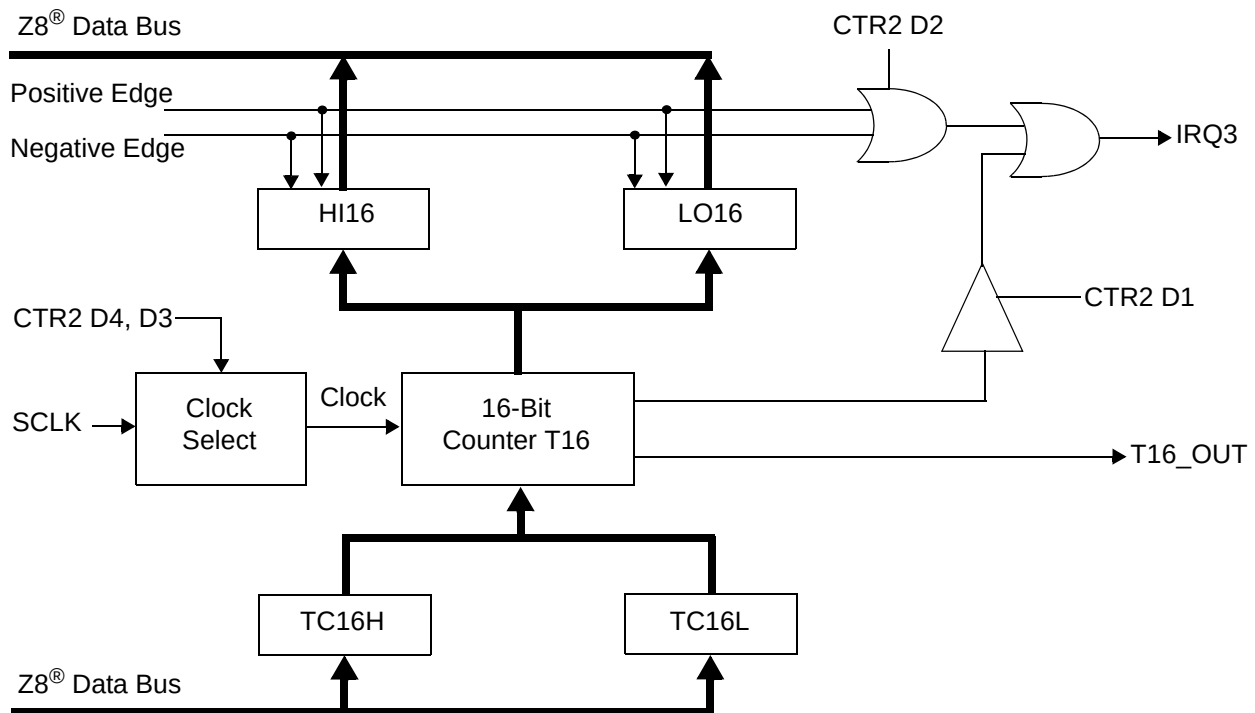

**Figure 25. 16-Bit Counter/Timer Circuits**

► **Note:** Global interrupts override this function as described in “Interrupts” on page 48.


If T16 is in SINGLE-PASS mode, it is stopped at this point (see Figure 26). If it is in Modulo-N Mode, it is loaded with TC16H \* 256 + TC16L, and the counting continues (see Figure 27).

You can modify the values in TC16H and TC16L at any time. The new values take effect when they are loaded.




**Caution:**

Do not load these registers at the time the values are to be loaded into the counter/timer to ensure known operation. An initial count of 1 is not allowed. An initial count of 0 causes T16 to count from 0 to FFFFH to FFFE<sub>H</sub>. Transition from 0 to FFFF<sub>H</sub> is not a timeout condition.

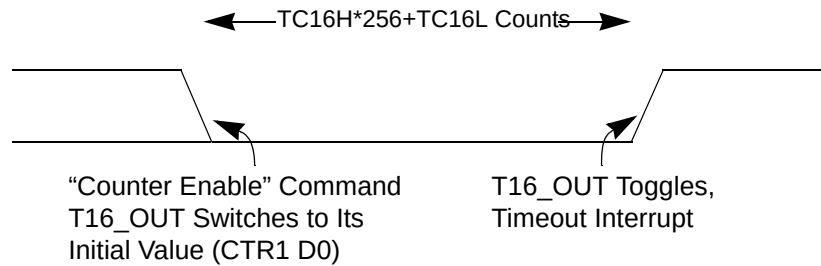

**Figure 26. T16\_OUT in Single-Pass Mode**

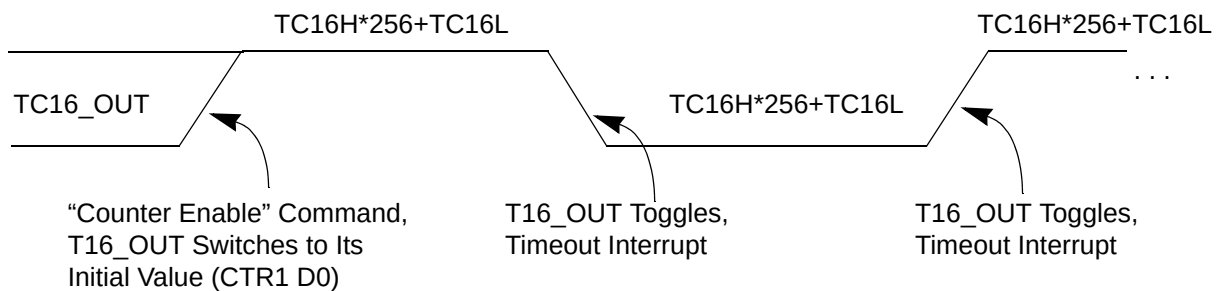

**Figure 27. T16\_OUT in Modulo-N Mode**

**T16 DEMODULATION Mode**

The user must program TC16L and TC16H to FF<sub>H</sub>. After T16 is enabled, and the first edge (rising, falling, or both depending on CTR1 D5; D4) is detected, T16 captures HI16 and LO16, reloads, and begins counting.

**If D6 of CTR2 Is 0**

When a subsequent edge (rising, falling, or both depending on CTR1, D5; D4) is detected during counting, the current count in T16 is complemented and put into HI16 and LO16. When data is captured, one of the edge detect status bits (CTR1, D1; D0) is set, and an interrupt is generated if enabled (CTR2, D2). T16 is loaded with FFFF<sub>H</sub> and starts again.

This T16 mode is generally used to measure space time, the length of time between bursts of carrier signal (marks).

### If D6 of CTR2 Is 1

T16 ignores the subsequent edges in the input signal and continues counting down. A timeout of T8 causes T16 to capture its current value and generate an interrupt if enabled (CTR2, D2). In this case, T16 does not reload and continues counting. If the D6 bit of CTR2 is toggled (by writing a 0 then a 1 to it), T16 captures and reloads on the next edge (rising, falling, or both depending on CTR1, D5; D4), continuing to ignore subsequent edges.


This T16 mode generally measures mark time, the length of an active carrier signal burst.

If T16 reaches 0, T16 continues counting from `FFFFh`. Meanwhile, a status bit (CTR2 D5) is set, and an interrupt timeout can be generated if enabled (CTR2 D1).

### Ping-Pong Mode

This operation mode is only valid in TRANSMIT Mode. T8 and T16 must be programmed in Single-Pass mode (CTR0, D6; CTR2, D6), and Ping-Pong mode must be programmed in CTR1, D3; D2. The user can begin the operation by enabling either T8 or T16 (CTR0, D7 or CTR2, D7). For example, if T8 is enabled, T8\_OUT is set to this initial value (CTR1, D1). According to T8\_OUT's level, TC8H or TC8L is loaded into T8. After the terminal count is reached, T8 is disabled, and T16 is enabled. T16\_OUT then switches to its initial value (CTR1, D0), data from TC16H and TC16L is loaded, and T16 starts to count. After T16 reaches the terminal count, it stops, T8 is enabled again, repeating the entire cycle. Interrupts can be allowed when T8 or T16 reaches terminal control (CTR0, D1; CTR2, D1). To stop the ping-pong operation, write 00 to bits D3 and D2 of CTR1. See Figure 28.


- **Note:** Enabling ping-pong operation while the counter/timers are running might cause intermittent counter/timer function. Disable the counter/timers and reset the status flags before instituting this operation.

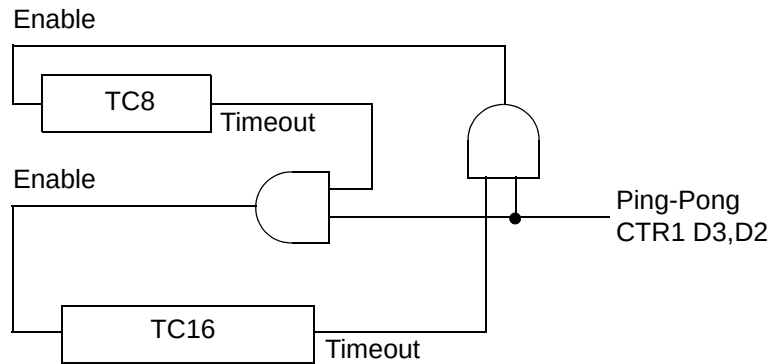

**Figure 28. Ping-Pong Mode Diagram**

### Initiating PING-PONG Mode

First, make sure both counter/timers are not running. Set T8 into Single-Pass mode (CTR0, D6), set T16 into SINGLE-PASS mode (CTR2, D6), and set the Ping-Pong mode (CTR1, D2; D3). These instructions can be in random order. Finally, start PING-PONG mode by enabling either T8 (CTR0, D7) or T16 (CTR2, D7). See Figure 29.

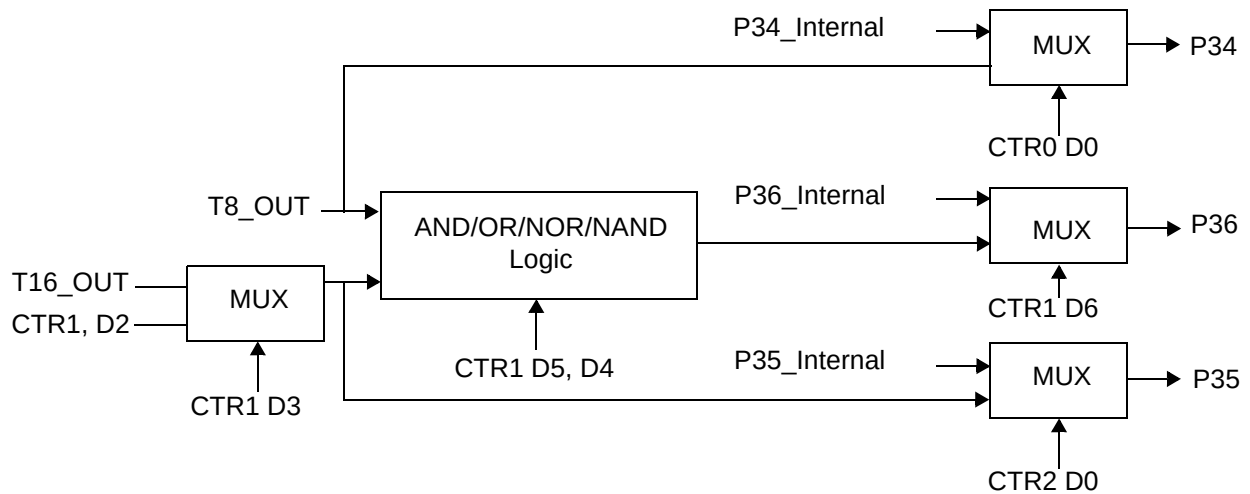

**Figure 29. Output Circuit**

The initial value of T8 or T16 must not be 1. Stopping the timer and restarting the timer reloads the initial value to avoid an unknown previous value.

### During PING-PONG Mode

The enable bits of T8 and T16 (CTR0, D7; CTR2, D7) are set and cleared alternately by hardware. The timeout bits (CTR0, D5; CTR2, D5) are set every time the counter/timers reach the terminal count.


### Timer Output

The output logic for the timers is illustrated in Figure 29. P34 is used to output T8-OUT when D0 of CTR0 is set. P35 is used to output the value of T16-OUT when D0 of CTR2 is set. When D6 of CTR1 is set, P36 outputs the logic combination of T8-OUT and T16-OUT determined by D5 and D4 of CTR1.

### Interrupts

The Z8 GP™ OTP MCU Family features six different interrupts (Table 16). The interrupts are maskable and prioritized (Figure 30). The six sources are divided as follows: three sources are claimed by Port 3 lines P33–P31, two by the counter/timers (Table 16) and one for low voltage detection. The Interrupt Mask Register (globally or individually) enables or disables the six interrupt requests.

The source for IRQ is determined by bit 1 of the Port 3 mode register (P3M). When in digital mode, Pin P33 is the source. When in analog mode the output of the Stop mode recovery source logic is used as the source for the interrupt. See Figure 35, Stop Mode Recovery Source, on page 57.

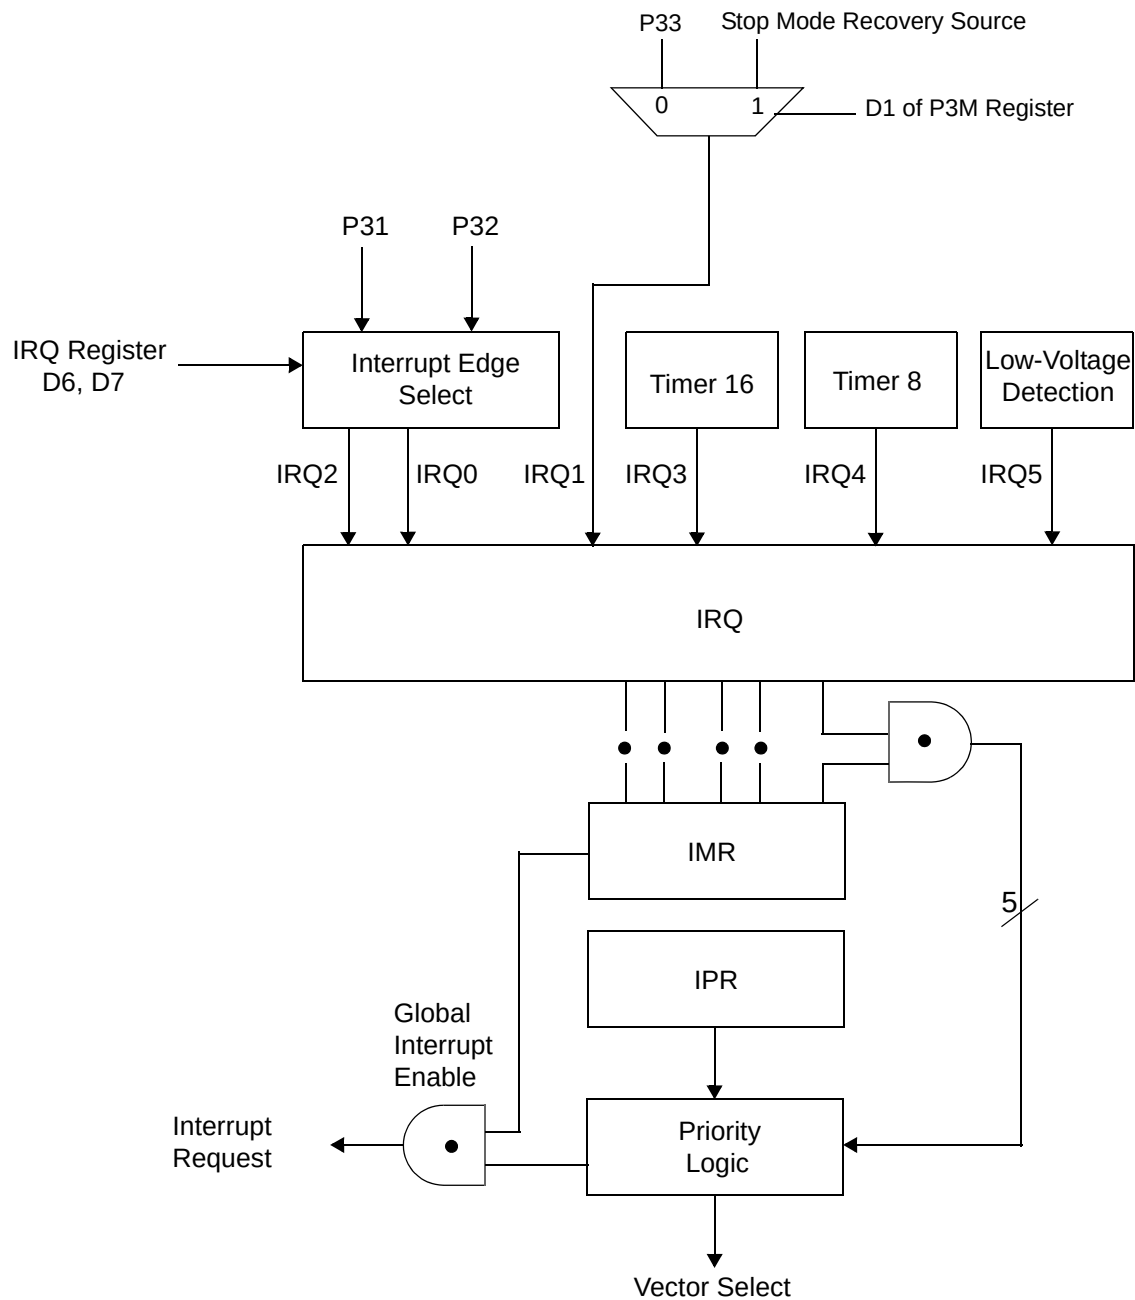

**Figure 30. Interrupt Block Diagram**

**Table 16. Interrupt Types, Sources, and Vectors**

| Name | Source               | Vector Location | Comments                                       |
|------|----------------------|-----------------|------------------------------------------------|
| IRQ0 | P32                  | 0,1             | External (P32), Rising, Falling Edge Triggered |
| IRQ1 | P33                  | 2,3             | External (P33), Falling Edge Triggered         |
| IRQ2 | P31, T <sub>IN</sub> | 4,5             | External (P31), Rising, Falling Edge Triggered |
| IRQ3 | T16                  | 6,7             | Internal                                       |
| IRQ4 | T8                   | 8,9             | Internal                                       |
| IRQ5 | LVD                  | 10,11           | Internal                                       |

When more than one interrupt is pending, priorities are resolved by a programmable priority encoder controlled by the Interrupt Priority Register. An interrupt machine cycle activates when an interrupt request is granted. As a result, all subsequent interrupts are disabled, and the Program Counter and Status Flags are saved. The cycle then branches to the program memory vector location reserved for that interrupt. All Z8 GP™ OTP MCU Family interrupts are vectored through locations in the program memory. This memory location and the next byte contain the 16-bit address of the interrupt service routine for that particular interrupt request. To accommodate polled interrupt systems, interrupt inputs are masked, and the Interrupt Request register is polled to determine which of the interrupt requests require service.

An interrupt resulting from AN1 is mapped into IRQ2, and an interrupt from AN2 is mapped into IRQ0. Interrupts IRQ2 and IRQ0 can be rising, falling, or both edge triggered. These interrupts are programmable by the user. The software can poll to identify the state of the pin.

Programming bits for the Interrupt Edge Select are located in the IRQ Register (R250), bits D7 and D6. The configuration is indicated in Table 17.

**Table 17. IRQ Register**

| IRQ |    | Interrupt Edge |            |
|-----|----|----------------|------------|
| D7  | D6 | IRQ2 (P31)     | IRQ0 (P32) |
| 0   | 0  | F              | F          |
| 0   | 1  | F              | R          |
| 1   | 0  | R              | F          |
| 1   | 1  | R/F            | R/F        |


**Note:** F = Falling Edge; R = Rising Edge



## Clock

The device's on-chip oscillator has a high-gain, parallel-resonant amplifier, for connection to a crystal, ceramic resonator, or any suitable external clock source (XTAL1 = Input, XTAL2 = Output). The crystal must be AT cut, 1 MHz to 8 MHz maximum, with a series resistance (RS) less than or equal to 100  $\Omega$ . The on-chip oscillator can be driven with a suitable external clock source.

The crystal must be connected across XTAL1 and XTAL2 using the recommended capacitors (capacitance greater than or equal to 22 pF) from each pin to ground.

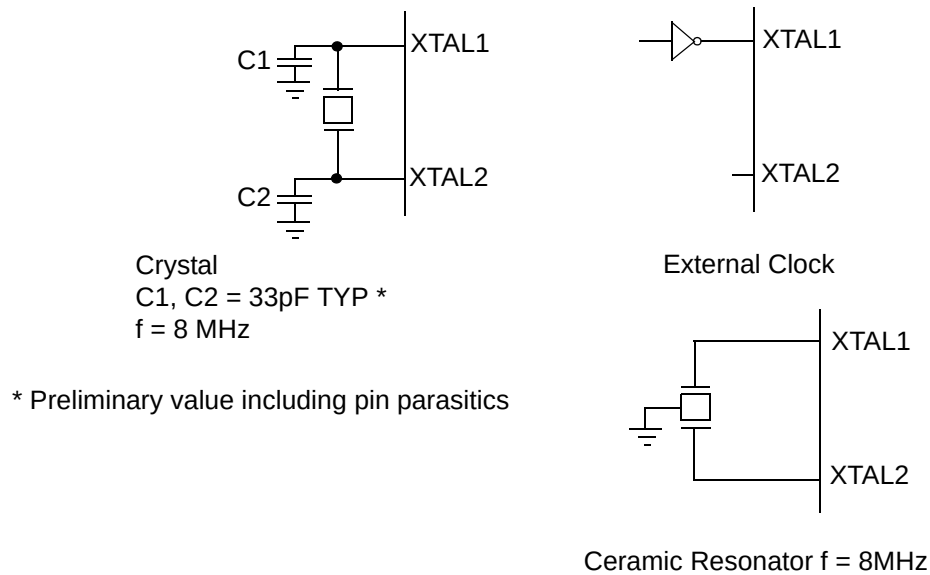

**Figure 31. Oscillator Configuration**

### Power-On Reset

A timer circuit clocked by a dedicated on-board RC-oscillator is used for the Power-On Reset (POR) timer function. The POR time allows  $V_{DD}$  and the oscillator circuit to stabilize before instruction execution begins.

The POR timer circuit is a one-shot timer triggered by one of three conditions:

- Power Fail to Power OK status, including Waking up from  $V_{BO}$  Standby
- Stop-Mode Recovery (if D5 of SMR = 1)
- WDT Timeout

The POR timer is 2.5 ms minimum. Bit 5 of the Stop-Mode Register determines whether the POR timer is bypassed after Stop-Mode Recovery (typical for external clock).

### HALT Mode

This instruction turns off the internal CPU clock, but not the XTAL oscillation. The counter/timers and external interrupts IRQ0, IRQ1, IRQ2, IRQ3, IRQ4, and IRQ5 remain active. The devices are recovered by interrupts, either externally or internally generated. An interrupt request must be executed (enabled) to exit HALT Mode. After the interrupt service routine, the program continues from the instruction after HALT Mode.

### STOP Mode

This instruction turns off the internal clock and external crystal oscillation, reducing the standby current to 10  $\mu$ A or less. STOP Mode is terminated only by a reset, such as WDT timeout, POR, SMR or external reset. This condition causes the processor to restart the application program at address 000CH. To enter STOP (or HALT) mode, first flush the instruction pipeline to avoid suspending execution in mid-instruction. Execute a NOP (Opcode = FFH) immediately before the appropriate sleep instruction, as follows:

```
FF      NOP      ; clear the pipeline
6F      Stop     ; enter Stop Mode
```


or

```
FF      NOP      ; clear the pipeline
7F      HALT     ; enter HALT Mode
```

### Port Configuration Register

The Port Configuration (PCON) register (Figure 32) configures the comparator output on Port 3. It is located in the expanded register 2 at Bank F, location 00.

PCON(FH)00H

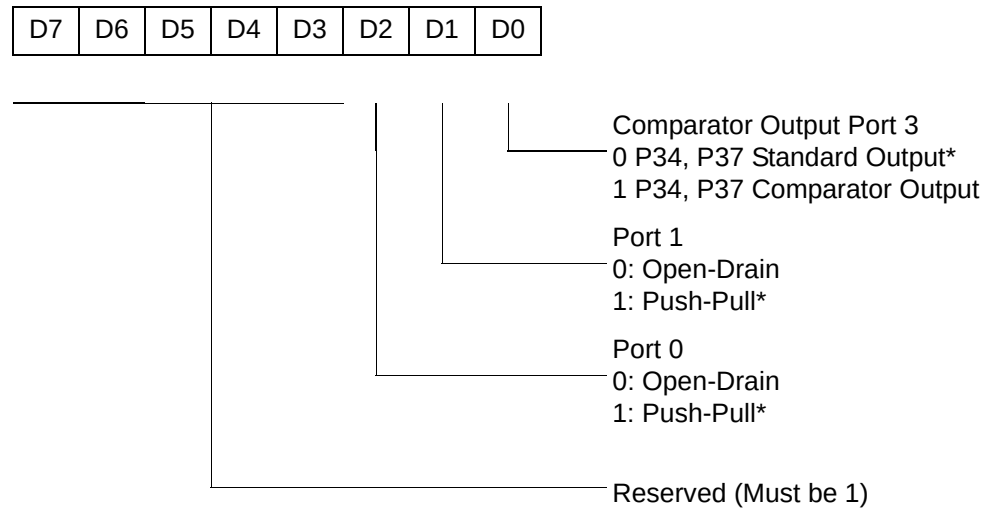

\* Default setting after reset

**Figure 32. Port Configuration Register (PCON) (Write Only)**

#### Comparator Output Port 3 (D0)

Bit 0 controls the comparator used in Port 3. A 1 in this location brings the comparator outputs to P34 and P37, and a 0 releases the Port to its standard I/O configuration.

#### Port 1 Output Mode (D1)

Bit 1 controls the output mode of port 1. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.


### Port 0 Output Mode (D2)

Bit 2 controls the output mode of port 0. A 1 in this location sets the output to push-pull, and a 0 sets the output to open-drain.

### Stop-Mode Recovery Register (SMR)

This register selects the clock divide value and determines the mode of Stop Mode Recovery (Figure 33). All bits are write only except bit 7, which is read only. Bit 7 is a flag bit that is hardware set on the condition of Stop recovery and reset by a power-on cycle. Bit 6 controls whether a low level or a high level at the XOR-gate input (Figure 35 on page 57) is required from the recovery source. Bit 5 controls the reset delay after recovery. Bits D2, D3, and D4 of the SMR register specify the source of the Stop Mode Recovery signal. Bits D0 determines if SCLK/TCLK are divided by 16 or not. The SMR is located in Bank F of the Expanded Register Group at address 0BH.

SMR(0F)0BH

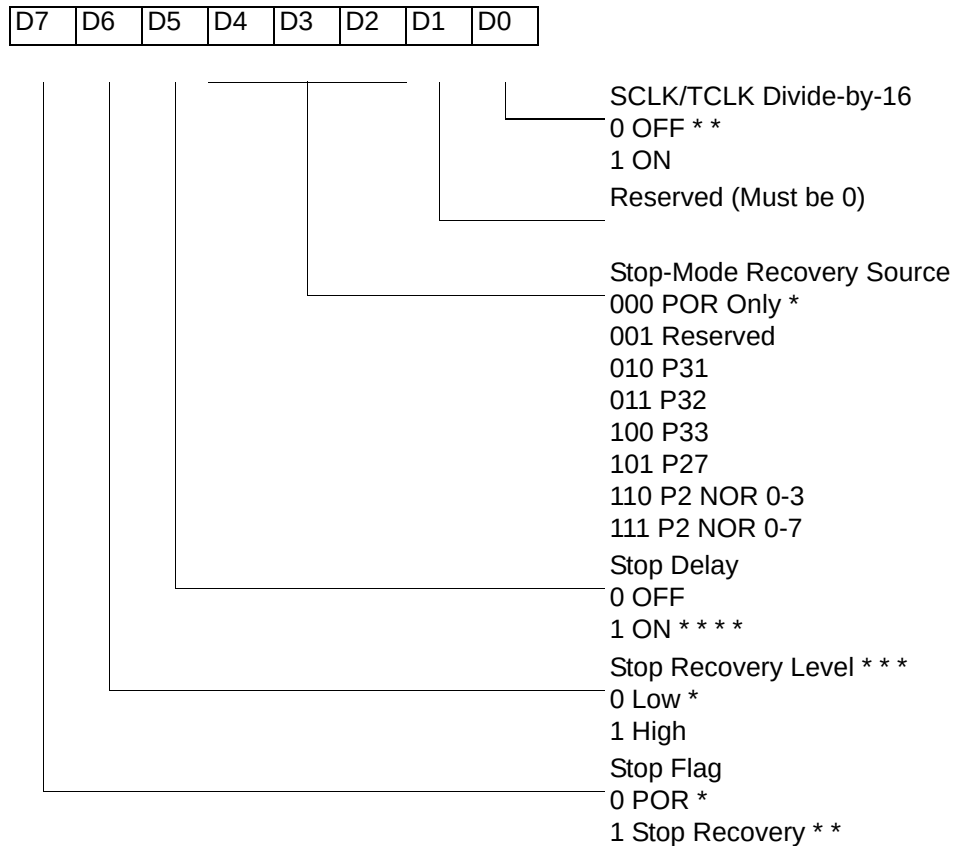

\* Default after Power On Reset or Watch-Dog Reset

\*\* Set after STOP Mode Recovery

\*\*\* At the XOR gate input

\*\*\*\* Default setting after reset. Must be 1 if using a crystal or resonator clock source.

**Figure 33. STOP Mode Recovery Register**

### SCLK/TCLK Divide-by-16 Select (D0)

D0 of the SMR controls a divide-by-16 prescaler of SCLK/TCLK (Figure 34). This control selectively reduces device power consumption during normal processor execution (SCLK control) and/or Halt Mode (where TCLK sources interrupt logic). After Stop Mode Recovery, this bit is set to a 0.

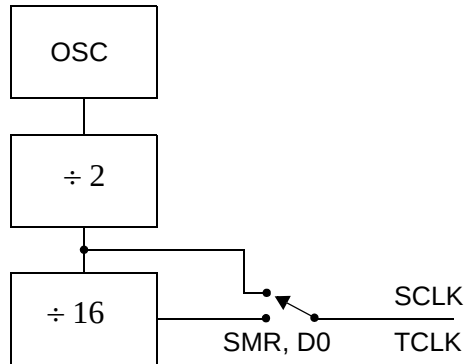


Figure 34. SCLK Circuit

### Stop-Mode Recovery Source (D2, D3, and D4)

These three bits of the SMR specify the wake-up source of the Stop recovery (Figure 35 and Table 19).

### Stop-Mode Recovery Register 2—SMR2(F)0DH

Table 18 lists and briefly describes the fields for this register.


Table 18. SMR2(F)0DH:Stop Mode Recovery Register 2\*

| Field          | Bit Position | Value                                                               | Description                                                                                                                                                                                      |
|----------------|--------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reserved       | 7-----       | 0                                                                   | Reserved (Must be 0)                                                                                                                                                                             |
| Recovery Level | -6-----      | W 0 <sup>†</sup><br>1                                               | Low<br>High                                                                                                                                                                                      |
| Reserved       | --5-----     | 0                                                                   | Reserved (Must be 0)                                                                                                                                                                             |
| Source         | ---432--     | W 000 <sup>†</sup><br>001<br>010<br>011<br>100<br>101<br>110<br>111 | A. POR Only<br>B. NAND of P23–P20<br>C. NAND of P27–P20<br>D. NOR of P33–P31<br>E. NAND of P33–P31<br>F. NOR of P33–P31, P00, P07<br>G. NAND of P33–P31, P00, P07<br>H. NAND of P33–P31, P22–P20 |
| Reserved       | -----10      | 00                                                                  | Reserved (Must be 0)                                                                                                                                                                             |

**Notes:**

\* Port pins configured as outputs are ignored as a SMR recovery source.

<sup>†</sup> Indicates the value upon Power-On Reset

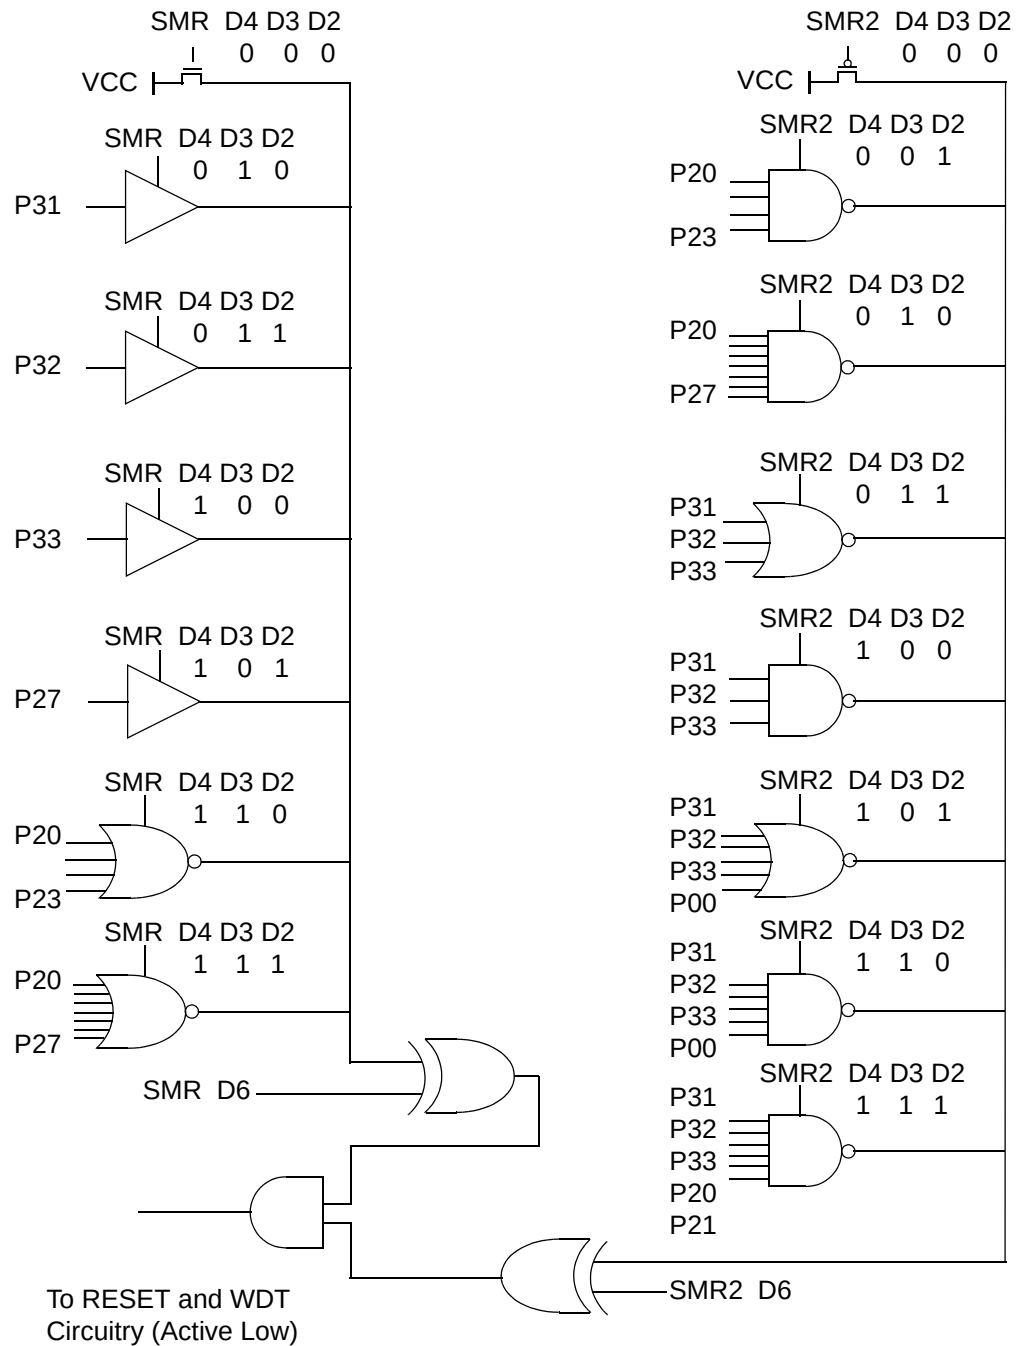

**Figure 35. Stop Mode Recovery Source**

Table 19. Stop Mode Recovery Source

| SMR:432 |    |    | Operation                          |
|---------|----|----|------------------------------------|
| D4      | D3 | D2 | Description of Action              |
| 0       | 0  | 0  | POR and/or external reset recovery |
| 0       | 0  | 1  | Reserved                           |
| 0       | 1  | 0  | P31 transition                     |
| 0       | 1  | 1  | P32 transition                     |
| 1       | 0  | 0  | P33 transition                     |
| 1       | 0  | 1  | P27 transition                     |
| 1       | 1  | 0  | Logical NOR of P20 through P23     |
| 1       | 1  | 1  | Logical NOR of P20 through P27     |

- **Note:** Any Port 2 bit defined as an output drives the corresponding input to the default state. For example, if the NOR of P23-P20 is selected as the recovery source and P20 is configured as an output, the remaining SMR pins (P23-P21) form the NOR equation. This condition allows the remaining inputs to control the AND/OR function. Refer to SMR2 register on page 59 for other recover sources.

#### Stop Mode Recovery Delay Select (D5)

This bit, if Low, disables the  $T_{POR}$  delay after Stop Mode Recovery. The default configuration of this bit is 1. If the “fast” wake up is selected, the Stop Mode Recovery source must be kept active for at least 5  $T_{pC}$ .

- **Note:** It is recommended that this bit be set to 1 if using a crystal or resonator clock source. The  $T_{POR}$  delay allows the clock source to stabilize before executing instructions.

#### Stop Mode Recovery Edge Select (D6)

A 1 in this bit position indicates that a High level on any one of the recovery sources wakes the device from Stop Mode. A 0 indicates Low level recovery. The default is 0 on POR.

#### Cold or Warm Start (D7)


This bit is read only. It is set to 1 when the device is recovered from Stop Mode. The bit is set to 0 when the device reset is other than Stop Mode Recovery (SMR).



### Stop Mode Recovery Register 2 (SMR2)

This register determines the mode of Stop Mode Recovery for SMR2 (Figure 36).

SMR2(0F)DH

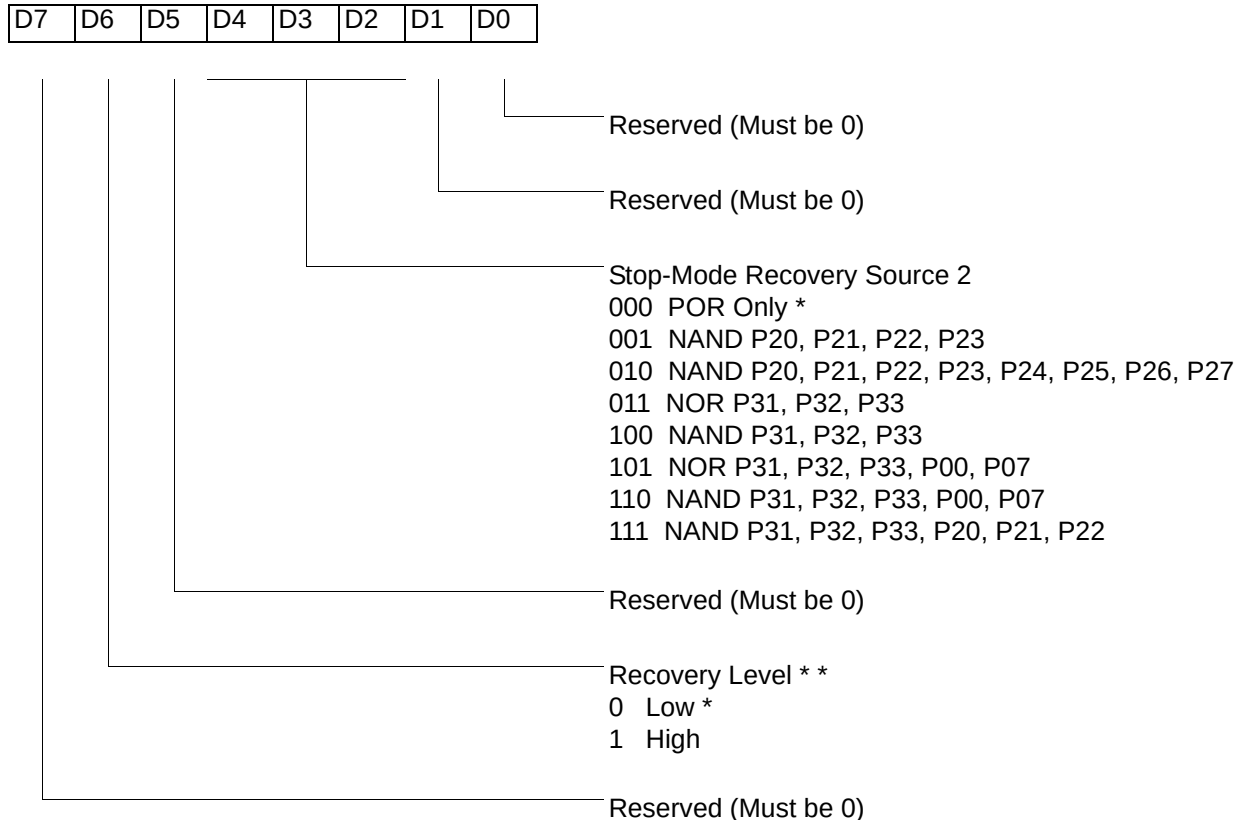

Note: If used in conjunction with SMR, either of the two specified events causes a Stop-Mode Recovery.

\* Default setting after reset

\* \* At the XOR gate input

**Figure 36. Stop Mode Recovery Register 2 ((0F)DH:D2–D4, D6 Write Only)**

If SMR2 is used in conjunction with SMR, either of the specified events causes a Stop Mode Recovery.


► **Note:** Port pins configured as outputs are ignored as an SMR or SMR2 recovery source. For example, if the NAND or P23–P20 is selected as the recovery source and P20 is configured as an output, the remaining SMR pins (P23–P21) form the NAND equation.

### Watch-Dog Timer Mode Register (WDTMR)

The Watch-Dog Timer (WDT) is a retriggerable one-shot timer that resets the Z8® CPU if it reaches its terminal count. The WDT must initially be enabled by executing the WDT instruction. On subsequent executions of the WDT instruction, the WDT is refreshed. The WDT circuit is driven by an on-board RC-oscillator. The WDT instruction affects the Zero (Z), Sign (S), and Overflow (V) flags.

The POR clock source the internal RC-oscillator. Bits 0 and 1 of the WDT register control a tap circuit that determines the minimum timeout period. Bit 2 determines whether the WDT is active during HALT, and Bit 3 determines WDT activity during Stop. Bits 4 through 7 are reserved (Figure 37). This register is accessible only during the first 60 processor cycles (120 XTAL clocks) from the execution of the first instruction after Power-On-Reset, Watch-Dog Reset, or a Stop-Mode Recovery (Figure 36). After this point, the register cannot be modified by any means (intentional or otherwise). The WDTMR cannot be read. The register is located in Bank F of the Expanded Register Group at address location 0Fh. It is organized as shown in Figure 37.

WDTMR(0F)0Fh

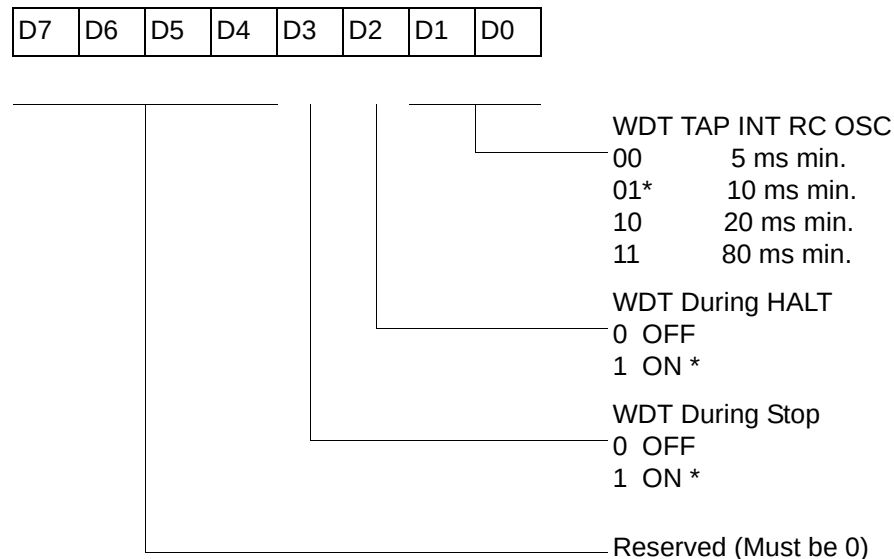

\* Default setting after reset

**Figure 37. Watch-Dog Timer Mode Register (Write Only)**

### WDT Time Select (D0, D1)


This bit selects the WDT time period. It is configured as indicated in Table 20.

**Table 20. Watch-Dog Timer Time Select**

| D1 | D0 | Timeout of Internal RC-Oscillator |
|----|----|-----------------------------------|
| 0  | 0  | 5ms min.                          |
| 0  | 1  | 10ms min.                         |
| 1  | 0  | 20ms min.                         |
| 1  | 1  | 80ms min.                         |

### WDTMR During Halt (D2)

This bit determines whether or not the WDT is active during HALT Mode. A 1 indicates active during HALT. The default is 1. See Figure 38.

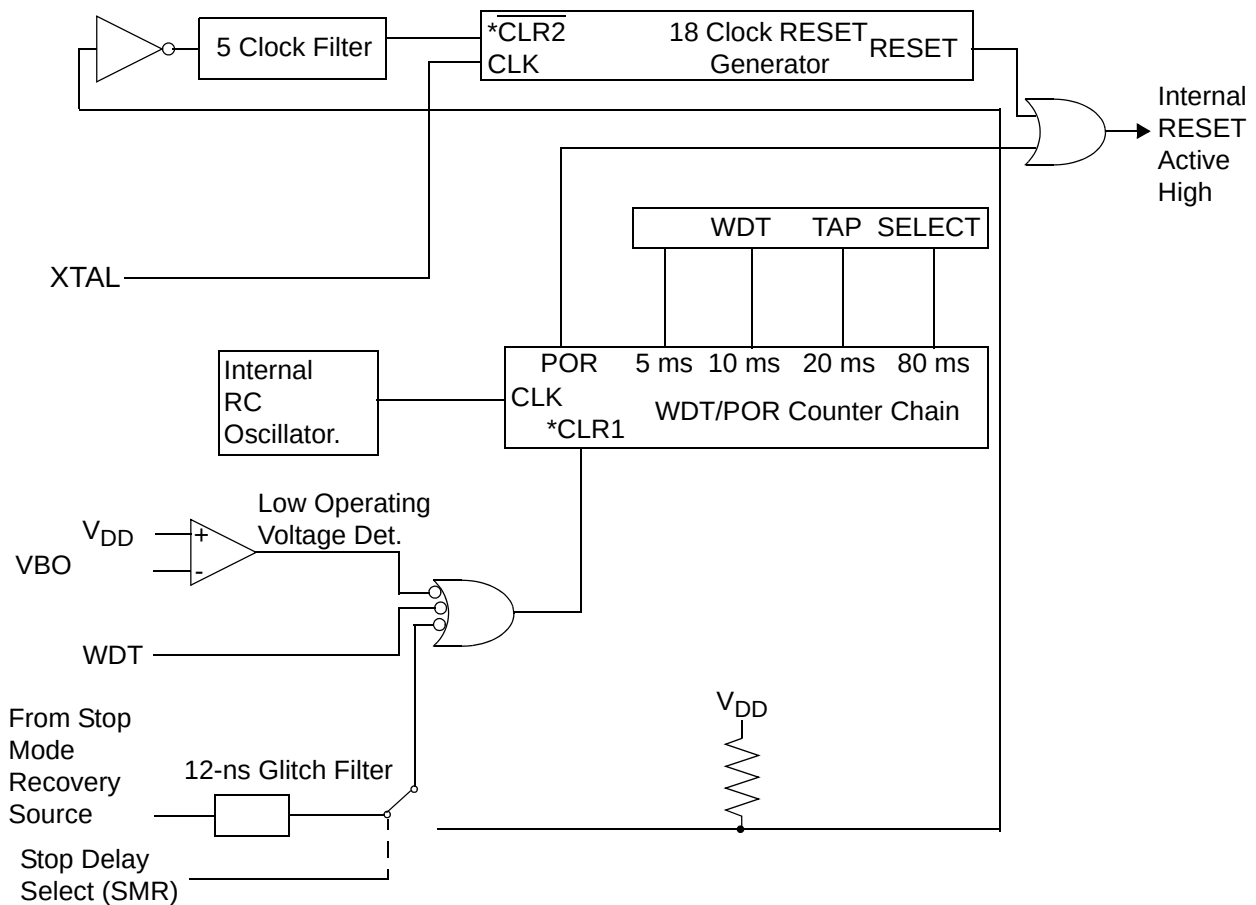

\* CLR1 and  $\overline{\text{CLR2}}$  enable the WDT/POR and 18 Clock Reset timers respectively upon a Low-to-High input translation.

**Figure 38. Resets and WDT**

### WDTMR During STOP (D3)

This bit determines whether or not the WDT is active during STOP Mode. Because the XTAL clock is stopped during STOP Mode, the on-board RC has to be selected as the clock source to the WDT/POR counter. A 1 indicates active during Stop. The default is 1.

### EPROM Selectable Options

There are seven EPROM Selectable Options to choose from based on ROM code requirements. These options are listed in Table 21.

**Table 21. EPROM Selectable Options**

|                                   |        |
|-----------------------------------|--------|
| Port 00–03 Pull-Ups               | On/Off |
| Port 04–07 Pull-Ups               | On/Off |
| Port 10–13 Pull-Ups               | On/Off |
| Port 14–17 Pull-Ups               | On/Off |
| Port 20–27 Pull-Ups               | On/Off |
| EPROM Protection                  | On/Off |
| Watch-Dog Timer at Power-On Reset | On/Off |

### Voltage Brown-Out/Standby

An on-chip Voltage Comparator checks that the  $V_{DD}$  is at the required level for correct operation of the device. Reset is globally driven when  $V_{DD}$  falls below  $V_{BO}$ . A small drop in  $V_{DD}$  causes the XTAL1 and XTAL2 circuitry to stop the crystal or resonator clock. If the  $V_{DD}$  is allowed to stay above  $V_{RAM}$ , the RAM content is preserved. When the power level is returned to above  $V_{BO}$ , the device performs a POR and functions normally.

### Low-Voltage Detection Register—LVD(D)0Ch

- **Note:** Voltage detection does not work at Stop mode. It must be disabled during Stop mode in order to reduce current.

| Field              | Bit Position | Description           |         |                                |
|--------------------|--------------|-----------------------|---------|--------------------------------|
| LVD                | 76543---     | Reserved<br>No Effect |         |                                |
|                    | ----2--      | R                     | 1<br>0* | HVD flag set<br>HVD flag reset |
|                    | -----1-      | R                     | 1<br>0* | LVD flag set<br>LVD flag reset |
|                    | -----0       | R/W                   | 1<br>0* | Enable VD<br>Disable VD        |
| *Default after POR |              |                       |         |                                |

- **Note:** Do not modify register P01M while checking a low-voltage condition. Switching noise of both ports 0 and 1 together might trigger the LVD flag.

### Voltage Detection and Flags

The Voltage Detection register (LVD, register 0CH at the expanded register bank 0Dh) offers an option of monitoring the  $V_{CC}$  voltage. The Voltage Detection is enabled when bit 0 of LVD register is set. Once Voltage Detection is enabled, the the  $V_{CC}$  level is monitored in real time. The flags in the LVD register valid 20uS after Voltage Detection is enabled. The HVD flag (bit 2 of the LVD register) is set only if  $V_{CC}$  is higher than  $V_{HVD}$ . The LVD flag (bit 1 of the LVD register) is set only if  $V_{CC}$  is lower than the  $V_{LVD}$ . When Voltage Detection is enabled, the LVD flag also triggers IRQ5. The IRQ bit 5 latches the low voltage condition until it is cleared by instructions or reset. The IRQ5 interrupt is served if it is enabled in the IMR register. Otherwise, bit 5 of IRQ register is latched as a flag only.


- **Notes:** If it is necessary to receive an LVD interrupt upon power-up at an operating voltage lower than the low battery detect threshold, enable interrupts using the Enable Interrupt instruction (EI) prior to enabling the voltage detection.

## Expanded Register File Control Registers (0D)

The expanded register file control registers (0D) are depicted in Figure 39 through Figure 43.

CTR0(0D)00H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

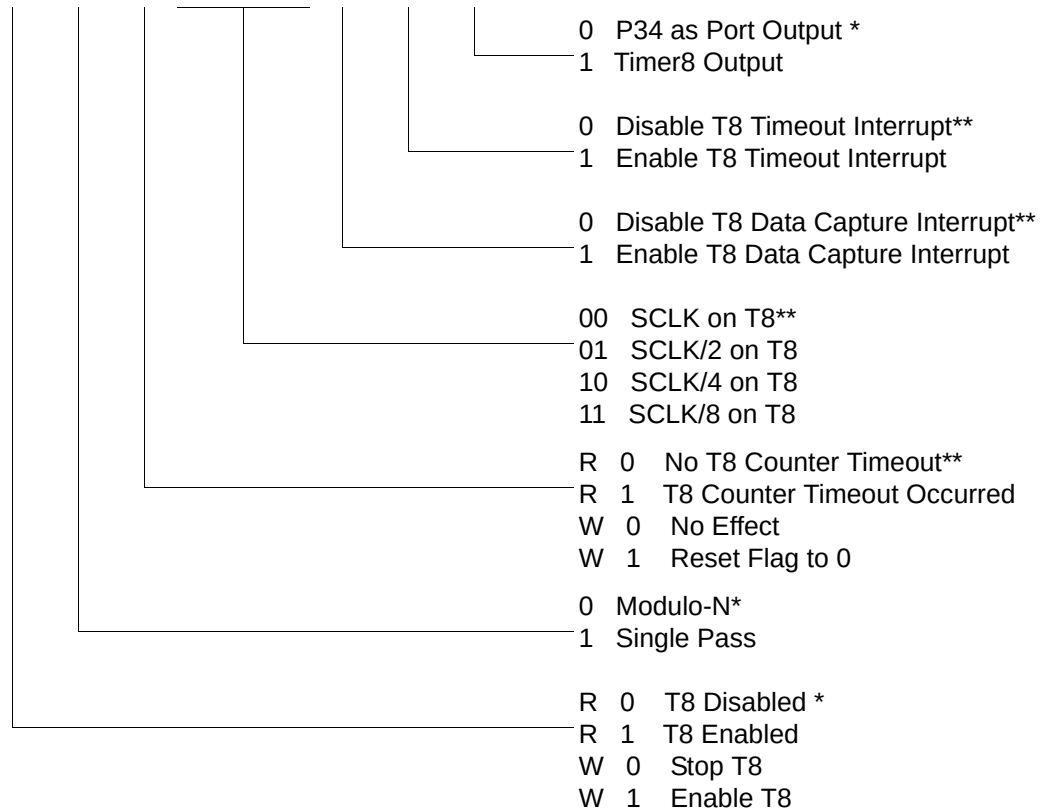

\* Default setting after reset

\*\*Default setting after reset. Not reset with Stop Mode recovery.

**Figure 39. TC8 Control Register ((0D)00H: Read/Write Except Where Noted)**

CTR1(0D)01H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

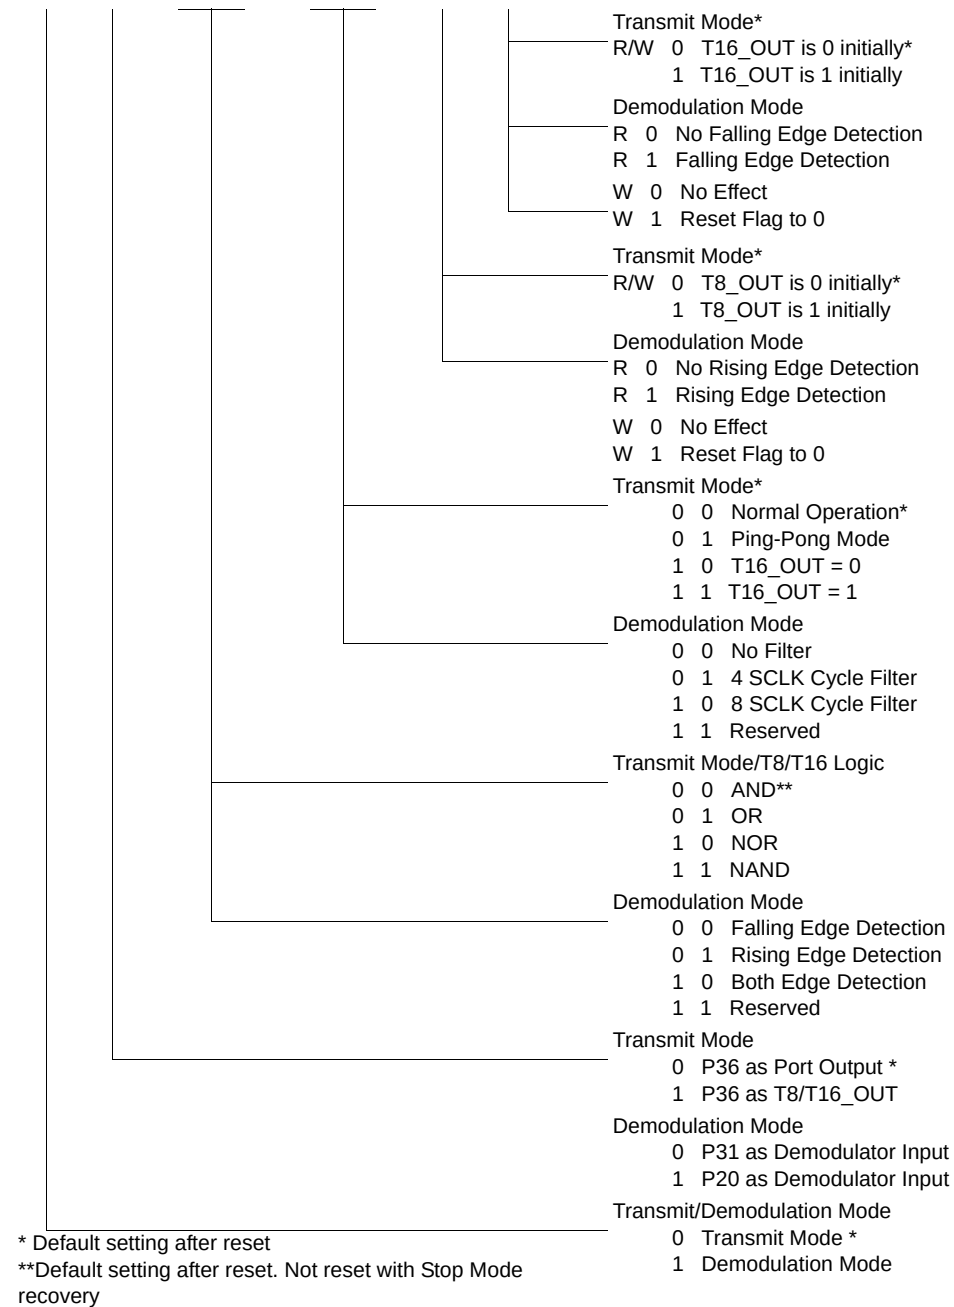


Figure 40. T8 and T16 Common Control Functions ((0D)01H: Read/Write)




- **Notes:** Take care in differentiating the Transmit Mode from Demodulation Mode. Depending on which of these two modes is operating, the CTR1 bit has different functions.

Changing from one mode to another cannot be performed without disabling the counter/timers.



CTR2(0D)02H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

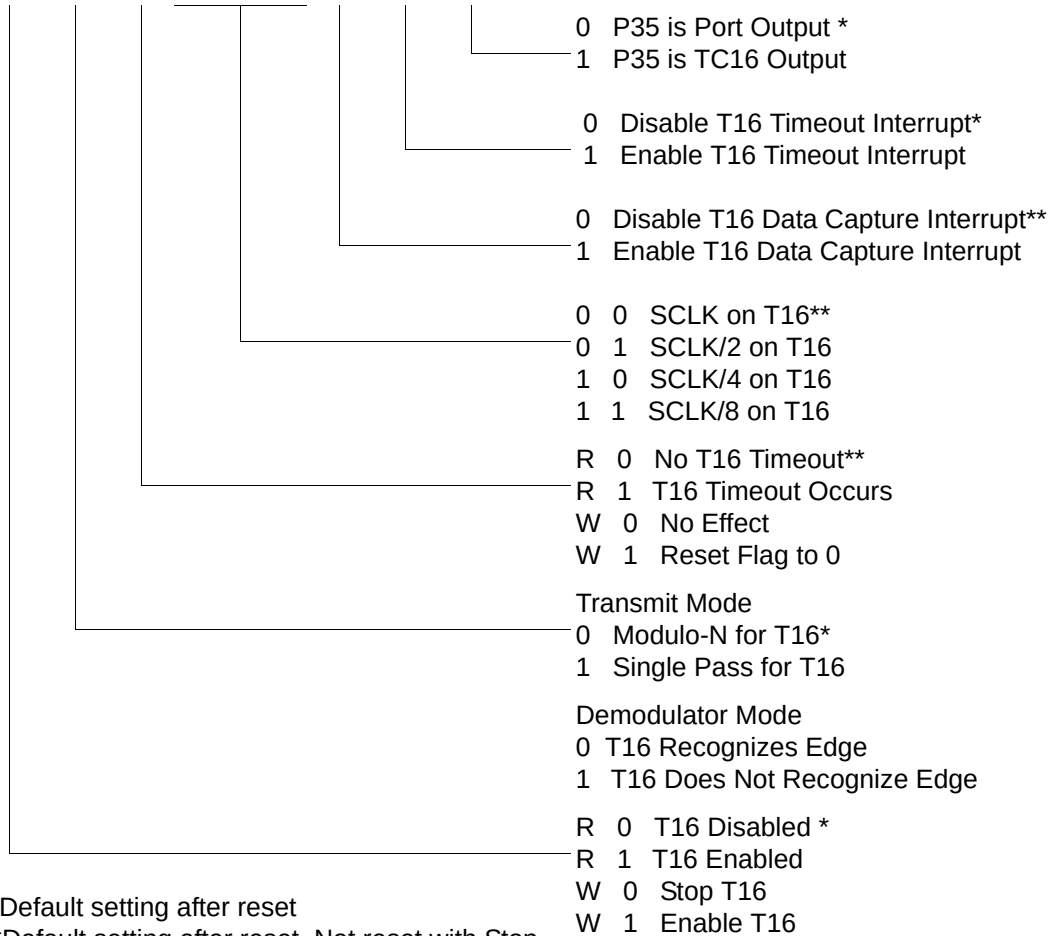


\* Default setting after reset

\*\*Default setting after reset. Not reset with Stop Mode recovery.

**Figure 41. T16 Control Register ((0D) 2H: Read/Write Except Where Noted)**

CTR3(0D)03H

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

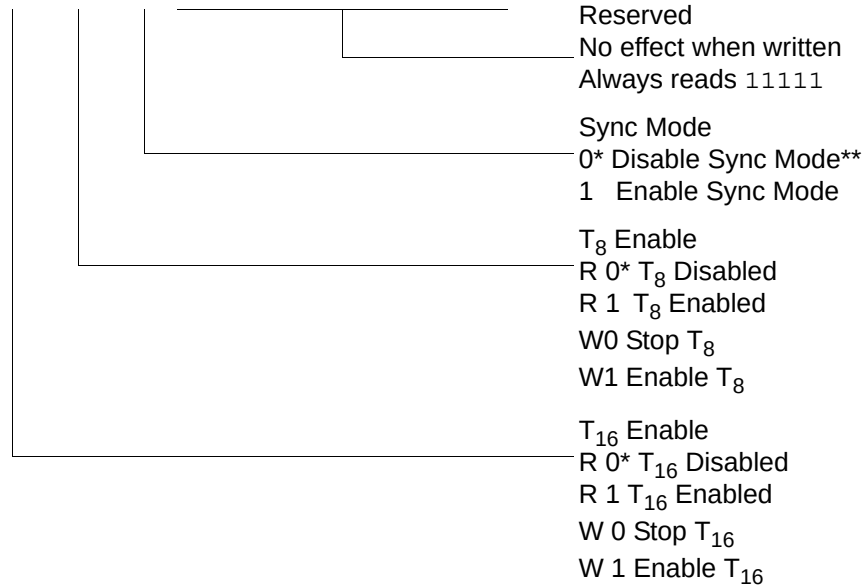

\* Default setting after reset.


\*\* Default setting after reset. Not reset with Stop Mode recovery.

**Figure 42. T8/T16 Control Register (0D)03H: Read/Write (Except Where Noted)**

► **Note:** If Sync Mode is enabled, the first pulse of T8 carrier is always synchronized with T16 (demodulated signal). It can always provide a full carrier pulse.

LVD(0D)0CH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

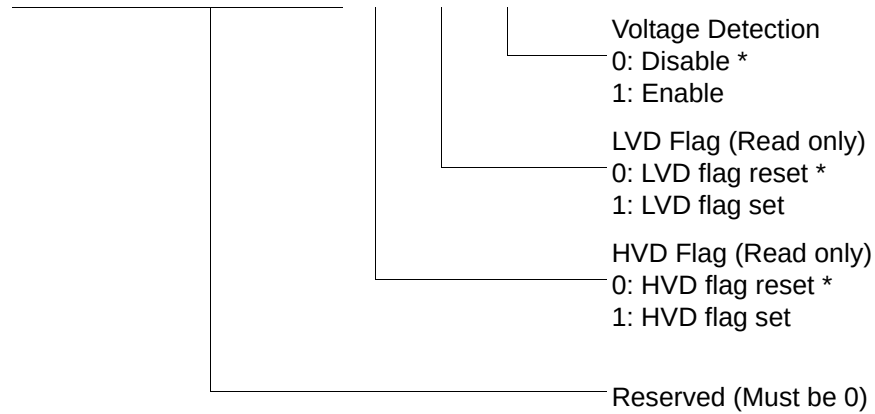

\* Default


**Figure 43. Voltage Detection Register**

- **Note:** Do not modify register P01M while checking a low-voltage condition. Switching noise of both ports 0 and 1 together might trigger the LVD flag.

## Expanded Register File Control Registers (0F)

The expanded register file control registers (0F) are depicted in Figures 44 through Figure 57.

PCON(0F)00H

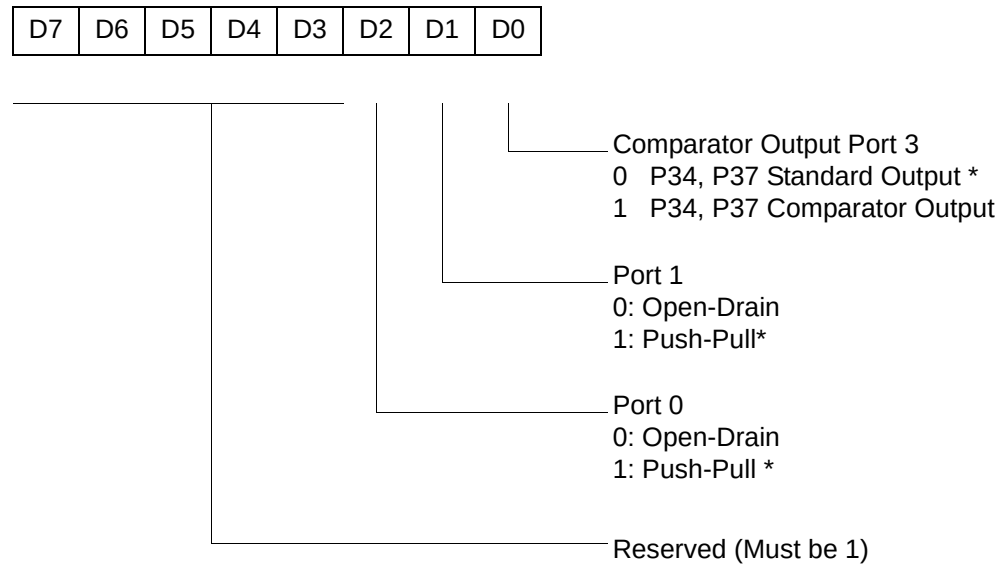


\* Default setting after reset

**Figure 44. Port Configuration Register (PCON)(0F)00H: Write Only**

SMR(0F)0BH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

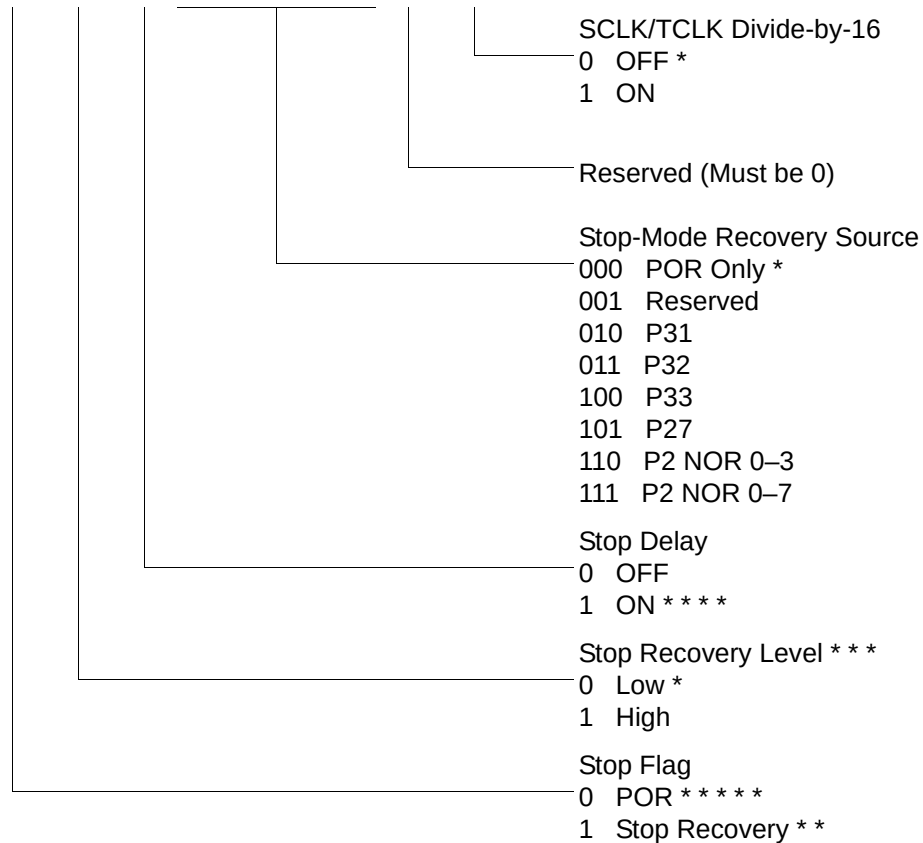

\* Default setting after Reset

\*\* Set after STOP Mode Recovery

\*\*\* At the XOR gate input


\*\*\*\* Default setting after Reset. Must be 1 if using a crystal or resonator clock source.

\*\*\*\*\* Default setting after Power On Reset. Not Reset with a Stop Mode recovery.

**Figure 45. Stop Mode Recovery Register ((0F)0BH: D6–D0=Write Only, D7=Read Only)**

SMR2(0F)0DH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

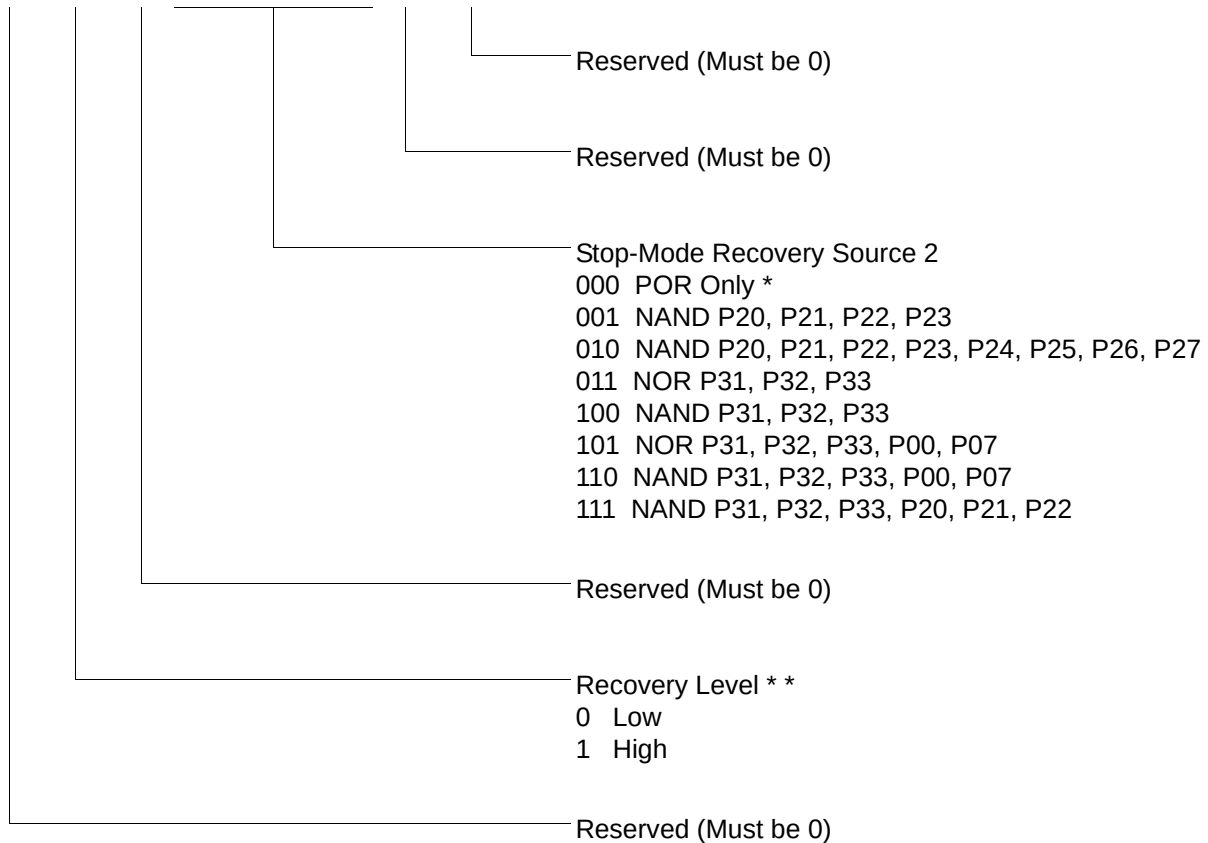

Note: If used in conjunction with SMR, either of the two specified events causes a Stop-Mode Recovery.


\* Default setting after reset

\*\* At the XOR gate input

Figure 46. Stop Mode Recovery Register 2 ((0F)0DH:D2–D4, D6 Write Only)

WDTMR(0F)0FH

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

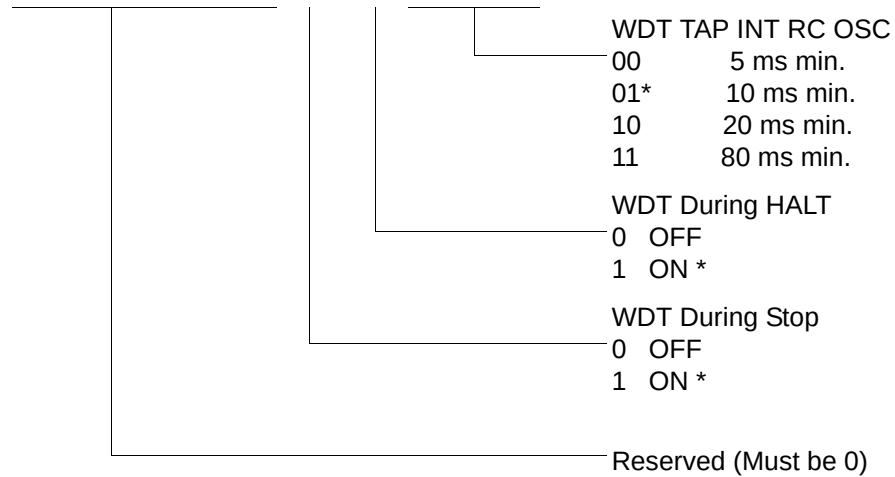


\* Default setting after reset

Figure 47. Watch-Dog Timer Register ((0F) 0FH: Write Only)

## Standard Control Registers

R246 P2M(F6H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|




\* Default setting after reset

Figure 48. Port 2 Mode Register (F6H: Write Only)

R247 P3M(F7H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

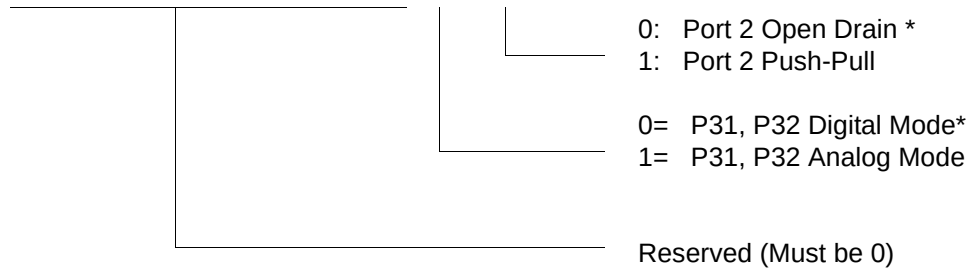


\* Default setting after reset. Not reset with Stop Mode recovery.

**Figure 49. Port 3 Mode Register (F7H: Write Only)**



R248 P01M(F8H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

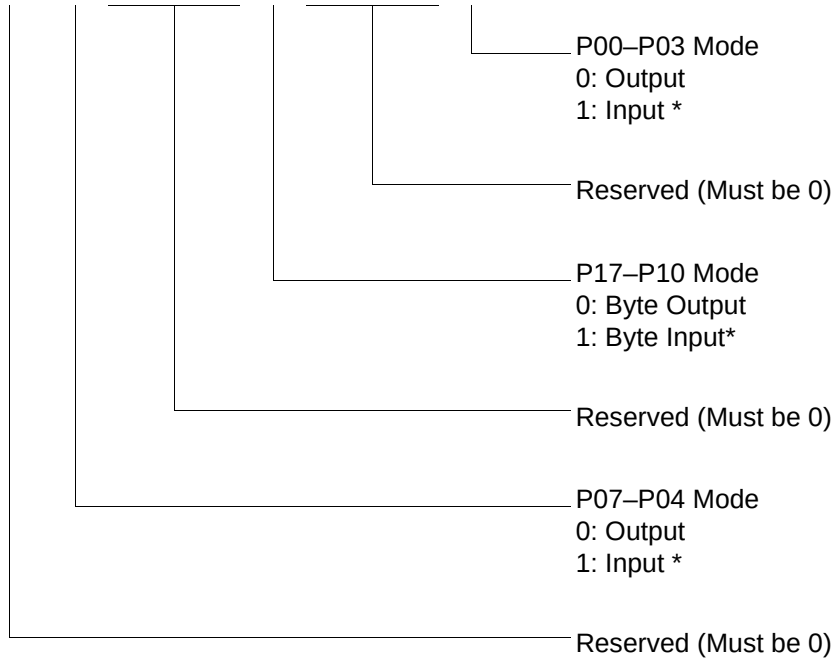


\* Default setting after reset; only P00, P01 and P07 are available in 20-pin configurations.

**Figure 50. Port 0 and 1 Mode Register (F8H: Write Only)**


R249 IPR(F9H)

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
|----|----|----|----|----|----|----|----|

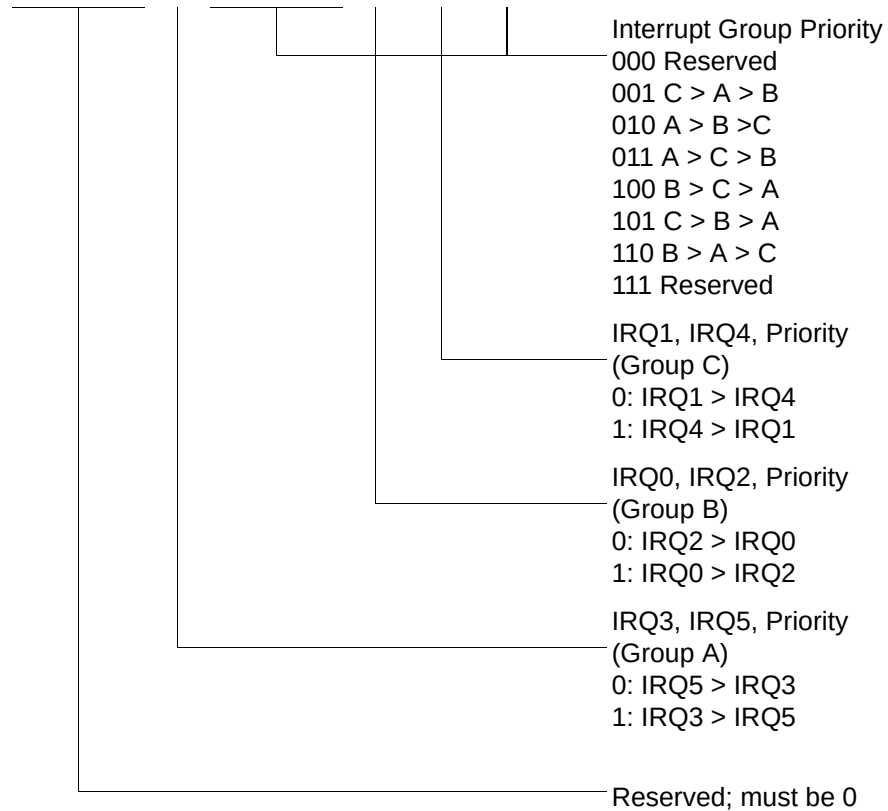


**Figure 51. Interrupt Priority Register (F9H: Write Only)**

R250 IRQ(FAH)

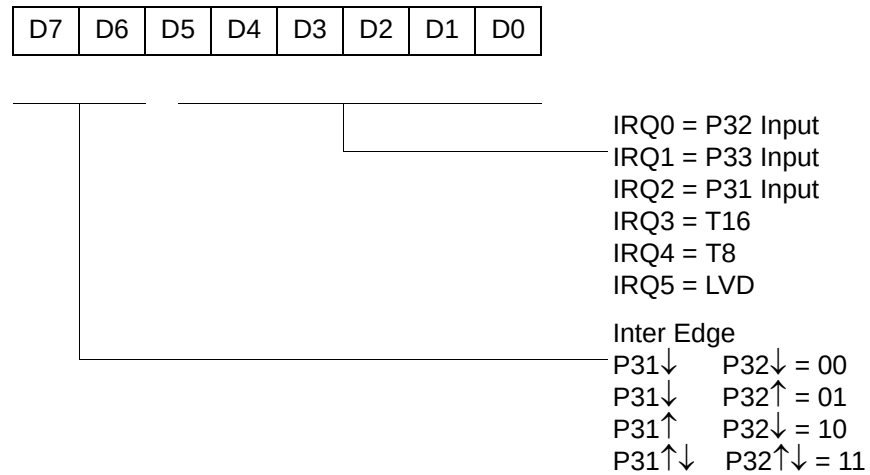

**Figure 52. Interrupt Request Register (FAH: Read/Write)**

R251 IMR(FBH)

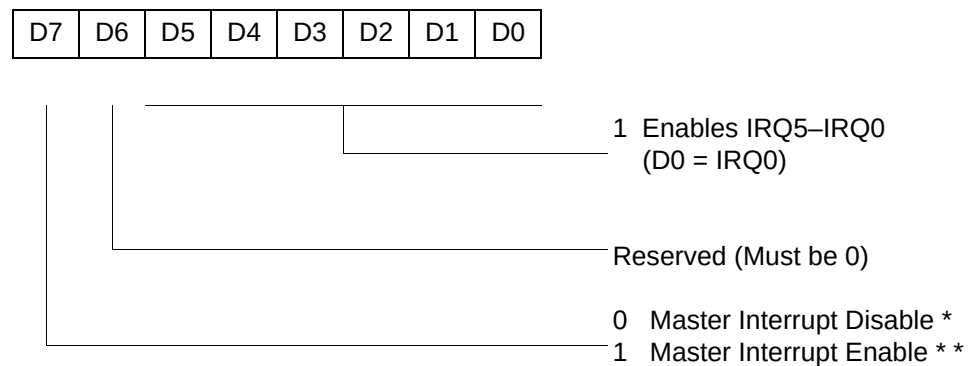


\* Default setting after reset

\*\* Only by using EI, DI instruction; DI is required before changing the IMR register


**Figure 53. Interrupt Mask Register (FBH: Read/Write)**

### R252 Flags(FCH)

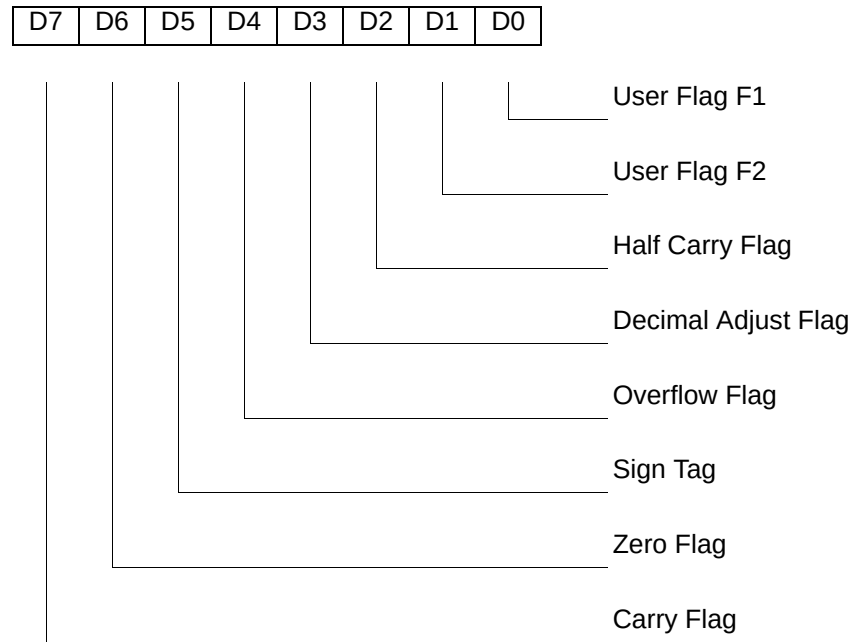

**Figure 54. Flag Register (FCH: Read/Write)**

### R253 RP(FDH)

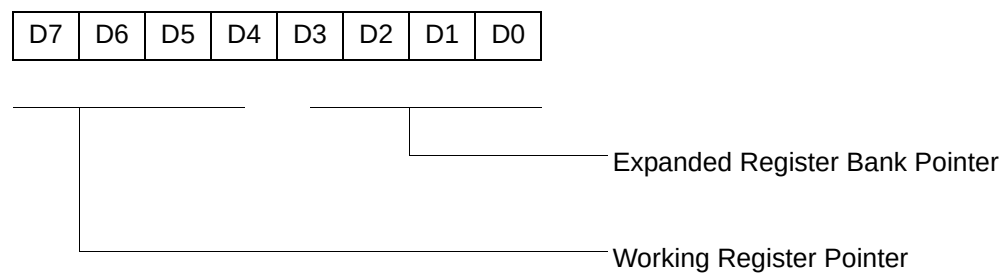

Default setting after reset = 0000 0000

**Figure 55. Register Pointer (FDH: Read/Write)**

R254 SPH(FEH)

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

General-Purpose Register

**Figure 56. Stack Pointer High (FEH: Read/Write)**

R255 SPL(FFH)


|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|

Stack Pointer Low  
Byte (SP7–SP0)


**Figure 57. Stack Pointer Low (FFH: Read/Write)**

## Package Information

Package information for all versions of Z8 GP™ OTP MCU Family are depicted in Figures 58 through Figure 68.

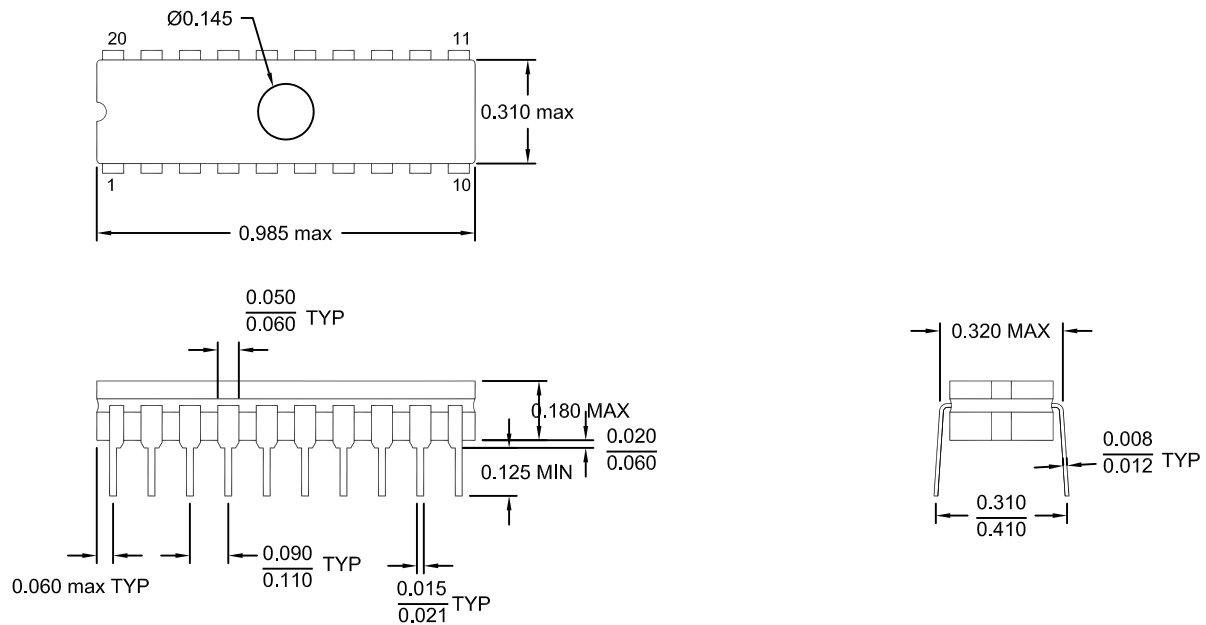


**Figure 58. 20-Pin CDIP Package**

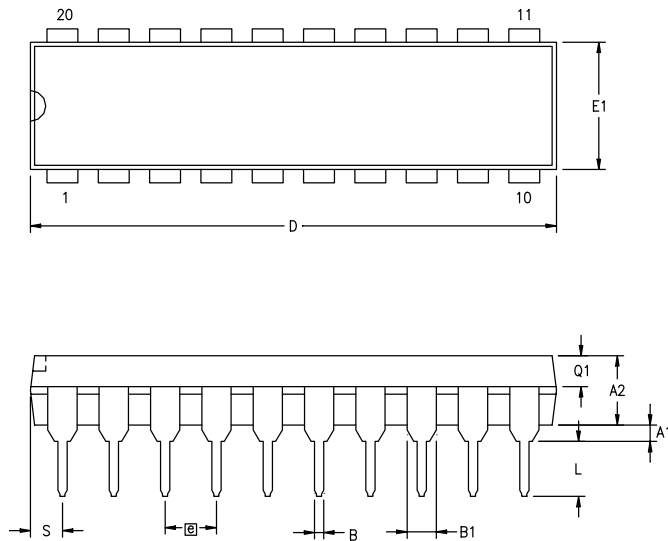

| SYMBOL | MILLIMETER |       | INCH     |       |
|--------|------------|-------|----------|-------|
|        | MIN        | MAX   | MIN      | MAX   |
| A1     | 0.38       | 0.81  | .015     | .032  |
| A2     | 3.25       | 3.68  | .128     | .145  |
| B      | 0.41       | 0.51  | .016     | .020  |
| B1     | 1.47       | 1.57  | .058     | .062  |
| C      | 0.20       | 0.30  | .008     | .012  |
| D      | 25.65      | 26.16 | 1.010    | 1.030 |
| E      | 7.49       | 8.26  | .295     | .325  |
| E1     | 6.10       | 6.65  | .240     | .262  |
| Ⓢ      | 2.54 BSC   |       | .100 BSC |       |
| eA     | 7.87       | 9.14  | .310     | .360  |
| L      | 3.18       | 3.43  | .125     | .135  |
| Q1     | 1.42       | 1.65  | .056     | .065  |
| S      | 1.52       | 1.65  | .060     | .065  |

CONTROLLING DIMENSIONS : INCH


Figure 59. 20-Pin PDIP Package Diagram

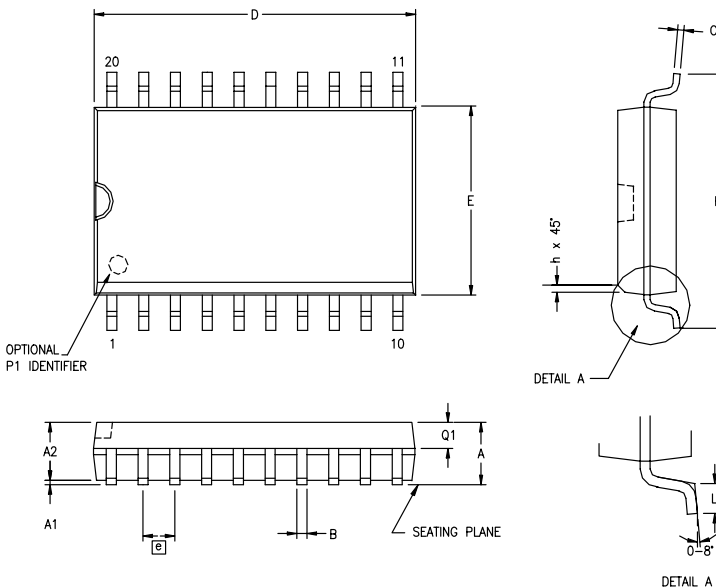

| SYMBOL | MILLIMETER |       | INCH     |      |
|--------|------------|-------|----------|------|
|        | MIN        | MAX   | MIN      | MAX  |
| A      | 2.40       | 2.65  | .094     | .104 |
| A1     | 0.10       | 0.30  | .004     | .012 |
| A2     | 2.24       | 2.44  | .088     | .096 |
| B      | 0.36       | 0.46  | .014     | .018 |
| C      | 0.23       | 0.30  | .009     | .012 |
| D      | 12.60      | 12.95 | .496     | .510 |
| E      | 7.40       | 7.60  | .291     | .299 |
| Ⓢ      | 1.27 BSC   |       | .050 BSC |      |
| H      | 10.00      | 10.65 | .394     | .419 |
| h      | 0.30       | 0.40  | .012     | .016 |
| L      | 0.60       | 1.00  | .024     | .039 |
| Q1     | 0.97       | 1.07  | .038     | .042 |


CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH.

Figure 60. 20-Pin SOIC Package Diagram

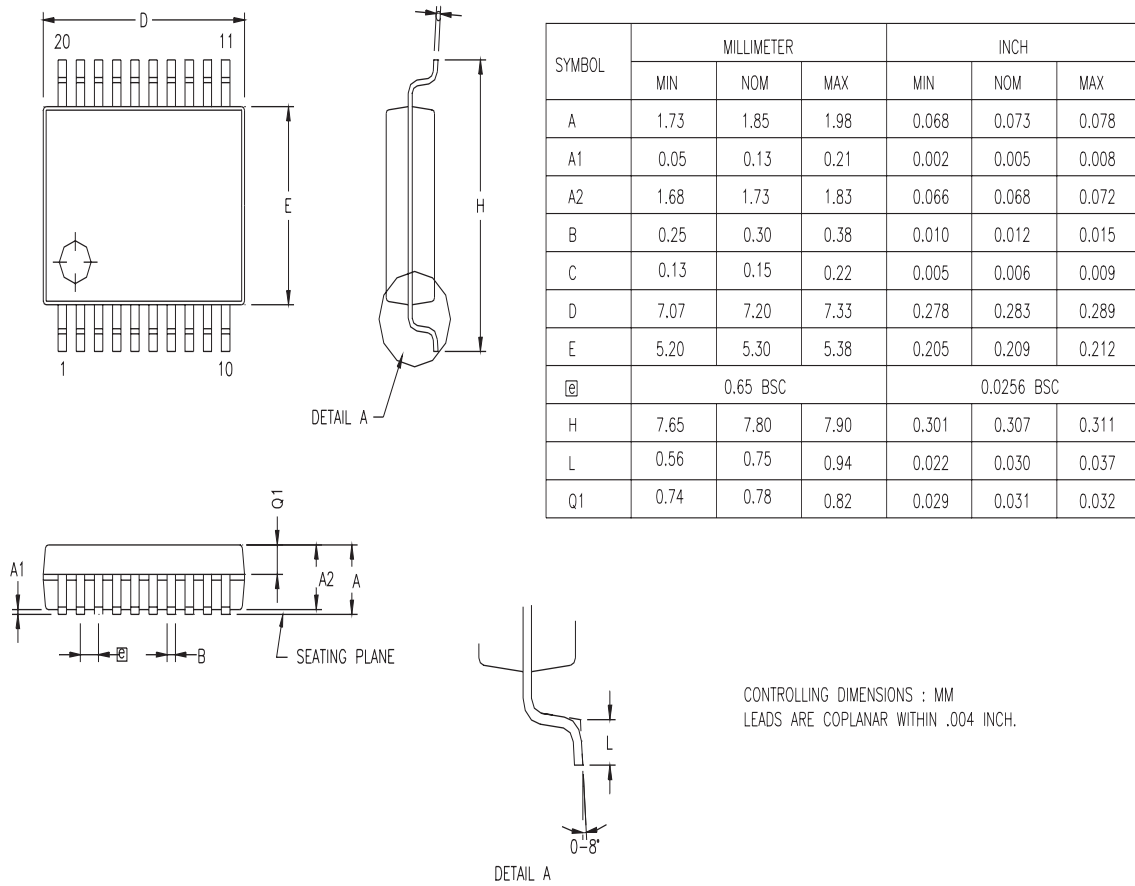


**Figure 61. 20-Pin SSOP Package Diagram**



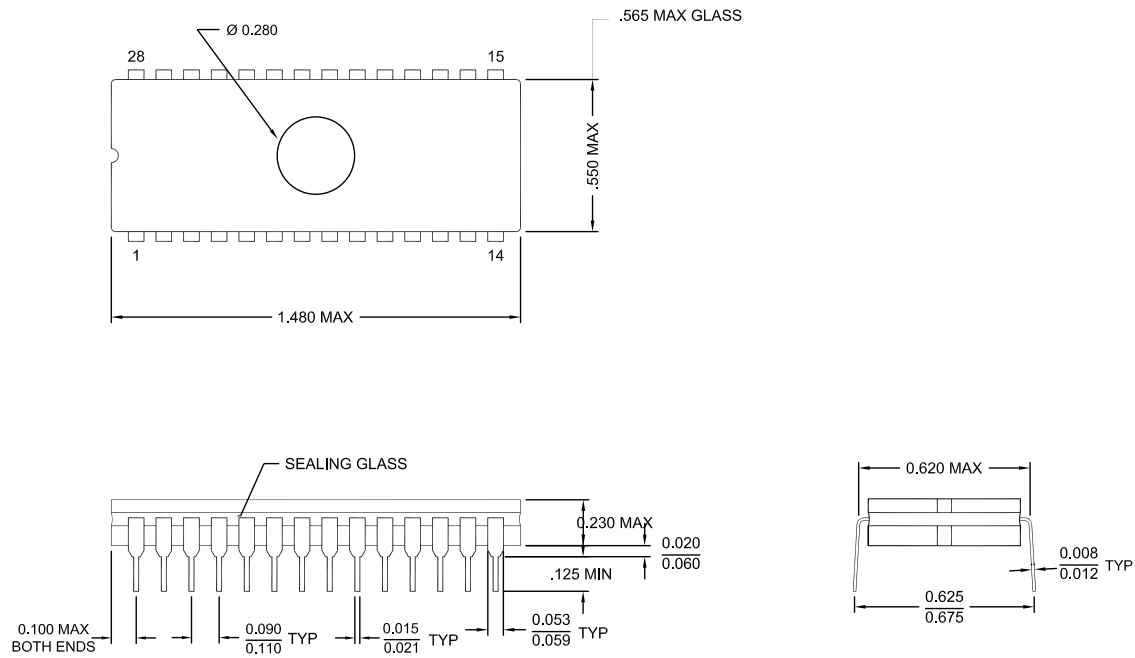


**Figure 62. 28-Pin CDIP Package**

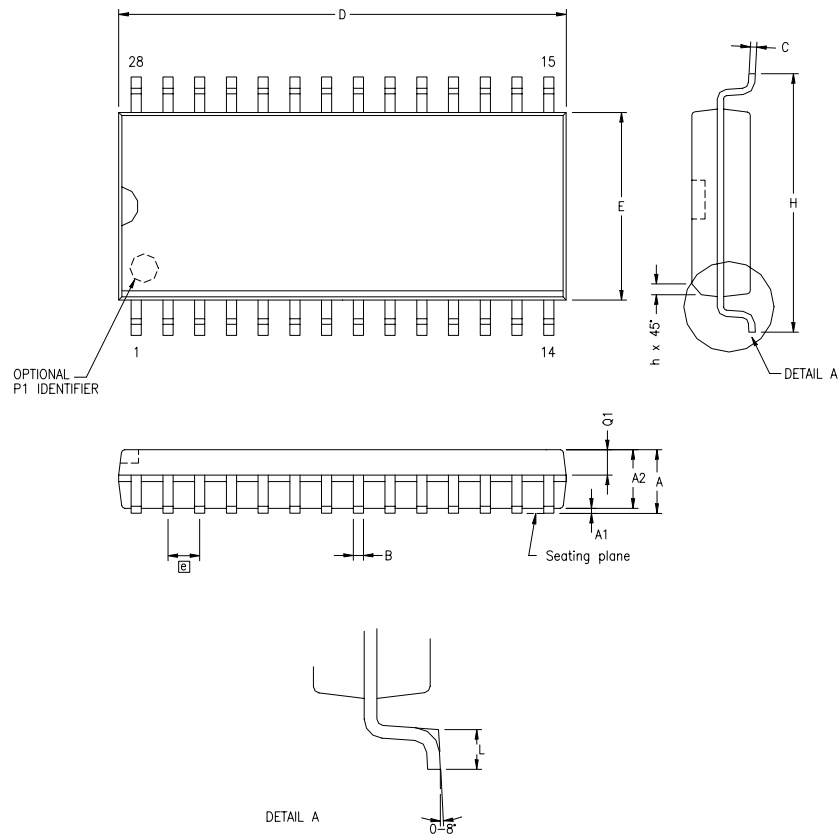

| SYMBOL | MILLIMETER |       | INCH     |      |
|--------|------------|-------|----------|------|
|        | MIN        | MAX   | MIN      | MAX  |
| A      | 2.40       | 2.64  | .094     | .104 |
| A1     | 0.10       | 0.30  | .004     | .012 |
| A2     | 2.24       | 2.44  | .088     | .096 |
| B      | 0.36       | 0.46  | .014     | .018 |
| C      | 0.23       | 0.30  | .009     | .012 |
| D      | 17.78      | 18.00 | .700     | .710 |
| E      | 7.40       | 7.60  | .291     | .299 |
| ⓐ      | 1.27 BSC   |       | .050 BSC |      |
| H      | 10.00      | 10.65 | .394     | .419 |
| h      | 0.30       | 0.71  | .012     | .028 |
| L      | 0.61       | 1.00  | .024     | .039 |
| Q1     | 0.97       | 1.09  | .038     | .043 |

CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH.

**Figure 63. 28-Pin SOIC Package Diagram**

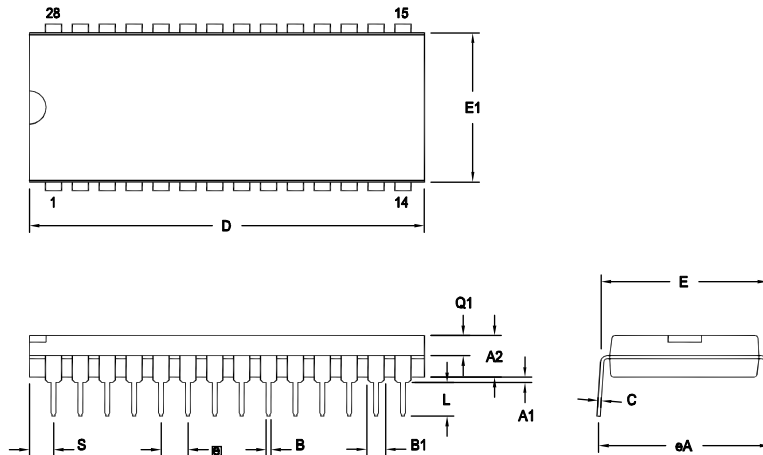

| OPTION TABLE |          |
|--------------|----------|
| OPTION #     | PACKAGE  |
| 01           | STANDARD |
| 02           | IDF      |

Note: ZILOG supplies both options for production. Component layout PCB design should cover bigger option 01.

| SYMBOL | OPT # | MILLIMETER |       | INCH     |       |
|--------|-------|------------|-------|----------|-------|
|        |       | MIN        | MAX   | MIN      | MAX   |
| A1     |       | 0.38       | 1.02  | .015     | .040  |
| A2     |       | 3.18       | 4.19  | .125     | .165  |
| B      |       | 0.38       | 0.53  | .015     | .021  |
| B1     | 01    | 1.40       | 1.65  | .055     | .065  |
|        | 02    | 1.14       | 1.40  | .045     | .055  |
| C      |       | 0.23       | 0.38  | .009     | .015  |
| D      | 01    | 36.58      | 37.34 | 1.440    | 1.470 |
|        | 02    | 35.31      | 35.94 | 1.390    | 1.415 |
| E      |       | 15.24      | 15.75 | .600     | .620  |
| E1     | 01    | 13.59      | 14.10 | .535     | .555  |
|        | 02    | 12.83      | 13.08 | .505     | .515  |
| e      |       | 2.54 TYP   |       | .100 BSC |       |
| eA     |       | 15.49      | 16.76 | .610     | .660  |
| L      |       | 3.05       | 3.81  | .120     | .150  |
| Q1     | 01    | 1.40       | 1.91  | .055     | .075  |
|        | 02    | 1.40       | 1.78  | .055     | .070  |
| S      | 01    | 1.52       | 2.29  | .060     | .090  |
|        | 02    | 1.02       | 1.52  | .040     | .060  |

CONTROLLING DIMENSIONS : INCH

Figure 64. 28-Pin PDIP Package Diagram

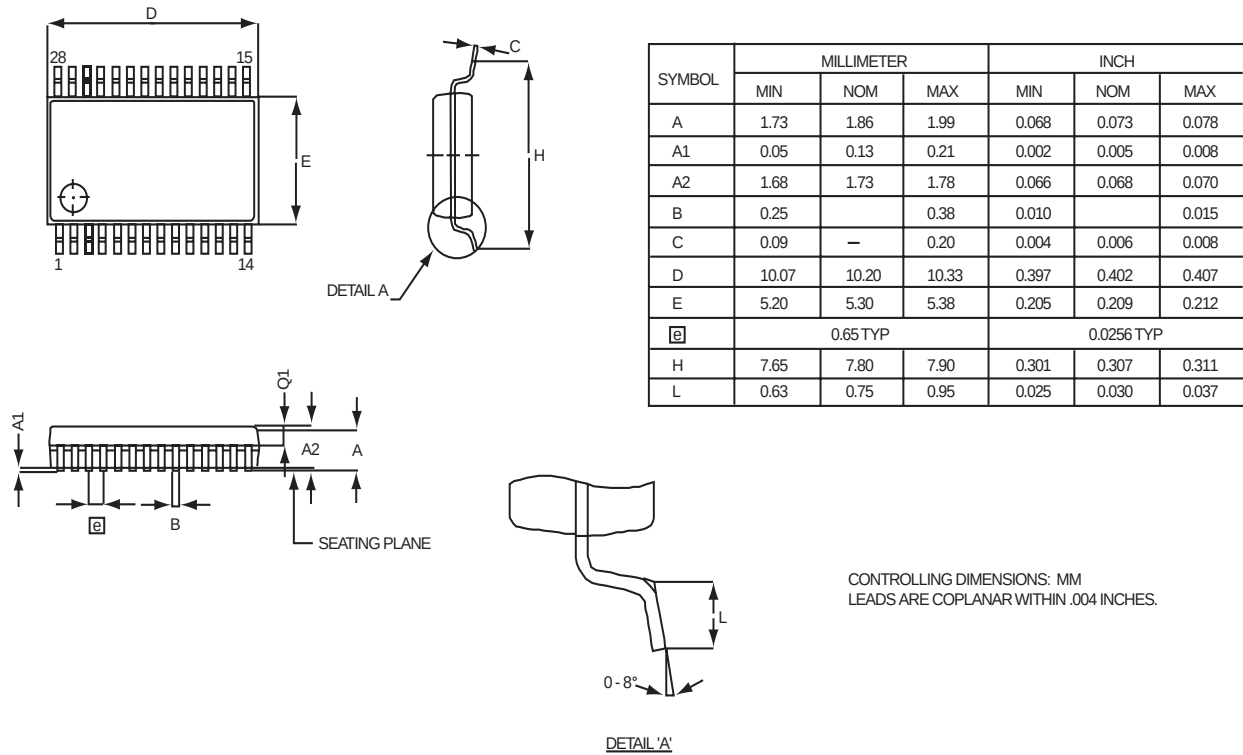


Figure 65. 28-Pin SSOP Package Diagram

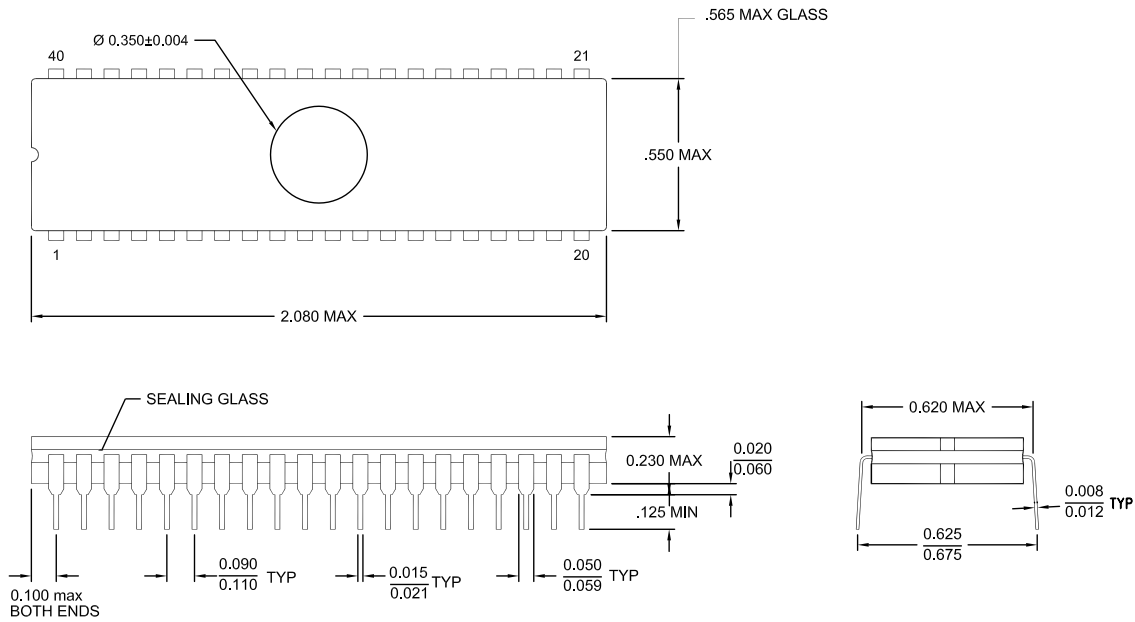


Figure 66. 40-Pin CDIP Package


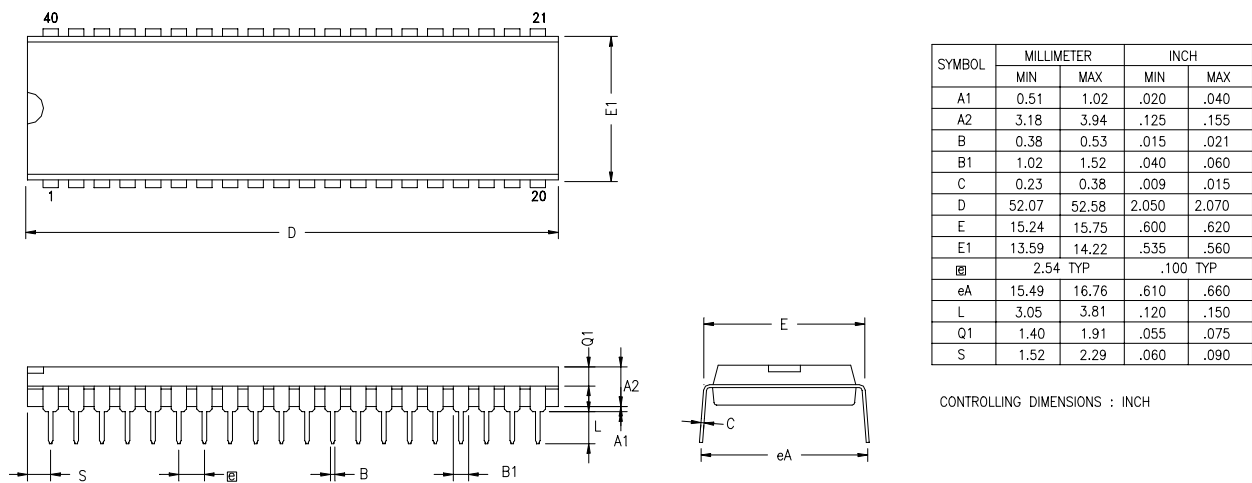


Figure 67. 40-Pin PDIP Package Diagram

CONTROLLING DIMENSIONS : INCH

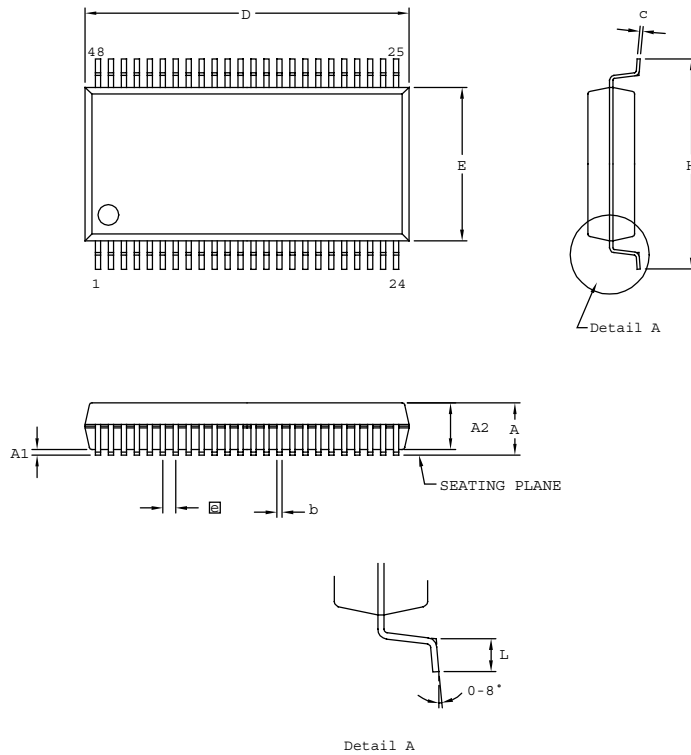

| SYMBOL | MILLIMETER |       | INCH      |        |
|--------|------------|-------|-----------|--------|
|        | MIN        | MAX   | MIN       | MAX    |
| A      | 2.41       | 2.79  | 0.095     | 0.110  |
| A1     | 0.23       | 0.38  | 0.009     | 0.015  |
| A2     | 2.18       | 2.39  | 0.086     | 0.094  |
| b      | 0.20       | 0.34  | 0.008     | 0.0135 |
| c      | 0.13       | 0.25  | 0.005     | 0.010  |
| D      | 15.75      | 16.00 | 0.620     | 0.630  |
| E      | 7.39       | 7.59  | 0.291     | 0.299  |
| ⓐ      | 0.635 BSC  |       | 0.025 BSC |        |
| H      | 10.16      | 10.41 | 0.400     | 0.410  |
| L      | 0.51       | 1.016 | 0.020     | 0.040  |

CONTROLLING DIMENSIONS : MM  
LEADS ARE COPLANAR WITHIN .004 INCH

**Figure 68. 48-Pin SSOP Package Design**

- **Note:** Check with ZiLOG on the actual bonding diagram and coordinate for chip-on-board assembly.

## Ordering Information

| <b>32KB Standard Temperature: 0° to +70°C</b>      |                     |                    |                     |
|----------------------------------------------------|---------------------|--------------------|---------------------|
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LSH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LSS2832C     | 28-pin SOIC 32K OTP |
| ZGP323LSP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LSH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LSH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LSP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LSP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LSS2032C     | 20-pin SOIC 32K OTP |
| ZGP323LSK2032E                                     | 20-pin CDIP 32K OTP | ZGP323LSK4032E     | 40-pin CDIP 32K OTP |
|                                                    |                     | ZGP323LSK2832E     | 28-pin CDIP 32K OTP |
| <b>32KB Extended Temperature: -40° to +105°C</b>   |                     |                    |                     |
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LEH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LES2832C     | 28-pin SOIC 32K OTP |
| ZGP323LEP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LEH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LEH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LEP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LEP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LES2032C     | 20-pin SOIC 32K OTP |
| <b>32KB Automotive Temperature: -40° to +125°C</b> |                     |                    |                     |
| <b>Part Number</b>                                 | <b>Description</b>  | <b>Part Number</b> | <b>Description</b>  |
| ZGP323LAH4832C                                     | 48-pin SSOP 32K OTP | ZGP323LAS2832C     | 28-pin SOIC 32K OTP |
| ZGP323LAP4032C                                     | 40-pin PDIP 32K OTP | ZGP323LAH2032C     | 20-pin SSOP 32K OTP |
| ZGP323LAH2832C                                     | 28-pin SSOP 32K OTP | ZGP323LAP2032C     | 20-pin PDIP 32K OTP |
| ZGP323LAP2832C                                     | 28-pin PDIP 32K OTP | ZGP323LAS2032C     | 20-pin SOIC 32K OTP |
| Note: Replace C with G for Lead-Free Packaging     |                     |                    |                     |



**16KB Standard Temperature: 0° to +70°C**

| Part Number    | Description         | Part Number    | Description         |
|----------------|---------------------|----------------|---------------------|
| ZGP323LSH4816C | 48-pin SSOP 16K OTP | ZGP323LSS2816C | 28-pin SOIC 16K OTP |
| ZGP323LSP4016C | 40-pin PDIP 16K OTP | ZGP323LSH2016C | 20-pin SSOP 16K OTP |
| ZGP323LSH2816C | 28-pin SSOP 16K OTP | ZGP323LSP2016C | 20-pin PDIP 16K OTP |
| ZGP323LSP2816C | 28-pin PDIP 16K OTP | ZGP323LSS2016C | 20-pin SOIC 16K OTP |

**16KB Extended Temperature: -40° to +105°C**

| Part Number    | Description         | Part Number    | Description         |
|----------------|---------------------|----------------|---------------------|
| ZGP323LEH4816C | 48-pin SSOP 16K OTP | ZGP323LES2816C | 28-pin SOIC 16K OTP |
| ZGP323LEP4016C | 40-pin PDIP 16K OTP | ZGP323LES2016C | 20-pin SOIC 16K OTP |
| ZGP323LEH2816C | 28-pin SSOP 16K OTP | ZGP323LEH2016C | 20-pin SSOP 16K OTP |
| ZGP323LEP2816C | 28-pin PDIP 16K OTP | ZGP323LEP2016C | 20-pin PDIP 16K OTP |

**16KB Automotive Temperature: -40° to +125°C**

| Part Number    | Description         | Part Number    | Description         |
|----------------|---------------------|----------------|---------------------|
| ZGP323LAH4816C | 48-pin SSOP 16K OTP | ZGP323LAS2816C | 28-pin SOIC 16K OTP |
| ZGP323LAP4016C | 40-pin PDIP 16K OTP | ZGP323LAH2016C | 20-pin SSOP 16K OTP |
| ZGP323LAH2816C | 28-pin SSOP 16K OTP | ZGP323LAP2016C | 20-pin PDIP 16K OTP |
| ZGP323LAP2816C | 28-pin PDIP 16K OTP | ZGP323LAS2016C | 20-pin SOIC 16K OTP |

Note: Replace C with G for Lead-Free Packaging






---



---

**8KB Standard Temperature: 0° to +70°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LSH4808C | 48-pin SSOP 8K OTP | ZGP323LSS2808C | 28-pin SOIC 8K OTP |
| ZGP323LSP4008C | 40-pin PDIP 8K OTP | ZGP323LSH2008C | 20-pin SSOP 8K OTP |
| ZGP323LSH2808C | 28-pin SSOP 8K OTP | ZGP323LSP2008C | 20-pin PDIP 8K OTP |
| ZGP323LSP2808C | 28-pin PDIP 8K OTP | ZGP323LSS2008C | 20-pin SOIC 8K OTP |

---



---

**8KB Extended Temperature: -40° to +105°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LEH4808C | 48-pin SSOP 8K OTP | ZGP323LES2808C | 28-pin SOIC 8K OTP |
| ZGP323LEP4008C | 40-pin PDIP 8K OTP | ZGP323LEH2008C | 20-pin SSOP 8K OTP |
| ZGP323LEH2808C | 28-pin SSOP 8K OTP | ZGP323LEP2008C | 20-pin PDIP 8K OTP |
| ZGP323LEP2808C | 28-pin PDIP 8K OTP | ZGP323LES2008C | 20-pin SOIC 8K OTP |

---



---

**8KB Automotive Temperature: -40° to +125°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LAH4808C | 48-pin SSOP 8K OTP | ZGP323LAS2808C | 28-pin SOIC 8K OTP |
| ZGP323LAP4008C | 40-pin PDIP 8K OTP | ZGP323LAH2008C | 20-pin SSOP 8K OTP |
| ZGP323LAH2808C | 28-pin SSOP 8K OTP | ZGP323LAP2008C | 20-pin PDIP 8K OTP |
| ZGP323LAP2808C | 28-pin PDIP 8K OTP | ZGP323LAS2008C | 20-pin SOIC 8K OTP |

---



---

Note: Replace C with G for Lead-Free Packaging

---

---



---

**4KB Standard Temperature: 0° to +70°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LSH4804C | 48-pin SSOP 4K OTP | ZGP323LSS2804C | 28-pin SOIC 4K OTP |
| ZGP323LSP4004C | 40-pin PDIP 4K OTP | ZGP323LSH2004C | 20-pin SSOP 4K OTP |
| ZGP323LSH2804C | 28-pin SSOP 4K OTP | ZGP323LSP2004C | 20-pin PDIP 4K OTP |
| ZGP323LSP2804C | 28-pin PDIP 4K OTP | ZGP323LSS2004C | 20-pin SOIC 4K OTP |

---



---

**4KB Extended Temperature: -40° to +105°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LEH4804C | 48-pin SSOP 4K OTP | ZGP323LES2804C | 28-pin SOIC 4K OTP |
| ZGP323LEP4004C | 40-pin PDIP 4K OTP | ZGP323LEH2004C | 20-pin SSOP 4K OTP |
| ZGP323LEH2804C | 28-pin SSOP 4K OTP | ZGP323LEP2004C | 20-pin PDIP 4K OTP |
| ZGP323LEP2804C | 28-pin PDIP 4K OTP | ZGP323LES2004C | 20-pin SOIC 4K OTP |

---



---

**4KB Automotive Temperature: -40° to +125°C**

| Part Number    | Description        | Part Number    | Description        |
|----------------|--------------------|----------------|--------------------|
| ZGP323LAH4804C | 48-pin SSOP 4K OTP | ZGP323LAS2804C | 28-pin SOIC 4K OTP |
| ZGP323LAP4004C | 40-pin PDIP 4K OTP | ZGP323LAH2004C | 20-pin SSOP 4K OTP |
| ZGP323LAH2804C | 28-pin SSOP 4K OTP | ZGP323LAP2004C | 20-pin PDIP 4K OTP |
| ZGP323LAP2804C | 28-pin PDIP 4K OTP | ZGP323LAS2004C | 20-pin SOIC 4K OTP |

---



---

Note: Replace C with G for Lead-Free Packaging

---



---

**Additional Components**

| Part Number    | Description         | Part Number    | Description        |
|----------------|---------------------|----------------|--------------------|
| ZGP323ICE01ZEM | Emulator/programmer | ZGP32300100ZPR | Programming System |



For fast results, contact your local ZiLOG sales office for assistance in ordering the part desired.

**Codes**

ZG = ZiLOG General Purpose Family

P = OTP

323 = Family Designation

L = Voltage Range

2V to 3.6V

T = Temperature Range:

S = 0 to 70 degrees C (Standard)

E = -40 to +105 degrees C (Extended)

A = -40 to +125 degrees C (Automotive)

P = Package Type:

K = Windowed Cerdip

P = PDIP

H = SSOP

S = SOIC

## = Number of Pins

CC = Memory Size

M = Packaging Options


C = Non Lead-Free

G = Lead-Free

E = CDIP



**Example**

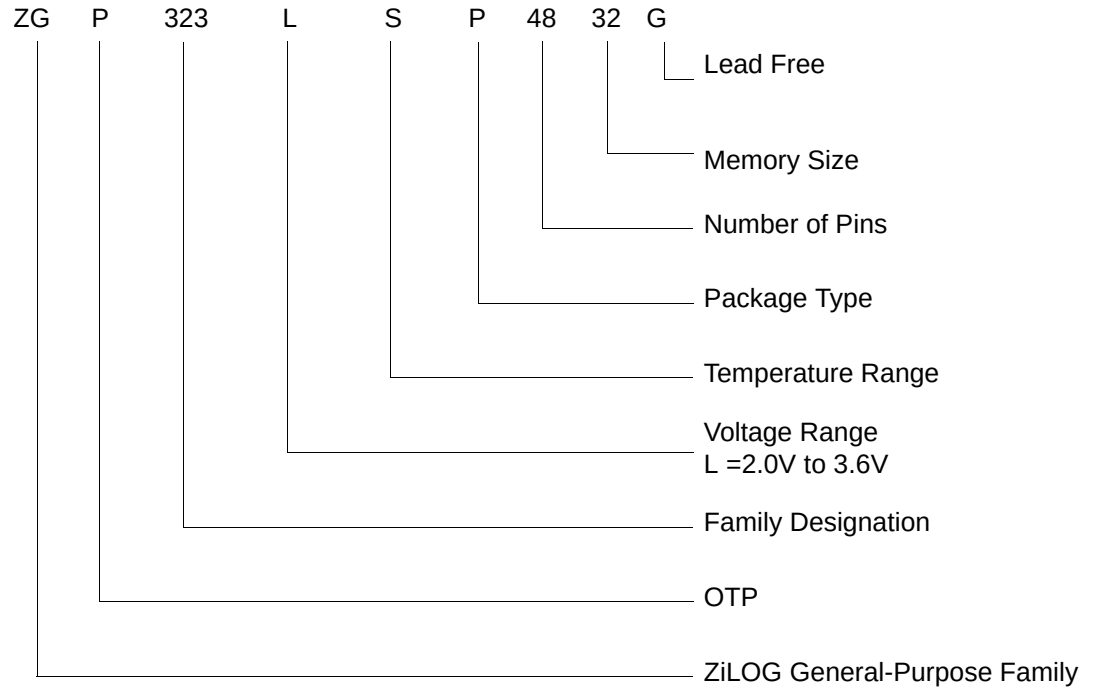



## Precharacterization Product

The product represented by this document is newly introduced and ZiLOG has not completed the full characterization of the product. The document states what ZiLOG knows about this product at this time, but additional features or nonconformance with some aspects of the document might be found, either by ZiLOG or its customers in the course of further application and characterization work. In addition, ZiLOG cautions that delivery might be uncertain at times, due to start-up yield issues.

ZiLOG, Inc.

532 Race Street

San Jose, CA 95126-3432

Telephone: (408) 558-8500

FAX: 408 558-8300

Internet: <http://www.ZiLOG.com>

# Index

## Numerics

- 16-bit counter/timer circuits 44
- 20-pin DIP package diagram 81
- 20-pin SSOP package diagram 82
- 28-pin DIP package diagram 85
- 28-pin SOIC package diagram 84
- 28-pin SSOP package diagram 86
- 40-pin DIP package diagram 87
- 48-pin SSOP package diagram 88
- 8-bit counter/timer circuits 40

## A

- absolute maximum ratings 10
- AC
  - characteristics 14
  - timing diagram 14
- address spaces, basic 2
- architecture 2
  - expanded register file 26

## B

- basic address spaces 2
- block diagram, ZLP32300 functional 3

## C

- capacitance 11
- characteristics
  - AC 14
  - DC 11
- clock 51
- comparator inputs/outputs 23
- configuration
  - port 0 17
  - port 1 18
  - port 2 19
  - port 3 20
  - port 3 counter/timer 22

## counter/timer

- 16-bit circuits 44
- 8-bit circuits 40
- brown-out voltage/standby 62
- clock 51
- demodulation mode count capture flow-chart 42
- demodulation mode flowchart 43
- EPROM selectable options 62
- glitch filter circuitry 38
- halt instruction 52
- input circuit 38
- interrupt block diagram 49
- interrupt types, sources and vectors 50
- oscillator configuration 51
- output circuit 47
- ping-pong mode 46
- port configuration register 53
- resets and WDT 61
- SCLK circuit 56
- stop instruction 52
- stop mode recovery register 55
- stop mode recovery register 2 59
- stop mode recovery source 57
- T16 demodulation mode 45
- T16 transmit mode 44
- T16\_OUT in modulo-N mode 45
- T16\_OUT in single-pass mode 45
- T8 demodulation mode 41
- T8 transmit mode 38
- T8\_OUT in modulo-N mode 41
- T8\_OUT in single-pass mode 41
- transmit mode flowchart 39
- voltage detection and flags 63
- watch-dog timer mode register 60
- watch-dog timer time select 61
- CTR(D)01h T8 and T16 Common Functions 33

## D

DC characteristics 11  
demodulation mode  
    count capture flowchart 42  
    flowchart 43  
    T16 45  
    T8 41  
description  
    functional 23  
    general 2  
    pin 4

## E

EPROM  
    selectable options 62  
expanded register file 24  
expanded register file architecture 26  
expanded register file control registers 69  
    flag 78  
    interrupt mask register 77  
    interrupt priority register 76  
    interrupt request register 77  
    port 0 and 1 mode register 75  
    port 2 configuration register 73  
    port 3 mode register 74  
    port configuration register 73  
    register pointer 78  
    stack pointer high register 79  
    stack pointer low register 79  
    stop-mode recovery register 71  
    stop-mode recovery register 2 72  
    T16 control register 67  
    T8 and T16 common control functions register 65  
    T8/T16 control register 68  
    TC8 control register 64  
    watch-dog timer register 73

## F

features  
    standby modes 1

## functional description

counter/timer functional blocks 38  
CTR(D)01h register 33  
CTR0(D)00h register 31  
CTR2(D)02h register 35  
CTR3(D)03h register 37  
expanded register file 24  
expanded register file architecture 26  
HI16(D)09h register 30  
HI8(D)0Bh register 30  
LO8(D)0Ah register 30  
LO16(D)08h register 30  
program memory map 24  
RAM 23  
register description 63  
register file 28  
register pointer 27  
register pointer detail 29  
SMR2(F)0D1h register 38  
stack 29  
TC16H(D)07h register 30  
TC16L(D)06h register 31  
TC8H(D)05h register 31  
TC8L(D)04h register 31

## G

glitch filter circuitry 38

## H

halt instruction, counter/timer 52

## I

input circuit 38  
interrupt block diagram, counter/timer 49  
interrupt types, sources and vectors 50

## L

low-voltage detection register 63

## M

memory, program 23  
modulo-N mode  
    T16\_OUT 45  
    T8\_OUT 41

## O

oscillator configuration 51  
output circuit, counter/timer 47

## P

package information  
    20-pin DIP package diagram 81  
    20-pin SSOP package diagram 82  
    28-pin DIP package diagram 85  
    28-pin SOIC package diagram 84  
    28-pin SSOP package diagram 86  
    40-pin DIP package diagram 87  
    48-pin SSOP package diagram 88  
pin configuration  
    20-pin DIP/SOIC/SSOP 5  
    28-pin DIP/SOIC/SSOP 6  
    40- and 48-pin 8  
    40-pin DIP 7  
    48-pin SSOP 8  
pin functions  
    port 0 (P07 - P00) 16  
    port 0 (P17 - P10) 17  
    port 0 configuration 17  
    port 1 configuration 18  
    port 2 (P27 - P20) 18  
    port 2 (P37 - P30) 19  
    port 2 configuration 19  
    port 3 configuration 20  
    port 3 counter/timer configuration 22  
    reset) 23  
    XTAL1 (time-based input 16  
    XTAL2 (time-based output) 16  
ping-pong mode 46  
port 0 configuration 17  
port 0 pin function 16

port 1 configuration 18  
port 1 pin function 17  
port 2 configuration 19  
port 2 pin function 18  
port 3 configuration 20  
port 3 pin function 19  
port 3 counter/timer configuration 22  
port configuration register 53  
power connections 3  
power supply 5  
precharacterization product 95  
program memory 23  
    map 24

## R

ratings, absolute maximum 10  
register 59  
    CTR(D)01h 33  
    CTR0(D)00h 31  
    CTR2(D)02h 35  
    CTR3(D)03h 37  
    flag 78  
    HI16(D)09h 30  
    HI8(D)0Bh 30  
    interrupt priority 76  
    interrupt request 77  
    interruptmask 77  
    L016(D)08h 30  
    L08(D)0Ah 30  
    LVD(D)0Ch 63  
    pointer 78  
    port 0 and 1 75  
    port 2 configuration 73  
    port 3 mode 74  
    port configuration 53, 73  
    SMR2(F)0Dh 38  
    stack pointer high 79  
    stack pointer low 79  
    stop mode recovery 55  
    stop mode recovery 2 59  
    stop-mode recovery 71  
    stop-mode recovery 2 72  
    T16 control 67



- T8 and T16 common control functions 65
- T8/T16 control 68
- TC16H(D)07h 30
- TC16L(D)06h 31
- TC8 control 64
- TC8H(D)05h 31
- TC8L(D)04h 31
- voltage detection 69
- watch-dog timer 73
- register description
  - Counter/Timer2 LS-Byte Hold 31
  - Counter/Timer2 MS-Byte Hold 30
  - Counter/Timer8 Control 31
  - Counter/Timer8 High Hold 31
  - Counter/Timer8 Low Hold 31
  - CTR2 Counter/Timer 16 Control 35
  - CTR3 T8/T16 Control 37
  - Stop Mode Recovery2 38
  - T16\_Capture\_LO 30
  - T8 and T16 Common functions 33
  - T8\_Capture\_HI 30
  - T8\_Capture\_LO 30
- register file 28
  - expanded 24
- register pointer 27
  - detail 29
- reset pin function 23
- resets and WDT 61

## S

- SCLK circuit 56
- single-pass mode
  - T16\_OUT 45
  - T8\_OUT 41
- stack 29
- standard test conditions 10
- standby modes 1
- stop instruction, counter/timer 52
- stop mode recovery
  - 2 register 59
  - source 57
- stop mode recovery 2 59
- stop mode recovery register 55

## T

- T16 transmit mode 44
- T16\_Capture\_HI 30
- T8 transmit mode 38
- T8\_Capture\_HI 30
- test conditions, standard 10
- test load diagram 10
- timing diagram, AC 14
- transmit mode flowchart 39

## V

- VCC 5
- voltage
  - brown-out/standby 62
  - detection and flags 63
- voltage detection register 69

## W

- watch-dog timer
  - mode registerwatch-dog timer mode register 60
  - time select 61

## X

- XTAL1 5
- XTAL1 pin function 16
- XTAL2 5
- XTAL2 pin function 16