
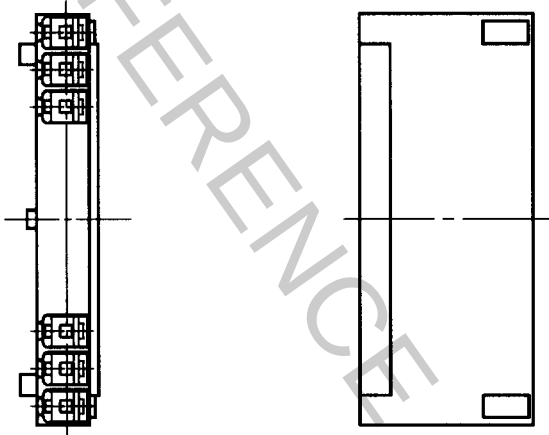
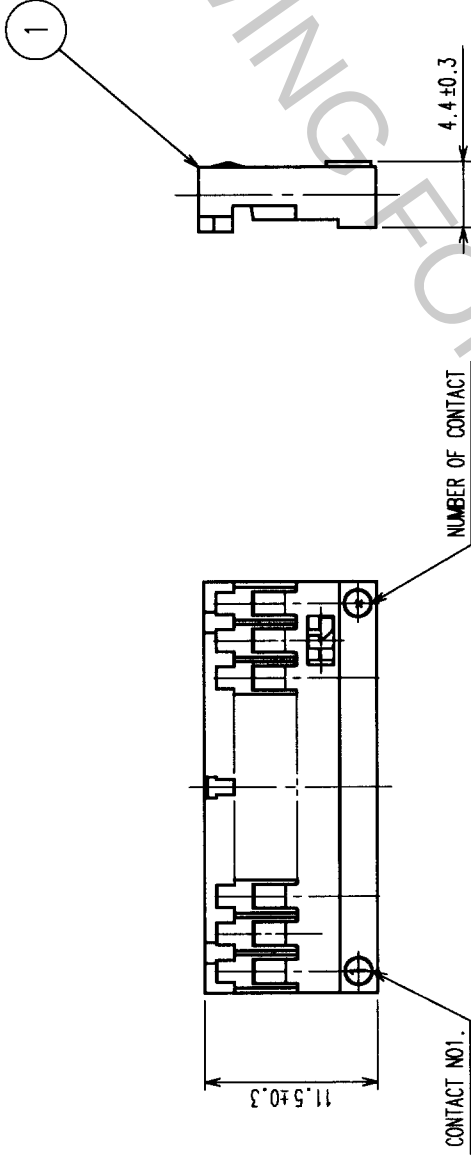


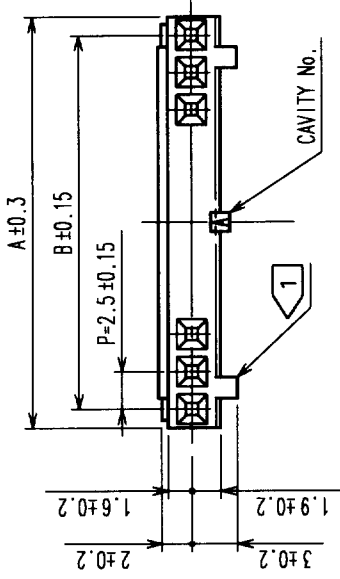

HRS NO	PART NO	A	B
CL541-0200-6	DF1B-2S-2.5R	5.0	2.5
CL541-0201-9	DF1B-3S-2.5R	7.5	5.0
CL541-0202-1	DF1B-4S-2.5R	10.0	7.5
CL541-0203-4	DF1B-5S-2.5R	12.5	10.0
CL541-0204-7	DF1B-6S-2.5R	15.0	12.5
CL541-0205-0	DF1B-7S-2.5R	17.5	15.0
CL541-0206-2	DF1B-8S-2.5R	20.0	17.5
CL541-0207-5	DF1B-9S-2.5R	22.5	20.0
CL541-0208-8	DF1B-10S-2.5R	25.0	22.5
CL541-0209-0	DF1B-11S-2.5R	27.5	25.0
CL541-0210-0	DF1B-12S-2.5R	30.0	27.5
CL541-0211-2	DF1B-13S-2.5R	32.5	30.0
CL541-0212-5	DF1B-14S-2.5R	35.0	32.5
CL541-0213-8	DF1B-15S-2.5R	37.5	35.0
CL541-0214-0	DF1B-16S-2.5R	40.0	37.5
CL541-0215-3	DF1B-18S-2.5R	45.0	42.5
CL541-0216-6	DF1B-20S-2.5R	50.0	47.5

NOTE 1 2 positions socket have one polarizing slot at senter.
3 TO 6 positions have 2 polarizing slots at both ends.
Other positions have 3 polarizing slots as per drawing.

1		POLYAMIDE		NATURAL (WHITE), UL94V-0	
NO.		MATERIAL		FINISH, REMARKS	

CODE NO. (OLD)		DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED	
CL				Y. Inoue		J. Miyagaki		K. Katayama			
				'00. 9. 19		'00. 9. 19		'00. 8. 19			

DRAWING NO.		PART NO.		DF1B-*S-2.5R	
EDC3-160017					

SCALE		CODE NO.		CL541	
2 : 1					
UNITS					
mm					

HRS		HIROSE ELECTRIC CO., LTD		6		7		8	