


Rotary Cam Switches

Front Panel Mounting – type E Front/Base Mounting – type ER

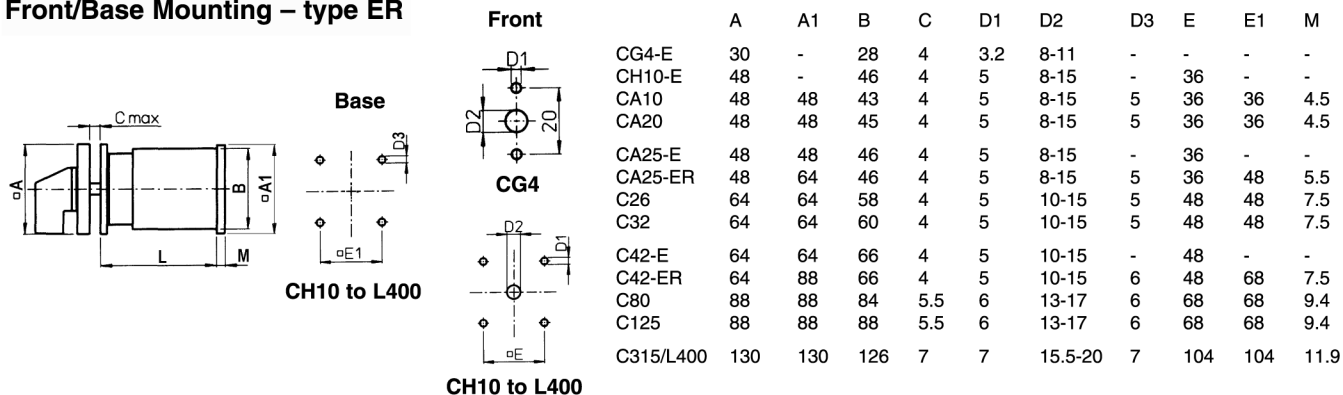


'L' Dimension

Stages	CG4	CH10	CA10	CA20	CA25	C26	C32	C42	C80	C125	C315/L400
1	38.5	43.5	33.5	37.7	39	42	46.8	50.8	61.5	67.5	78.6
2	50.5	57.5	43	50.4	53	54.7	64.3	72.3	88	100	117.2
3	62.5	71.5	52.5	63.1	67	67.4	81.8	93.8	114.5	132.5	155.8
4	74.5	85.5	62	75.8	81	80.1	99.3	115.3	141	165	194.4
5	86.5	99.5	71.5	88.5	95	92.8	116.8	136.8	167.5	197.5	233
6	98.5	113.5	81	101.2	109	105.5	134.3	158.3	194	230	271.6
7	110.5	127.5	90.5	113.9	123	118.2	151.8	179.8	220.5	262.5	310.2
8	122.5	141.5	100	126.6	137	130.9	169.3	201.3	247	295	348.8
9	-	155.5	109.5	139.3	151	143.6	186.8	222.8	273.5	327.5	387.4
10	-	169.5	119	152	165	156.3	204.3	244.3	300	360	426
11	-	183.5	128.5	164.7	179	169	221.8	265.8	326.5	392.5	464.6
12	-	197.5	138	177.4	193	181.7	239.3	287.3	353	425	503.2

Note: Bypass switches shown on page 13 comprise 2 switch bodies coupled together. The additional length for the coupling device is as follows: C80 & C125 = 12.9
C315 & L400 = 32.9


Mounting Options

FS/FT1 & 2





	A	B	C	D	M
CG4	30	28	5	29.5	12.5
CH10	49	46	6	39	20
CA10	49	43	6	39	20
CA20	49	45	6	39	20
CA25	49	46	6	39	20

FS/FT1 & 2 V750D/..






	A1	B1	C1	D1	M1
CG4	29.5	28	5.5	29.5	12.5
CH10	49	46	6	39	20.5
CA10	49	43	6	39	20.5
CA20	49	45	6	39	20.5
CA25	49	46	6	39	20.5

EG



	A	B	C	D1	D2	E	M
CH10	64	46	4	5	10-15	48	6.7
CA10	64	43	4	5	10-15	48	6.7
CA20	64	45	4	5	10-15	48	6.7
CA25	64	46	4	5	10-15	48	6.7
C26	88	58	5.5	6	13-17	68	0.5
C32	88	60	5.5	6	13-17	68	0.5
C42	88	66	5.5	6	13-17	68	0.5

EF



	A	B	C	D1	D2	E
CG4	30	28	4	3.2	8-11	-
CH10	48	46	4	5	15-19	36
CA10	48	43	4	5	15-19	36
CA20	48	45	4	5	15-19	36
CA25	48	46	4	5	15-19	36
C26	64	58	4	5	19-22	48
C32	64	60	4	5	19-22	48
C42	64	66	4	5	19-22	48