

## 2.25-A, WIDE INPUT, ADJUSTABLE SWITCHING REGULATOR WITH AUTO-TRACK™ SEQUENCING




### FEATURES

- Up to 2.25-A Output Current at 85°C
- 4.5-V to 14-V Input Voltage Range
- Wide-Output Voltage Adjust (0.9 V to 5.5 V)
- Efficiencies Up to 94%
- On/Off Inhibit
- Undervoltage Lockout (UVLO)
- Output Overcurrent Protection (Nonlatching, Auto-Reset)
- Overtemperature Protection
- Ambient Temperature Range: –40°C to 85°C
- Surface-Mount Package

- Safety Agency Approvals:  
UL/CUL 60950, EN60950

### APPLICATIONS


- Telecommunications, Instrumentation, and General-Purpose Circuits



### DESCRIPTION

The PTH08000W is a highly integrated, low-cost switching regulator module that delivers up to 2.25 A of output current. The PTH08000W sources output current at a much higher efficiency than a TO-220 linear regulator IC, eliminating the need for a heatsink. The small size (0.75 inch × 0.5 inch) and flexible operation creates value for a variety of applications.

The input voltage range of the PTH08000W is 4.5 V to 14 V, allowing operation from either a 5-V or 12-V input bus. Using state-of-the-art switched-mode power-conversion technology, the PTH08000W can step down to voltages as low as 0.9 V from a 5-V input bus, with less than 1 W of power dissipation. The output voltage can be adjusted to any voltage over the range, 0.9 V to 5.5 V, using a single external resistor. This series includes Auto-Track™ sequencing. This feature simplifies the task of supply voltage sequencing in a power system by enabling modules to track each other, or any external voltage, during power up and power down. Operating features include an undervoltage lockout (UVLO), on/off inhibit, overcurrent protection, and overtemperature protection. Target applications include telecommunications, test and measurement applications, and high-end consumer products. This product is available in both through-hole and surface-mount package options, including tape and reel. The PTH08000W is compatible with TI's roadmap for RoHS and lead-free compliance.

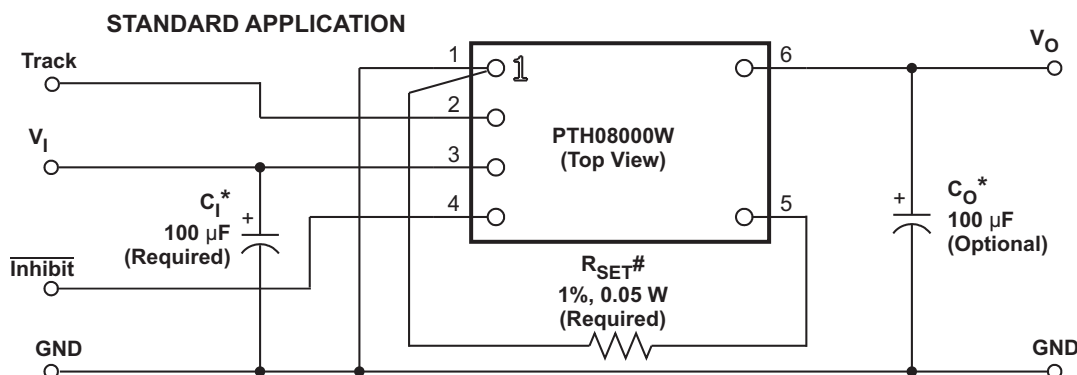

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Auto-Track, POLA, TMS320 are trademarks of Texas Instruments.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## ORDERING INFORMATION

For the most current package and ordering information, see the Package Option Addendum at the end of this datasheet, or see the TI website at [www.ti.com](http://www.ti.com).

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted<sup>(1)</sup>

|           |                                                     |                                            | PTH08000W  | UNIT |
|-----------|-----------------------------------------------------|--------------------------------------------|------------|------|
| $T_A$     | Operating free-air temperature                      | Over $V_I$ range                           | –40 to 85  | °C   |
|           | Lead temperature (H suffix)                         | 5 seconds                                  | 260        | °C   |
|           | Solder reflow temperature (S suffix)                | Surface temperature of module body or pins | 235        |      |
|           | Solder reflow temperature (Z suffix) <sup>(2)</sup> | Surface temperature of module body or pins | 260        |      |
| $T_{stg}$ | Storage temperature                                 |                                            | –55 to 125 | °C   |

(1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability

(2) Moisture Sensitivity Level (MSL) Rating Level-3-260C-168HR

## RECOMMENDED OPERATING CONDITIONS

|       |                                | MIN | MAX | UNIT |
|-------|--------------------------------|-----|-----|------|
| $V_I$ | Input voltage                  | 4.5 | 14  | V    |
| $T_A$ | Operating free-air temperature | –40 | 85  | °C   |

## PACKAGE SPECIFICATIONS

| PTH08000W (Suffix AH, AS, and AZ) |                                                      |                      |
|-----------------------------------|------------------------------------------------------|----------------------|
| Weight                            |                                                      | 1.5 grams            |
| Flammability                      | Meets UL 94 V-O                                      |                      |
| Mechanical shock                  | Per Mil-STD-883D, Method 2002.3, 1 ms, sine, mounted | 500 G <sup>(1)</sup> |
| Mechanical vibration              | Mil-STD-883D, Method 2007.2, 20-2000 Hz              | 20 G <sup>(1)</sup>  |

(1) Qualification limit.

## ELECTRICAL CHARACTERISTICS

at 25°C free-air temperature,  $V_I = 12\text{ V}$ ,  $V_O = 3.3\text{ V}$ ,  $I_O = I_{Omax}$ ,  $C_I = 100\text{ }\mu\text{F}$  (unless otherwise noted)

| PARAMETER       |                                | TEST CONDITIONS                                                                                 | MIN                                                    | TYP                | MAX                 | UNIT             |
|-----------------|--------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------|---------------------|------------------|
| $I_O$           | Output current                 | $T_A = 85^\circ\text{C}$ , natural convection airflow                                           | 0                                                      |                    | 2.25                | A                |
| $V_I$           | Input voltage range            | Over $I_O$ range                                                                                | 4.5 <sup>(1)</sup>                                     |                    | 14                  | V                |
| $V_O$           | Set-point voltage tolerance    | $T_A = 25^\circ\text{C}$                                                                        |                                                        |                    | 2 <sup>(2)</sup>    | %                |
|                 | Temperature variation          | $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$                                              |                                                        | 0.5                |                     | % $V_O$          |
|                 | Line regulation                | Over $V_I$ range                                                                                |                                                        | 7                  |                     | mV               |
|                 | Load regulation                | Over $I_O$ range                                                                                |                                                        | 0.13               |                     | % $V_O$          |
|                 | Total output voltage variation | Includes set-point, line, load, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$              |                                                        |                    | 3 <sup>(2)</sup>    | % $V_O$          |
| $V_{(ADJ)}$     | Output Voltage Adjust Range    | Over $I_O$ range                                                                                | 0.9                                                    |                    | 5.5                 | V                |
| $\eta$          | Efficiency                     | $T_A = 25^\circ\text{C}$ ,<br>$I_O = 2\text{ A}$                                                | $R_{SET} = 346\text{ }\Omega$ , $V_O = 5\text{ V}$     | 93.5%              |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 1.87\text{ k}\Omega$ , $V_O = 3.3\text{ V}$ | 92%                |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 3.74\text{ k}\Omega$ , $V_O = 2.5\text{ V}$ | 90.5%              |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 6.19\text{ k}\Omega$ , $V_O = 2\text{ V}$   | 89.5%              |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 8.06\text{ k}\Omega$ , $V_O = 1.8\text{ V}$ | 88%                |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 13\text{ k}\Omega$ , $V_O = 1.5\text{ V}$   | 86.5%              |                     |                  |
|                 |                                |                                                                                                 | $R_{SET} = 27.4\text{ k}\Omega$ , $V_O = 1.2\text{ V}$ | 84.5%              |                     |                  |
|                 | Output voltage ripple          | 20-MHz bandwidth                                                                                |                                                        | 40                 |                     | mV <sub>PP</sub> |
|                 | Overcurrent threshold          | Reset, followed by autorecovery                                                                 |                                                        | 3.5                |                     | A                |
|                 | Transient response             | $C_O = 100\text{ }\mu\text{F}$ , 1 A/ $\mu\text{s}$<br>load step from 50% to<br>100% $I_{Omax}$ | Recovery time                                          | 50                 |                     | $\mu\text{s}$    |
|                 |                                |                                                                                                 | $V_O$ over/undershoot                                  | 100                |                     | mV               |
| $I_{IL}$ track  | Track input current (pin 2)    | Pin to GND                                                                                      |                                                        |                    | -130                | $\mu\text{A}$    |
| $dV_{track}/dt$ | Track slew rate capability     | $C_O \leq C_{O(max)}$                                                                           |                                                        |                    | 1                   | V/ms             |
| UVLO            | Undervoltage lockout           | $V_I = \text{increasing}$                                                                       |                                                        | 4.35               | 4.5                 | V                |
|                 |                                | $V_I = \text{decreasing}$                                                                       | 3.6                                                    | 4                  |                     |                  |
|                 | Inhibit control (pin 4)        | Input high voltage ( $V_{IH}$ )                                                                 |                                                        |                    | Open <sup>(3)</sup> | V                |
|                 |                                | Input low voltage ( $V_{IL}$ )                                                                  | -0.2                                                   |                    | 0.5                 |                  |
|                 |                                | Input low current ( $I_{IL}$ )                                                                  |                                                        | -5                 |                     | $\mu\text{A}$    |
| $I_i$ (stby)    | Input standby current          | Pins 5 and 2 connected                                                                          |                                                        | 1                  |                     | mA               |
| $f_s$           | Switching frequency            | Over $V_I$ and $I_O$ ranges                                                                     |                                                        | 300                |                     | kHz              |
|                 | External input capacitance     | Electrolytic type ( $C_I$ )                                                                     | 100 <sup>(4)</sup>                                     |                    |                     | $\mu\text{F}$    |
|                 | External output capacitance    | Ceramic type ( $C_O$ )                                                                          |                                                        |                    | 220                 | $\mu\text{F}$    |
|                 |                                | Nonceramic type ( $C_O$ )                                                                       |                                                        | 100 <sup>(5)</sup> | 330 <sup>(6)</sup>  |                  |
|                 |                                | Equivalent series resistance (nonceramic)                                                       | 10 <sup>(7)</sup>                                      |                    |                     |                  |
| MTBF            | Calculated reliability         | Per Telcordia SR-332, 50% stress,<br>$T_A = 40^\circ\text{C}$ , ground benign                   | 10.3                                                   |                    |                     | $10^6\text{ Hr}$ |

(1) The minimum input voltage is 4.5 V or ( $V_O + 1.1$ ) V, whichever is greater.

(2) The set-point voltage tolerance is affected by the tolerance and stability of  $R_{SET}$ . The stated limit is unconditionally met if  $R_{SET}$  has a tolerance of 1% with 100 ppm/ $^\circ\text{C}$  or better temperature stability.

(3) This control pin has an internal pull-up to 3 V (TYP). Do not place an external pull-up on this pin. If it is left open-circuit, the module operates when input power is applied. A small, low-leakage ( $< 100\text{ nA}$ ) MOSFET is recommended for control. See the Application section for further guidance.


(4) An external 100- $\mu\text{F}$  electrolytic capacitor is required across the input ( $V_I$  and GND) for proper operation. Locate the capacitor close to the module.

(5) An external output capacitor is not required for proper operation. Adding 100  $\mu\text{F}$  of distributed capacitance at the load improves the transient response.

(6) This is the calculated maximum capacitance. The minimum ESR limitation often results in a lower value. See the capacitor application information for further guidance.

(7) This is the minimum ESR for all the electrolytic (nonceramic) capacitance. Use 14 m $\Omega$  as the minimum when calculating the total equivalent series resistance (ESR) using the maximum ESR values specified by the capacitor manufacturer.

## PIN ASSIGNMENT

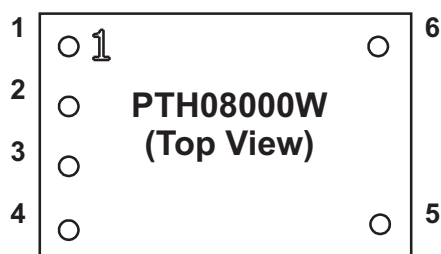

## TERMINAL FUNCTIONS

| TERMINAL     |     | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|-----|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME         | NO. |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| GND          | 1   |     | This is the common ground connection for the $V_I$ and $V_O$ power connections. It is also the 0- $V_{DC}$ reference for the <i>Inhibit</i> , $V_O$ <i>Adjust</i> , and <i>Track</i> control inputs.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Track        | 2   | I   | This is an analog control input that enables the output voltage to follow an external voltage. This pin becomes active typically 20 ms after the input voltage has been applied, and allows direct control of the output voltage from 0 V up to the nominal set-point voltage. Within this range, the output voltage follows the voltage at the Track pin on a volt-for-volt basis. When the control voltage is raised above this range, the module regulates at its set-point voltage. The feature allows the output voltage to rise simultaneously with other modules powered from the same input bus. If unused, this input should be connected to $V_I$ .<br><br><i>NOTE: Due to the undervoltage lockout feature, the output of the module cannot follow its own input voltage during power up. For more information, consult the related application section.</i> |
| $V_I$        | 3   | I   | The positive input voltage power node to the module, which is referenced to common GND.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Inhibit      | 4   | I   | The Inhibit pin is an open-collector/drain-negative logic input that is referenced to GND. Applying a low-level ground signal to this input disables the module's output. When the Inhibit control is active, the input current drawn by the regulator is significantly reduced. If the Inhibit pin is left open-circuit, the module produces an output voltage whenever a valid input source is applied. Do not place an external pull-up on this pin.                                                                                                                                                                                                                                                                                                                                                                                                                 |
| $V_O$ Adjust | 5   | I   | A 1% resistor must be connected between this pin and GND (pin 1) to set the output voltage of the module higher than 0.9 V. If left open-circuit, the output voltage defaults to this value. The temperature stability of the resistor should be 100 ppm/°C (or better). The set-point range is from 0.9 V to 5.5 V. The electrical specification table gives the standard resistor value for a number of common output voltages. See the application information for further guidance.                                                                                                                                                                                                                                                                                                                                                                                 |
| $V_O$        | 6   | O   | The regulated positive power output with respect to the GND node.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## TYPICAL CHARACTERISTICS (5-V INPUT)<sup>(1)(2)</sup>

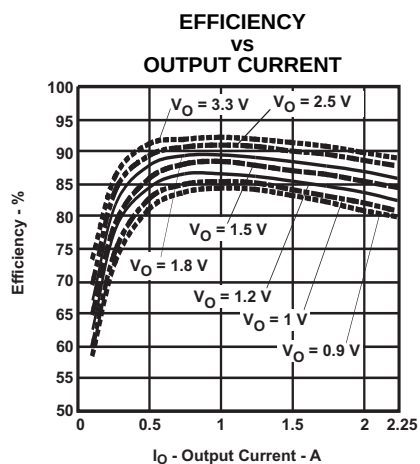


Figure 1.

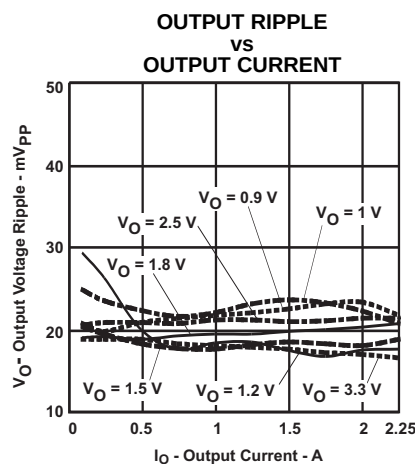


Figure 2.

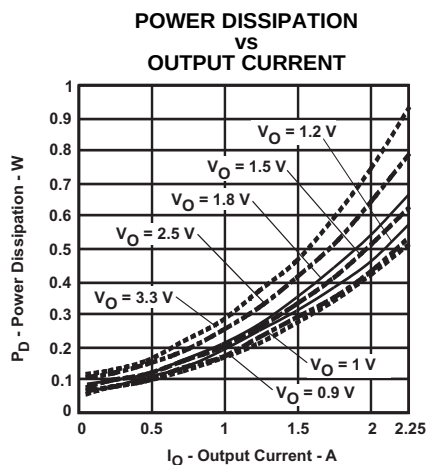


Figure 3.

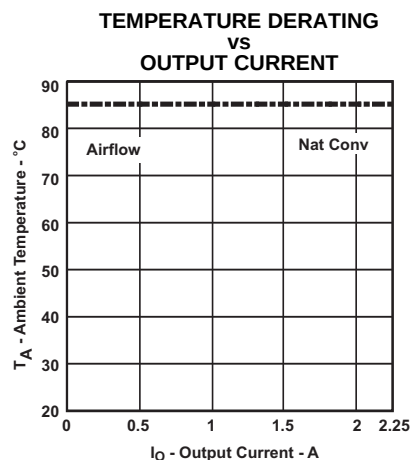


Figure 4.

- (1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter. Applies to [Figure 1](#), [Figure 2](#), and [Figure 3](#).
- (2) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100-mm x 100-mm, double-sided PCB with 2-oz. copper. Applies to [Figure 4](#).

## TYPICAL CHARACTERISTICS (12-V INPUT)<sup>(1)(2)</sup>

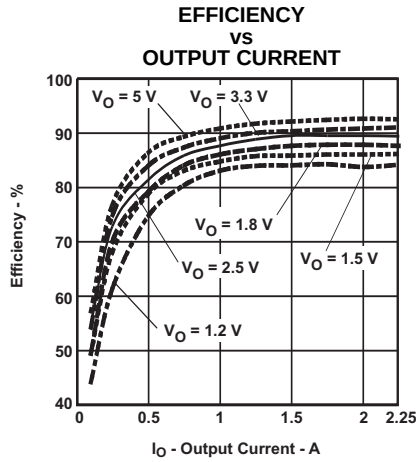


Figure 5.

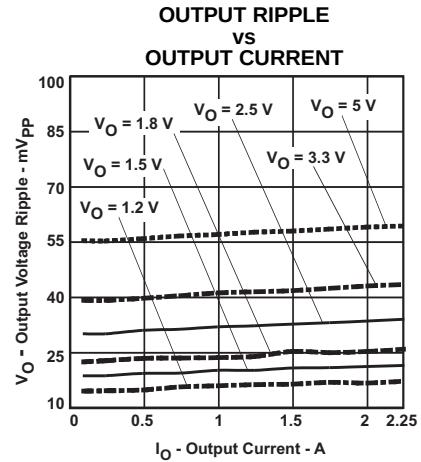


Figure 6.

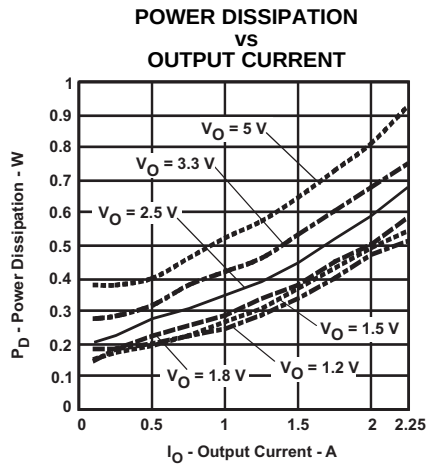


Figure 7.

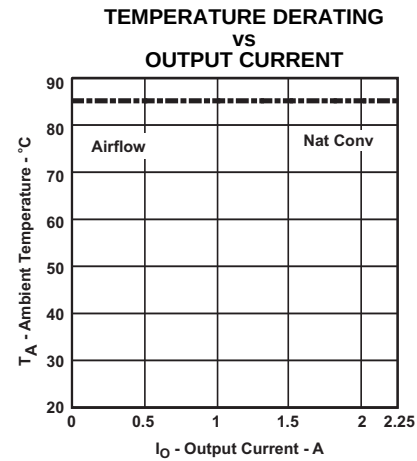


Figure 8.

- (1) The electrical characteristic data has been developed from actual products tested at 25°C. This data is considered typical for the converter. Applies to [Figure 5](#), [Figure 6](#), and [Figure 7](#).
- (2) The temperature derating curves represent the conditions at which internal components are at or below the manufacturer's maximum operating temperatures. Derating limits apply to modules soldered directly to a 100-mm x 100-mm, double-sided PCB with 2-oz. copper. Applies to [Figure 8](#).

## APPLICATION INFORMATION

### Adjusting the Output Voltage of the PTH08000W Wide-Output Adjust Power Modules

The  $V_O$  Adjust control (pin 5) sets the output voltage of the PTH08000W product. The adjustment range is from 0.9 V to 5.5 V. The adjustment method requires the addition of a single external resistor,  $R_{SET}$ , that must be connected directly between the  $V_O$  Adjust and GND (pin 1). Table 1 gives the standard external resistor for a number of common bus voltages, along with the actual voltage the resistance produces.


For other output voltages, the value of the required resistor can either be calculated using the following formula, or simply selected from the range of values given in Table 2. Figure 9 shows the placement of the required resistor.

$$R_{SET} = 10 \text{ k}\Omega \times \frac{0.891 \text{ V}}{V_O - 0.9 \text{ V}} - 1.82 \text{ k}\Omega$$

**Table 1. Standard Values of  $R_{SET}$  for Common Output Voltages**

| $V_O$ (V)<br>(Required) | $R_{SET}$ (k $\Omega$ )<br>(Standard Value) | $V_O$ (V)<br>(Actual) |
|-------------------------|---------------------------------------------|-----------------------|
| 5 <sup>(1)</sup>        | 0.348                                       | 5.010                 |
| 3.3                     | 1.87                                        | 3.315                 |
| 2.5                     | 3.74                                        | 2.503                 |
| 2                       | 6.19                                        | 2.012                 |
| 1.8                     | 8.06                                        | 1.802                 |
| 1.5                     | 13.0                                        | 1.501                 |
| 1.2                     | 27.4                                        | 1.205                 |
| 1                       | 86.6                                        | 1.001                 |
| 0.9                     | Open                                        | 0.9                   |

(1) The minimum input voltage is 4.5 V or ( $V_O + 1.1$ ) V, whichever is greater.

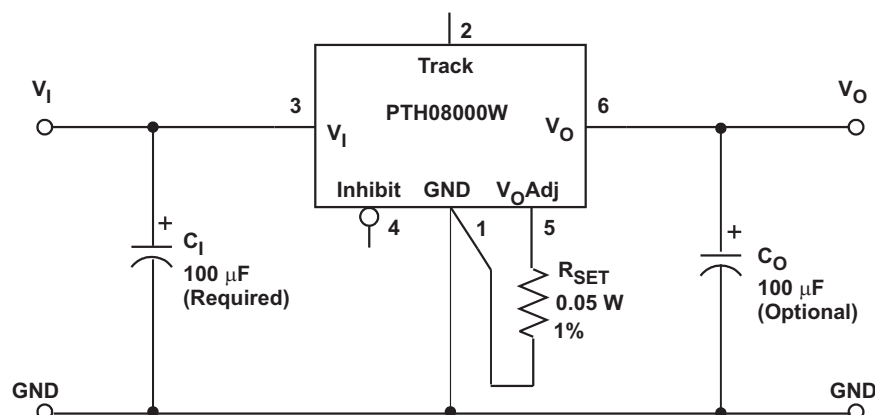

- (1) A 0.05-W rated resistor may be used. The tolerance should be 1%, with a temperature stability of 100 ppm/°C (or better). Place the resistor as close to the regulator as possible. Connect the resistor directly between pins 5 and 1 using dedicated PCB traces.
- (2) Never connect capacitors from  $V_O$  Adjust to either GND or  $V_O$ . Any capacitance added to the  $V_O$  Adjust pin affects the stability of the regulator.

**Figure 9.  $V_O$  Adjust Resistor Placement**

**Table 2. Calculated Set-Point Resistor Values**

| V <sub>O</sub> Required | R <sub>SET</sub> | V <sub>O</sub> Required | R <sub>SET</sub> | V <sub>O</sub> Required | R <sub>SET</sub> |
|-------------------------|------------------|-------------------------|------------------|-------------------------|------------------|
| 0.900                   | Open             | 1.800                   | 8.08 kΩ          | 3.700                   | 1.36 kΩ          |
| 0.925                   | 355 kΩ           | 1.850                   | 7.56 kΩ          | 3.750                   | 1.32 kΩ          |
| 0.950                   | 176 kΩ           | 1.900                   | 7.09 kΩ          | 3.800                   | 1.25 kΩ          |
| 0.975                   | 117 kΩ           | 1.950                   | 6.67 kΩ          | 3.850                   | 1.20 kΩ          |
| 1.000                   | 87.2 kΩ          | 2.000                   | 6.28 kΩ          | 3.900                   | 1.15 kΩ          |
| 1.025                   | 69.5 kΩ          | 2.050                   | 5.92 kΩ          | 3.950                   | 1.10 kΩ          |
| 1.050                   | 57.6 kΩ          | 2.100                   | 5.61 kΩ          | 4.000                   | 1.05 kΩ          |
| 1.075                   | 49.1 kΩ          | 2.150                   | 5.31 kΩ          | 4.050                   | 1.01 kΩ          |
| 1.100                   | 42.7 kΩ          | 2.200                   | 5.03 kΩ          | 4.100                   | 964 Ω            |
| 1.125                   | 37.8 kΩ          | 2.250                   | 4.78 kΩ          | 4.150                   | 922 Ω            |
| 1.150                   | 33.8 kΩ          | 2.300                   | 4.54 kΩ          | 4.200                   | 880 Ω            |
| 1.175                   | 30.6 kΩ          | 2.350                   | 4.33 kΩ          | 4.250                   | 840 Ω            |
| 1.200                   | 27.9 kΩ          | 2.400                   | 4.12 kΩ          | 4.300                   | 801 Ω            |
| 1.225                   | 25.6 kΩ          | 2.450                   | 3.93 kΩ          | 4.350                   | 763 Ω            |
| 1.250                   | 23.6 kΩ          | 2.500                   | 3.75 kΩ          | 4.400                   | 726 Ω            |
| 1.275                   | 21.9 kΩ          | 2.550                   | 3.58 kΩ          | 4.450                   | 690 Ω            |
| 1.300                   | 20.5 kΩ          | 2.600                   | 3.42 kΩ          | 4.500                   | 655 Ω            |
| 1.325                   | 19.1 kΩ          | 2.650                   | 3.27 kΩ          | 4.550                   | 621 Ω            |
| 1.350                   | 17.9 kΩ          | 2.700                   | 3.13 kΩ          | 4.600                   | 588 Ω            |
| 1.375                   | 16.9 kΩ          | 2.750                   | 2.99 kΩ          | 4.650                   | 556 Ω            |
| 1.400                   | 14.6 kΩ          | 2.800                   | 2.87 kΩ          | 4.700                   | 525 Ω            |
| 1.425                   | 13.7 kΩ          | 2.850                   | 2.75 kΩ          | 4.750                   | 494 Ω            |
| 1.450                   | 13.0 kΩ          | 2.900                   | 2.64 kΩ          | 4.800                   | 465 Ω            |
| 1.475                   | 13.7 kΩ          | 2.950                   | 2.53 kΩ          | 4.850                   | 436 Ω            |
| 1.500                   | 13.0 kΩ          | 3.000                   | 2.42 kΩ          | 4.900                   | 408 Ω            |
| 1.525                   | 12.4 kΩ          | 3.050                   | 2.32 kΩ          | 4.950                   | 380 Ω            |
| 1.550                   | 11.9 kΩ          | 3.100                   | 2.23 kΩ          | 5.000                   | 353 Ω            |
| 1.575                   | 11.4 kΩ          | 3.150                   | 2.14 kΩ          | 5.050                   | 327 Ω            |
| 1.600                   | 10.9 kΩ          | 3.200                   | 2.05 kΩ          | 5.100                   | 301 Ω            |
| 1.625                   | 10.5 kΩ          | 3.250                   | 1.97 kΩ          | 5.150                   | 276 Ω            |
| 1.650                   | 10.0 kΩ          | 3.300                   | 1.89 kΩ          | 5.200                   | 252 Ω            |
| 1.675                   | 9.68 kΩ          | 3.350                   | 1.82 kΩ          | 5.250                   | 228 Ω            |
| 1.700                   | 9.32 kΩ          | 3.400                   | 1.74 kΩ          | 5.300                   | 205 Ω            |
| 1.725                   | 8.98 kΩ          | 3.450                   | 1.67 kΩ          | 5.350                   | 182 Ω            |
| 1.750                   | 8.66 kΩ          | 3.500                   | 1.61 kΩ          | 5.400                   | 160 Ω            |
| 1.775                   | 8.36 kΩ          | 3.550                   | 1.54 kΩ          | 5.450                   | 138 Ω            |
| 1.800                   | 8.08 kΩ          | 3.600                   | 1.48 kΩ          | 5.500                   | 117 Ω            |
| 1.825                   | 7.81 kΩ          | 3.650                   | 1.42 kΩ          |                         |                  |



## CAPACITOR RECOMMENDATIONS FOR THE PTH08000W WIDE-OUTPUT ADJUST POWER MODULES

### Input Capacitor

The minimum required input capacitor is 100  $\mu\text{F}$  of capacitance. When  $V_O > 3.4\text{ V}$ , the 100- $\mu\text{F}$  electrolytic capacitance must be rated for 650-mArms ripple current. For  $V_O < 3.4\text{ V}$ , the ripple current rating must be at least 500 mArms. The ripple current rating of electrolytic capacitors is a major consideration when they are used at the input.

When specifying regular tantalum capacitors for use at the input, a minimum voltage rating of  $2 \times$  (maximum dc voltage + ac ripple) is highly recommended. This is standard practice to ensure reliability. Polymer-tantalum capacitors are not affected by this requirement.

For improved ripple reduction on the input bus, ceramic capacitors can also be added to complement the required electrolytic capacitance.

### Output Capacitors (Optional)

No output capacitance is required for normal operation. However, applications with load transients (sudden changes in load current) can benefit by adding external output capacitance. A 100- $\mu\text{F}$  electrolytic or ceramic capacitor can be used to improve transient response. Adding a 100- $\mu\text{F}$  nonceramic capacitor allows the module to meet its transient response specification. A high-quality computer-grade electrolytic capacitor should be adequate.

Electrolytic capacitors should be located close to the load circuit. These capacitors provide decoupling over the frequency range, 2 kHz to 150 kHz. Aluminum electrolytic capacitors are suitable for ambient temperatures above  $0^\circ\text{C}$ . For operation below  $0^\circ\text{C}$ , tantalum or Os-Con-type capacitors are recommended. When using one or more nonceramic capacitors, the calculated equivalent ESR should be no lower than  $10\text{m}\Omega$  ( $14\text{m}\Omega$  using the manufacturer's maximum ESR for a single capacitor). A list of preferred low-ESR-type capacitors are identified in [Table 3](#).

### Ceramic Capacitors

Above 150 kHz, the performance of aluminum electrolytic capacitors becomes less effective. To further improve the reflected input ripple current, or the output transient response, multilayer ceramic capacitors must be added. Ceramic capacitors have low ESR and their resonant frequency is higher than the bandwidth of the regulator. When placed at the output, their combined ESR is not critical as long as the total value of ceramic capacitance does not exceed 220  $\mu\text{F}$ . Also, to prevent the formation of local resonances, do not exceed the maximum number of capacitors specified in the capacitor table.

### Tantalum Capacitors

Additional tantalum-type capacitors can be used at both the input and output, and are recommended for applications where the ambient operating temperature can be less than  $0^\circ\text{C}$ . The AVX TPS, Sprague 593D/594/595, and Kemet T495/T510/T520 capacitors series are suggested over many other tantalum types due to their rated surge, power dissipation, and ripple current capability. As a caution, many general-purpose tantalum capacitors have considerably higher ESR and lower ripple current capability. These capacitors are also less reliable as they have lower power dissipation capability and surge current ratings. Tantalum capacitors that do not have a stated ESR or surge current rating are not recommended for power applications. When specifying Os-Con and polymer-tantalum capacitors for the output, the minimum ESR limit is encountered well before the maximum capacitance value is reached.

### Capacitor Table

The capacitor table, [Table 3](#), identifies the characteristics of capacitors from a number of vendors with acceptable ESR and ripple current (rms) ratings. The recommended number of capacitors required at both the input and output buses is identified for each capacitor type. This is not an extensive capacitor list. Capacitors from other vendors are available with comparable specifications. Those listed are for guidance. The rms rating and ESR (at 100 kHz) are critical parameters necessary to ensure both optimum regulator performance and long capacitor life.

**Table 3. Recommended Input/Output Capacitors <sup>(1)</sup>**

| CAPACITOR VENDOR/<br>COMPONENT<br>SERIES | CAPACITOR CHARACTERISTICS |                     |                                                          |                                                                  |                          | QUANTITY                    |               | VENDOR<br>NUMBER                       |
|------------------------------------------|---------------------------|---------------------|----------------------------------------------------------|------------------------------------------------------------------|--------------------------|-----------------------------|---------------|----------------------------------------|
|                                          | WORKING<br>VOLTAGE<br>(V) | VALUE<br>( $\mu$ F) | EQUIVALENT<br>SERIES<br>RESISTANCE<br>(ESR) ( $\Omega$ ) | 85°C<br>MAXIMUM<br>RIPPLE<br>CURRENT<br>(I <sub>RMS</sub> ) (mA) | PHYSICAL<br>SIZE<br>(mm) | INPUT<br>BUS <sup>(2)</sup> | OUTPUT<br>BUS |                                        |
| Panasonic WA (SMT)                       | 20                        | 150                 | 0.026                                                    | 3700                                                             | 10 × 10,2                | 1                           | ≤ 2           | EEFWA1D151P                            |
| FC (SMT)                                 | 25                        | 220                 | 0.150                                                    | 670                                                              | 10 × 10,2                | 1                           | 1             | EEVFC1E221P                            |
| Panasonic SL                             | 6.3                       | 47                  | 0.018                                                    | 2500                                                             | 7,3 × 4,3                | N/R <sup>(3)</sup>          | ≤ 3           | EEFCD0J470R                            |
| SP-cap(SMT)                              | 6.3                       | 120                 | 0.007                                                    | 3500                                                             | 7,3 × 4,3                | N/R <sup>(3)</sup>          | ≤ 1           | EEFSD0J121R                            |
| United Chemi-con                         |                           |                     |                                                          |                                                                  |                          |                             |               |                                        |
| PXA (SMT)                                | 16                        | 150                 | 0.026                                                    | 3400                                                             | 10 × 7,7                 | 1                           | ≤ 2           | PXA16VC151MJ80TP                       |
| PS                                       | 25                        | 100                 | 0.020                                                    | 4300                                                             | 10 × 12,5                | 1                           | ≤ 2           | 25PS100MJ12                            |
| LXZ                                      | 35                        | 220                 | 0.180                                                    | 760                                                              | 10 × 12,5                | 1                           | 1             | LXZ35VB221M10X12LL                     |
| MVY (SMT)                                | 35                        | 333                 | 0.150                                                    | 670                                                              | 10 × 10                  | 1                           | 1             | MVY35VC331MJ10TP                       |
| Nichicon UWG (SMT)                       | 35                        | 100                 | 0.150                                                    | 670                                                              | 10 × 10                  | 1                           | 1             | UWG1V101MNR1GS                         |
| F559(Tantalum)                           | 10                        | 100                 | 0.055                                                    | 2000                                                             | 7,7 × 4,3                | N/R <sup>(4)</sup>          | ≤ 3           | F551A107MN                             |
| HD                                       | 25                        | 220                 | 0.072                                                    | 760                                                              | 8 × 11,5                 | 1                           | 1             | UHD1E221MPR                            |
| Sanyo Os-con\ POS-Cap                    | 10                        | 68                  | 0.025                                                    | 2400                                                             | 7,3 × 4,3                | N/R <sup>(4)</sup>          | ≤ 2           | 10TPE68M                               |
| SVP (SMT)                                | 20                        | 150                 | 0.020                                                    | 4320                                                             | 10 × 12,7                | 1                           | ≤ 1           | 20SVP150M                              |
| SP                                       | 20                        | 120                 | 0.024                                                    | 3110                                                             | 8 × 10,5                 | 1                           | ≤ 2           | 20SP120M                               |
| AVX Tantalum TPS (SMD)                   | 35                        | 47                  | 0.100                                                    | 1430                                                             | 7,3 × 4,3 × 4,1          | 2                           | ≤ 4           | TPSV476M035R0100                       |
|                                          | 25                        | 47                  | 0.100                                                    | 1150                                                             | 7,3 × 4,3 × 4,1          | 2                           | ≤ 4           | TPSE476M025R0100 (V <sub>I</sub> <13V) |
| Kemet T520 (SMD)                         | 10                        | 100                 | 0.025                                                    | > 2000                                                           | 7,3 × 5,7 × 4            | N/R <sup>(4)</sup>          | ≤ 1           | T520V107M010ASE025                     |
| AO-CAP                                   | 6.3                       | 100                 | 0.018                                                    | > 2900                                                           | 7,3 × 5,7 × 4            | N/R <sup>(4)</sup>          | ≤ 1           | A700V107M006AT                         |
| Vishay/Sprague                           | 35                        | 47                  | 0.280                                                    | > 1000                                                           | 7,3 × 6 × 4,1            | 2                           | ≤ 5           | 595D476X0035R2T                        |
| 594D/SVP(SMD)                            | 20                        | 100                 | 0.025                                                    | 3200                                                             | 8 × 12                   | 1                           | ≤ 2           | 94SVP107X0020E12                       |
| 94SS                                     | 20                        | 150                 | 0.030                                                    | 3200                                                             | 10 × 10,5                | 1                           | ≤ 2           | 94SS157X0020F8P                        |
| Murata Ceramic X5R                       | 16                        | 47                  | 0.002                                                    | > 1400                                                           | 3225                     | 1 <sup>(5)</sup>            | ≤ 3           | GRM32ER61C476M                         |
| TDK ceramic X5R                          | 6.3                       | 47                  | 0.002                                                    | > 1400                                                           | 3225                     | N/R <sup>(4)</sup>          | ≤ 3           | C3225X5R0J476MT (V <sub>O</sub> <5.5V) |
| Kemet Ceramic X5R                        | 6.3                       | 47                  | 0.002                                                    | > 1400                                                           | 3225                     | N/R <sup>(4)</sup>          | ≤ 3           | C1210C476K9PAC (V <sub>O</sub> <5.5V)  |
| TDK Ceramic X7R                          | 25                        | 10                  | 0.002                                                    | > 1400                                                           | 3225                     | 1 <sup>(5)</sup>            | ≤ 4           | C3225X7R1E106K                         |
| Murata Ceramic X5R                       | 25                        | 10                  | 0.002                                                    | > 1400                                                           | 3225                     | 1 <sup>(5)</sup>            | ≤ 4           | GRM32DR61E106KA12                      |
| Kemet                                    | 16                        | 10                  | 0.002                                                    | > 1400                                                           | 3225                     | 1 <sup>(5)</sup>            | ≤ 4           | C1210C106M4PAC                         |
| TDK Ceramic X7R                          | 25                        | 2.2                 | 0.002                                                    | > 1400                                                           | 3225                     | 1                           | 1             | C3225X7R1E225KT/MT                     |
| Murata Ceramic X7R                       | 25                        | 2.2                 | 0.002                                                    | > 1400                                                           | 3225                     | 1                           | 1             | GRM32RR71J225KC01L                     |
| Kemet                                    | 25                        | 2.2                 | 0.002                                                    | > 1400                                                           | 3225                     | 1                           | 1             | C1210C225K3RAC                         |

(1) Check with capacitor manufacturers for availability and lead-free status.

(2) The voltage rating of the input capacitor must be selected for the desired operating input voltage range of the regulator. To operate the regulator at a higher input voltage, select a capacitor with a higher voltage rating.

(3) Not Recommended (N/R). The voltage rating of this capacitor does not meet the minimum operating limit in most applications.

(4) Not Recommended (N/R). The voltage rating of this capacitor does not meet the minimum operating limit in most applications.

(5) Ceramic capacitors can be used to complement electrolytic types at the input bus by reducing high-frequency ripple current.

## Designing for Load Transients

The transient response of the dc/dc converter has been characterized using a load transient with a di/dt of 1A/ $\mu$ s. The typical voltage deviation for this load transient is given in the data-sheet specification table using the optional value of output capacitance. As the di/dt of a transient is increased, the response of a converter's regulation circuit ultimately depends on its output capacitor decoupling network. This is an inherent limitation with any dc/dc converter once the speed of the transient exceeds its bandwidth capability. If the target application specifies a higher di/dt or lower voltage deviation, the requirement can only be met with additional output capacitor decoupling. In these cases, special attention must be paid to the type, value, and ESR of the capacitors selected.

If the transient performance requirements exceed those specified in the data sheet, the selection of output capacitors becomes more important. Review the minimum ESR in the characteristic data sheet for details on the capacitance maximum.

## Features of the PTH/PTV Family of Nonisolated, Wide-Output Adjustable Power Modules

### POLA™ Compatibility

The PTH/PTV family of nonisolated, wide-output adjustable power modules from Texas Instruments are optimized for applications that require a flexible, high-performance module that is small in size. Each of these products are POLA™ compatible. POLA-compatible products are produced by a number of manufacturers, and offer customers advanced, nonisolated modules with the same footprint and form factor. POLA parts are also ensured to be interoperable, thereby providing customers with true second-source availability.

### Soft-Start Power Up

The Auto-Track feature allows the power up of multiple PTH/PTV modules to be directly controlled from the Track pin. However, in a stand-alone configuration, or when the Auto-Track feature is not being used, the *Track* pin should be directly connected to the input voltage,  $V_I$  (see Figure 10).

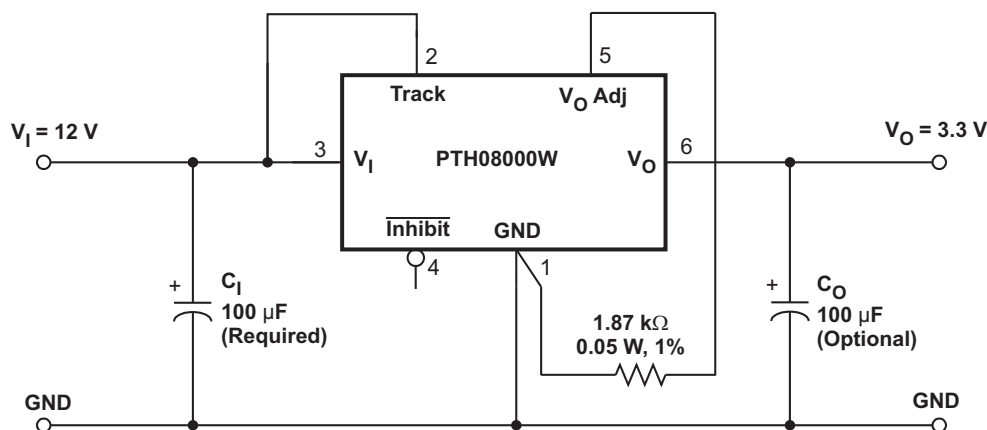


Figure 10. Power-Up Application Circuit

When the *Track* pin is connected to the input voltage, the Auto-Track function is permanently disengaged. This allows the module to power up entirely under the control of its internal soft-start circuitry. When power up is under soft-start control, the output voltage rises to the set-point at a quicker and more linear rate.

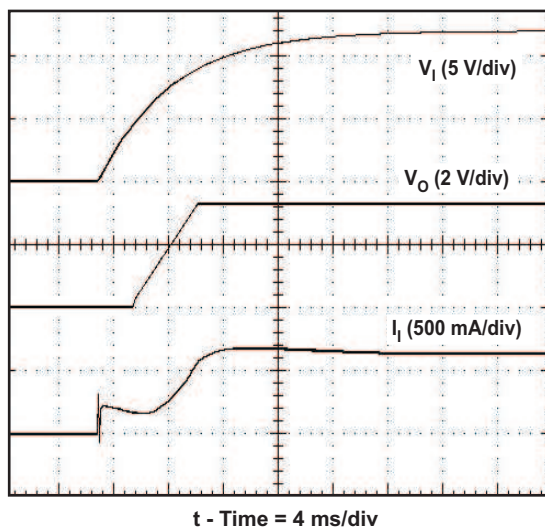


Figure 11. Power-Up Waveform

From the moment a valid input voltage is applied, the soft-start control introduces a short time delay (typically

less than 5 ms) before allowing the output voltage to rise. The output then progressively rises to the module set-point voltage. Figure 11 shows the soft-start power-up characteristic of the PTH08000W, operating from a 12-V input bus and configured for a 3.3-V output. The waveforms were measured with a 2-A resistive load and the Auto-Track feature disabled. The initial rise in input current when the input voltage first starts to rise is the charge current drawn by the input capacitors. Power up is complete within 25 ms.

## Current Limit Protection

The PTH08000W modules protect against load faults with an output overcurrent trip. Under a load fault condition, the output current cannot exceed the current limit value. Attempting to draw current that exceeds the current limit value causes the output voltage to enter into a *hiccup* mode of operation, whereby the module continues in a cycle of successive shutdown and power up until the load fault is removed. On removal of the fault, the output voltage promptly recovers.

## Thermal Shutdown

Thermal shutdown protects the module internal circuitry against excessively high temperatures. A rise in temperature may be the result of a drop in airflow, a high ambient temperature, or a higher than normal output current. If the junction temperature of the internal components exceeds 165°C, the module shuts down. This reduces the output voltage to zero. The module starts up automatically, by initiating a soft-start power up when the sensed temperature decreases 10°C below the thermal shutdown trip-point.

## Output On/Off Inhibit

For applications requiring output voltage on/off control, the PTH08000 power module incorporates an output on/off Inhibit control (pin 4). The inhibit feature can be used wherever there is a requirement for the output voltage from the regulator to be turned off.

The power module functions normally when the Inhibit pin is left open-circuit, providing a regulated output whenever a valid source voltage is connected to  $V_I$  with respect to GND.

Figure 12 shows the typical application of the inhibit function. Note the discrete transistor (Q1). The Inhibit control has its own internal pull-up to 3 V. An open-collector or open-drain device is recommended to control this input.

**Do not place an external pull-up on this pin.**

Turning Q1 on applies a low voltage to the *Inhibit* control pin and disables the output of the module. If Q1 is then turned off, the module executes a soft-start power-up sequence. A regulated output voltage is produced within 20 ms. Figure 13 shows the typical rise in the output voltage, following the turn off of Q1. The turn off of Q1 corresponds to the rise in the waveform, Q1  $V_{DS}$ . The waveforms were measured with a 2-A resistive load.

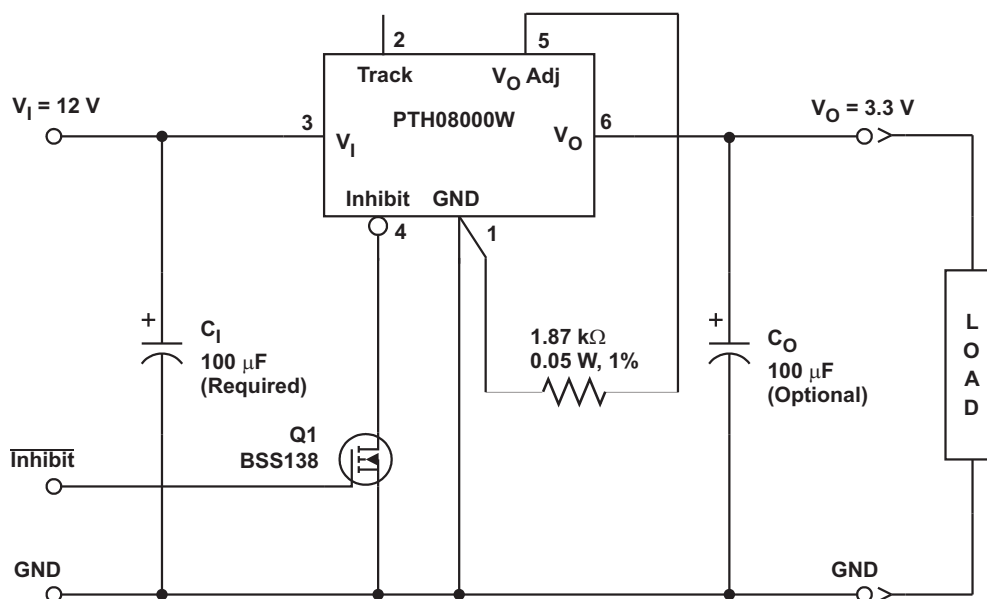
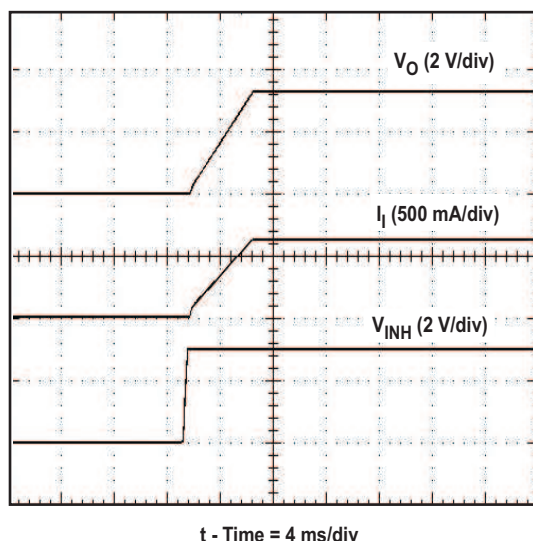


Figure 12. On/Off Inhibit Control Circuit



**Figure 13. Power-Up Response From Inhibit Control**

## Auto-Track™ Function

The Auto-Track function is unique to the PTH/PTV family, and is available with all POLA products. Auto-Track was designed to simplify the amount of circuitry required to make the output voltage from each module power up and power down in sequence. The sequencing of two or more supply voltages during power up is a common requirement for complex mixed-signal applications that use dual-voltage VLSI ICs such as the TMS320™ DSP family, microprocessors, and ASICs.

## How Auto-Track™ Works

Auto-Track works by forcing the module output voltage to follow a voltage presented at the *Track* control pin <sup>(1)</sup>. This control range is limited to between 0 V and the module set-point voltage. Once the track-pin voltage is raised above the set-point voltage, the module output remains at its set-point <sup>(2)</sup>. As an example, if the *Track* pin of a 2.5-V regulator is at 1 V, the regulated output is 1 V. If the voltage at the *Track* pin rises to 3 V, the regulated output does not go higher than 2.5 V.

When under Auto-Track control, the regulated output from the module follows the voltage at its *Track* pin on a volt-for-volt basis. By connecting the *Track* pin of a number of these modules together, the output voltages follow a common signal during power up and power down. The control signal can be an externally generated master ramp waveform, or the output voltage from another power supply circuit <sup>(3)</sup>. For convenience, the *Track* input incorporates an internal RC-charge circuit. This operates off the module input voltage to produce a suitable rising waveform at power up.

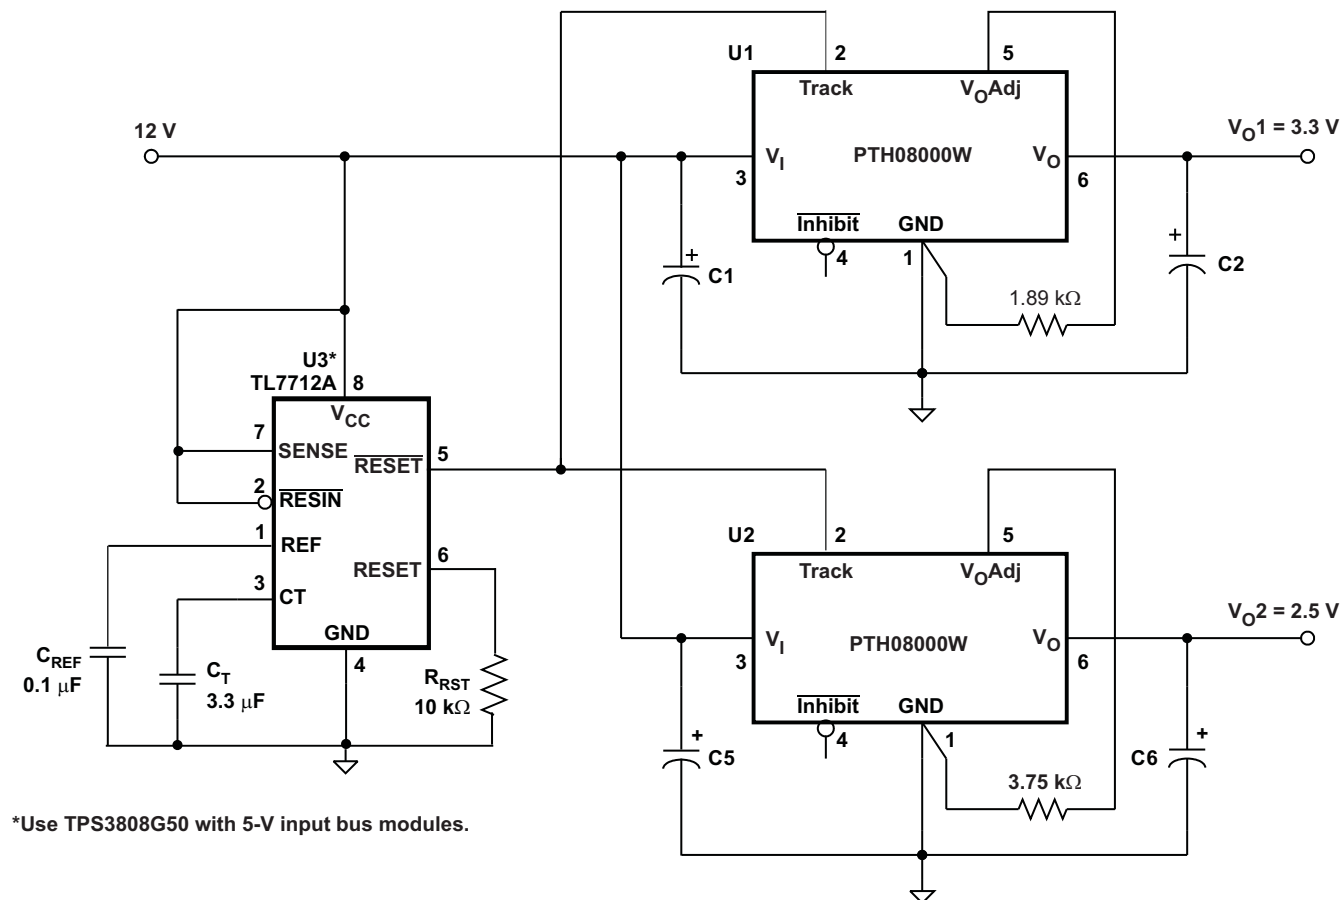


Figure 14. Auto-Track Circuit

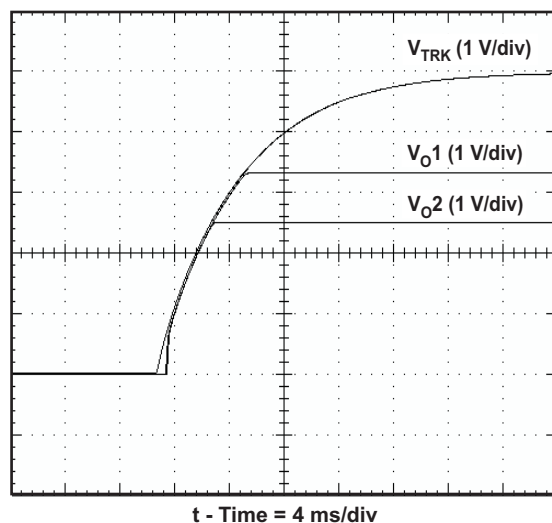


Figure 15. Simultaneous Power Up With Auto-Track Control

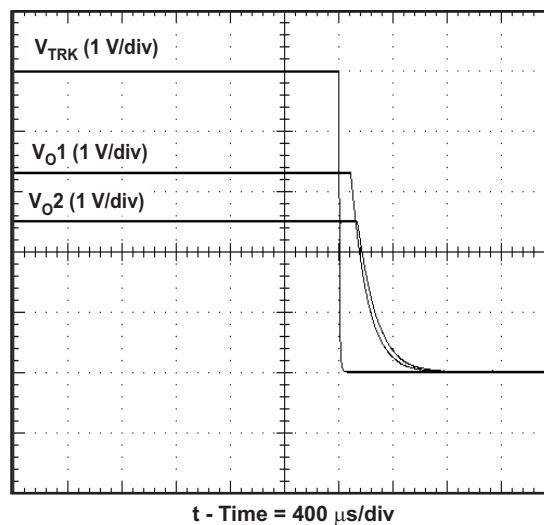


Figure 16. Simultaneous Power Down With Auto-Track Control



## Typical Application

The basic implementation of Auto-Track allows for simultaneous voltage sequencing of a number of Auto-Track compliant modules. Connecting the *Track* inputs of two or more modules forces their track input to follow the same collective RC-ramp waveform, and allows their power-up sequence to be coordinated from a common Track control signal. This can be an open-collector (or open-drain) device, such as a power-up reset voltage supervisor IC. See U3 in [Figure 14](#).

To coordinate a power-up sequence, the Track control must first be pulled to ground potential. This should be done at or before input power is applied to the modules. The ground signal should be maintained for at least 20 ms after input power has been applied. This brief period gives the modules time to complete their internal soft-start initialization<sup>(4)</sup>, enabling them to produce an output voltage. A low-cost supply voltage supervisor IC, that includes a built-in time delay, is an ideal component for automatically controlling the Track inputs at power up.

[Figure 14](#) shows how the TPS3808G50 supply voltage supervisor IC (U3) can be used to coordinate the sequenced power up of two 5-V input Auto-Track modules. The output of the TPS3808G50 supervisor becomes active above an input voltage of 0.8 V, enabling it to assert a ground signal to the common track control well before the input voltage has reached the module's undervoltage lockout threshold. The ground signal is maintained until approximately 27 ms after the input voltage has risen above U3's voltage threshold, which is 4.65 V. The 27-ms time period is controlled by the capacitor C3. The value of 4700 pF provides sufficient time delay for the modules to complete their internal soft-start initialization. The output voltage of each module remains at zero until the track control voltage is allowed to rise. When U3 removes the ground signal, the track control voltage automatically rises. This causes the output voltage of each module to rise simultaneously with the other modules, until each reaches its respective set-point voltage.

[Figure 15](#) shows the output voltage waveforms from the circuit of [Figure 14](#) after input voltage is applied to the circuit. The waveforms,  $V_{O1}$  and  $V_{O2}$ , represent the output voltages from the two power modules, U1 (3.3 V) and U2 (2.5 V), respectively.  $V_{O1}$  and  $V_{O2}$  are shown rising together to produce the desired simultaneous power-up characteristic.

The same circuit also provides a power-down sequence. When the input voltage falls below U3's voltage threshold, the ground signal is re-applied to the common track control. This pulls the track inputs to zero volts, forcing the output of each module to follow. Power down is normally complete before the input voltage has fallen below the modules' undervoltage lockout. This is an important constraint. Once the modules recognize that an input voltage is no longer present, their outputs can no longer follow the voltage applied at their track input. During a power-down sequence, the fall in the output voltage from the modules is limited by the Auto-Track slew rate capability.

## Notes on Use of Auto-Track™

1. The *Track* pin voltage must be allowed to rise above the module set-point voltage before the module regulates at its adjusted set-point voltage.
2. The Auto-Track function tracks almost any voltage ramp during power up, and is compatible with ramp speeds of up to 1 V/ms.
3. The absolute maximum voltage that may be applied to the *Track* pin is the input voltage  $V_I$ .
4. The module cannot follow a voltage at its track control input until it has completed its soft-start initialization. This takes about 20 ms from the time that a valid voltage has been applied to its input. During this period, it is recommended that the *Track* pin be held at ground potential.
5. The Auto-Track function is disabled by connecting the *Track* pin to the input voltage ( $V_I$ ). When Auto-Track is disabled, the output voltage rises at a quicker and more linear rate after input power has been applied.

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins                    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5)          | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-----------------------------------|-----------------------|-------------|--------------------------------------|--------------------------------------------|--------------|---------------------|
| <a href="#">PTH08000WAH</a>  | Active        | Production           | Through-Hole<br>Module (EUS)   6  | 56   TIW TRAY         | Exempt      | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| PTH08000WAH.B                | Active        | Production           | Through-Hole<br>Module (EUS)   6  | 56   TIW TRAY         | Exempt      | SN                                   | N/A for Pkg Type                           | -40 to 85    |                     |
| <a href="#">PTH08000WAS</a>  | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 49   TIW TRAY         | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| PTH08000WAS.B                | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 49   TIW TRAY         | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| <a href="#">PTH08000WAST</a> | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 250   SMALL T&R       | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| PTH08000WAST.B               | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 250   SMALL T&R       | No          | SNPB                                 | Level-1-235C-UNLIM/<br>Level-3-260C-168HRS | -40 to 85    |                     |
| <a href="#">PTH08000WAZ</a>  | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 49   TIW TRAY         | Exempt      | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTH08000WAZ.B                | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 49   TIW TRAY         | Exempt      | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| <a href="#">PTH08000WAZT</a> | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 250   SMALL T&R       | Exempt      | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |
| PTH08000WAZT.B               | Active        | Production           | Surface Mount<br>Module (EUT)   6 | 250   SMALL T&R       | Exempt      | SNAGCU                               | Level-3-260C-168 HR                        | -40 to 85    |                     |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.




<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

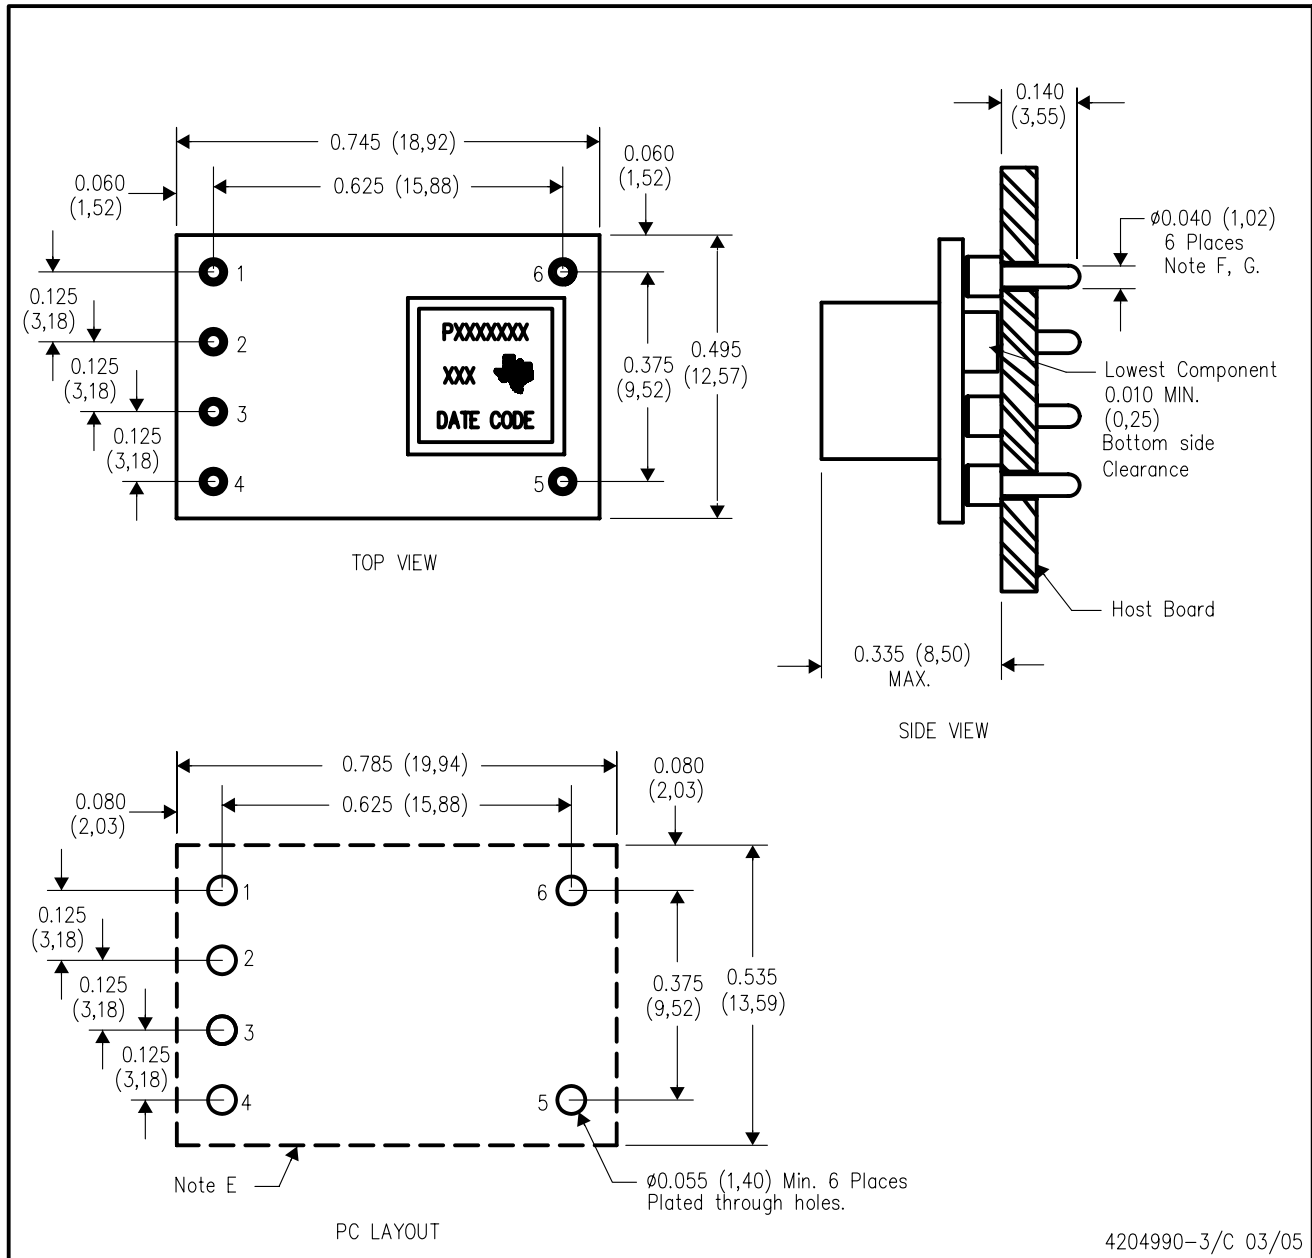


- NOTES:
- All linear dimensions are in inches (mm).
  - This drawing is subject to change without notice.
  - 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - Recommended keep out area for user components.


- Pins are 0.040" (1,02) diameter with 0.070" (1,78) diameter standoff shoulder.
- All pins: Material - Copper Alloy  
Finish - Tin (100%) over Nickel plate

## EUT (R-PDSS-B6)


## DOUBLE SIDED MODULE

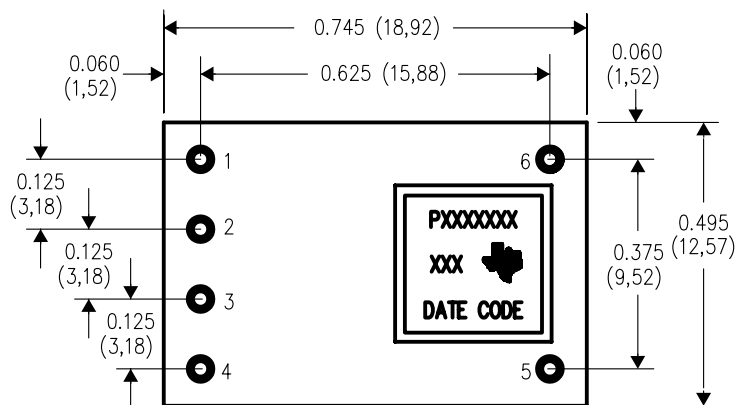


TOP VIEW

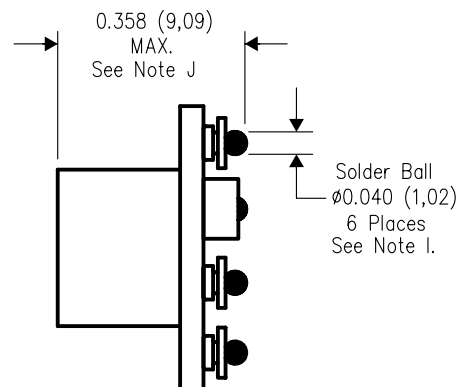

SIDE VIEW

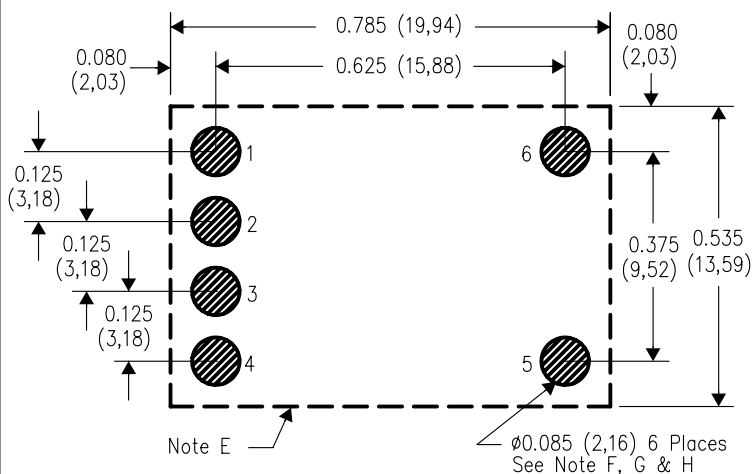

PC LAYOUT

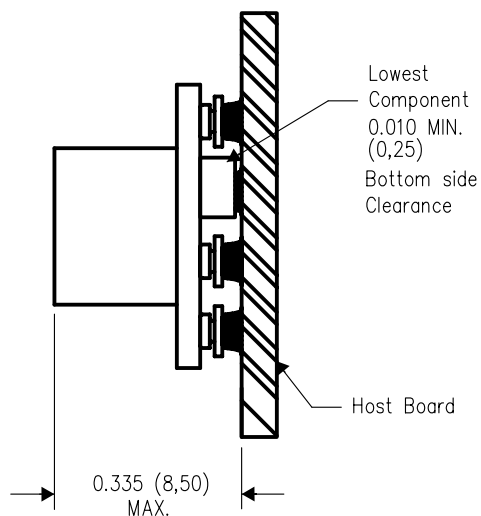

4204991-3/C 03/05

- NOTES:
- A. All linear dimensions are in inches (mm).
  - B. This drawing is subject to change without notice.
  - C. 2 place decimals are  $\pm 0.030$  ( $\pm 0,76$ mm).
  - D. 3 place decimals are  $\pm 0.010$  ( $\pm 0,25$ mm).
  - E. Recommended keep out area for user components.
  - F. Power pin connection should utilize two or more vias to the interior power plane of 0.025 (0,63) I.D. per input, ground and output pin (or the electrical equivalent).

- G. Paste screen opening: 0.080 (2,03) to 0.085 (2,16).  
Paste screen thickness: 0.006 (0,15).
- H. Pad type: Solder mask defined.
- I. All pins: Material – Copper Alloy  
Finish – Tin (100%) over Nickel plate  
Solder Ball – See product data sheet.
- J. Dimension prior to reflow solder.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated