


CKCA43C0G1H331K100AA (TDK item description : CKCA43C0G1H331KT****)

Applications		Commercial Grade
Feature		4 in 1 Array
Series	CKCA43(3216) [EIA CC1206]	

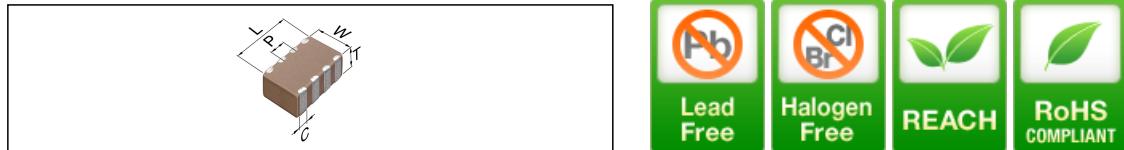







Size	
Length(L)	3.20mm +/-0.20mm
Width(W)	1.60mm +/-0.20mm
Thickness(T)	1.00mm +/-0.15mm
Terminal Width(C)	0.40mm Min.
Terminal Spacing(P)	0.80mm Min.

Electrical Characteristics	
Capacitance	330pF +/-10%
Rated Voltage	50Vdc
Temperature Characteristic	C0G(0+/-30ppm/degC)
Q	1000 Min.
Insulation Resistance	10000MΩ Min.

Other	
Soldering Method	Reflow
AEC Q200	No
Packing	Blister (Plastic)Taping [180mm Reel]
Package Quantity	2000 Pcs Min.

CKCA43C0G1H331K100AA

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

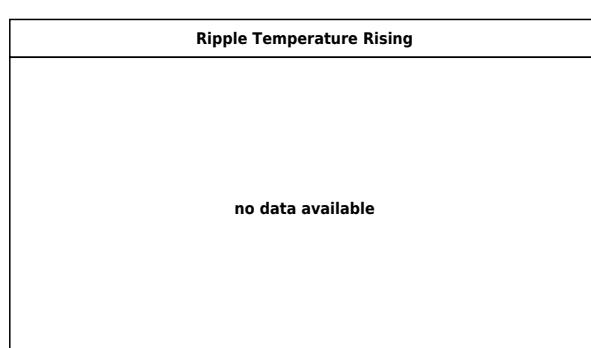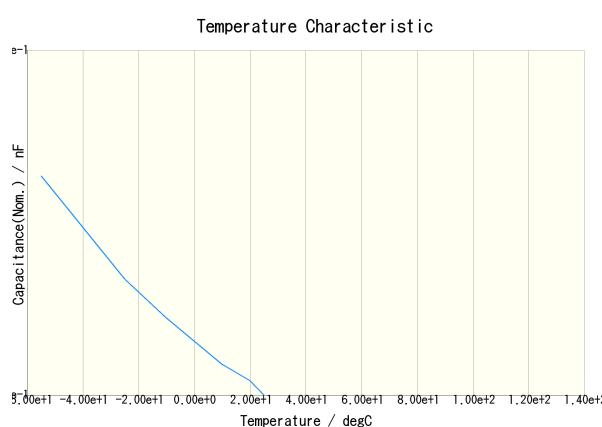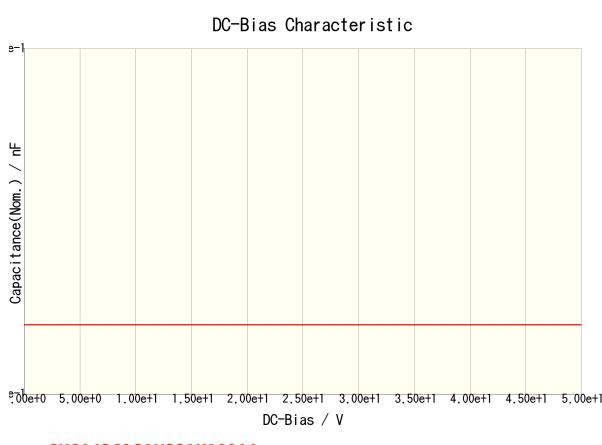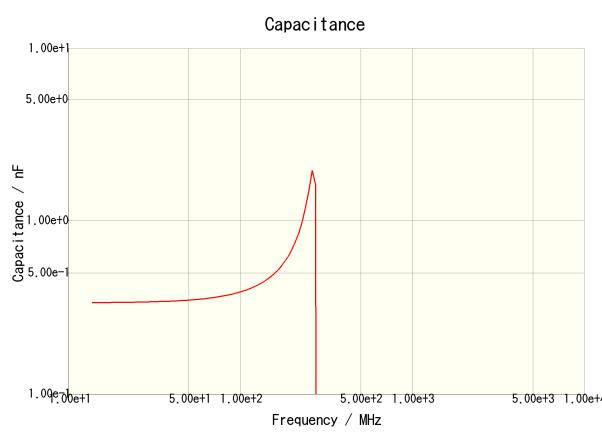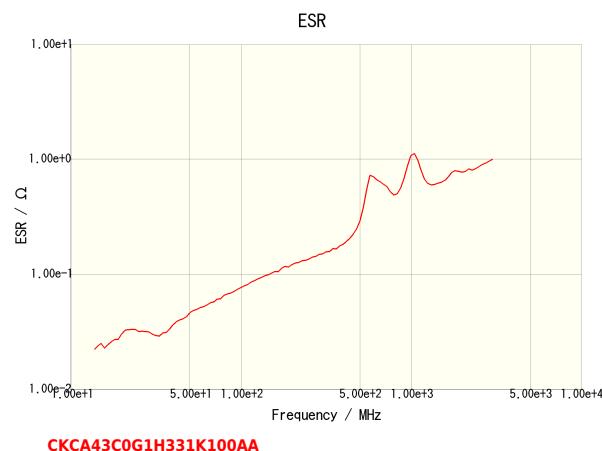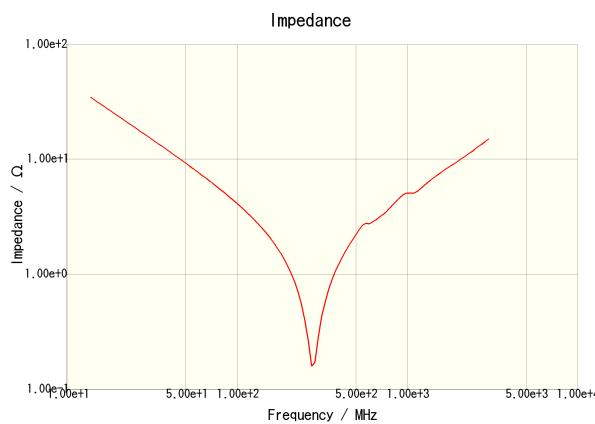

•This PDF document was created based on the data listed on the TDK Corporation website.

•All specifications are subject to change without notice.