


 Panel mounting type
 One-touch installation type

 Panel mounting type
 Installation frame type


PC board mounting type

Features

1. 8.7 mm .343 inch Character Height (previously 7 mm)
 Easy-to-read character height increased from 7 mm to 8.7 mm .276 inch to .343 inch.



2. Plenty of Digits



3. Counting Speed Switchable between 2 kHz and 30 Hz

4. Panel Mounting Type Features 2 Installation Methods

Comes with very easy one-touch installation type and also installation frame type that uses the bracket on the timer/counter. Choose a method that suits the application.

5. Battery Replacement Easy on Environment

To replace battery simply remove body for the one-touch installation type, and remove battery lid for the installation frame type.

6. Screw Terminals Designed for Safety

Built in finger protection.

7. Panel Covers Replaceable

(Standard color is ash gray.)

Change the panel design by replacing with a black panel cover.

8. Conforms to IP66 Protective Construction (Only Installation frame type.) (Front panel surface)

9. Input Methods

1) Non-voltage input method

2) Voltage input method

3) Free voltage input method

10. Backlight Type Added to Series and Now 2-color Switchable (green/red)

Easy viewing even in dark places and switchable between green and red (Voltage input type).

11. Conforms to Safety Regulations

PRODUCT CHART

Type		Standard type			Backlight type
Installation type	One-touch installation type	Non-voltage input type	Voltage input type (4.5 to 30 V DC)	Free voltage input type (24 to 240 V AC/DC)	Voltage input type (4.5 to 30 V DC)
		○	○	○	○
Panel mounting type	Installation frame type	○	○	○	○
PC board mounting type		○	—	—	—

PRODUCT TYPES

1. Panel mounting type

1) One-touch installation type

① Standard type

No. digits	Counting speed	Front reset	Input method		Part No.
8 digits	2 kHz/30 Hz switchable	Yes	Non-voltage input type		LC2H-FE-2KK
			Voltage input type (4.5 to 30 V DC)		LC2H-FE-DL-2KK
	30 Hz		Free voltage input type (24 to 240 V AC/DC)		LC2H-FE-FV-30

(Note) Please ask us about types without front resetting.

② Backlight type

No. digits	Counting speed	Front reset	Input method		Part No.
8 digits	2 kHz/30 Hz switchable	Yes	Voltage input type (4.5 to 30 V DC)		LC2H-FE-DL-2KK-B

2) Installation frame type

① Standard type

No. digits	Counting speed	Front reset	Input method		Part No.
8 digits	2 kHz/30 Hz switchable	Yes	Non-voltage input type		LC2H-F-2KK
	30 Hz		Voltage input type (4.5 to 30 V DC)		LC2H-F-DL-2KK
			Free voltage input type (24 to 240 V AC/DC)		LC2H-F-FV-30

Note) Please ask us about types without front resetting.

② Backlight type

No. digits	Counting speed	Front reset	Input method		Part No.
8 digits	2 kHz/30 Hz switchable	Yes	Voltage input type (4.5 to 30 V DC)		LC2H-F-DL-2KK-B

2. PC board mounting type

No. digits	Counting speed	Front reset	Input method		Part No.
		No	Non-voltage input type		LC2H-C-2K-N LC2H-C-30-N

SPECIFICATIONS

1. Panel mounting type

Type		Standard type		Backlight type	Standard type
Item		Non-voltage input	Voltage input		Free voltage type
No. digits		8 digits			
External power supply		Not required (built-in battery)			
Max. counting speed		2 kHz/30 Hz (Switchable by switch)			30 Hz (Note 2)
Count input	Min. input signal width (ON: OFF = 1:1)	0.25 ms/16.7 ms (Switchable by switch)			16.7 ms
	Input method (signal)	Non-voltage input using contacts or open collector connection	High level: 4.5 to 30 V DC Low level: 0 to 2 V DC		High level: 24 to 240 V AC/DC Low level: 0 to 2.4 V AC/DC
	Input impedance	When shorted: Max. 10 kΩ When open: Max. 750 kΩ	Approx. 4.7 kΩ		—
	Residual voltage	Max. 0.5 V	—		—
Reset input	Min. input signal width	200 ms			
	Input method (signal)	Non-voltage input using contacts or open collector connection	High level: 4.5 to 30 V DC Low level: 0 to 2 V DC		Non-voltage input using contacts or open collector connection
	Input impedance	When shorted: Max. 10 kΩ When open: Max. 750 kΩ	Approx. 4.7 kΩ		When shorted: Max. 10 kΩ When open: Max. 750 kΩ
	Residual voltage	Max 0.5 V	—		Max. 0.5 V
Display method		7-segment LCD		7-segment LCD With green/red backlight	
Breakdown voltage (initial)		Between charged and uncharged parts: 1,000 V AC for 1 minute.			Between charged and uncharged parts: 2,000 V AC for 1 minute.
Insulation resistance (initial)		Min. 100 MΩ (measured at 500 V DC) Measurement location same as for break down voltage.			
Backlight power		—		24 V DC (±10%)	
Protective construction (Note 3)		IEC Standard IP66 (only panel front: when using rubber gasket)			
Accessories (Note 3)		Rubber gasket, mounting bracket			
Battery life		7 years (at 25°C 77°F) Note 1			6 years (at 25°C 77°F)

Notes) 1. The value given for battery life is calculated based on continuous operation (count input signal ON/OFF = 1:1), therefore, this value is not guaranteed.

Also, battery life is decreased 30% when operation is continuous with 2 kHz count inputting in 2 kHz mode.

2. Operation is at 25 Hz when using 24 V AC.

3. Only for installation frame type.

LC2H

2. PC board mounting type

Type		PC board mounting type	
Item		Non DC voltage input	
Input method		8 digits	
No. digits		3 V DC	
Rated operation voltage		2.7 to 3.3 V DC	
Allowable operation voltage range		Max. 30 µA (max. 250 µA during reset input)	
Current consumption		30 Hz	
Max. counting speed		2 kHz	16.7 ms
Count input	Min. input signal width (ON: OFF = 1:1)		
	Input method	Non-voltage input using contacts or open collector connection	
	Input impedance	When shorted: Max. 10 kΩ When open: Max. 750 kΩ	
Reset input	Residual voltage	Max. 0.5 V	
	Min. input signal width	10 ms	
	Input method	Non-voltage input using contacts or open collector connection	
Reset input	Input impedance	When shorted: Max. 10 kΩ When open: Max. 750 kΩ	
	Residual power	Max. 0.5 V	
Break down voltage (initial)		Between charged and uncharged parts: 1,000 V AC for 1 minute.	
Insulation resistance (initial)		Min. 100 MΩ (measured at 500 V DC) Measurement location same as for break down voltage.	

3. Common

Item	Type	Panel mounting/PC board mounting types
Vibration resistance	Functional	10 to 55 Hz (1 cycle/min.), single amplitude: 0.15 mm .006 inch (10 min. on 3 axes)
	Destructive	10 to 55 Hz (1 cycle/min.), single amplitude: 0.375 mm .015 inch (1 hr. on 3 axes)
Shock resistance	Functional	Min. 98 m/s² (4 times on 3 axes)
	Destructive	Min. 294 m/s² (5 times on 3 axes)
Operation temperature		−10 to +55°C +14 to +131°F (without frost or dew)
Storage temperature		−25 to +65°C −13 to +149°F (without frost or dew)
Ambient humidity		35 to 85% RH

PART NAMES

1. Front reset button

This button resets the count value. It does not work when the lock switch is ON. Be aware that battery life will decrease if this switch is used frequently.

2. Lock switch (Refer to chart on right.)


Disable the front reset button.

Note) Turn ON at the LCD side (reset disabled) and OFF at the terminal block side (reset enabled).

3. Count speed switch (Refer to chart on right.)

Use this switch to switch the count speed between 30 Hz and 2 kHz. (On the non-voltage and voltage input types, 30 Hz is on the LCD side and 2 kHz is on the terminal block side. Fixed at 30 Hz for free voltage input type.)

Note) You must press the front reset button when you change the count speed switch setting.

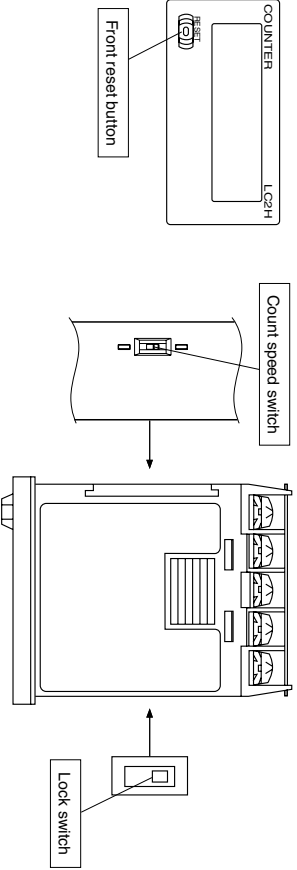

	Non-voltage input/voltage input	Free voltage input
Lock switch (Unit display 1)	(Terminal block side) (LCD side)	OFF* (LCD side) ON
Count speed switch (Unit display 2)	(Terminal block side) (LCD side)	2K Hz 30Hz* (Fixed at 30 Hz)

Notes) 1. *Default setting when shipped.

2. Make the switch setting before installing to panel.


Dimensions

mm inch
General tolerance: $\pm 1.0 \pm .039$


1. Panel mounting type

• External dimensions


1) One-touch installation type

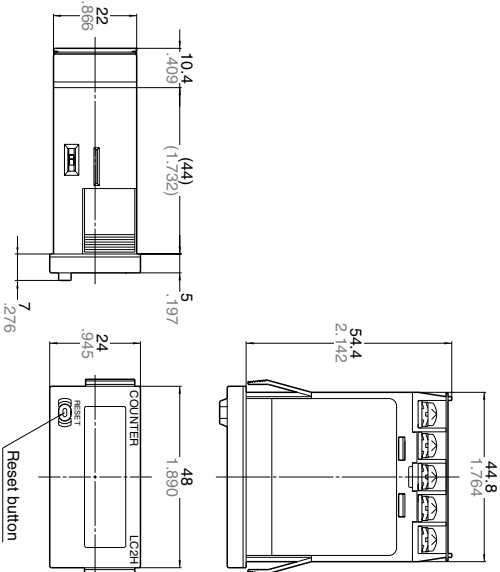

2) Installation frame type

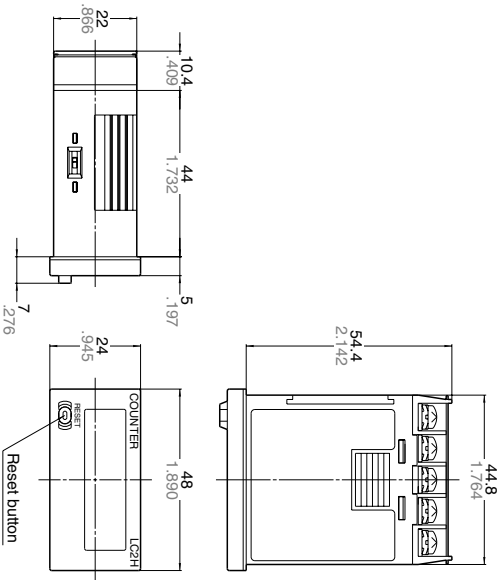


• Panel installation diagram

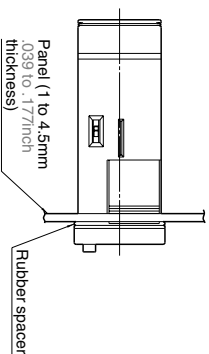


Note) When installing to a 4.5 mm .177 inch thick panel, remove the rubber spacer first.

• Panel installation diagram

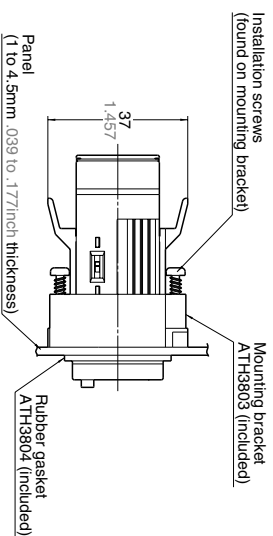


• Panel cut-out dimensions

The standard panel cut-out is shown below.
Use the mounting bracket (ATH3803) and the rubber packing (ATH3804).
(Only mounting bracket installation type.)



• When installing repeatedly (sealed installation)
(Only mounting bracket installation type.)



Notes) 1. Suitable installation panel thickness is 1 to 4.5 mm .039 to .177 inch.
2. Waterproofing will be lost when installing repeatedly (sealed installation).

• Terminal layout and wiring diagrams


1) Standard type

Non voltage input type	Voltage input type	Free voltage input type
Count input Reset input ①-④ are connected internally.	Count input Reset input +V 0V	Count input Reset input or ~ + 0V

LC2H


2) Backlight type

Voltage input type

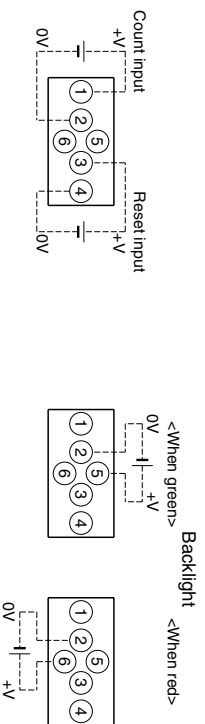


2. PC board mounting type

- External dimensions

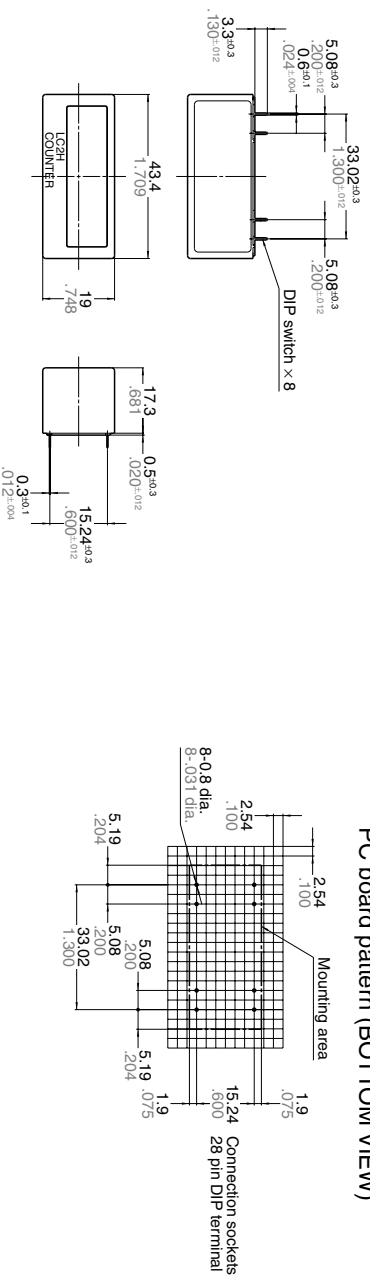

- **Terminal layout and wiring diagrams**

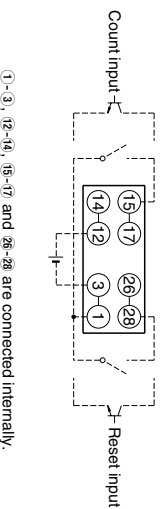

INPUT METHOD

1. Standard type

Non-voltage input type		PC board mounting type	
Panel mounting type			
Contact input (2 and 4 are connected internally.)	Transistor input (2 and 4 are connected internally.)	Contact input 3V DC (2 and 4 are connected internally.)	Transistor input 3V DC (2 and 4 are connected internally.)

Notes) 1. When using contact input, since current flow is small from terminals ① and ③ on the panel mounting type and terminals ⑮ to ⑰ and ⑳ to ㉔ on the PC board mounting type, please use relays and switches with high contact reliability.

2. When using transistor input, use the following as a guide for which transistors (Tr) to use for inputting. (Collector withstand voltage ≥ 50 V, leakage current $< 1 \mu\text{A}$)

Voltage input type			
Contact input	Transistor input		Free voltage input type
	NPN transistor	PNP transistor	

Notes) 1. ② and ④. (The input and reset circuits are functionally insulated.)

2. When using transistor (Tr) input, use the right as a guide. (Collector withstand voltage ≥ 50 V, leakage current $< 1 \mu\text{A}$)


3. Be aware that the application of voltage that exceeds the voltage range of the H level to the count input terminal, and the application of voltage to the reset input terminal, can cause damage to the internal elements.

LC2H

- 3) Since the current flow is very small from reset input terminal ③, please use relays and switches with high contact reliability.
- 4) When inputting a reset with an open collector of a transistor, use a transistor for small signals in which ICBO is 1 μ A or less and always input with no voltage.
- 5) To reset externally, short reset input terminals ③ and ④ on the rear.
- 6) Input uses a high impedance circuit; therefore, erroneous operation may occur if the influence of induction voltage is present. If you plan to use wiring for the input signal that is 10 m or longer (wire capacitance 120 pF/m at normal temperature), we recommend the use of a CR filter or the connection of a bleeder resistor.

4. How to reset multiple panel mounting type counters all at once (input is the same for count)

Non-voltage input type




Notes) 1. Use the following as a guide for choosing transistors used for input (Tr).

Leakage current < 1 μ A

- 2. Use as small a diode (D) as possible in the forward voltage so that the voltage between terminals 3 and 4 during reset input meets the standard value (0.5 V).

(At IF = 20 μ A, forward voltage 0.1 and higher.)


Voltage input type



Note) Make sure that H (reset ON) level is at least 4.5 V.

5. Backlight luminance

To prevent varying luminance among backlights when using multiple Backlight types, please use the same backlight power supply.



6. Insulation sheet

Before using a panel mounting type, please pull and remove the insulation sheet from the side of the product in the direction of the arrow.

In consideration that the product might be stored for long periods without being used, an insulation sheet is inserted before shipping. Remove the insulation sheet and press the front reset button.