

INTRODUCTIONS

1. Direct PC board mounting for easy installation and space saving.

2. ME2: UL.

ME3D:

ME3:

ME3G:

ME3B:

ME3DA/GA:

15ME2/ME3:

02ME4E2:

ME4/P: UL, CSA, TUV

UL, CSA, VDE,

SPECIFICATIONS

1. Maximum leakage current each

line-to-ground @ 115VAC 60Hz: 0.20mA

0.45mA (02ME4E1)

@ 250VAC 50Hz: 0.40mA

0.80mA (02ME4E1)

2. Hipot rating (one minute)

line-to-ground: 2250VDC

line-to-line: 1450VDC

3. Operating frequency: 50/60Hz

4. Rated voltage: 115/250VAC

COMPONENTS

PART NO.	C1 (uF)	L1 (mH)	PART NO.	C1 (uF)	L1 (mH)
01ME2	0.1	3.7	03ME3G-R/(S)	0.1	2.5
01ME3/(S)	0.033	5	03ME4/P	0.47	15
02ME3G/(S)	0.1	7	06ME2	0.1	0.4
02ME3GA/(S)			06ME3/(S)	0.033	0.6
02ME3G-R/(S)			06ME3D/(S)	0.047	0.53
02ME4E1	0.47	25	06ME3DA/(S)		
*02ME4E2	0.22	25	06ME3G/(S)		
*02MP1		20	06ME3GA/(S)	0.1	0.8
*02MP2		25	06ME3G-R/(S)	0.1	0.1
03ME2	0.1	1.3	10ME2		
03ME2A	0.1	2.5	10ME3/(S)	0.033	0.18
03ME3/(S)	0.033	2.3	10ME3G/(S)	0.1	0.2
03ME3G/(S)	0.1	2.5	10ME3		
*03ME3GA/(S)		1.2	**15ME2		0.12
*03ME3B			**15ME3/(S)	0.1	
03ME3DA/(S)	0.047	1.2			
03ME3D/(S)					

* UL, CSA approved to 2.5A 115/250VAC


• 03ME3D/(S): 03ME3D, 03ME3D(S)

•• VDE, SEV, SEMKO approved to 10A/250VAC

MINIMUM INSERTION LOSS IN dB







COMMON MODE (L-G) IN 50 OHM SYSTEM															
TYPE	CURRENT RATING	FREQUENCY-MHz						TYPE	CURRENT RATING	FREQUENCY-MHz					
		.15	.50	1.0	5.0	10	30			.15	50	1.0	5.0	10	30
01ME2	1A	27	37	42	44	45	35	03ME3G	3A	20	25	30	38	40	40
01ME3/(S)	1A	25	35	40	40	40	40	03ME3GA	3A	20	23	30	40	40	40
02ME3G/(S)	2A	28	35	28	38	40	40	06ME2	6A	12	18	20	35	40	50
02ME3GA/(S)	2A	20	25	35	40	40	40	06ME3	6A	12	20	25	40	45	45
02ME4E1	2A	35	45	45	35	35	35	06ME3D	6A	10	20	20	30	35	40
02ME4E2	2.5/2A	30	40	40	35	35	40	06ME3DA	6A	8	10	15	30	30	40
02ME4/P	2A	35	45	45	35	35	35	06ME3G	6A	10	15	20	35	40	40
02MP1	2.5/2A	45	60	60	45	40	25	06ME3GA	6A	10	15	20	30	35	40
02MP2	2.5/2A	50	55	55	50	40	25	10ME3/(S)	10A	4	10	15	30	38	45
03ME2	3A	15	28	32	45	45	50	10ME3G/(S)	10A	4	10	13	28	35	40
03ME3	3A	22	30	35	45	45	48	15ME2	15A/10A	2	8	10	20	25	40
03ME3B	3A	12	20	28	40	40	40	15ME3/(S)	15A/10A	2	8	10	20	25	40
03ME3D	3A	18	28	39	48	48	55								
03ME3DA	3A	15	25	30	40	40	45								
03ME4/P	3A	30	40	40	35	35	35								

ELECTRICAL SCHEMATIC

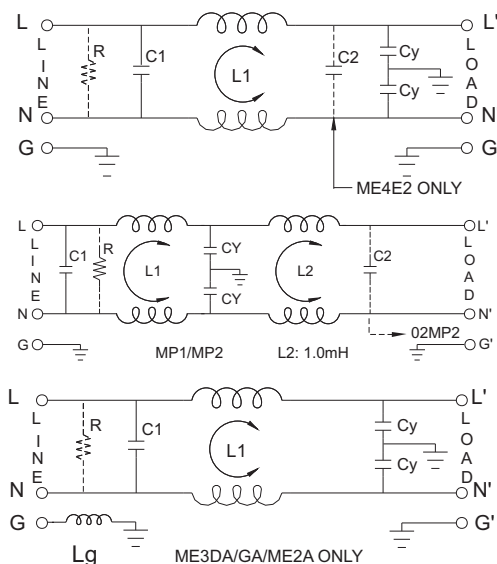

R: 1MΩ(ME3) C2: 0.1μF(ME4E2/MP2)
R: 560KΩ(ME4) R: 330KΩ(ME4E2)
Cy: 2200pF
Cy: 4700pF(ME4/E1)
Lg: 18.3μH (2A/GA/DA)


INSERTION LOSS (TYPICAL)

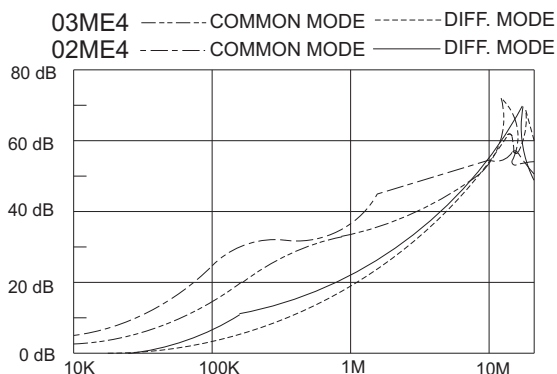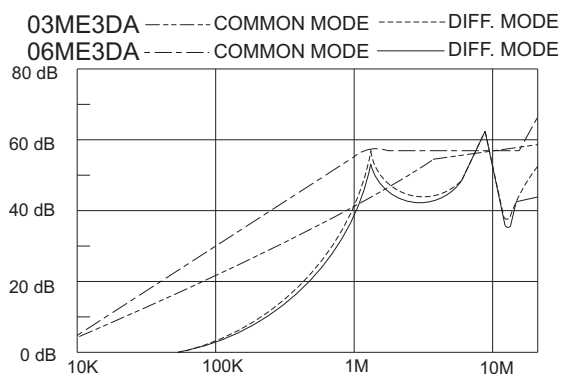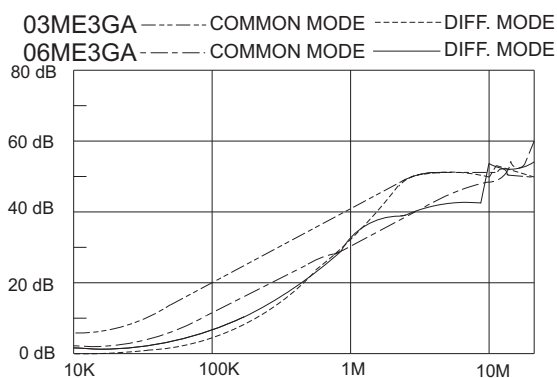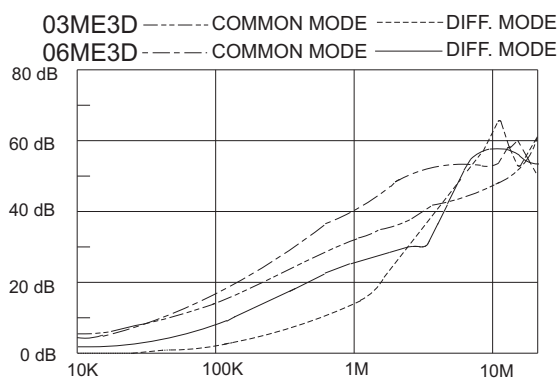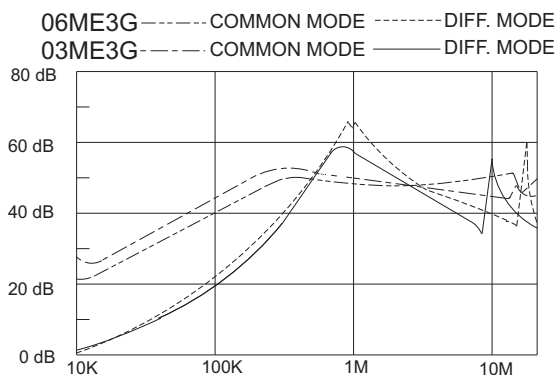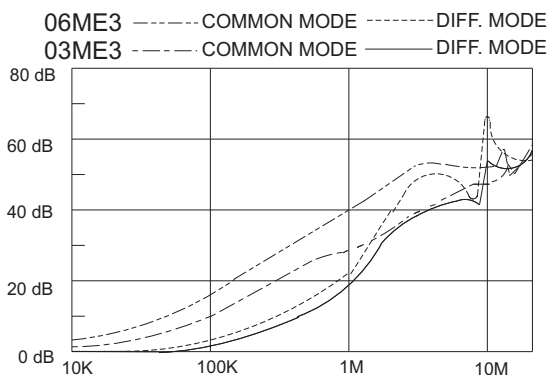


MECHANICAL CONSTRUCTION



ME2/ME2A

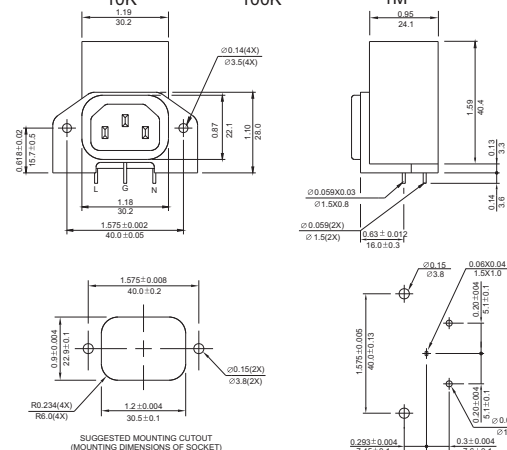

UNIT: $\frac{\text{INCH}}{\text{mm}}$



◆ **Proposal of installation for ME3 series
please follow these steps to install:**

1. Insert filter to PCB and soldering.
2. Screw panel and filter on PCB.
3. Assemble case with PCB with panel and filter.

Note: - Socket of filter should be assembled with mounting hole of case tightly for easy insertion of power cord.
- Screw from the outside of case to fix filter for more secured assembly (optional).















ME3



ME3DA



ME4E



UNIT: INCH
mm