

# CMB-Series

## THERMAL CIRCUIT PROTECTORS

**Rating:**

3 to 20A, 125-250VAC, 32VDC

**Approvals:**

UL, CUL, CSA, TUV, CE  
UL1500/ISO8846 for ignition  
protection/marine

**Dielectric Strength:**

2500 VAC/1 minute

**Interrupting capacity:**

2500 amps @ 32 VDC

**Insulation Resistance:**

100M ohms

**Operating Temperature:**

-10°C to 60°C

**Voltage drop:**


< 0.25 V

**Applications:**

Household Appliances  
Transportation  
Marine  
Power Strips  
Medical Equipment  
Audio Visual Equipment  
Power Supplies

**ROHS Compliant**

A COMPACT, SINGLE POLE, PUSH-TO-RESET  
FAMILY OF THERMAL CIRCUIT BREAKERS

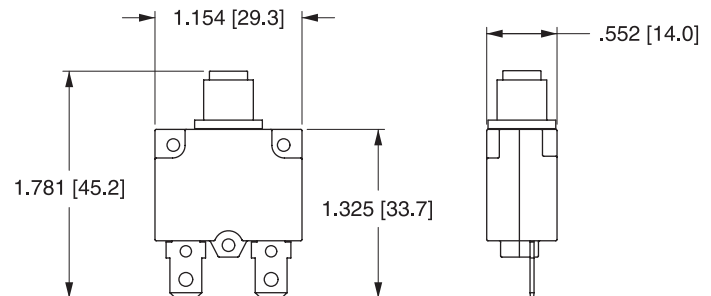**Dimensional Specifications:**

**Carling Technologies®**

Innovative Designs. Powerful Solutions.

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.  
60 Johnson Avenue • Plainville, CT 06062-1177  
Phone: (860) 793-9281 • Fax: (860) 793-9231  
Email: [sales@carlingtech.com](mailto:sales@carlingtech.com) • [www.carlingtech.com](http://www.carlingtech.com)

**CMB** — **10** **3** — **11** **C** **3** **N** — **B** — **A** /**10**

1  
Series

2  
Rating

3  
Voltage

4  
Mounting  
Hole

5  
Bushing  
Type

6  
Mounting  
Nut

7  
Indicator  
Plate

8  
Button

9  
Terminal

10  
Button Marking

### 1 SERIES CMB

### 3 VOLTAGE


3 125-250VAC/ 32 VDC

### 2 RATING

|           |        |
|-----------|--------|
| <b>10</b> | 10 amp |
| <b>03</b> | 3 amp  |
| <b>04</b> | 4 amp  |
| <b>05</b> | 5 amp  |
| <b>06</b> | 6 amp  |
| <b>07</b> | 7 amp  |
| <b>08</b> | 8 amp  |
| <b>12</b> | 12 amp |
| <b>13</b> | 13 amp |
| <b>14</b> | 14 amp |
| <b>15</b> | 15 amp |
| <b>16</b> | 16 amp |
| <b>20</b> | 20 amp |

### 4 MOUNTING HOLE


**11**<sup>1</sup> M11  
**12**<sup>2</sup> M12  
**00**<sup>3</sup> Snap In Style  
**27**<sup>9</sup> 3/8" 27 UNS  
**28**<sup>12</sup> 3/8" 27 UNS  
(double flatted)

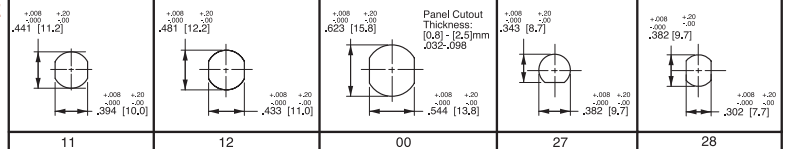

### 5 BUSHING

#### PLASTIC

**C**<sup>4</sup> Type C  
**D**<sup>4</sup> Type D  
**E**<sup>5</sup> Type E  
**G**<sup>8</sup> Type G  
**H**<sup>6</sup> Type H  
**K**<sup>13</sup> Type K  
**METAL**  
**J**<sup>8</sup> Type J

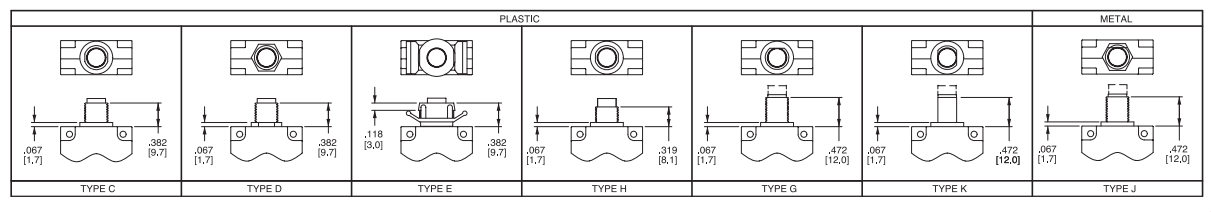

### 6 MOUNTING NUT<sup>7</sup>

**N** None  
**1** Type 1  
**2** Type 2  
**3**<sup>11</sup> Type 3  
**4** Type 4  
**5** Type 5  
**6**<sup>14</sup> Type 6  
**7**<sup>9</sup> Type 7  
**8**<sup>9</sup> Type 8




NOTE: Type 5 is clear hex boot. Type 8 is black hex boot (available for bushings G, J & K only); Type 3 nut includes molded in "PRESS TO RESET" marking.

### 7 INDICATOR PLATE<sup>7</sup>

**N** None  
**A** Embossed Legend  
**B** Silver Printing  
on Black

All indicator plates are marked  
"Suppl. Prot. press to reset".

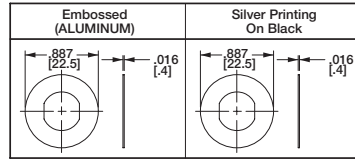

Notes: All dimensions are in [mm]. Tolerance  $\pm 0.05$  [1.27] unless otherwise specified.

- Used with bushing C or D only.
- Used with H bushing only.
- Used with bushing E only.
- Used with M11 mounting hole only.
- Used with mounting hole 00 only.
- Used with M12 mounting hole only.
- All hardware available separately. Consult factory.
- Available with mounting hole 27 only.
- Available with G, J or K bushing only.
- Amp rating must match button marking (ex: 20 will be marked on the button of CMB-203-27G3N-W-A/20)
- Includes molded in "PRESS TO RESET" marking.
- Available with K bushing only.
- Available with mounting hole 28 only.
- Thickness is 3.0 mm, .118 in.


### 8 BUTTON

**B** Black **R** Red **W** White

### 9 TERMINAL

**F** Type F  
**A** Type A  
**B** Type B  
**C** Type C  
**D** Type D  
**E** Type E  
**G** Type G  
**H** Type H  
**J** Type J

F,G,H,J TERMINALS ARE 8-32 UNC

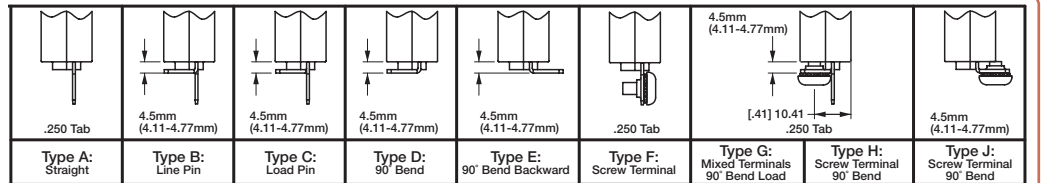


### 10 BUTTON MARKING (IF BLANK, NO MARKING.)<sup>10</sup> Button Marking Orientation:

line load

|           |       |           |       |           |       |           |        |           |        |           |        |           |        |
|-----------|-------|-----------|-------|-----------|-------|-----------|--------|-----------|--------|-----------|--------|-----------|--------|
| <b>03</b> | 3 amp | <b>05</b> | 5 amp | <b>07</b> | 7 amp | <b>10</b> | 10 amp | <b>13</b> | 13 amp | <b>15</b> | 15 amp | <b>20</b> | 20 amp |
| <b>04</b> | 4 amp | <b>06</b> | 6 amp | <b>08</b> | 8 amp | <b>12</b> | 12 amp | <b>14</b> | 14 amp | <b>16</b> | 16 amp |           |        |

### Time Delay

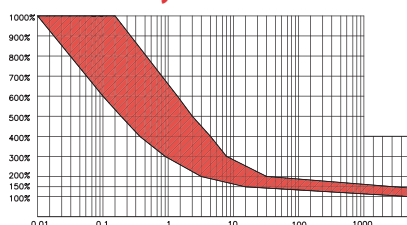

| DERATING FACTOR |       |
|-----------------|-------|
| -10°C           | X1.70 |
| -5°C            | X1.60 |
| 0°C             | X1.50 |
| 5°C             | X1.40 |
| 10°C            | X1.30 |
| 15°C            | X1.20 |
| 20°C            | X1.10 |
| 25°C            | X1.00 |

| DERATING FACTOR |       |
|-----------------|-------|
| 30°C            | X0.90 |
| 35°C            | X0.85 |
| 40°C            | X0.80 |
| 45°C            | X0.75 |
| 50°C            | X0.70 |
| 55°C            | X0.65 |
| 60°C            | X0.60 |

| OVERLOAD | TRIP TIME    |
|----------|--------------|
| 100 %    | NO TRIP      |
| 150 %    | TRIP IN 1 HR |
| 200 %    | 4.0~40 sec   |
| 300 %    | 0.9~8.0 sec  |
| 400 %    | 0.42~5.0 sec |
| 500 %    | 0.25~3.0 sec |
| 600 %    | 0.1~1.8 sec  |

Notes:

Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.

- To adjust the breaker rating for ambient temperature multiply the breaker rating by the factor. (ex: 5 amp rating at 0°C: 5 x .67 = 3.3 amp. Select 3 amp rating.)