



# SAW filters for infrastructure systems

## **Series/Type: B3830**

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39401B3830Z810		2013-03-08	2013-12-31	2014-03-31


For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).

**SAW Components**
**B3830**
**Low-Loss Filter**
**395,0 MHz**
**Data Sheet**
**Ceramic package QCC8B**
**Features**

- Low-loss filter (RX) for Trunked Radio
- Usable bandwidth 10 MHz
- No matching required for operation at  $50\ \Omega$
- Unbalanced to unbalanced or unbalanced to balanced operation
- Package for Surface Mounted Technology (SMT)
- Hermetically sealed ceramic package

**Terminals**


- Gold-plated

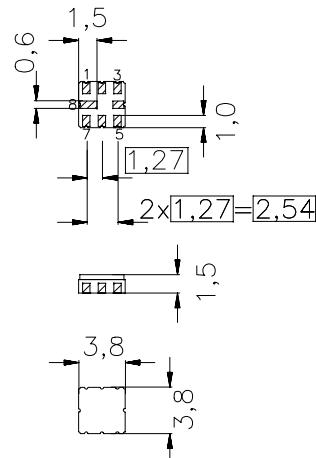

typ. Dimensions in mm, approx. weight 0,07 g

**Pin configuration**

5	Input
1	Output / Output balanced
2	Output ground / Output balanced
3, 6, 7	Ground
4, 8	Input ground / Case ground

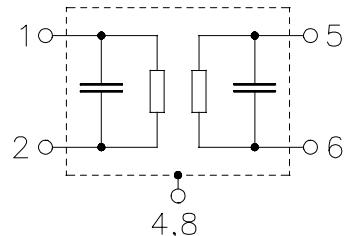

Type	Ordering code	Marking and Package according to	Packing according to
B3830	B39401-B3830-Z810	C61157-A7-A46	F61074-V8037-Z000

**Electrostatic Sensitive Device (ESD)**
**Maximum ratings**

Operable temperature range	$T_A$	-30 / +70	°C	
Storage temperature range	$T_{stg}$	-40 / +85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	15	dBm	passband

**SAW Components****B3830****Low-Loss Filter****395,0 MHz****Data Sheet****Characteristics**

Operating temperature range:

 $T_A = +15 \dots +35^\circ\text{C}$ 

Terminating source impedance:

 $Z_S = 50 \Omega$  unbalanced or unbalanced to balanced

Terminating load impedance:

 $Z_L = 50 \Omega$  unbalanced or unbalanced to balanced

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	395,0	—	MHz
<b>Maximum insertion attenuation</b> 390,0 MHz ... 400,0 MHz	$\alpha_{\max}$	—	1,8	3,5	dB
<b>Amplitude ripple (p-p)</b> 390,0 MHz ... 400,0 MHz	$\Delta\alpha$	—	0,7	1,5	dB
<b>VSWR</b> 390,0 MHz ... 400,0 MHz		—	1,65:1	2,0:1	
<b>Absolute attenuation</b>	$\alpha_{\text{abs}}$				
0,1 MHz ... 350,0 MHz		40	60	—	dB
350,0 MHz ... 383,0 MHz		25	30	—	dB
383,0 MHz ... 385,0 MHz		18	20	—	dB
410,0 MHz ... 440,0 MHz		10	20	—	dB
440,0 MHz ... 563,0 MHz		44	50	—	dB
563,0 MHz ... 1100,0 MHz		30	35	—	dB
1100,0 MHz ... 1526,0 MHz		30	37	—	dB
1526,0 MHz ... 2200,0 MHz		30	37	—	dB
2200,0 MHz ... 2500,0 MHz		15	20	—	dB
2500,0 MHz ... 4000,0 MHz		5	7	—	dB
<b>Symmetry in band</b>					
$ \text{S}_{31} / \text{S}_{21} $ 390,0 ... 400,0 MHz		-1,0	0	1,0	dB
$\text{arg}(\text{S}_{31}/\text{S}_{21})$ 390,0 ... 400,0 MHz		170	180	190	°
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-36	—	ppm/K

**SAW Components****B3830****Low-Loss Filter****395,0 MHz****Data Sheet****Characteristics**

Operating temperature range:

 $T_A = -30 \dots +70^\circ\text{C}$ 

Terminating source impedance:

 $Z_S = 50 \Omega$  unbalanced or unbalanced to balanced

Terminating load impedance:

 $Z_L = 50 \Omega$  unbalanced or unbalanced to balanced

		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>Nominal frequency</b>	$f_N$	—	395,0	—	MHz
<b>Maximum insertion attenuation</b> 390,0 MHz ... 400,0 MHz	$\alpha_{\max}$	—	1,9	4,0	dB
<b>Amplitude ripple (p-p)</b> 390,0 MHz ... 400,0 MHz	$\Delta\alpha$	—	0,8	2,0	dB
<b>VSWR</b> 390,0 MHz ... 400,0 MHz		—	1,65:1	2,0:1	
<b>Absolute attenuation</b>	$\alpha_{\text{abs}}$				
0,1 MHz ... 350,0 MHz		40	60	—	dB
350,0 MHz ... 383,0 MHz		25	30	—	dB
383,0 MHz ... 385,0 MHz		18	20	—	dB
410,0 MHz ... 440,0 MHz		10	20	—	dB
440,0 MHz ... 563,0 MHz		44	50	—	dB
563,0 MHz ... 1100,0 MHz		30	35	—	dB
1100,0 MHz ... 1526,0 MHz		30	37	—	dB
1526,0 MHz ... 2200,0 MHz		30	37	—	dB
2200,0 MHz ... 2500,0 MHz		15	20	—	dB
2500,0 MHz ... 4000,0 MHz		5	7	—	dB
<b>Symmetry in band</b>					
$ S_{31} / S_{21} $ 390,0 ... 400,0 MHz		-1,0	0	1,0	dB
$\arg(S_{31}/S_{21})$ 390,0 ... 400,0 MHz		170	180	190	°
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-36	—	ppm/K

**SAW Components**


**B3830**

**Low-Loss Filter**


**395,0 MHz**

**Data Sheet**

**Transfer function**

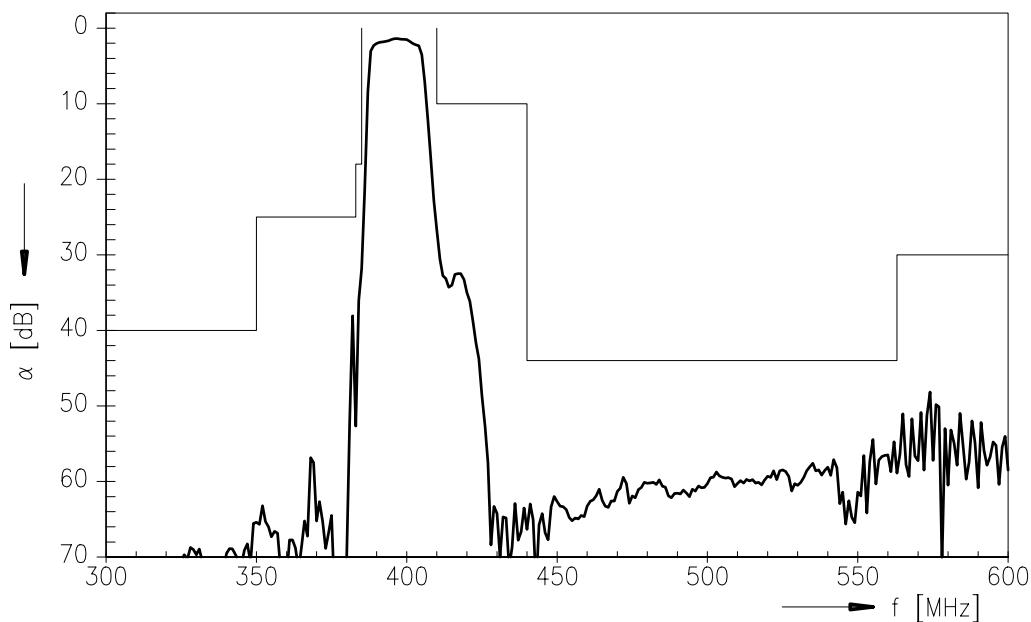

**Normalized transfer function (pass band; +15 °C ... +35 °C)**

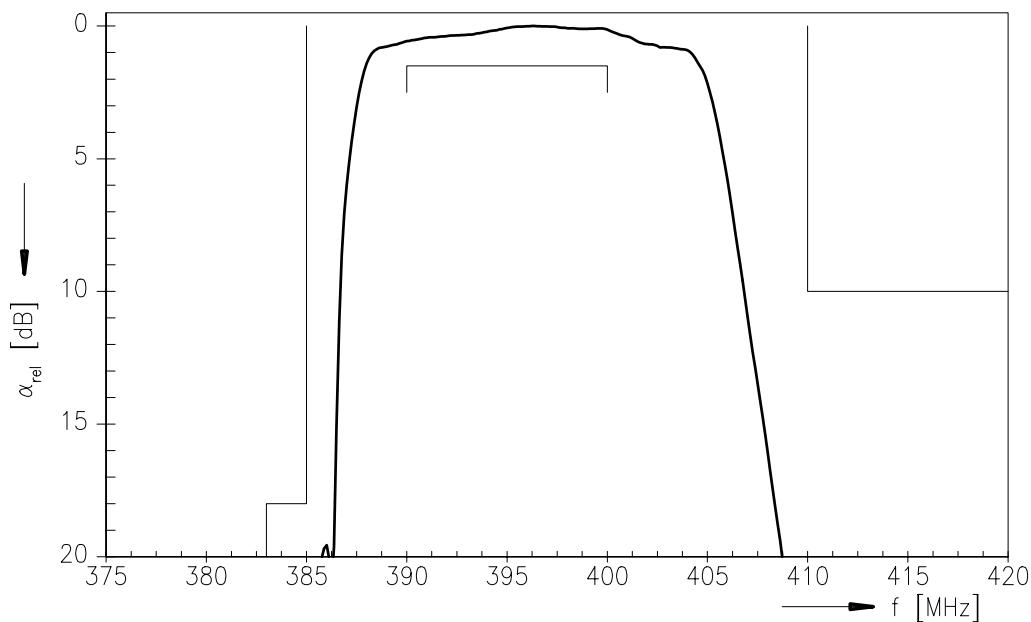



**SAW Components**


**B3830**

**Low-Loss Filter**


**395,0 MHz**

**Data Sheet**

**Amplitude symmetry  $|S_{31}|/|S_{21}|$**

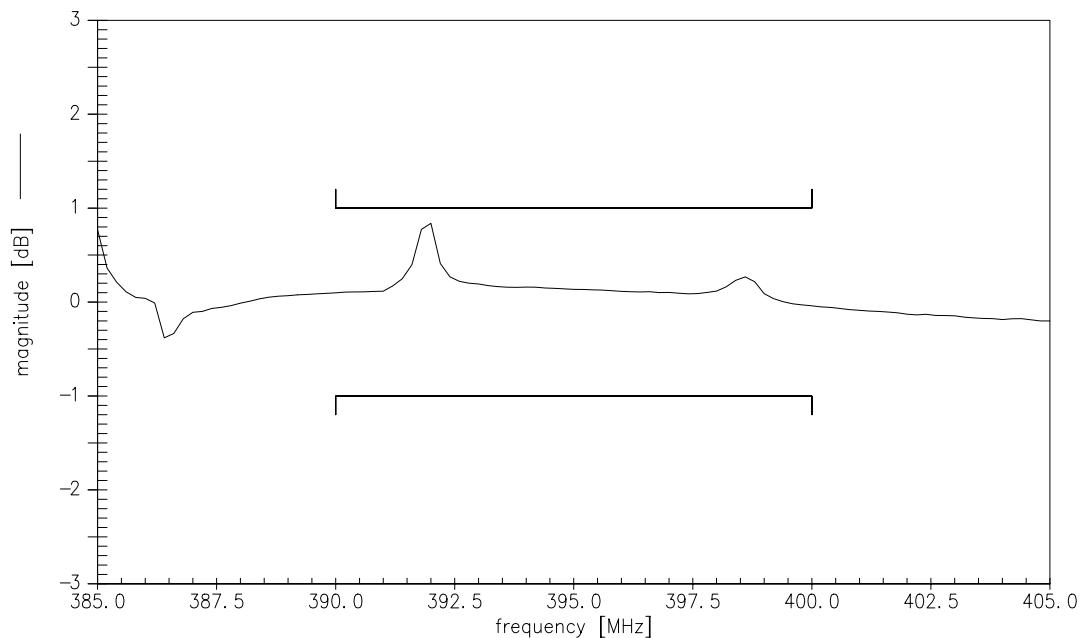

**Phase symmetry  $\arg(S_{31}/S_{21}) - 180^\circ$**

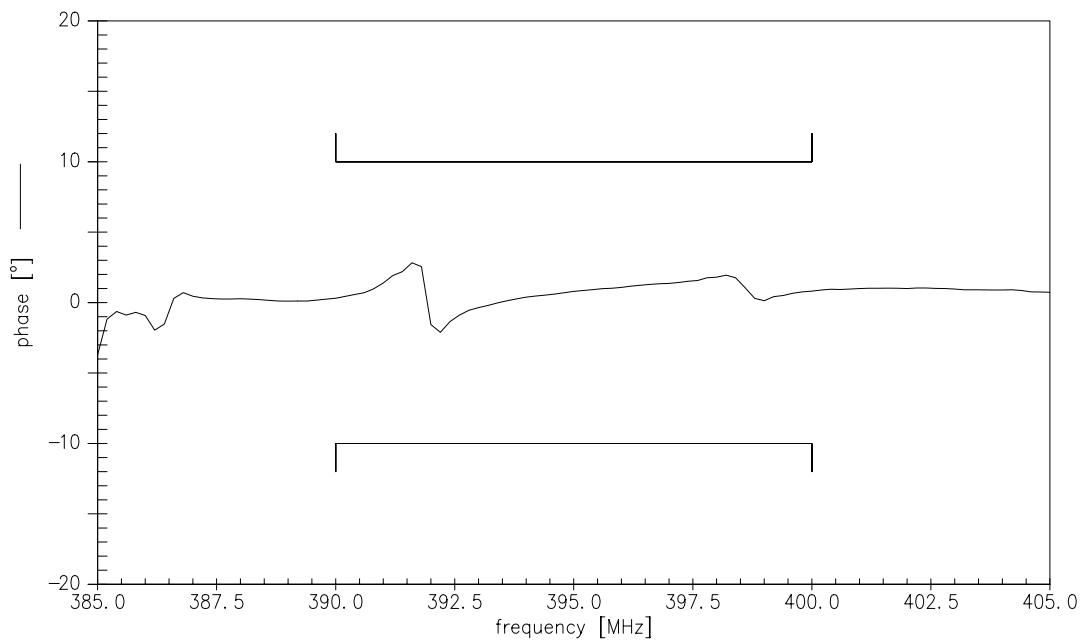



**SAW Components**

**B3830**

**Low-Loss Filter**

**395,0 MHz**

**Data Sheet**

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC IS**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EPCOS:](#)

[B39401B3830Z810](#)