




.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

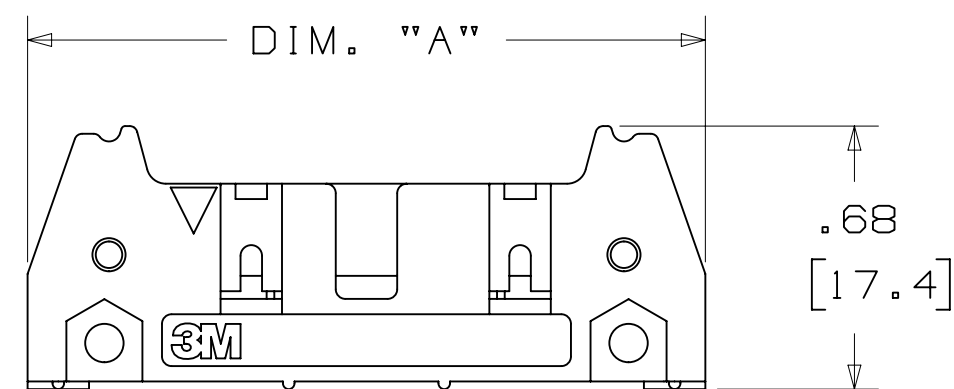

-X0XX
HEADER WITHOUT LATCH EJECTOR

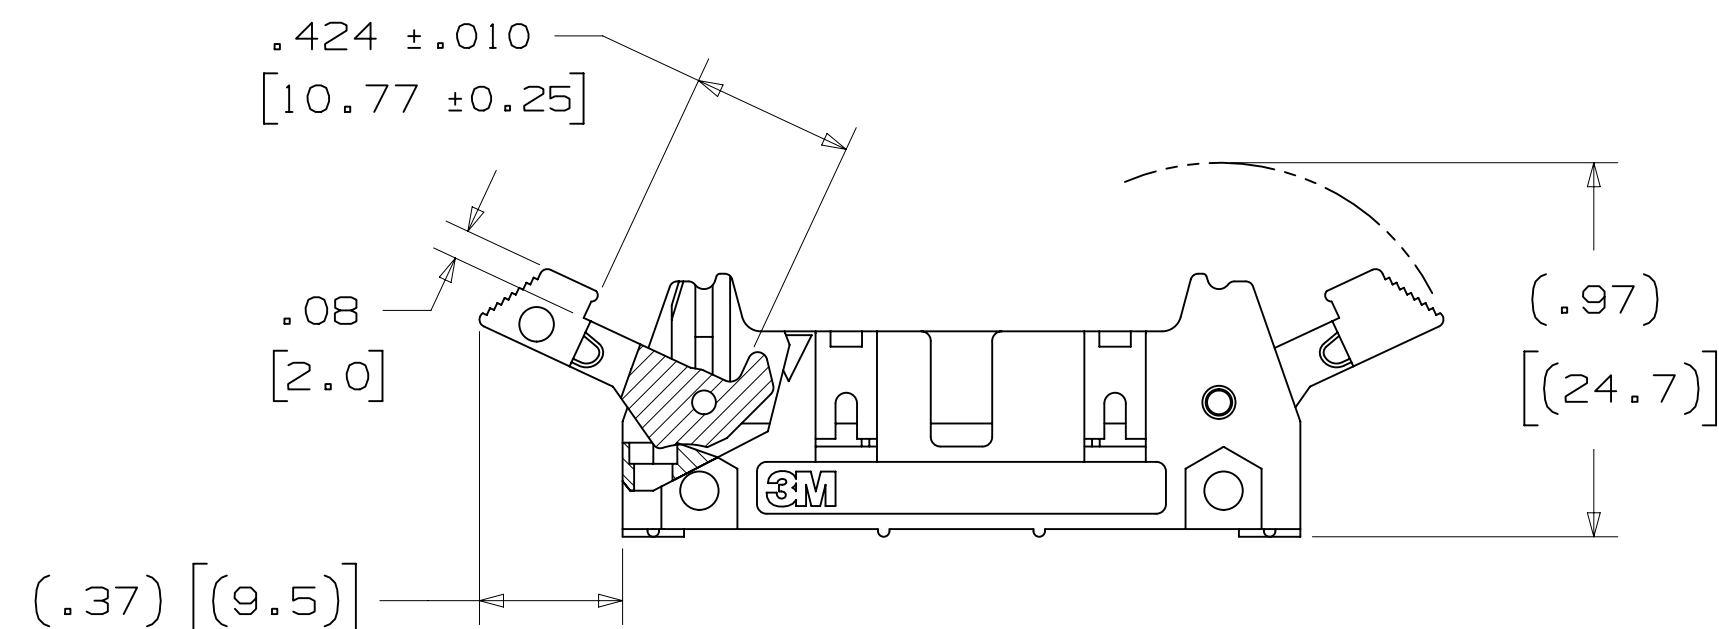

-X2XX
HEADER WITH SHORT LATCH EJECTOR
FOR 3M SOCKETS WITHOUT STRAIN RELIEF

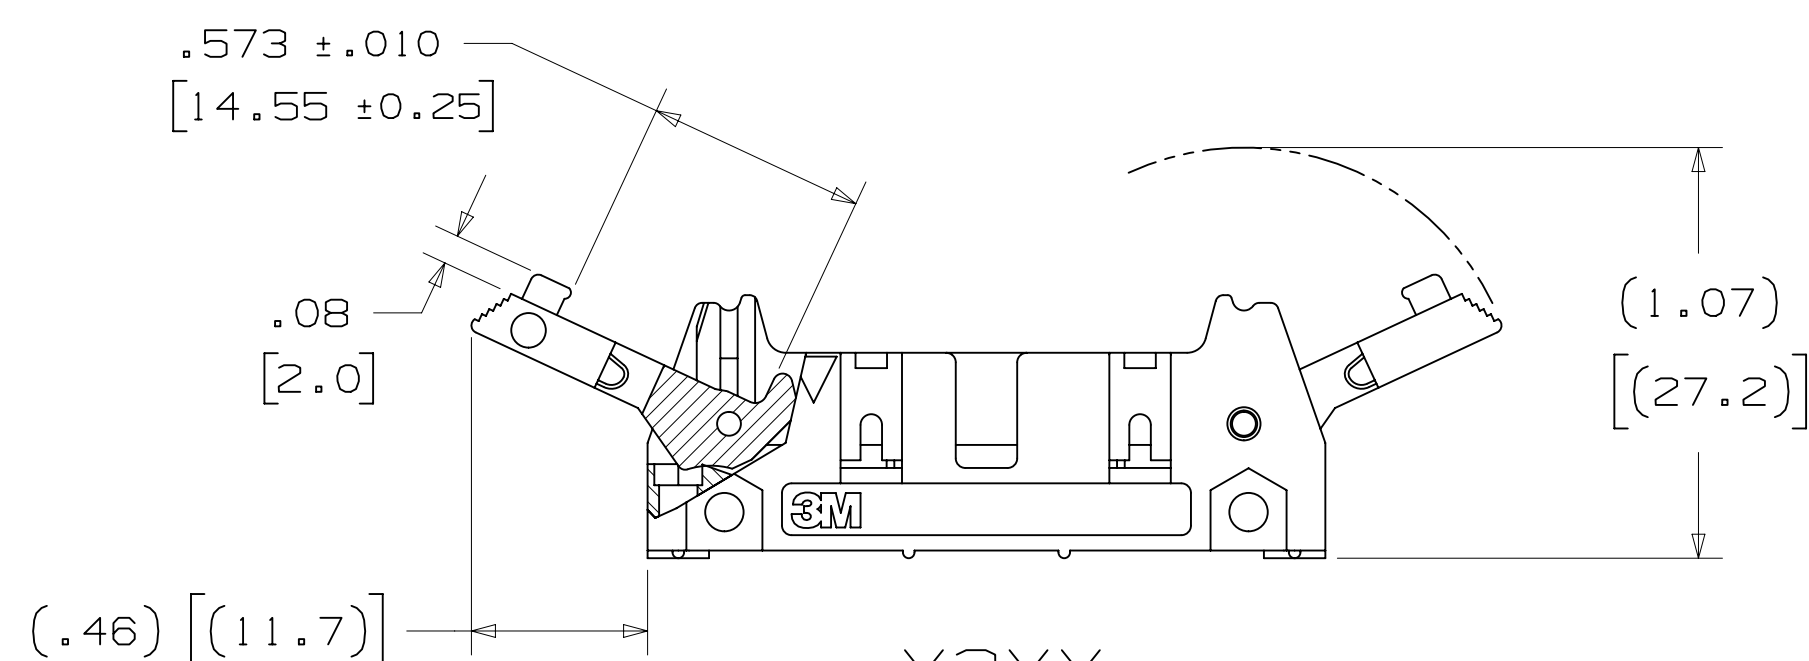

-X3XX
HEADER WITH LONG LATCH EJECTOR
FOR 3M SOCKETS WITH STRAIN RELIEF

X3XXX-XXXXXX

3M PART NUMBER:
(SEE TABLE 1)

- PLATING:

RB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm] MATTE TIN
(APP. E1 & C1 APPLY)

UB = 30μ" [0.76μm] GOLD AND 200μ" [5.08μm]
TIN LEAD (APP. E3 & C2 APPLY)

- TAIL :

02 = FOR .062 [1.57] THICK BOARD
03 = FOR .094 TO .125 [2.39 TO 3.18] THICK BOARD
K2 = KINKED FOR .062 [1.57] THICK BOARD

- LATCH/EJECTOR SYSTEM:

0 = NO LATCH/EJECTOR INSTALLED
2 = SHORT ROLL PIN LATCH/EJECTORS
3 = LONG ROLL PIN LATCH/EJECTORS

- * MILITARY (WITH 3M'S N3518 POLARIZING KEY) AND CENTERBUMP POLARIZATION.
- * OPTIONAL EJECTOR LATCHES.
- * MOUNTING HOLES FOR SECURING HEADER TO BOARD.
- * OPTIONAL POLARIZING POSTS AVAILABLE.
- * HIGH TEMPERATURE INSULATOR SUITABLE FOR "NO LEAD" SOLDERING OPERATIONS.
- * SUITABLE FOR REFLOW SOLDERING USING "PASTE IN HOLE" TECHNIQUES.
- * SOLDER TAIL OPTION.

2 PHYSICAL :

```

INSULATOR:
  MATERIAL: GLASS FILLED POLYESTER (PCT)
FLAMMABILITY: UL94V-0
  COLOR: BLACK
  CONTACT:
    MATERIAL: COPPER ALLOY
    PLATING:
      UNDER PLATING: 100μ" [ 2.54μm ] NICKEL-OVERALL
      WIPING AREA: 30μ" [ 0.76μm ] AVG. GOLD
      SOLDER TAILS: TIN LEAD OR MATTE TIN (SEE ORDERING INFORMATION)
      MARKINGS: 3M LOGO, PART IDENTIFICATION NUMBER AND ORIENTATION TRIANGLE

```

2 ELECTRICAL :

CURRENT RATING: 5.00A, 1 CONTACT POWERED
3.00A, 6 CONTACTS POWERED
1.75A, ALL CONTACTS POWERED
RATING CONDITIONS: EIA-364-070 METHOD 2, 30° C MAXIMUM
TEMPERATURE RISE, 20% DERATED. REFERENCE APPROPRIATE
3M PRODUCT SPECIFICATION FOR DETAILED CURRENT DERATING
CURVES.

INSULATION RESISTANCE: $>1 \times 10^9 \Omega$ AT 500 V_{DC}
WITHSTANDING VOLTAGE: 1,000V_{RMS} AT SEA LEVEL

2 ENVIRONMENTAL :

TEMPERATURE RATING: -55°C TO 105°C
PROCESS RATING: 260°C, PER J-STD-020C, SINGLE PASS
MOISTURE SENSITIVITY LEVEL: 1 (PER J-STD-020C)

3M ELECTRONIC MATERIALS SOLUTIONS DIVISION
INTERCONNECT SOLUTIONS
<http://www.3mconnectors.com>

3M IS A TRADEMARK OF 3M COMPANY.
FOR TECHNICAL, SALES OR ORDERING
INFORMATION CALL 800-225-5373

DIMENSIONS: INCHES [MM]
[MM] IS REF. ONLY

DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION		DRFT		CHKD	
ACCORDS				DRFT CASTIGLIONE		DATE JUL 25, 2014		INFO		DATE			
				CHKD		DATE		APPRV. R. SCHERER		DATE SEP 05, 2014			
DIVISION				DIVISION CODE				© 3M COPYRIGHT 2015 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.					
Interconnect Solutions				TOLERANCES EXCEPT AS NOTED				3M 3M Center St. Paul, MN 55144					
DO NOT SCALE DRAWING		SCALE 2 1		INCHES				TITLE					
				.0 ± .00 ± .01 .000 ± .005 .0000 ±				HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA					
THIRD ANGLE PROJECTION				MILLIMETERS				CAGE NUMBER SIZE DRAWING NO. D 78-5100-0772-3					
INTERPRET PER ASME Y14.5 - 2009				.0 ± .00 ± .13 .00 ±				REV.					
☒ MAX SURFACE ROUGHNESS ☐ ALL SURFACES ☒ MARKED ONLY				ANGLES				MODEL 3000 SERIES DET. ☐ STS ☐ YES ☒ NO ☐ SHT 1 OF					

CULUS
UL FILE NO: E68080

A

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE


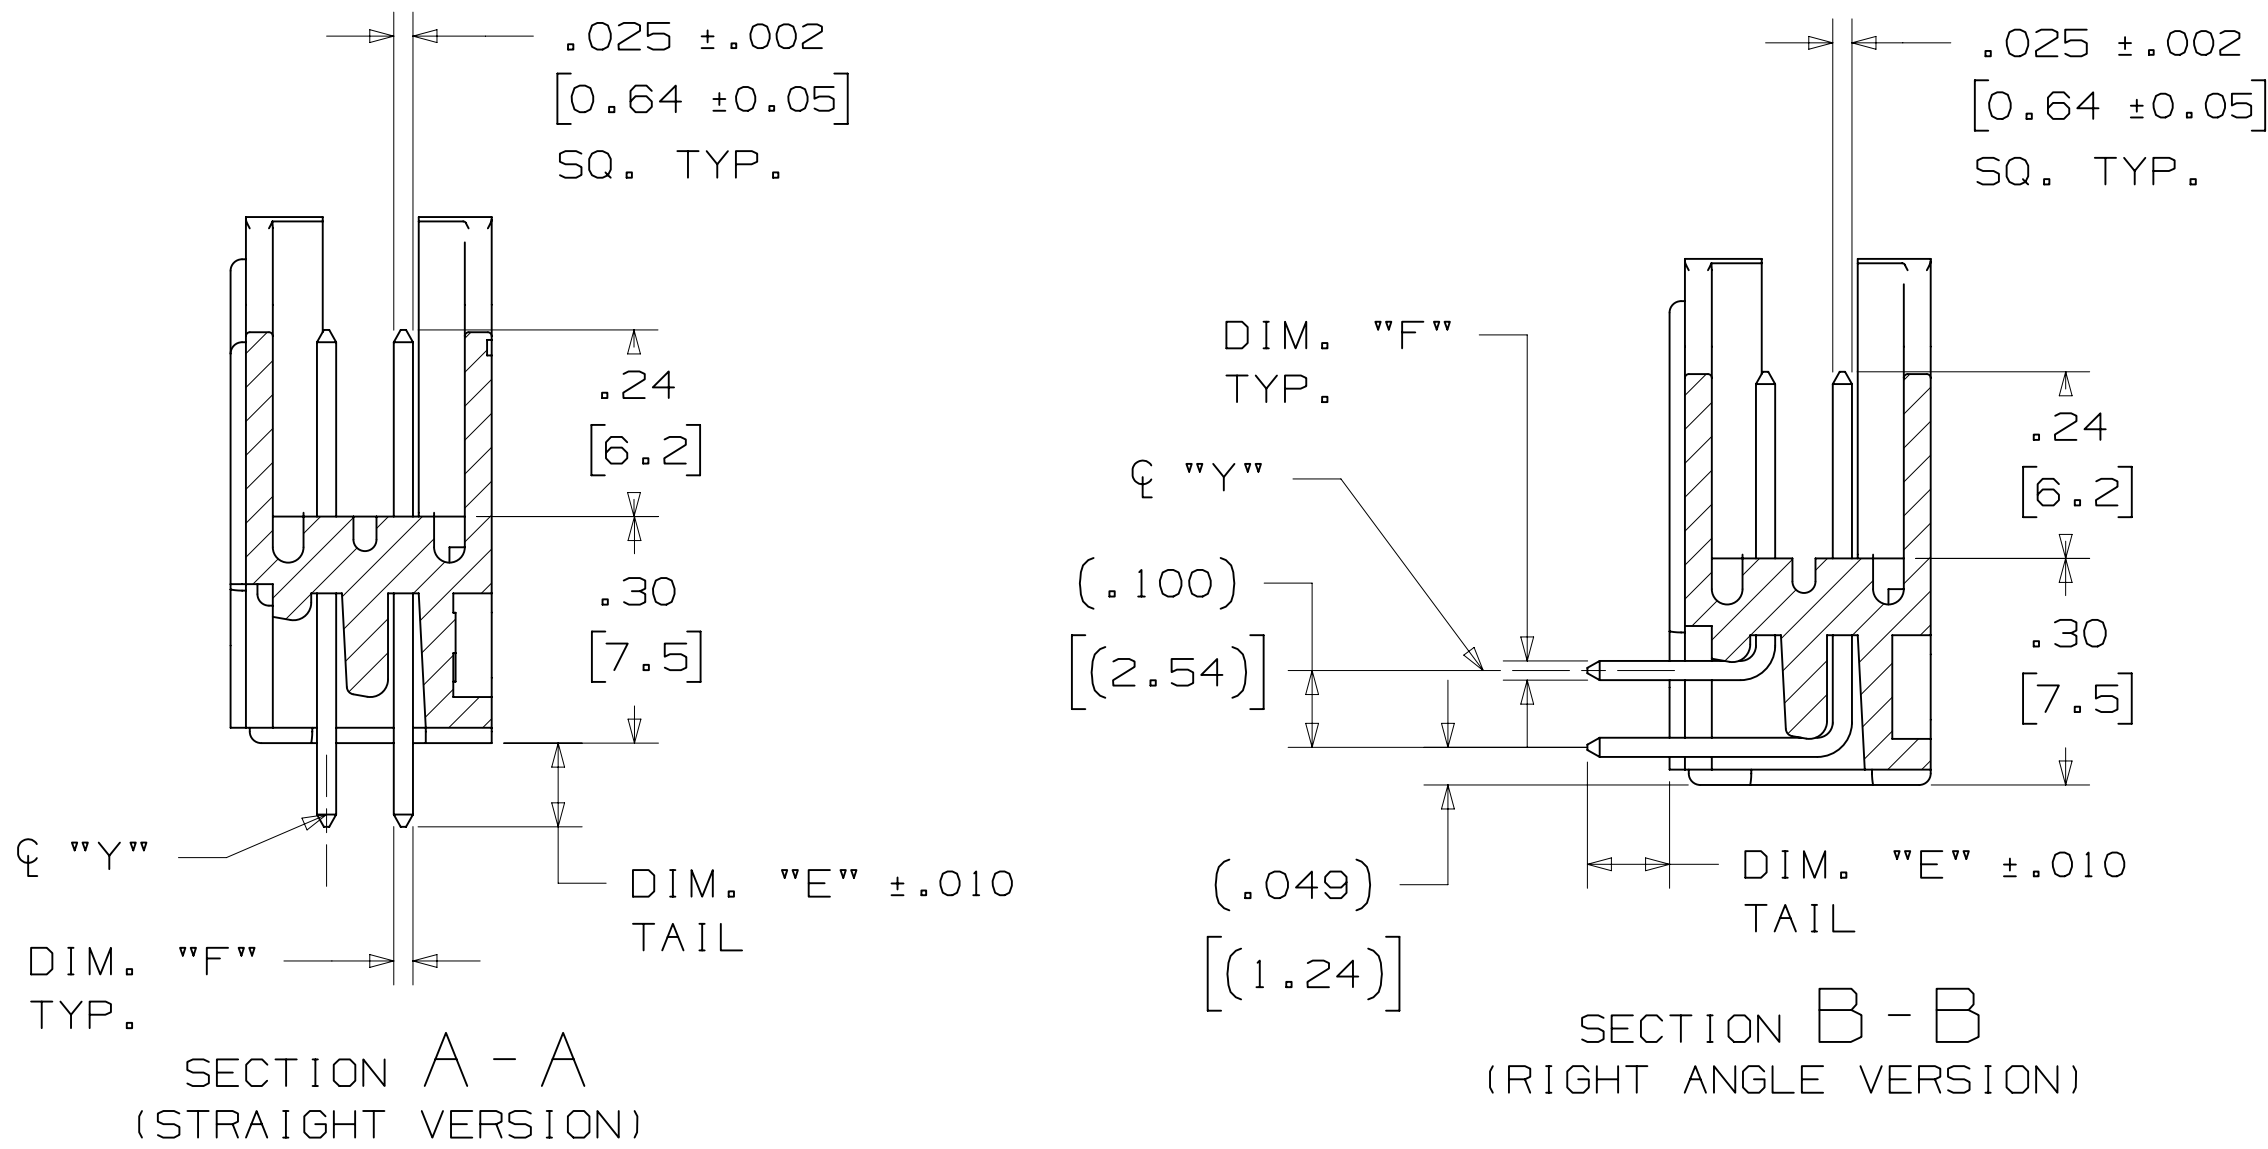


TABLE 1							
PIN QTY.	3M PART NUMBER	DIM. "A"	DIM. "B"	DIM. "C"	DIM. "D"	POLARIZING NOTCHES	PIN QTY.
06	3869	1.06 [27.0]	.905 [22.99]	.665 [16.89]	.51 [12.9]	B*	06
08	3889	1.16 [29.5]	1.005 [25.53]	.765 [19.43]	.61 [15.5]	B*	08
10	3793	1.26 [32.1]	1.105 [28.04]	.865 [21.97]	.71 [18.0]	BC	10
14	3314	1.46 [37.2]	1.305 [33.12]	1.065 [27.05]	.91 [23.1]	BC	14
16	3408	1.56 [39.7]	1.405 [35.66]	1.165 [29.59]	1.01 [25.6]	ABC	16
20	3428	1.76 [44.8]	1.604 [40.74]	1.365 [34.67]	1.21 [30.7]	ABC	20
24	3627	1.96 [49.9]	1.805 [45.82]	1.565 [39.75]	1.41 [35.8]	ABC	24
26	3429	2.06 [52.4]	1.905 [48.36]	1.665 [42.29]	1.51 [38.3]	ABC	26
30	3440	2.26 [57.5]	2.105 [53.44]	1.865 [47.37]	1.71 [43.4]	ABC	30
34	3431	2.46 [62.6]	2.305 [58.52]	2.065 [52.45]	1.91 [48.5]	ABC	34
40	3432	2.76 [70.2]	2.605 [66.14]	2.365 [60.07]	2.21 [56.1]	ABC	40
50	3433	3.26 [82.9]	3.105 [78.84]	2.865 [72.77]	2.71 [68.8]	ABC	50
60	3372	3.76 [95.6]	3.605 [91.54]	3.365 [85.47]	3.21 [81.5]	ABC	60
64	3764	3.96 [100.7]	3.805 [96.62]	3.565 [90.55]	3.41 [86.6]	ABC	64

* AVAILABLE WITHOUT CENTER NOTCH B. CONTACT 3M

TABLE 2						
3M PART NUMBER SUFFIX	CONTACT TAIL	DIM. "E"	PIN CROSS SECTION			DIM. "G"
-5XX2 -6XX2	.062 [1.57] THICK PC BOARD	.112 [2.84]	DIM. "F" .0245+/- .0005 [.622]	DIAGONALS .028+/- .001 [.71]	CORNER RADIUS .0075 REF. [.191]	.035+/- .003 [.89] SEE NOTE 5
-5X03 -6X03	.094 [2.39] TO .125 [3.18] THICK PC BOARD	.155 [3.94]	.0245+/- .0005 [.622]	.028+/- .001 [.71]	.0075 REF. [.191]	.035+/- .003 [.89]

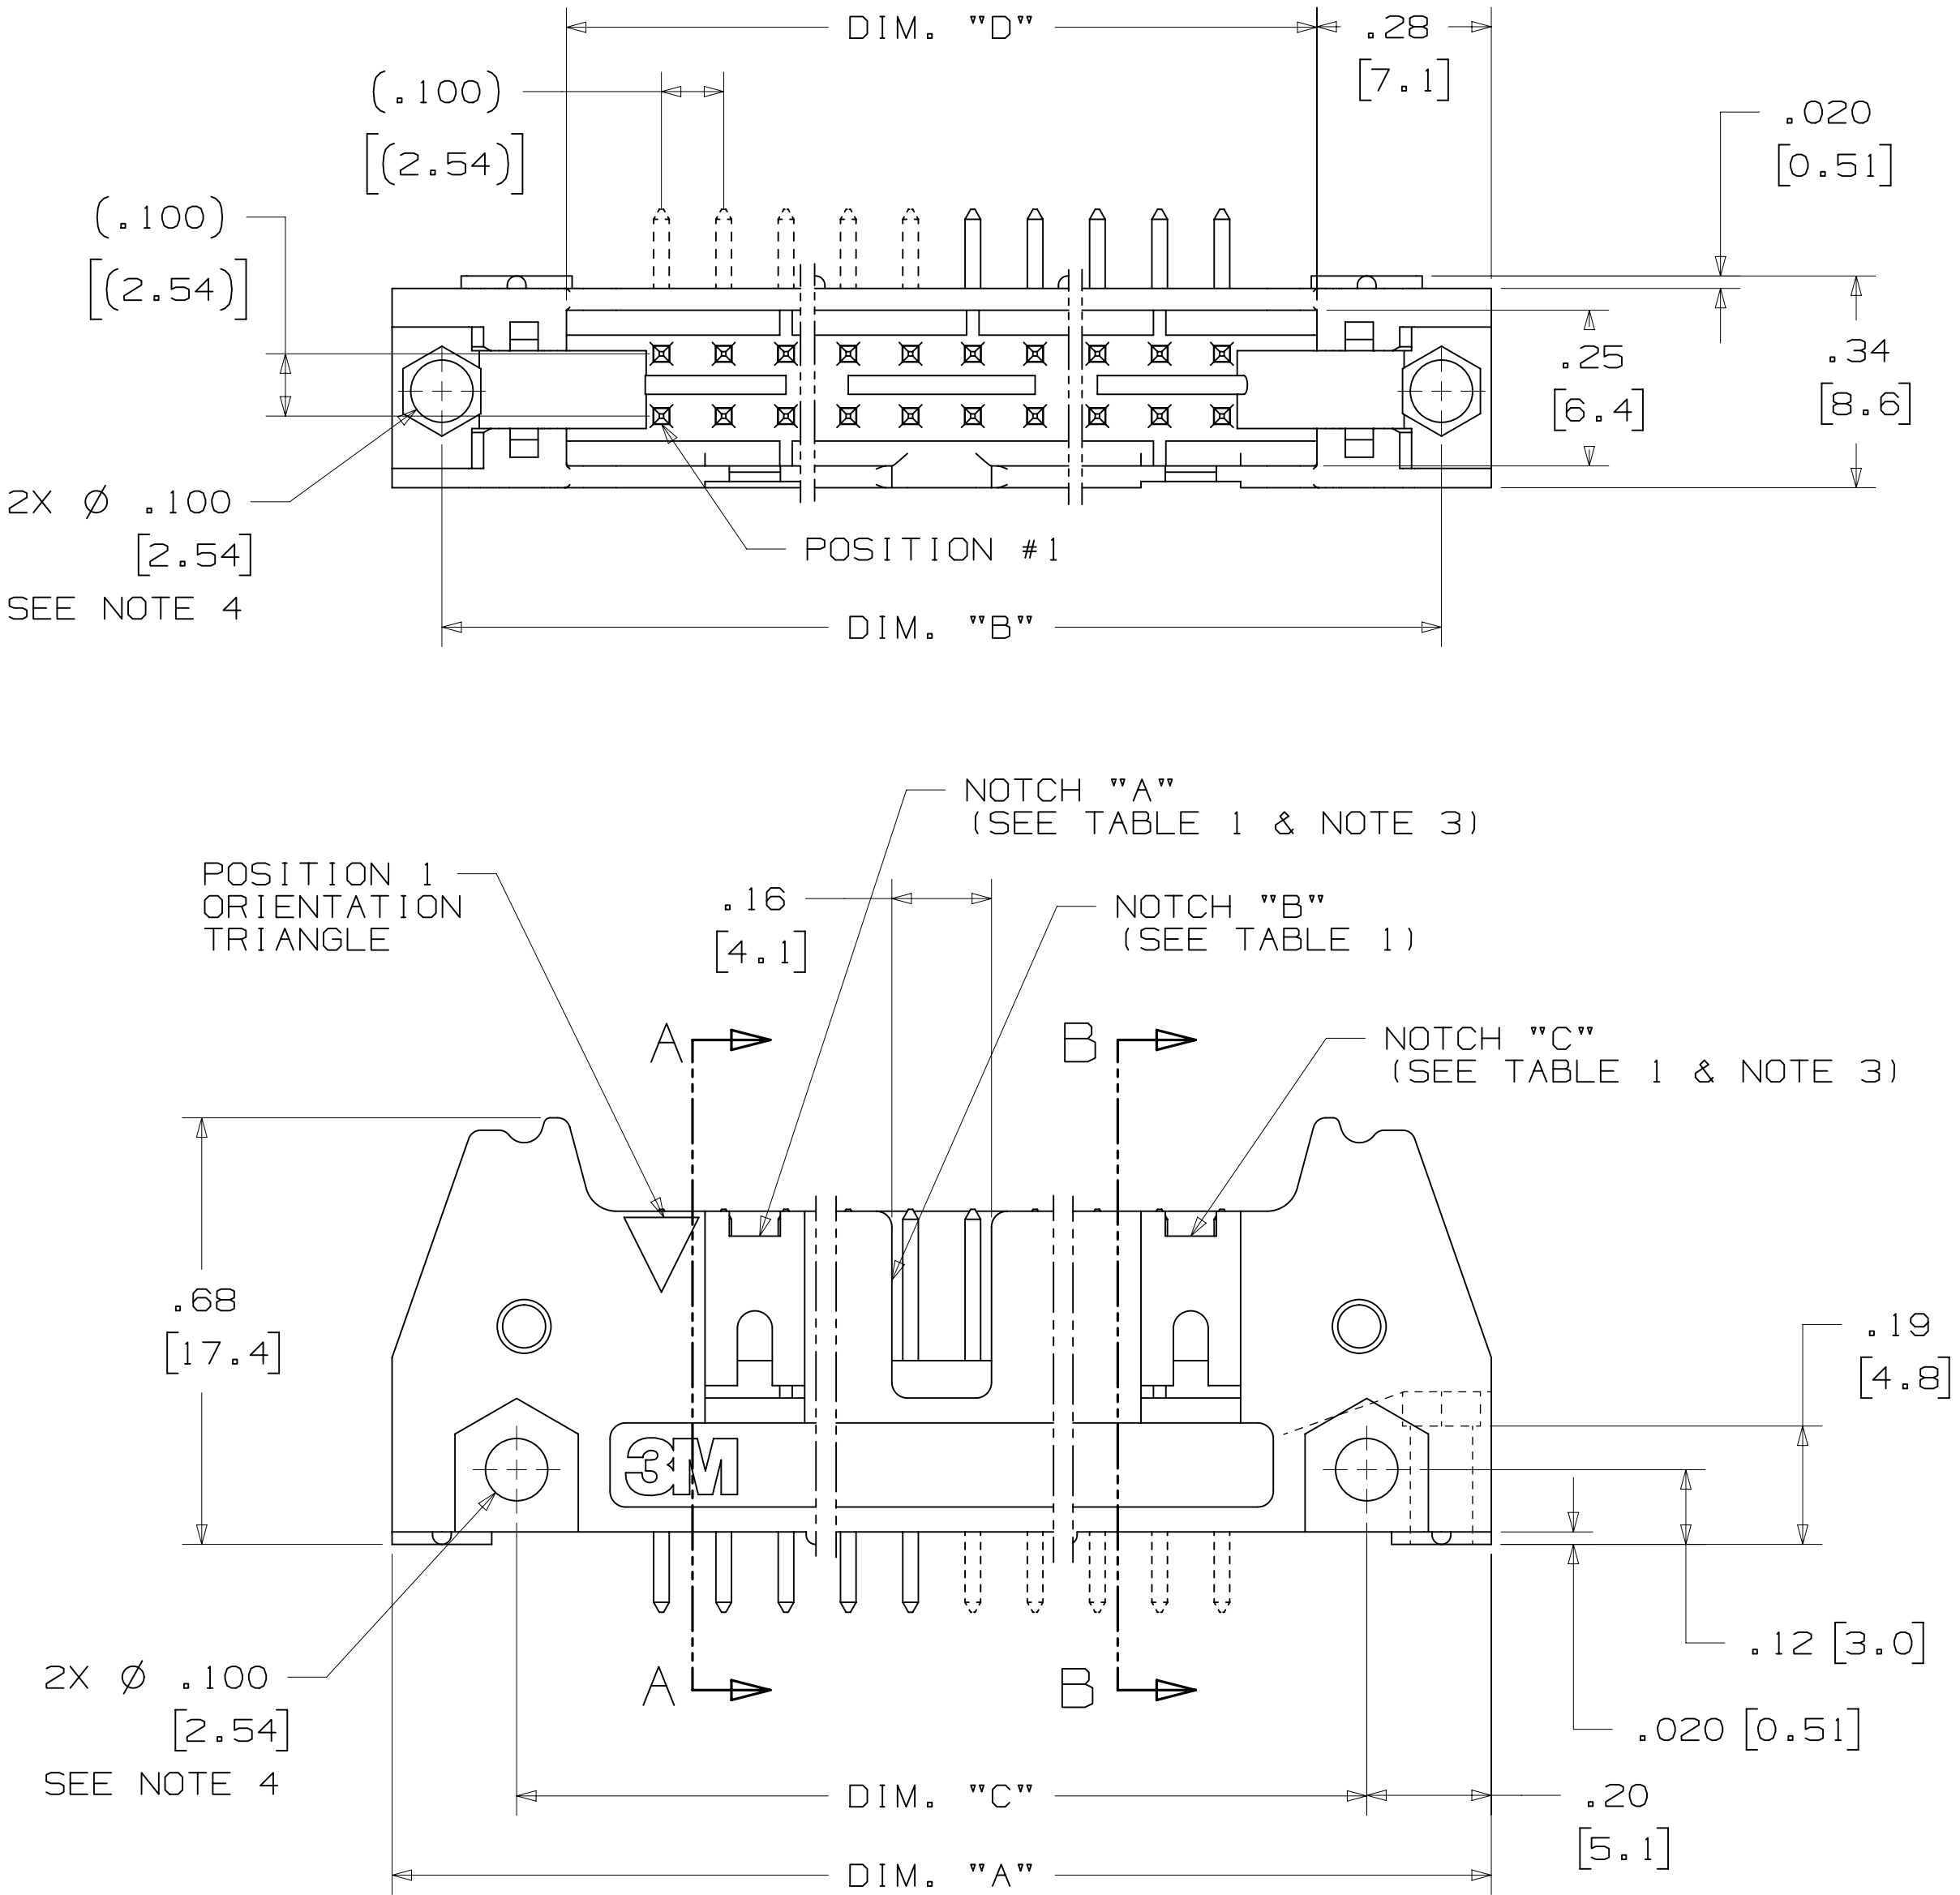

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
3M CODES	3M CODES	DR	CASTIGLIONE	DATE JUL 25, 2014	MFG	DATE
DIVISION	Interconnect Solutions	DIVISION CODE	EMSD	APPR	R. SCHERER	DATE SEP 05, 2014
DO NOT SCALE DRAWING	SCALE 4/1	TOLERANCES EXCEPT AS NOTED	INCHES	0 ± .01	0.000 ± .005	0.0000 ±
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 2009	MILLIMETERS	0 ± .3	0.00 ± .13	0.000 ±	0.000 ±
MAX SURFACE ROUGHNESS	12.5 SURFACES	MARKED ONLY	ANGLES	CAGE NUMBER	SIZE	DRAWING NO.
				D	78-5100-0772-3	S
				MODEL	3000 SERIES	LISTS
				YES	NO	SHT 2 OF 4


.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE



 (.03)
 [(0.8)]
 TYP.

3M™ FOUR-WALL HEADER, 3000 SERIES
.100" X .100" LATCH/EJECTOR, STRAIGHT AND RIGHT ANGLE

MOUNTING HARDWARE

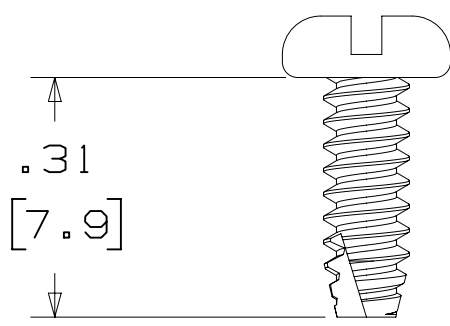

3341-5
(INSTALL FROM BOTTOM OF BOARD)
PANHEAD THREAD CUTTING SCREW:
#4-24 X 5/16"
TYPE: USA STD BT, FEDERAL BG
MATERIAL: STAINLESS STEEL




3341-6
HEX HEAD BOLT, NUT AND WASHER:
BOLT - #2-56 X 1/2"
MATERIAL: STAINLESS STEEL




STRAIGHT VERSION INSTALL
(MUST BE INSERTED PRIOR TO
LATCH INSTALL)

RIGHT ANGLE VERSION INSTALL

3341-6
#2-56 NUT AND BOLT
TORQUE FOR EACH BOLT: 1.25 - 3.125 INCH LBS.

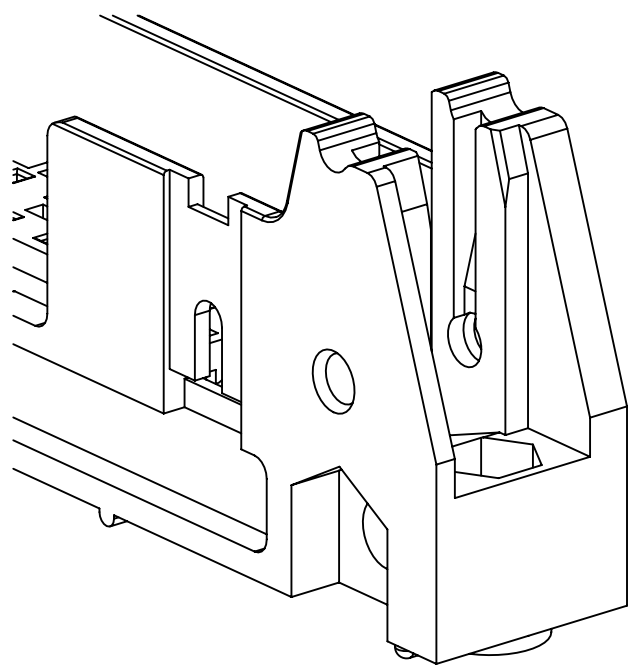

#4-24 TYPE BT SELF THREADING SCREW
WHEN USING LATCHES, MAXIMUM LENGTH
OF SCREW IS .250 INCHES PLUS
THICKNESS OF THE BOARD.
TORQUE FOR EACH SCREW IS 3-5 INCH LBS.



3341-5

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
ACROSS		DOWN		DATE		MFG		DATE	
CODES		CASTIGLIONE		JUL 25, 2014		R. SCHERER		SEP 05, 2014	
DIVISION		DIVISION CODE		S		60056		MAR 06, 2015	
Interconnect Solutions		EMSD		R		56068		JUL 25, 2014	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 2009		MAX SURFACE ROUGHNESS		CAGE NUMBER		DRAWING NO.	
MAX SURFACE ROUGHNESS		MARKED ONLY		ANGLES		MODEL		REV.	
TITLE		HEADER, 4-WALL, .100 X .100 LATCH/EJECTOR, STRAIGHT & RA		CAGE NUMBER		D78-5100-0772-3		REV.	
DETAILS		YES NO		SHT		4 OF 4		REV.	
S		JNC		RS		JNC		RS	
R		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC		RS		JNC		RS	
ECO		JNC							