

**MAXIM****SOT23, 3V/5V, Single-Supply, Rail-to-Rail  
Instrumentation Amplifiers****General Description**

The MAX4460/MAX4461/MAX4462 are instrumentation amplifiers with precision specifications, low-power consumption, and excellent gain-bandwidth product. Proprietary design techniques allow ground-sensing capability combined with ultra-low input current and increased common-mode rejection performance. These Rail-to-Rail® output instrumentation amplifiers are offered in fixed or adjustable gains and the option for either a shutdown mode or a pin to set the output voltage relative to an external reference (see *Ordering Information* and *Selector Guide*).

The MAX4460 has an adjustable gain and uses ground as its reference voltage. The MAX4461 is offered in fixed gains of 1, 10, and 100, uses ground as its reference voltage, and has a logic-controlled shutdown input. The MAX4462 is offered in fixed gains of 1, 10, and 100 and has a reference input pin (REF). REF sets the output voltage for zero differential input to allow bipolar signals in single-supply applications.

The MAX4460/MAX4461/MAX4462 have high-impedance inputs optimized for small-signal differential voltages. The MAX4461 and MAX4462 are factory-trimmed to gains of 1, 10, or 100 (suffixed U, T, and H) with  $\pm 0.1\%$  accuracy. The typical offset of the MAX4460/MAX4461/MAX4462 is  $100\mu\text{V}$ . All devices have a gain-bandwidth product of  $2.5\text{MHz}$ .

These amplifiers operate with a single-supply voltage from 2.85V to 5.25V and with a quiescent current of only  $700\mu\text{A}$  (less than  $1\mu\text{A}$  in shutdown for the MAX4461). The MAX4462 can also be operated with dual supplies. Smaller than most competitors, the MAX4460/MAX4461/MAX4462 are available in space-saving 6-pin SOT23 packages.

**Applications**

Industrial Process Control  
Strain-Gauge Amplifiers  
Transducer Interface  
Precision Low-Side Current Sense  
Low-Noise, Microphone Pre-Amplifier  
Differential Voltage Amplification  
Battery-Powered Medical Equipment

**Selector Guide** appears at end of data sheet.

**Pin Configurations** appear at end of data sheet.

Rail-to-Rail is a registered trademark of Nippon Motorola, Ltd.

**MAXIM**

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at [www.maxim-ic.com](http://www.maxim-ic.com).


**Features**

- ◆ Tiny 6-Pin SOT23 Package
- ◆ Input Negative Rail Sensing
- ◆  $1\text{pA}$  (typ) Input Bias Current
- ◆  $100\mu\text{V}$  Input Offset Voltage
- ◆ Rail-to-Rail Output
- ◆ 2.85V to 5.25V Single Supply
- ◆  $700\mu\text{A}$  Supply Current
- ◆  $\pm 0.1\%$  Gain Error
- ◆ 2.5MHz Gain-Bandwidth Product
- ◆  $18\text{nV}/\sqrt{\text{Hz}}$  Input-Referred Noise

**Ordering Information**

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
<b>MAX4460EUT-T*</b>	-40°C to +85°C	6 SOT23-6	AASS
MAX4460ESA*	-40°C to +85°C	8 SO	—
<b>MAX4461UEUT-T*</b>	-40°C to +85°C	6 SOT23-6	AAST
MAX4461UESA*	-40°C to +85°C	8 SO	—
MAX4461TEUT-T*	-40°C to +85°C	6 SOT23-6	AASU
MAX4461TESA*	-40°C to +85°C	8 SO	—
MAX4461HEUT-T*	-40°C to +85°C	6 SOT23-6	AASV
MAX4461HESA*	-40°C to +85°C	8 SO	—
<b>MAX4462UEUT-T</b>	-40°C to +85°C	6 SOT23-6	AASW
MAX4462UESA	-40°C to +85°C	8 SO	—
MAX4462TEUT-T	-40°C to +85°C	6 SOT23-6	AASX
MAX4462TESA	-40°C to +85°C	8 SO	—
MAX4462HEUT-T	-40°C to +85°C	6 SOT23-6	AASY
MAX4462HESA	-40°C to +85°C	8 SO	—

\*Future Product—contact factory for availability.

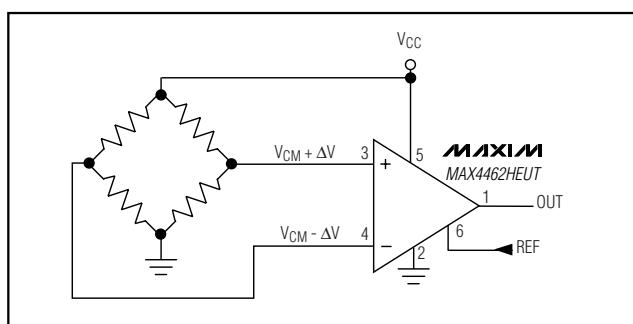**Typical Application Circuit****MAX4460/MAX4461/MAX4462**

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V <sub>DD</sub> to V <sub>SS</sub> )	-0.3V to +6V
All Other Pins	(V <sub>SS</sub> - 0.3V) to (V <sub>DD</sub> + 0.3V)
Output Short-Circuit Duration to Either Supply	1s
Continuous Power Dissipation (T <sub>A</sub> = +70°C)	
6-Pin SOT23 (derate 8.7mW/°C above +70°C)	695mW
8-Pin SO (derate 5.9mW/°C above +70°C)	470mW

Operating Temperature Range	-40°C to +85°C
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Soldering Temperature	300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—MAX4462

(V<sub>DD</sub> = 5V, V<sub>SS</sub> = 0, V<sub>CM</sub> = V<sub>REF</sub> = V<sub>DD</sub>/2, R<sub>L</sub> = 100kΩ to V<sub>DD</sub>/2, T<sub>A</sub> = +25°C, unless otherwise noted. V<sub>DIFF</sub> = V<sub>IN+</sub> - V<sub>IN-</sub> = -100mV to +100mV for G = 1 and G = 10, -20mV to +20mV for G = 100.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage	V <sub>DD</sub>	Guaranteed by PSRR test		2.85	5.25		V
Supply Current		V <sub>DD</sub> = 5V, V <sub>DIFF</sub> = 0		0.7	0.85		mA
		V <sub>DD</sub> = 3V, V <sub>DIFF</sub> = 0		0.65	0.75		
Input Offset Voltage (Note 1)	V <sub>OS</sub>	MAX4462_ESA		±50	±250		µV
		MAX4462_EUT		±100	±500		
Input Resistance	R <sub>IN</sub>	V <sub>CM</sub> = V <sub>DD</sub> /2	Differential mode	2			GΩ
			Common mode	2			
Input Common-Mode Range	V <sub>CM</sub>	Guaranteed by Input CMRR test		V <sub>SS</sub> - 0.1	V <sub>DD</sub> - 1.7		V
REF Input Range		Guaranteed by REF rejection test		V <sub>SS</sub> + 0.1	V <sub>DD</sub> - 1.7		V
Input Common-Mode Rejection Ratio	CMRR	V <sub>CM</sub> = (V <sub>SS</sub> - 0.1V) to (V <sub>DD</sub> - 1.7V)		90	120		dB
REF Input Rejection Ratio		V <sub>CM</sub> = (V <sub>SS</sub> + 0.1V) to (V <sub>DD</sub> - 1.7V)		85	100		dB
Power-Supply Rejection Ratio	PSRR	V <sub>DD</sub> = 2.85V to 5.25V		90	100		dB
Input Bias Current (Note 2)	I <sub>B</sub>			1	100		pA
Input Voltage Noise	e <sub>N</sub>	f = 10kHz		18			nV/√Hz
		f = 1kHz		38			
Output Voltage Swing	V <sub>OH</sub>	V <sub>DD</sub> - V <sub>OH</sub> (Note 3)	R <sub>L</sub> = 100kΩ	1	2.5		mV
			R <sub>L</sub> = 10kΩ	3	5		
	V <sub>OL</sub>	V <sub>OL</sub> - V <sub>SS</sub> (Note 3)	R <sub>L</sub> = 100kΩ	2	4		
			R <sub>L</sub> = 10kΩ	6	12		
Short-Circuit Current (Note 4)	I <sub>SC</sub>			±150			mA
Gain Error		R <sub>L</sub> = 10kΩ	G = 1V/V, MAX4462UESA	0.1	0.30		%
			G = 10V/V, MAX4462TESA	0.12	0.35		
			G = 100V/V, MAX4462HESA	0.15	0.5		
			MAX4462_EUT	0.15	0.5		
Nonlinearity		R <sub>L</sub> = 10kΩ		0.05	0.15		%

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## ELECTRICAL CHARACTERISTICS—MAX4462 (continued)

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = +25^\circ C$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Maximum Capacitive Load	$C_L$	No sustained oscillations		100			pF
-3dB Bandwidth	BW-3dB	$C_L = 100pF$	$G = 1V/V$ , MAX4462U	2500			kHz
			$G = 10V/V$ , MAX4462T	250			
			$G = 100V/V$ , MAX4462H	25			
Gain-Bandwidth Product	GBWP	$C_L = 100pF$		2.5			MHz
Slew Rate	SR	$C_L = 100pF$	$G = 1V/V$ , MAX4462U	0.5			V/μs
			$G = 10V/V$ , MAX4462T	0.5			
			$G = 100V/V$ , MAX4462H	0.25			
Settling Time	ts	$C_L = 100pF$ , within 0.1% of final value	$G = 1V/V$ , MAX4462U	15			μs
			$G = 10V/V$ , MAX4462T	75			
			$G = 100V/V$ , MAX4462H	250			

## ELECTRICAL CHARACTERISTICS—MAX4462

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .) (Note 5)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage	$V_{DD}$	Guaranteed by PSRR test		2.85	5.25		V
Supply Current		$V_{DD} = 5V$ , $V_{DIFF} = 0$			1.0		mA
		$V_{DD} = 3V$ , $V_{DIFF} = 0$			0.95		
Input Offset Voltage (Note 1)	V <sub>OS</sub>	MAX4462_ESA	$T_A = 0^\circ C$ to $+85^\circ C$		$\pm 500$		μV
			$T_A = -40^\circ C$ to $+85^\circ C$		$\pm 750$		
		MAX4462_EUT	$T_A = 0^\circ C$ to $+85^\circ C$		$\pm 1100$		
			$T_A = -40^\circ C$ to $+85^\circ C$		$\pm 1300$		
Input Offset Voltage Drift (Note 1)	TCV <sub>OS</sub>				1.5		μV/°C
Input Common-Mode Range	V <sub>CM</sub>	Guaranteed by input CMRR test		$V_{SS} - 0.1$	$V_{DD} - 1.85$		V
REF Input Range		Guaranteed by REF rejection test		$V_{SS} + 0.1$	$V_{DD} - 1.85$		V
Input Common-Mode Rejection Ratio	CMRR	$V_{CM} = (V_{SS} - 0.1V)$ to $(V_{DD} - 1.85V)$		80			dB
REF Input Rejection Ratio		$V_{CM} = (V_{SS} + 0.1V)$ to $(V_{DD} - 1.85V)$		75			dB
Power-Supply Rejection Ratio	PSRR	$V_{DD} = 2.85V$ to $5.25V$		80			dB
Input Bias Current (Note 2)	I <sub>B</sub>				100		pA

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## ELECTRICAL CHARACTERISTICS—MAX4462 (continued)

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .) (Note 5)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Voltage Swing	$V_{OH}$	$V_{DD} - V_{OH}$ (Note 3)	$R_L = 100k\Omega$			4	mV
			$R_L = 10k\Omega$			8	
	$V_{OL}$	$V_{OL} - V_{SS}$ Note 3)	$R_L = 100k\Omega$			8	
			$R_L = 10k\Omega$			16	
Gain Error	GE	$R_L = 10k\Omega$ , MAX4462UESA	$T_A = 0^{\circ}C$ to $+85^{\circ}C$			0.8	%
			$T_A = -40^{\circ}C$ to $+85^{\circ}C$			1.6	
		$R_L = 10k\Omega$ , MAX4462TESA	$T_A = 0^{\circ}C$ to $+85^{\circ}C$			0.8	
			$T_A = -40^{\circ}C$ to $+85^{\circ}C$			1.7	
		$R_L = 10k\Omega$ , MAX4462HESA	$T_A = 0^{\circ}C$ to $+85^{\circ}C$			0.8	
			$T_A = -40^{\circ}C$ to $+85^{\circ}C$			1.7	
		$R_L = 10k\Omega$ , MAX4462_EUT	$T_A = 0^{\circ}C$ to $+85^{\circ}C$			1.8	
			$T_A = -40^{\circ}C$ to $+85^{\circ}C$			3.0	
Nonlinearity	NL	$R_L = 10k\Omega$	$T_A = 0^{\circ}C$ to $+85^{\circ}C$			0.2	%
			$T_A = -40^{\circ}C$ to $+85^{\circ}C$			0.25	

**Note 1:** Offset Voltage is measured with a best straight-line (BSL) method. See *Guide to Amplifier Accuracy* section in the data sheet.

**Note 2:** Guaranteed by design, not production tested.

**Note 3:** Output swing high is measured only on  $G = 100$  devices. Devices with  $G = 1$  and  $G = 10$  have output swing high limited by the range of  $V_{REF}$ ,  $V_{CM}$ , and  $V_{DIFF}$ . See *Output Swing* section.










**Note 4:** Short-circuit duration limited to 1s. See *Absolute Maximum Ratings*.

**Note 5:** SOT23 units are 100% production tested at  $+25^{\circ}C$ . Limits over temperature are guaranteed by design.

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## Typical Operating Characteristics

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{IN+} = V_{IN-} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = +25^\circ C$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .)

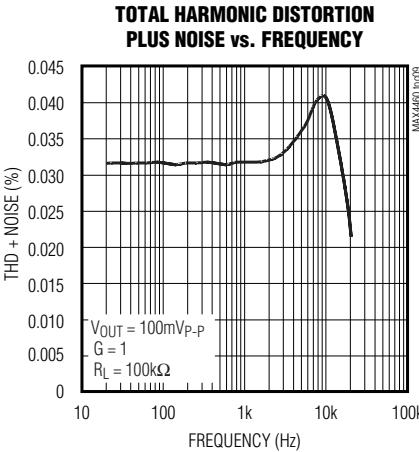
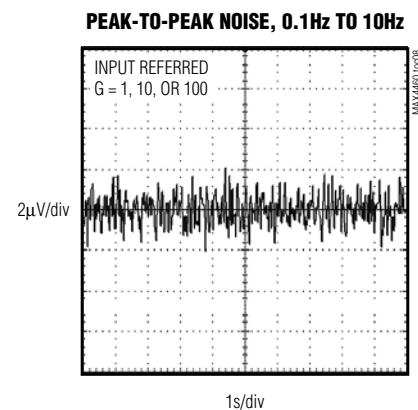
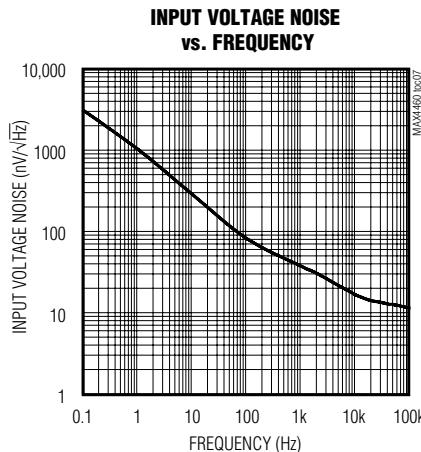
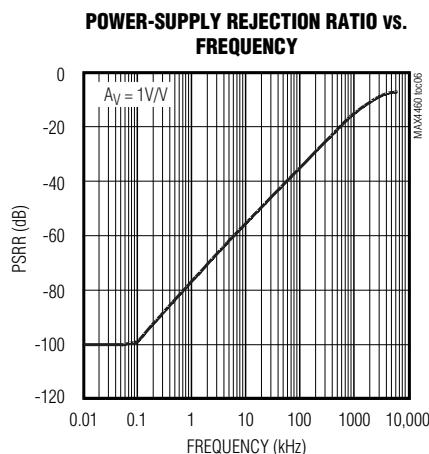
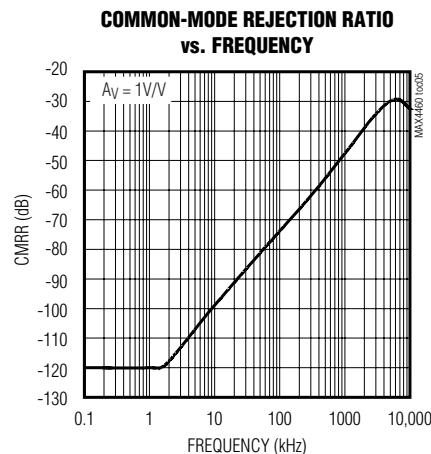
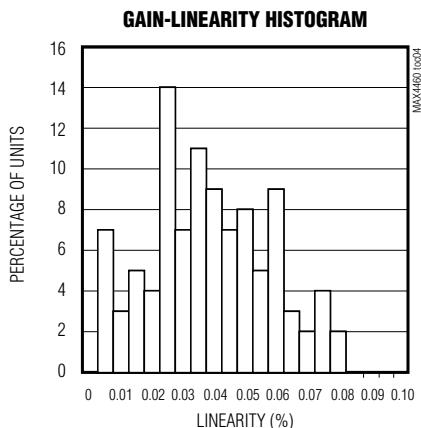
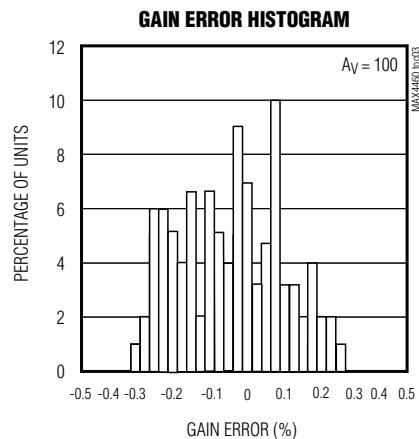
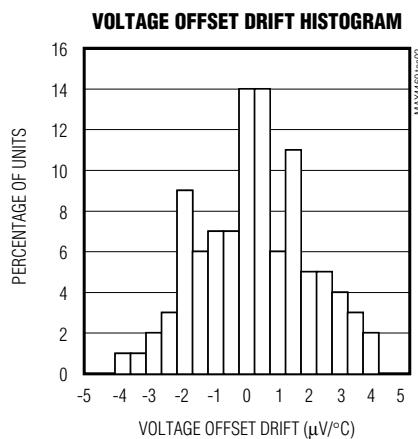
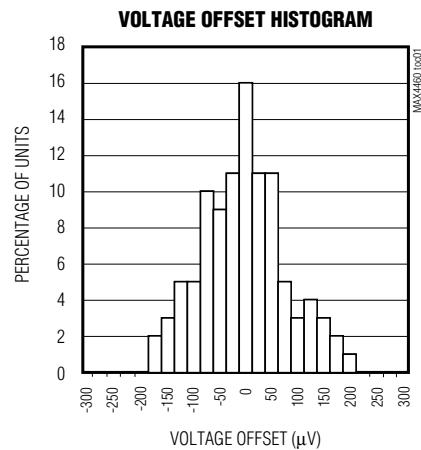


**MAX4460/MAX4461/MAX4462**

## SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

### Typical Operating Characteristics (continued)

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{IN+} = V_{IN-} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = +25^\circ C$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .)

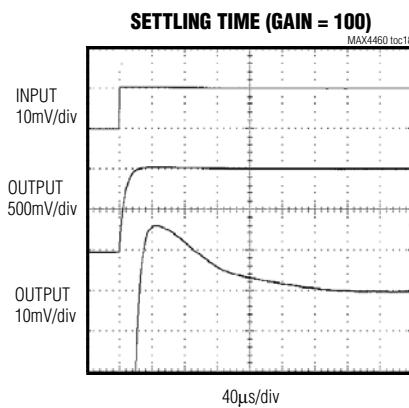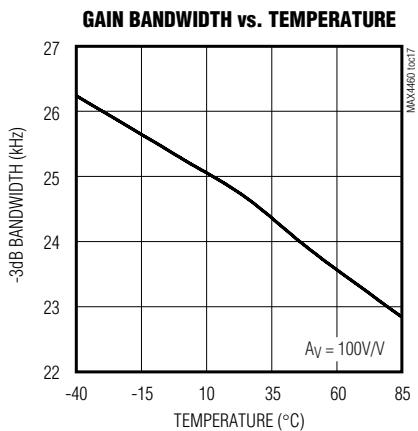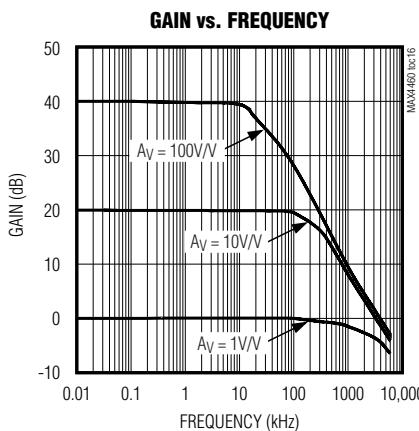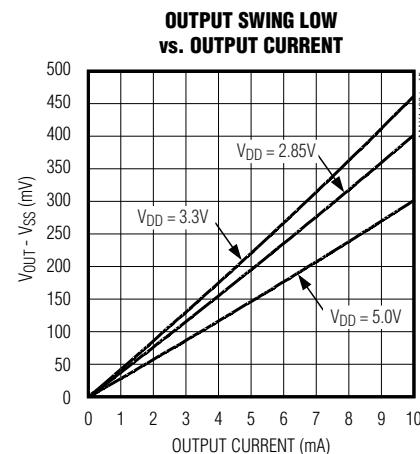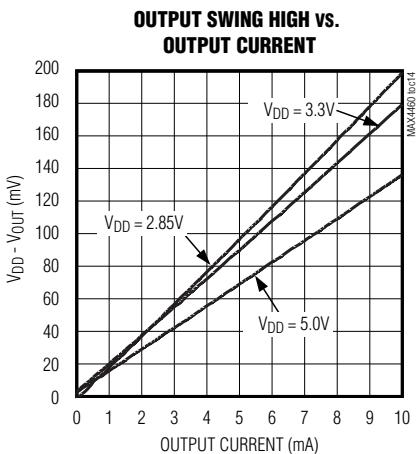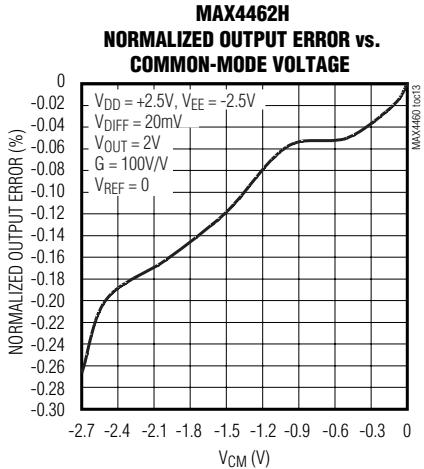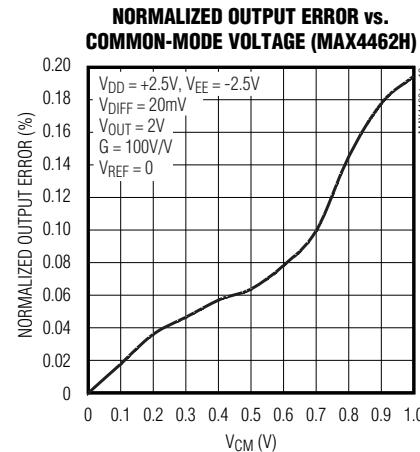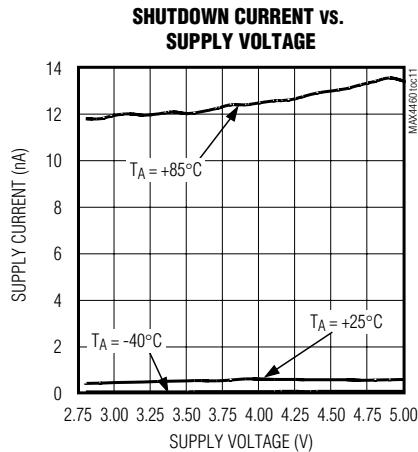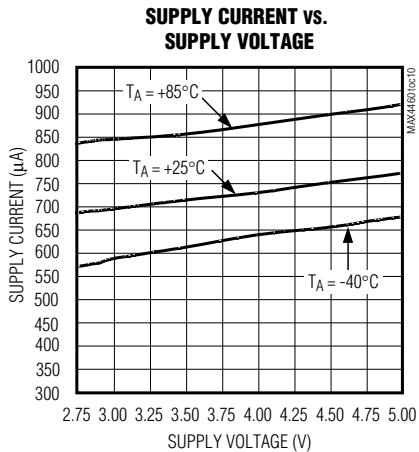


# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers


## Typical Operating Characteristics (continued)

( $V_{DD} = 5V$ ,  $V_{SS} = 0$ ,  $V_{IN+} = V_{IN-} = V_{REF} = V_{DD}/2$ ,  $R_L = 100k\Omega$  to  $V_{DD}/2$ ,  $T_A = +25^\circ C$ , unless otherwise noted.  $V_{DIFF} = V_{IN+} - V_{IN-} = -100mV$  to  $+100mV$  for  $G = 1$  and  $G = 10$ ,  $-20mV$  to  $+20mV$  for  $G = 100$ .)


**LARGE-SIGNAL PULSE RESPONSE  
(GAIN = 1V/V)**

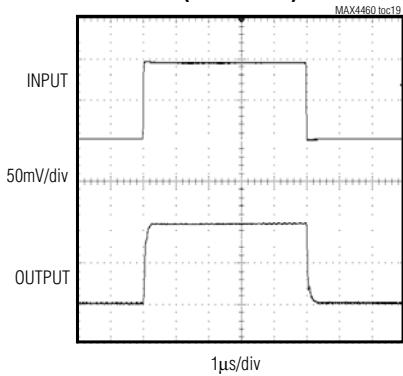


**LARGE-SIGNAL PULSE RESPONSE  
(GAIN = 100V/V)**

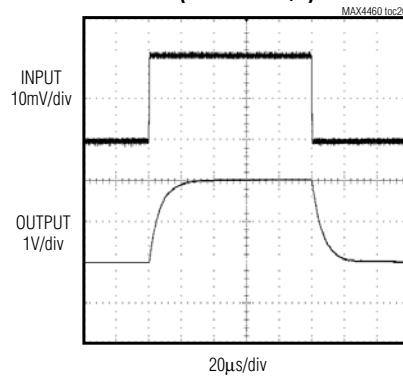


**SMALL-SIGNAL PULSE RESPONSE  
(GAIN = 1V/V)**

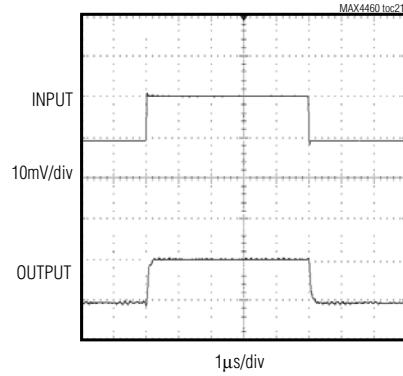


**SMALL-SIGNAL PULSE RESPONSE  
(GAIN = 1V/V)**

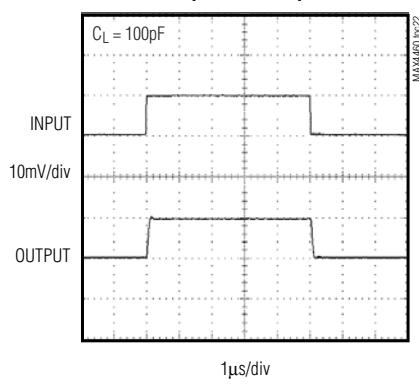

**SMALL-SIGNAL PULSE RESPONSE  
(GAIN = 100V/V)**

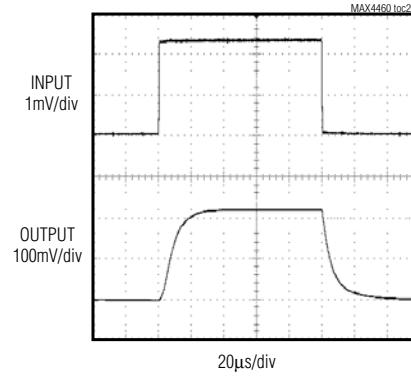

**SMALL-SIGNAL PULSE RESPONSE  
(GAIN = 100V/V)**

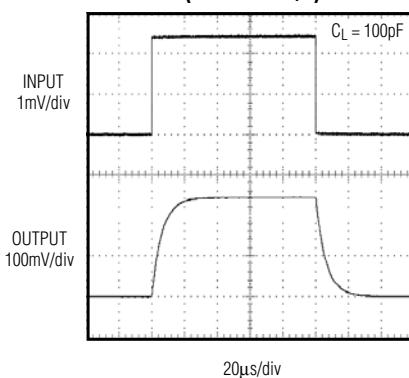

# **SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers**

## **Pin Descriptions**

PIN		NAME	FUNCTION
MAX4460			
SOT23	SO		
1	1	OUT	Output
2	2	GND	Negative Supply Voltage
3	3	IN+	Positive Differential Input
—	4, 5	N.C.	No Connection. Not internally connected.
4	6	IN-	Negative Differential Input
5	7	V <sub>DD</sub>	Positive Supply Voltage
6	8	FB	Feedback Input. Connect FB to the center tap of a resistive-divider from OUT to GND to set the gain.

PIN		NAME	FUNCTION
MAX4461			
SOT23	SO		
1	1	OUT	Output
2	2	GND	Negative Supply Voltage
3	3	IN+	Positive Differential Input
—	4, 5	N.C.	No Connection. Not internally connected.
4	6	IN-	Negative Differential Input
5	7	V <sub>DD</sub>	Positive Supply Voltage
6	8	SHDN	Shutdown Control. Drive SHDN high for normal operation.

PIN		NAME	FUNCTION
MAX4462			
SOT23	SO		
1	1	OUT	Output
2	2	V <sub>SS</sub>	Negative Supply Voltage
3	3	IN+	Positive Differential Input
—	4, 5	N.C.	No Connection. Not internally connected.
4	6	IN-	Negative Differential Input
5	7	V <sub>DD</sub>	Positive Supply Voltage
6	8	REF	Output Reference Level. Connect REF to an external low-impedance reference voltage. REF sets the OUT voltage for zero differential inputs.

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## Functional Diagrams

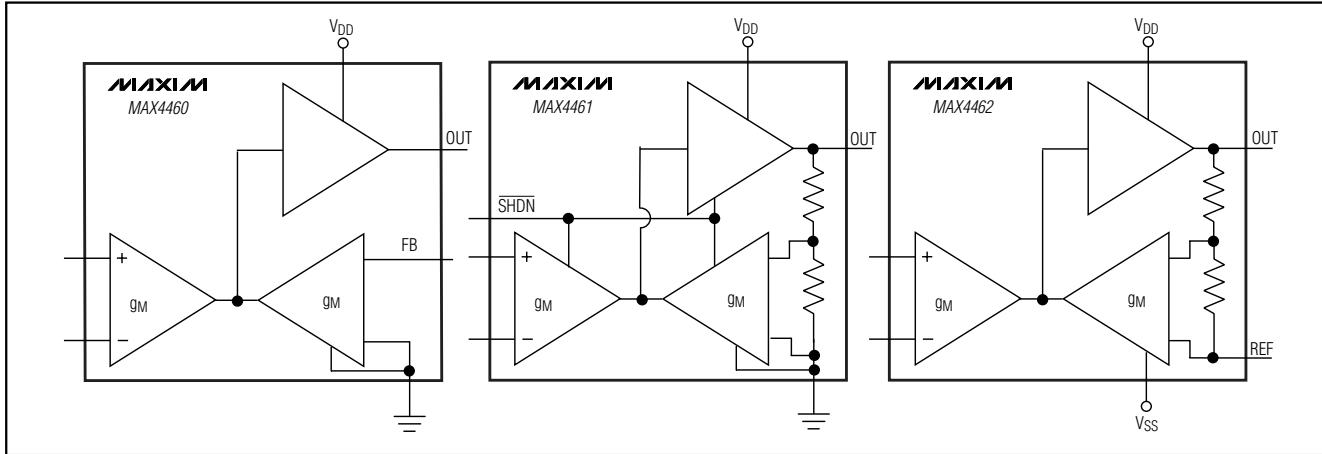


Figure 1. Functional Diagrams

## Detailed Description

The MAX4460/MAX4461/MAX4462 family of instrumentation amplifiers implements Maxim's proprietary indirect current-feedback design to achieve a precision specification and excellent gain-bandwidth product. These new techniques allow ground-sensing capability combined with an ultra-low input current and an increased common-mode rejection.

The differential input signal is converted to a current by an input transconductance stage. An output transconductance stage converts a portion of the output voltage (equal to the output voltage divided by the gain) into another precision current. These two currents are subtracted and the result is fed to a loop amplifier with a class AB output stage with sufficient gain to minimize errors (Figure 1).

The MAX4461U/T/H and MAX4462U/T/H have factory-trimmed gains of 1, 10, and 100, respectively. The MAX4460 has an adjustable gain, set with an external pair of resistors between the pins OUT, FB, and GND (Figure 2).

The MAX4462U/T/H has a reference input (REF) which is connected to an external reference for bipolar operation of the device. The range for V<sub>REF</sub> is +0.1V to (V<sub>DD</sub> - 1.7V). For full output-swing capability optimal performance is usually obtained with V<sub>REF</sub> = V<sub>DD</sub>/2.

The MAX4460/MAX4461/MAX4462 operate with single-supply voltages of 2.85V to 5.25V. It is possible to use MAX4462U/T/H in a dual-supply configuration with up to  $\pm 2.6V$  at V<sub>DD</sub> and V<sub>SS</sub>, with REF connected to ground.

MAX4460/MAX4461/MAX4462

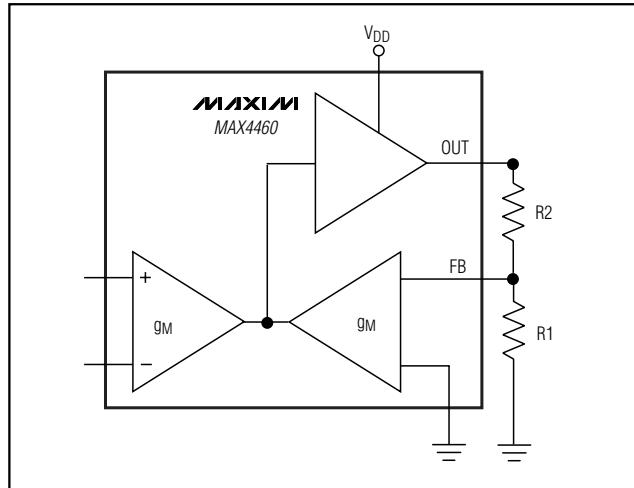


Figure 2. External Resistor Configuration (MAX4460)

The MAX4461U/T/H has a shutdown feature to reduce the supply current to less than 1 $\mu$ A. The MAX4461U/T/H output is internally referenced to ground, making the part suitable for unipolar operations.

The MAX4460U/T/H has an FB pin that can be used to externally set the gain through a pair of resistors. The MAX4460U/T/H output is internally referenced to ground, making the part suitable for unipolar operations.

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## **Input Common-Mode and Output Reference Ranges**

MAX4460/MAX4461/MAX4462 have an input common-mode range of 100mV below the negative supply to 1.7V below the positive supply.

The output reference voltage of MAX4462U/T/H is set by REF and ranges from 100mV above the negative supply to 1.7V below the positive supply. For maximum voltage swing in a bipolar operation, connect REF to  $V_{DD}/2$ .

The output voltages of the MAX4460 and MAX4461U/T/H are referenced to ground. Unlike the traditional three-op-amp configuration of common instrumentation amplifiers, the MAX4460/MAX4461/MAX4462 have ground-sensing capability (or to  $V_{SS}$  in dual-supply configuration) in addition to the extremely high input impedances of MOS input differential pairs.

## **Input Differential Signal Range**

The MAX4460/MAX4461/MAX4462 feature a proprietary input structure optimized for small differential signals. The unipolar output of the MAX4460 and MAX4461 is nominally zero for zero differential input. However, these devices are specified for inputs of 50mV to 100mV for the unity-gain devices, 20mV to 100mV for gain of ten devices, and 2mV to 48mV for gain of one hundred devices. The MAX4460/MAX4461 can be used with differential inputs approaching zero, albeit with reduced accuracy.

The bipolar output of the MAX4462 allows bipolar input ranges. The output voltage is equal to the reference voltage for zero differential input. The MAX4462 is specified for inputs of  $\pm 100mV$  for the unity gain and gain of ten devices, and  $\pm 20mV$  for gain of one hundred devices. The gain of one hundred devices (MAX4462H) can be operated beyond 20mV signal provided the reference is chosen for unsymmetrical swing.

## **Output Swing**

The MAX4460/MAX4461/MAX4462 are designed to have rail-to-rail output voltage swings. However, depending on the selected gain, supply voltage (and output reference level of the MAX4462), the rail-to-rail output swing is not required.

For example, consider the MAX4460U, a unity-gain device with its ground pin as the output reference level. The input voltage range is 0 to 100mV (50mV minimum to meet accuracy specifications). Because the device is unity gain and the output reference level is ground, the output will only see excursions from ground to 100mV.

Devices with higher gain and with bipolar output such as the MAX4462, can be configured to swing to higher levels. In these cases, as the output approaches either supply, accuracy may degrade, especially under heavy output loading.

## **Shutdown Mode**

The MAX4461U/T/H features a low-power shutdown mode. When the  $\overline{SHDN}$  pin is pulled low, the internal transconductance and amplifier blocks are switched off and supply current drops to typically less than  $0.1\mu A$  (Figure 1).

In shutdown, the amplifier output is high impedance. The output transistors are turned off, but the feedback resistor network remains connected. If the external load is referenced to GND the output will drop to approximately GND in shutdown. The output impedance in shutdown is typically greater than  $100k\Omega$ . Drive  $\overline{SHDN}$  high or connect to  $V_{CC}$  for normal operation.

## **A User Guide to Instrumentation Amplifier Accuracy Specifications**

As with any other electronic component, a complete understanding of instrumentation amplifier specifications is essential to successfully employ these devices in their application circuits. Most of the specifications for these differential closed-loop gain blocks are similar to the well-known specifications of operational amplifiers. However, there are a few accuracy specifications that could be confusing to first-time users. Therefore, some explanations and examples may be helpful.

Accuracy specifications are measurements of closeness of an actual output response to its ideal expected value. There are three main specifications in this category:

- Gain Error
- Gain Nonlinearity Error
- Offset Error

In order to understand these terms, we must look at the transfer function of an ideal instrumentation amplifier. As expected, this must be a straight line passing through origin with a slope equal to the ideal gain (see Figure 3). If the ideal gain is equal to 10 and the extreme applied input voltages are  $-100mV$  and  $+100mV$ , then the value of the output voltages will be  $-1V$  and  $+1V$ , respectively. Note that the line passes through the origin and therefore a zero input voltage gives a zero output response.

The transfer function of a real instrumentation amplifier is quite different from the ideal line pictured in Figure 3. Rather, it is a curve such as the one indicated as the typical curve in Figure 4, connecting end points A and B.

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

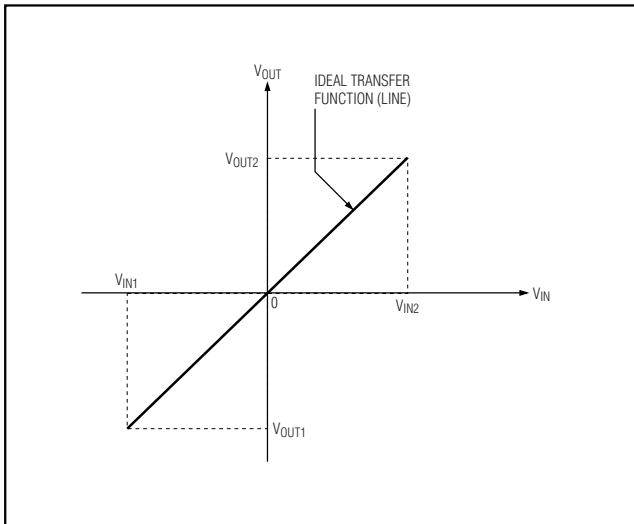


Figure 3. Transfer Function of an Ideal Instrumentation Amplifier (A Straight Line Passing Through the Origin)

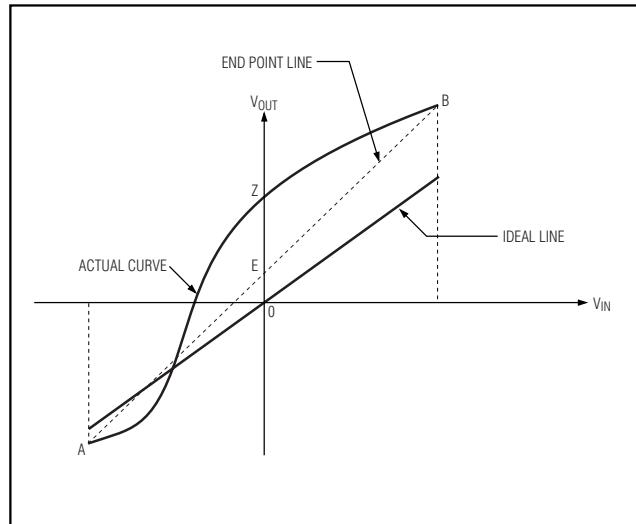


Figure 4. Typical Transfer Function for a Real Instrumentation Amplifier

Looking at this curve, one can immediately identify three types of errors.

First, there is an obvious nonlinearity (curvature) when this transfer function is compared to a straight line. More deviation is measured as greater nonlinearity error. This will be explained in more detail below.

Second, even if there was no nonlinearity error, that is, the actual curve in Figure 4 was a straight line connecting the end points A and B, there exists an obvious slope deviation from that of an ideal gain slope (drawn as the "ideal" line in Figure 4). This rotational error (delta slope) is a measure of how different the actual gain ( $G_A$ ) is from the expected ideal gain ( $G_I$ ) and is called Gain Error (GE) (see equation).

Third, even if the actual curve between the points A and B was a straight line (no nonlinearity error) and had the same slope as the ideal gain line (no gain error), there is still another error called the End Point Offset Error (OE on vertical axis), since the line is not passing through the origin.

Figure 5 is the same as Figure 4, but the ideal line (CD) is shifted up to pass through point E (the Y intercept of the end points line AB).

This is done to better visualize the rotational error (GE), which is the difference between the slopes of the end points line AB and the shifted ideal line CD.

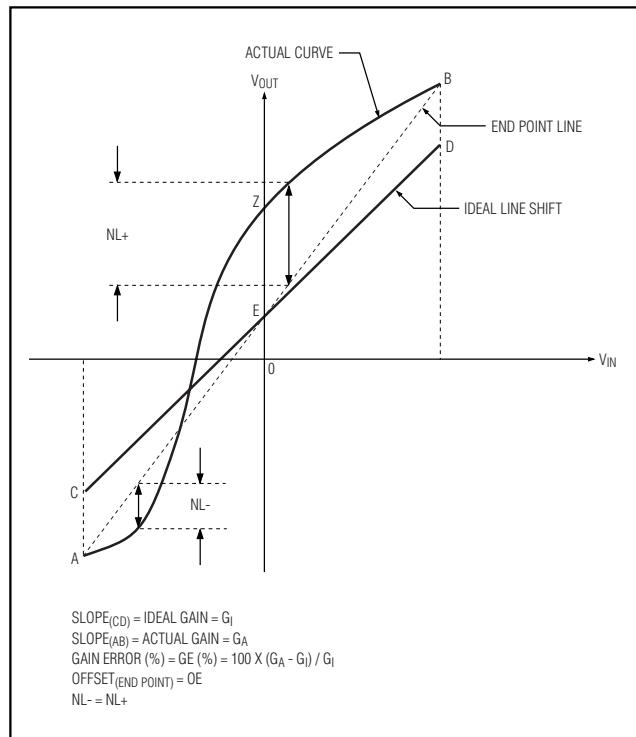


Figure 5. Typical Transfer Function for a Real Instrumentation Amplifier (Ideal Line (CD) is Shifted by the End Points Offset (OE) to Visualize Gain Error)

# **SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers**

Mathematically:

$$GE (\%) = 100 \times (G_A - G_I) / G_I$$

The rotational nature of gain error and the fact that it is pivoted around point E in Figure 5, shows that gain-error contribution to the total output voltage error is directly proportional to the input voltage. At zero input voltage, the error contribution of gain error is zero, that is, the total deviation from the origin (the expected zero output value) is only due to end points offset error (OE) and nonlinearity error at zero value of input (segment EZ on the vertical axis).

The nonlinearity is the maximum deviation from a straight line, and the end point nonlinearity is the deviation from the end-point line. As shown in Figure 5, it is likely that one encounters two nonlinearities, one positive and the other a negative nonlinearity error, shown as NL+ and NL- in Figure 5.

Generally NL+ and NL- have different values and this remains the case if the device is calibrated (trimmed) for end-points errors (which means changing the gain of the instrumentation amplifier in such a way that the slope of the line AB becomes equal to that of CD, and the offset becomes trimmed such that OE vanishes to zero). This is an undesirable situation when nonlinearity is of prime interest.

The straight line shown in Figure 6 is in parallel to the end-points line AB and has a Y intercept of OS on the vertical axis. This line is a shifted end-points line such that the positive and negative nonlinearity errors with respect to this line are equal. For this reason the line is called the best straight line (BSL). Maxim internally trims the MAX4460/MAX4461/MAX4462 with respect to this line (changing the gain slope to be as close as possible to the slope of the ideal line and trimming the offset such that OS gets as close to the origin as possible) to minimize all the errors. The total accuracy error is still the summation of the gain error, nonlinearity, and offset errors.

As an example let's assume the following specification for an instrumentation amplifier:

Gain = 10

$$GF = 0.15\%$$

Offset (BSL) = 250 $\mu$ V

$$Nl = 0.05\%$$

VDIF (input) = -100mV to +100mV

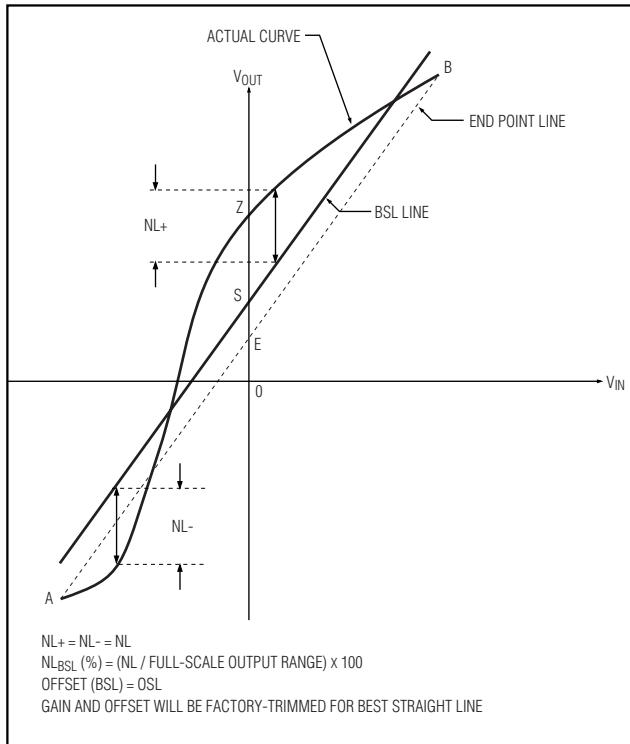


Figure 6. To Minimize Nonlinearity Error, the MAX4460/MAX4461/MAX4462 are Internally Trimmed to Adjust Gain and Offset for the Best Straight Line so  $NL_- = NL_+$

What is the maximum total error associated with the GE, Offset (BSL), and NL? With a differential input range of -0.1V to +0.1V and a gain of 10, the output voltage assumes a range of -1V to +1V, that is, a total full-scale range of 2V.

The individual errors are as follows:

$$GE = (0.15\%) (10) (100mV) = 1.5mV$$

$$\text{Offset (BSL)} = (250\mu\text{V}) (10) = 2.5\text{mV}$$

$$NL = (0.05\%) (2V) = 1mV$$

$$\text{Maximum Total Error} = 1.5\text{mV} + 2.5\text{mV} + 1\text{mV} \\ = 5\text{mV}$$

So, the absolute value of the output voltage, considering the above errors, would be at worst case between 0.995V to 1.005V. Note that other important parameters such as PSRR, CMRR, and noise also contribute to the total error in instrumentation applications. They are not considered here.

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## Applications Information

### Setting the Gain (MAX4460)

The MAX4460 gain is set by connecting a resistive-divider from OUT to GND, with the center tap connected to FB (Figure 2). The gain is calculated by:

$$\text{Gain} = 1 + R_2 / R_1$$

Because FB has less than 100pA IB, high-valued resistors can be used without significantly affecting the gain accuracy. The sum of resistors ( $R_1 + R_2$ ) near 100k $\Omega$  is a good compromise. Resistor accuracy directly affects gain accuracy. Resistor sum less than 20k $\Omega$  should not be used because their loading can slightly affect output accuracy.

### Capacitive-Load Stability

The MAX4460/MAX4461/MAX4462 are capable of driving capacitive loads up to 100pF.

Applications needing higher capacitive drive capability may use an isolation resistor between OUT and the load to reduce ringing on the output signal. However this reduces the gain accuracy due to the voltage drop across the isolation resistor.

### Output Loading

For best performance, the output loading should be to the potential seen at REF for the MAX4462 or to ground for the MAX4460/MAX4461.

### REF Input (MAX4462)

The REF input of the MAX4462 can be connected to any voltage from ( $V_{SS} + 0.1V$ ) to ( $V_{DD} - 1.7V$ ). A buffered voltage-divider with sink and source capability works well to center the output swing at  $V_{DD}/2$ . Unbuffered resistive-dividers should be avoided because the 100k $\Omega$  (typ) input impedance of REF will cause amplitude-dependent variations in the divider's output.

Bandgap references, either series or shunt, can be used to drive REF. This provides a voltage and temperature invariant reference. This same reference voltage can be used to bias bridge sensors to eliminate supply voltage ratiometricity. For proper operation, the reference must be able to sink and source at least 25 $\mu$ A.

In many applications, the MAX4462 is connected to a CODEC or other device with a reference voltage output. In this case, the receiving device's reference output makes an ideal reference voltage. Verify the reference output of the device is capable of driving the MAX4462's REF input.

### Power-Supply Bypass and Layout

Good layout technique optimizes performance by decreasing the amount of stray capacitance at the instrumentation amplifier's gain-setting pins. Excess capacitance will produce peaking in the amplifier's frequency response. To decrease stray capacitance, minimize trace lengths by placing external components as close to the instrumentation amplifier as possible. For best performance, bypass each power supply to ground with a separate 0.1 $\mu$ F capacitor.

### Microphone Amplifier

The MAX4462's bipolar output, along with its excellent common-mode rejection ratio, makes it suitable for precision microphone amplifier applications. Figure 7 illustrates one such circuit. In this case, the electret microphone is resistively biased to the supply voltage through a 2.2k $\Omega$  pullup resistor. The MAX4462 directly senses the output voltage at its noninverting input, and indirectly senses the microphone's ground through an AC-coupling capacitor. This technique provides excellent rejection of common-mode noise picked up by the microphone lead wires. Furthermore, ground noise from distantly located microphones is reduced.

The single-ended output of the MAX4462 is converted to differential through a single op amp, the MAX4335. The op amp forces the midpoint between OUT+ and OUT- to be equal to the reference voltage. The configuration does not change the MAX4462's fixed gain of 10.

**MAX4460/MAX4461/MAX4462**

# **SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers**

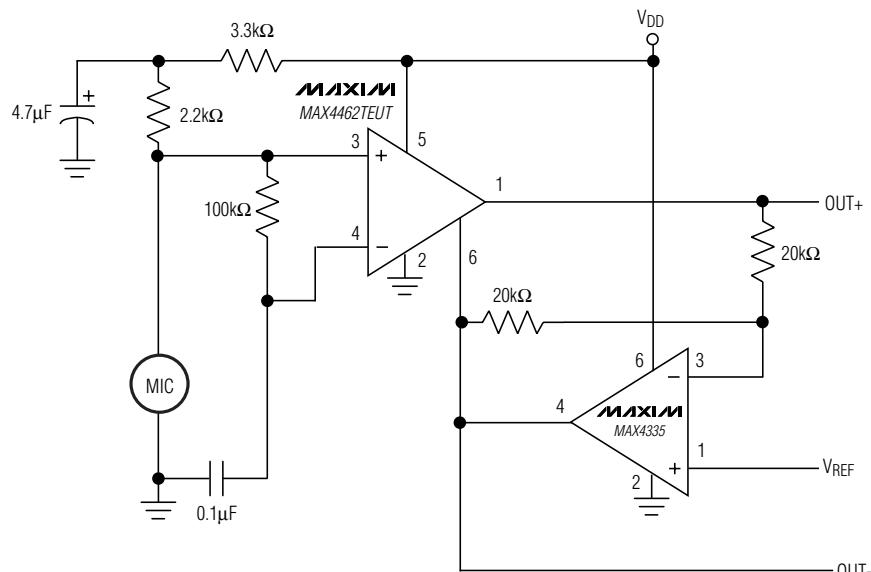


Figure 7. Differential I/O Microphone Amplifier

## Chip Information

TRANSISTOR COUNT: 421

## PROCESS: BiCMOS

## **Selector Guide**



PART	GAIN	REF	SHUTDOWN
MAX4460	Adjustable	GND	NO
MAX4461U	1	GND	YES
MAX4461T	10	GND	YES
MAX4461H	100	GND	YES
MAX4462U	1	EXT	NO
MAX4462T	10	EXT	NO
MAX4462H	100	EXT	NO

# **SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers**

## **Pin Configurations**



**MAX4460/MAX4461/MAX4462**

TOP VIEW





SOT23

SO




SOT23

SO




SOT23

SO

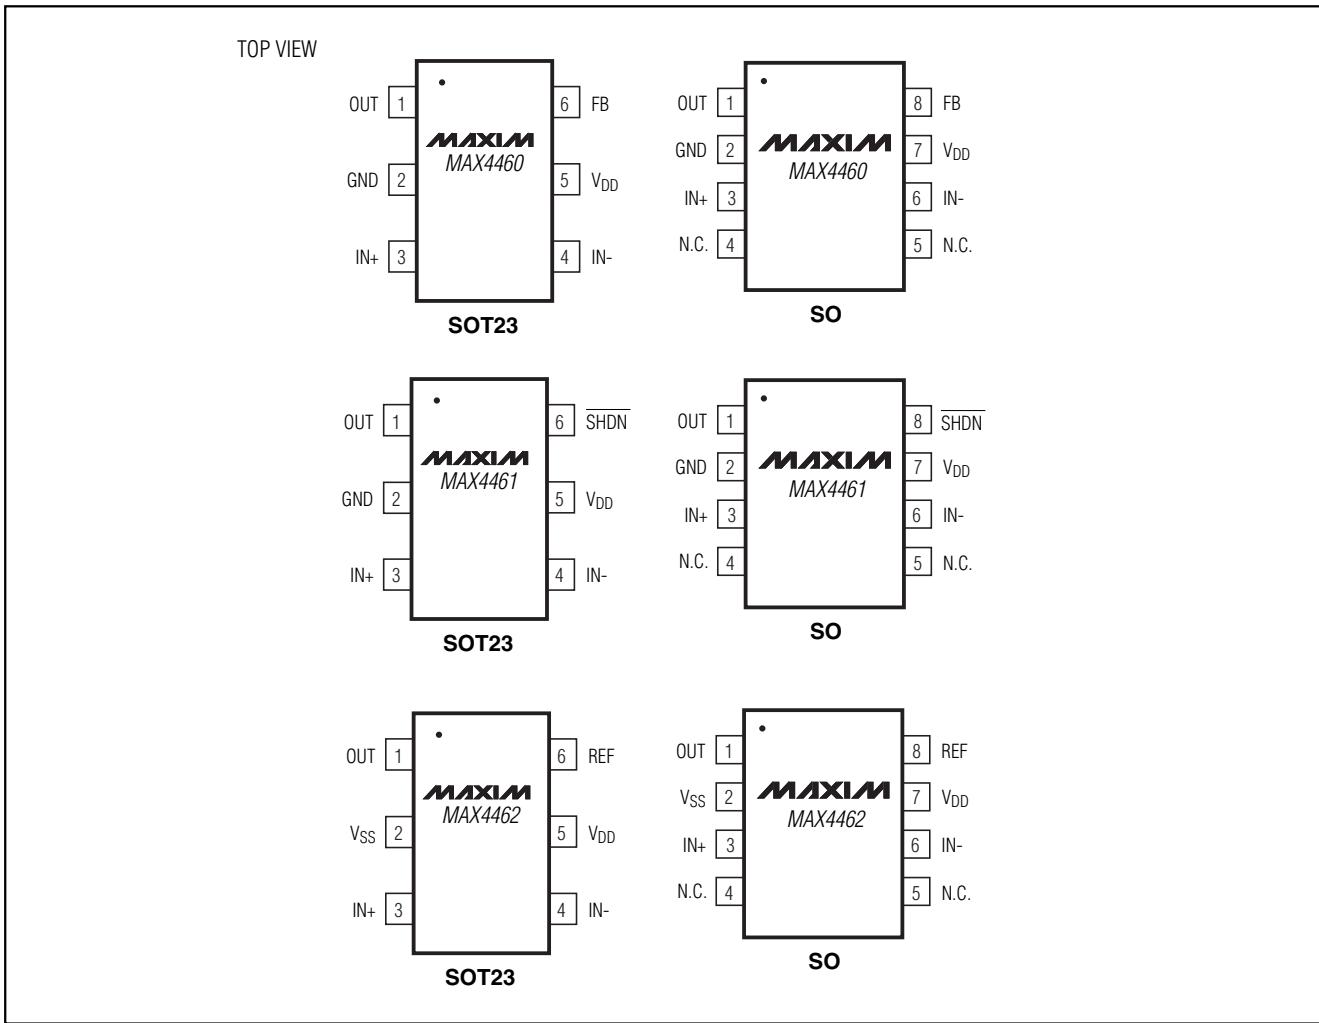

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers


## Package Information

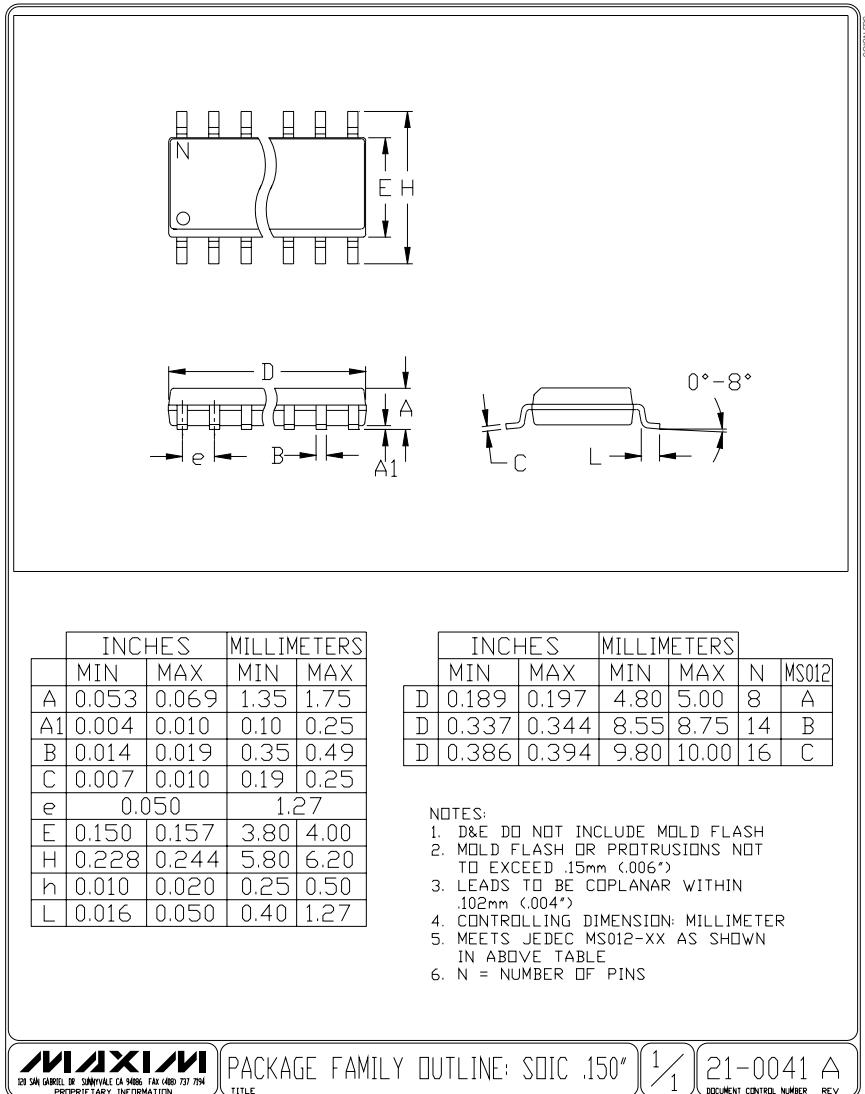

# SOT23, 3V/5V, Single-Supply, Rail-to-Rail Instrumentation Amplifiers

## Package Information (continued)

**MAX4460/MAX4461/MAX4462**

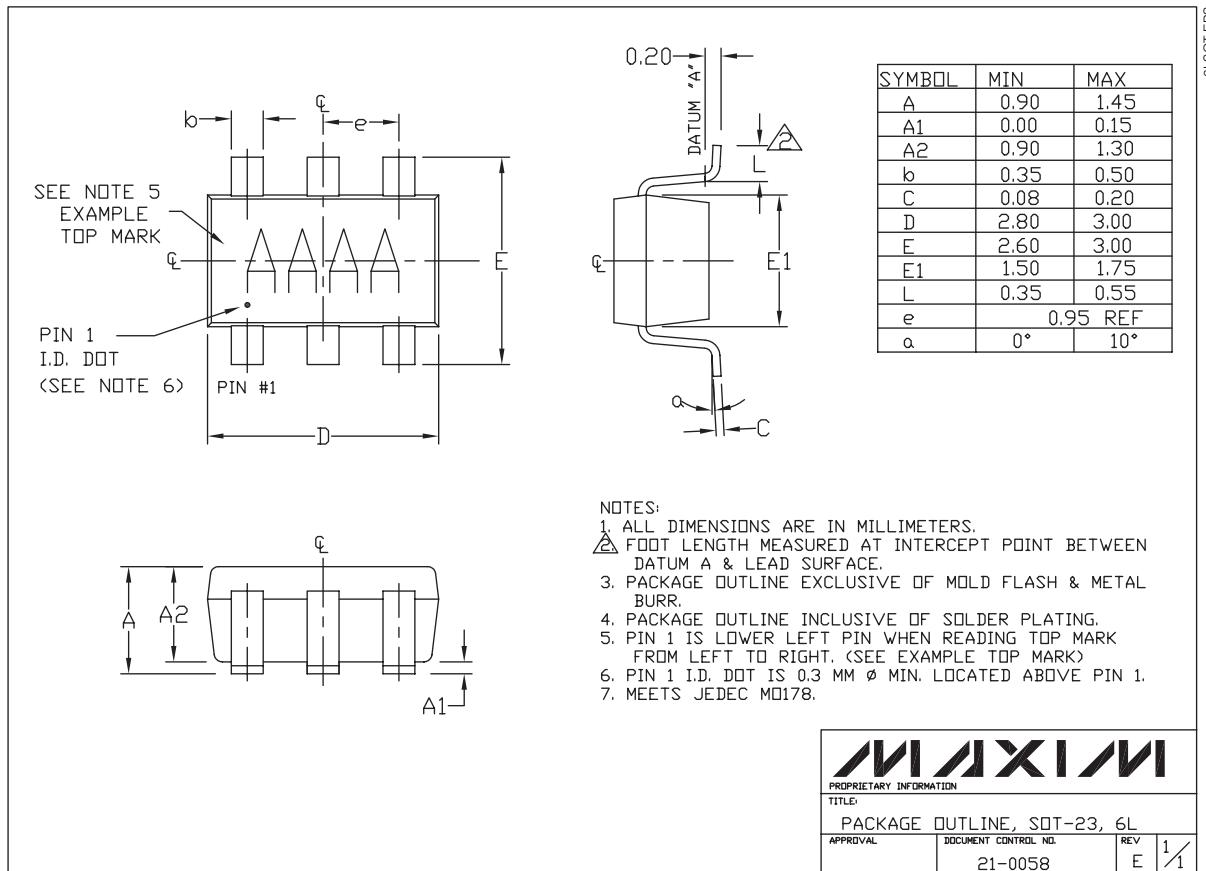

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

**Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

17