



SAW Components

Data Sheet B7728, Pb-Free

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a bright, circular highlight in the center of each, giving them a three-dimensional appearance. They are set against a dark, textured background that includes a faint, stylized globe and circuitry patterns, suggesting a global and technological context.



SAW Components

B7728

Low-Loss Filter

2140,0 MHz

Data Sheet


Features

- Low loss RF filter
- Unbalanced to balanced operation
- Low amplitude ripple
- Impedance transformation from 50 Ω to 100 Ω
- Suitable for GPRS class 1 to 12
- Pb-Free
- Package for **Surface Mounted Technology (SMT)**

Terminals

- Ni, gold-plated


Chip Sized SAW Package QCS5H

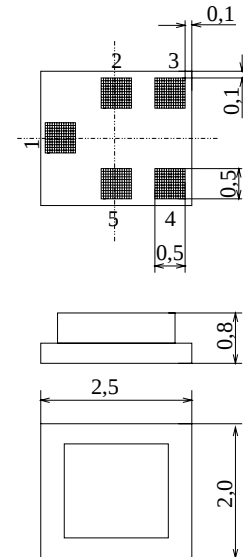

Dimensions in mm, approx. weight 0,015 g

Pin configuration

- | | |
|------|-------------------|
| 1 | Input, unbalanced |
| 3, 4 | Output, balanced |
| 2, 5 | Case ground |

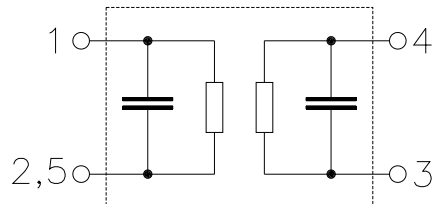

Type	Ordering code	Marking and Package according to	Packing according to
B7728	B39212-B7728-K910	C61157-A7-A139	F61074-V8189-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40/+ 85	$^{\circ}\text{C}$	Machine Model, 10 pulses source impedance 50 Ω , load impedance 100 Ω
Storage temperature range	T_{stg}	- 40/+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}^{*}	50*	V	
Source power	P_{s}	10	dBm	

*- acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B7728

Low-Loss Filter

2140,0 MHz

Data Sheet

Characteristics

Operating temperature range: $T_A = -30 \dots +85 \text{ }^\circ\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega \text{ unbal.}$
Terminating load impedance: $Z_L = 100 \text{ } \Omega \text{ bal.}$

		min.	typ.	max.	
Nominal frequency	f_N	—	2140,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
2110,0 MHz ... 2170,0 MHz		—	2,3	2,9	dB
2110,0 MHz ... 2170,0 MHz *)		—	2,3	2,7	dB
Amplitude ripple in passband (p-p)	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	0,6	1,0	dB
Amplitude ripple per 5MHz (p-p)	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	0,3	0,5	dB
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
2110,0 MHz ... 2170,0 MHz		-8	-3/+3	+8	$^\circ$
Output amplitude balance (S_{31} / S_{21})					
2110,0 MHz ... 2170,0 MHz		-1,9	-0,5/+1,2	+1,9	dB
Input VSWR	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	1,8	2,0	
Output VSWR	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	2,1	2,3	
Absolute attenuation	α				
50,0 MHz ... 849,0 MHz		45	52	—	dB
849,0MHz ... 1350,0 MHz		40	48	—	dB
1350,0 MHz ... 1980,0 MHz		35	40	—	dB
1980,0 MHz ... 2025,0 MHz		30	34	—	dB
2025,0 MHz ... 2050,0 MHz		15	30	—	dB
2215,0 MHz ... 2255,0 MHz		15	23	—	dB
2255,0 MHz ... 2270,0 MHz		20	21	—	dB
2270,0 MHz ... 2400,0 MHz		22	24	—	dB
2400,0 MHz ... 3910,0 MHz		30	35	—	dB
3910,0 MHz ... 5645,0 MHz		40	45	—	dB

*) $T_A = +25 \text{ }^\circ\text{C}$



SAW Components

B7728

Low-Loss Filter

2140,0 MHz

Data Sheet

Characteristics

Operating temperature range: $T_A = -30 \dots +85 \text{ }^\circ\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega \text{ unbal.}$
Terminating load impedance: $Z_L = 100 \text{ } \Omega \text{ bal. } || 33 \text{ nH }^{**})$

		min.	typ.	max.	
Nominal frequency	f_N	—	2140,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
2110,0 MHz ... 2170,0 MHz		—	2,3	2,9	dB
2110,0 MHz ... 2170,0 MHz *)		—	2,3	2,7	dB
Amplitude ripple in passband (p-p)	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	0,6	1,0	dB
Amplitude ripple per 5MHz (p-p)	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	0,3	0,5	dB
Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$)					
2110,0 MHz ... 2170,0 MHz		-8	-3/+3	+8	°
Output amplitude balance (S_{31}/S_{21})					
2110,0 MHz ... 2170,0 MHz		-1,9	-0,5/+1,2	+1,9	dB
Input VSWR	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	1,6	2,0	
Output VSWR	$\Delta\alpha$				
2110,0 MHz ... 2170,0 MHz		—	1,8	2,1	
Absolute attenuation	α				
50,0 MHz ... 849,0 MHz		45	52	—	dB
849,0 MHz ... 1350,0 MHz		40	48	—	dB
1350,0 MHz ... 1980,0 MHz		35	40	—	dB
1980,0 MHz ... 2025,0 MHz		30	34	—	dB
2025,0 MHz ... 2050,0 MHz		15	30	—	dB
2215,0 MHz ... 2255,0 MHz		15	23	—	dB
2255,0 MHz ... 2285,0 MHz		20	21	—	dB
2285,0 MHz ... 2400,0 MHz		22	25	—	dB
2400,0 MHz ... 3910,0 MHz		30	35	—	dB
3910,0 MHz ... 5645,0 MHz		40	45	—	dB

*) $T_A = +25 \text{ }^\circ\text{C}$

**) or a 0,6 nH serial inductance in each branch of the balanced output, which might be integrated into PCB.



SAW Components



B7728

Low-Loss Filter

2140,0 MHz

Data Sheet

Transfer function (no matching, $T_A = -30 \dots +85 \text{ }^\circ\text{C}$)

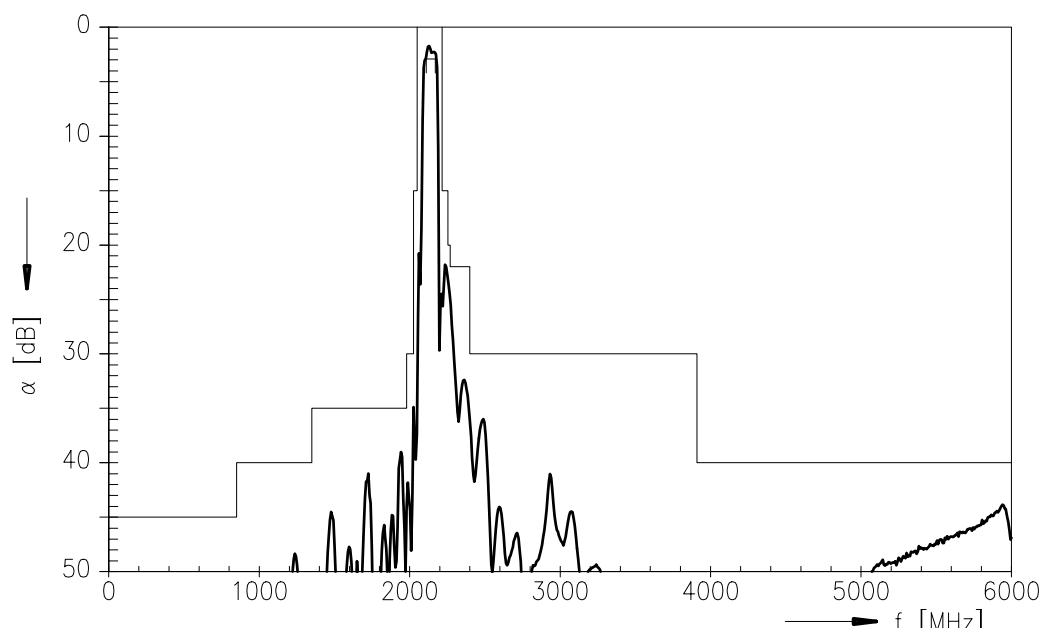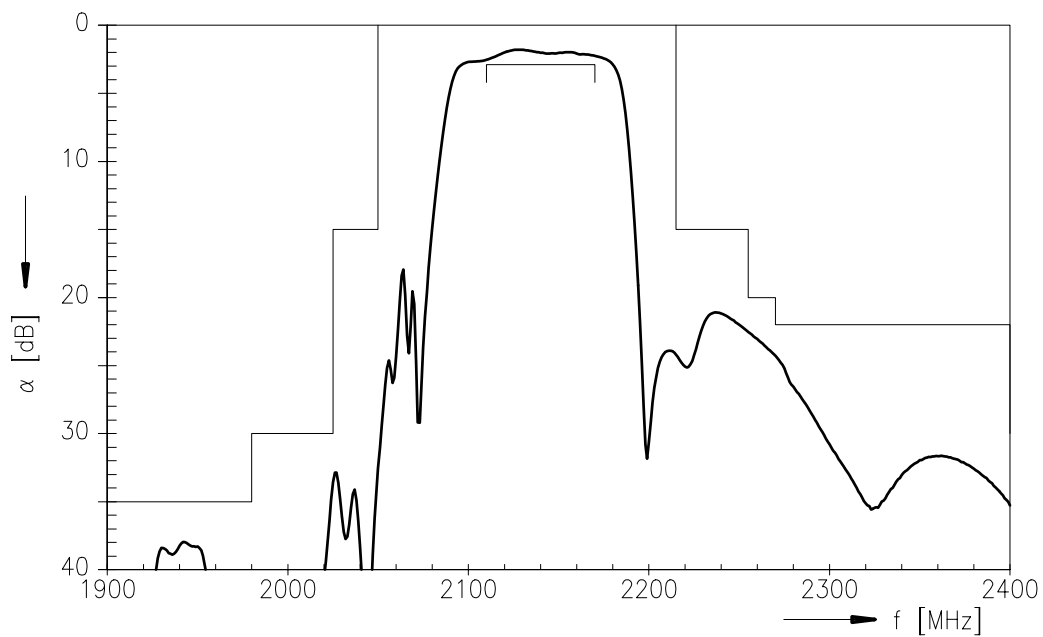



SAW Components

B7728

Low-Loss Filter

2140,0 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.