

MC34001, MC35001
MC34002, MC35002
MC34004, MC35004

2

JFET Input Operational Amplifiers

These low cost JFET Input operational amplifiers combine two state-of-the-art linear technologies on a single monolithic integrated circuit. Each internally compensated operational amplifier has well matched high voltage JFET input devices for low input offset voltage. The BIFET technology provides wide bandwidths and fast slew rates with low input bias currents, input offset currents, and supply currents.

The Motorola BIFET family offers single, dual and quad operational amplifiers which are pin-compatible with the industry standard MC1741, MC1458, and the MC3403/LM324 bipolar devices. The MC35001/35002/35004 series are specified over the military operating temperature range of -55° to +125°C and the MC34001/34002/34004 series are specified from 0° to +70°C.

- Input Offset Voltage Options of 5.0 mV and 10 mV Maximum
- Low Input Bias Current: 40 pA
- Low Input Offset Current: 10 pA
- Wide Gain Bandwidth: 4.0 MHz
- High Slew Rate: 13 V/μs
- Low Supply Current: 1.4 mA per Amplifier
- High Input Impedance: 10¹² Ω
- High Common Mode and Supply Voltage Rejection Ratios: 100 dB
- Industry Standard Pinouts

JFET INPUT
OPERATIONAL AMPLIFIERS



P SUFFIX
PLASTIC PACKAGE
CASE 626





U SUFFIX
CERAMIC PACKAGE
CASE 693



D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO-8)

PIN CONNECTIONS

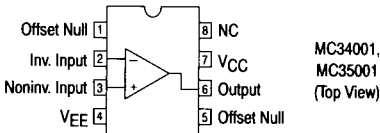


ORDERING INFORMATION

Op Amp Function	Device	Temperature Range	Package
Single	MC34001BD, D	0° to + 70°C	SO-8
	MC34001BP, P		Plastic DIP
	MC34001BU, U		Ceramic DIP
Dual	MC34002BD, D	0° to + 70°C	SO-8
	MC34002BP, P		Plastic DIP
	MC35002BU, U		Ceramic DIP
Quad	MC34004BL, L	0° to + 70°C	Ceramic DIP
	MC34004BP, P		Plastic DIP
	MC35004BL, L		Ceramic DIP




L SUFFIX
CERAMIC PACKAGE
CASE 632



P SUFFIX
PLASTIC PACKAGE
CASE 646

PIN CONNECTIONS



MC34004, MC35004 (Top View)

MC34001, MC35001, MC34002, MC35002, MC34004, MC35004

2

MAXIMUM RATINGS

Rating	Symbol	MC35001 MC35002 MC35004	MC34001 MC34002 MC34004	Unit
Supply Voltage	V_{CC}, V_{EE}	± 22	± 18	V
Differential Input Voltage (Note 1)	V_{ID}	± 40	± 30	V
Input Voltage Range	V_{IDR}	± 20	± 16	V
Open Short Circuit Duration	t_{SC}	Continuous		
Operating Ambient Temperature Range	T_A	-55 to +125	0 to +70	°C
Operating Junction Temperature Ceramic Package Plastic Package	T_J	150 —	150 150	°C
Storage Temperature Range Ceramic Package Plastic Package	T_{stg}	-65 to +150 —	-65 to +150 -55 to +125	°C

NOTES: 1. Unless otherwise specified, the absolute maximum negative input voltage is equal to the negative power supply.

ELECTRICAL CHARACTERISTICS ($V_{CC} = +15$ V, $V_{EE} = -15$ V, $T_A = 25^\circ\text{C}$, unless otherwise noted.)

Characteristics	Symbol	MC35001/35002/35004			MC34001/34002/34004			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage ($R_S \leq 10$ k) MC3500XB, MC3400XB MC3500X, MC3400X	V_{IO}	— —	3.0 5.0	5.0 10	— —	3.0 5.0	5.0 10	mV
Average Temperature Coefficient of Input Offset Voltage $R_S \leq 10$ k, $T_A = T_{low}$ to T_{high} (Note 2)	$\Delta V_{IO}/\Delta T$	—	10	—	—	10	—	$\mu\text{V}/^\circ\text{C}$
Input Offset Current ($V_{CM} = 0$) (Note 3) MC3500XB, MC3400XB MC3500X, MC3400X	I_{IO}	— —	10 25	50 100	— —	25 25	100 100	pA
Input Bias Current ($V_{CM} = 0$) (Note 3) MC3500XB, MC3400XB MC3500X, MC3400X	I_{IB}	— —	40 50	100 200	— —	50 50	200 200	pA
Input Resistance	r_i	—	10^{12}	—	—	10^{12}	—	Ω
Common Mode Input Voltage Range	V_{ICR}	± 11 —	$+15$ -12	— —	± 11 —	$+15$ -12	— —	V
Large Signal Voltage Gain ($V_O = \pm 10$ V, $R_L = 2.0$ k) MC3500XB, MC3400XB MC3500X, MC3400X	A_{VOL}	50 25	150 100	— —	50 25	150 100	— —	V/mV
Output Voltage Swing ($R_L \geq 10$ k) ($R_L \geq 2.0$ k)	V_O	± 12 ± 10	± 14 ± 13	— —	± 12 ± 10	± 14 ± 13	— —	V
Common Mode Rejection Ratio ($R_S \leq 10$ k) MC3500XB, MC3400XB MC3500X, MC3400X	CMRR	80 —	100 —	— —	80 70	100 100	— —	dB
Supply Voltage Rejection Ratio ($R_S \leq 10$ k) (Note 4) MC3500XB, MC3400XB MC3500X, MC3400X	PSRR	80 70	100 100	— —	80 70	100 100	— —	dB
Supply Current (Each Amplifier) MC3500XB, MC3400XB MC3500X, MC3400X	I_D	— —	1.4 1.4	2.5 2.7	— —	1.4 1.4	2.5 2.7	mA
Slew Rate ($A_V = 1.0$)	SR	—	13	—	—	13	—	V/ μs
Gain-Bandwidth Product	GBW	—	4.0	—	—	4.0	—	MHz
Equivalent Input Noise Voltage ($R_S = 100 \Omega$, $f = 1000$ Hz)	e_n	—	25	—	—	25	—	nV/ $\sqrt{\text{Hz}}$
Equivalent Input Noise Current ($f = 1000$ Hz)	i_n	—	0.01	—	—	0.01	—	pA/ $\sqrt{\text{Hz}}$

MC34001, MC35001, MC34002, MC35002, MC34004, MC35004

ELECTRICAL CHARACTERISTICS ($V_{CC} = +15\text{ V}$, $V_{EE} = -15\text{ V}$, $T_A = T_{\text{low}}$ to T_{high} [Note 2].)

Characteristics	Symbol	MC35001/35002/35004			MC34001/34002/34004			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage ($R_S \leq 10\text{ k}$) MC3500XB, MC3400XB MC3500X, MC3400X	V_{IO}	— —	— —	7.0 14	— —	— —	7.0 13	mV
Input Offset Current ($V_{CM} = 0$) (Note 3) MC3500XB, MC3400XB MC3500X, MC3400X	I_{IO}	— —	— —	40 40	— —	— —	4.0 4.0	nA
Input Bias Current ($V_{CM} = 0$) (Note 3) MC3500XB, MC3400XB MC3500X, MC3400X	I_{IB}	— —	— —	50 50	— —	— —	8.0 8.0	nA
Common Mode Input Voltage Range	V_{ICR}	± 11	—	—	± 11	—	—	V
Large Signal ($V_O = \pm 10\text{ V}$, $R_L = 2.0\text{ k}$) MC3500XB, MC3400XB MC3500X, MC3400X	A_{VOL}	25 15	— —	— —	25 15	— —	— —	V/mV
Output Voltage Swing ($R \geq 10\text{ k}$) ($R \geq 2.0\text{ k}$)	V_O	± 12 ± 10	— —	— —	± 12 ± 10	— —	— —	V
Common Mode Rejection Ratio ($R_S \leq 10\text{ k}$) MC3500XB, MC3400XB MC3500X, MC3400X	CMRR	80 70	— —	— —	80 70	— —	— —	dB
Supply Voltage Rejection Ratio ($R_S \leq 10\text{ k}$) (Note 4) MC3500XB, MC3400XB MC3500X, MC3400X	PSRR	80 70	— —	— —	80 70	— —	— —	dB
Supply Current (Each Amplifier) MC3500XB, MC3400XB MC3500X, MC3400X	I_D	— —	— —	2.8 3.0	— —	— —	2.8 3.0	mA

NOTES: 2. $T_{\text{low}} = -55^\circ\text{C}$ for MC35001/35001B
MC35002/35002B
MC35004/35004B
 $= 0^\circ\text{C}$ for MC34001/34001B
MC34002/35002B
MC34004/34004B
 $T_{\text{high}} = +125^\circ\text{C}$ for MC35001/35001B
MC35002/35002B
MC35004/35004B
 $= +70^\circ\text{C}$ for MC34001/34001B
MC34002/35002B
MC34004/34004B

- The input bias currents approximately double for every 10°C rise in junction temperature, T_J . Due to limited test time, the input bias currents are correlated to junction temperature. Use of a heatsink is recommended if input bias current is to be kept to a minimum.
- Supply voltage rejection ratio is measured for both supply magnitudes increasing or decreasing simultaneously, in accordance with common practice.

MC34001, MC35001, MC34002, MC35002, MC34004, MC35004

2

Figure 1. Input Bias Current versus Temperature

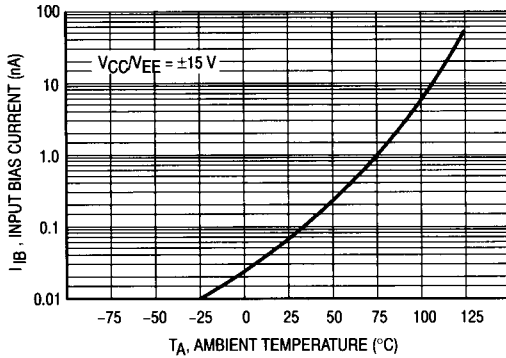


Figure 2. Output Voltage Swing versus Frequency

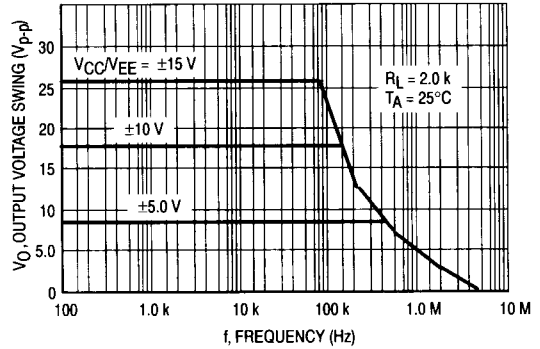


Figure 3. Output Voltage Swing versus Load Resistance

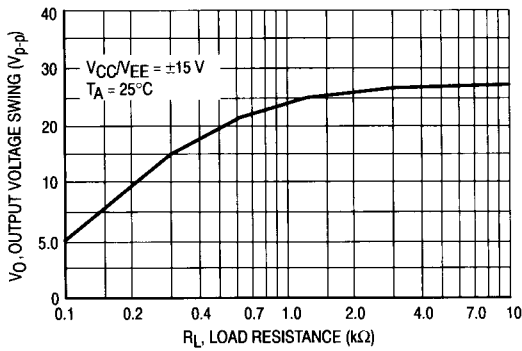


Figure 4. Output Voltage Swing versus Supply Voltage

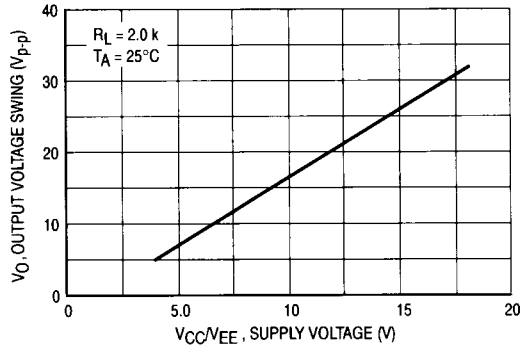


Figure 5. Output Voltage Swing versus Temperature


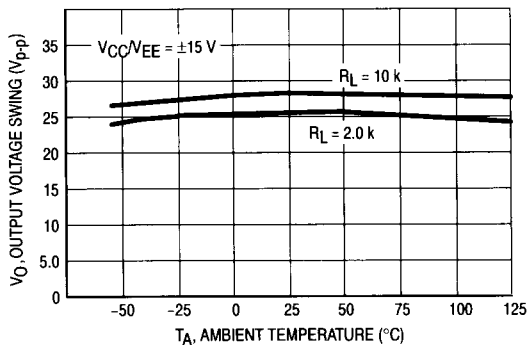


Figure 6. Supply Current per Amplifier versus Temperature

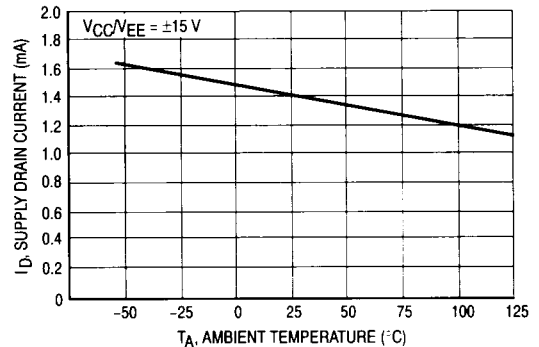

MC34001, MC35001, MC34002, MC35002, MC34004, MC35004

Figure 7. Large-Signal Voltage Gain and Phase Shift versus Frequency

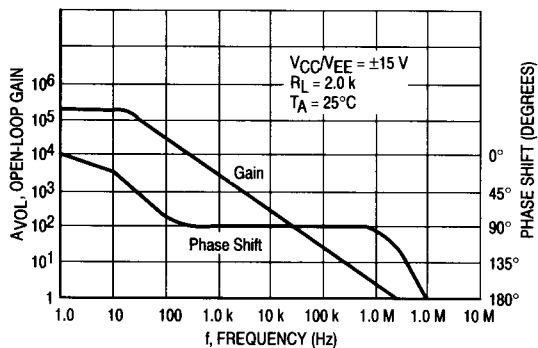


Figure 8. Large-Signal Voltage Gain versus Temperature

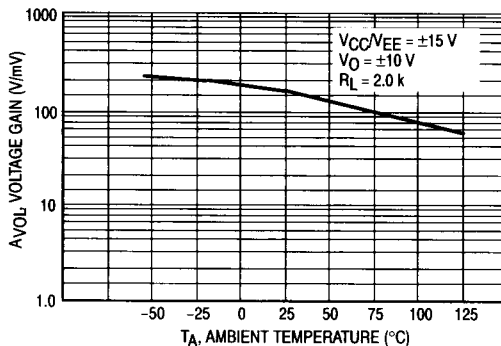


Figure 9. Normalized Slew Rate versus Temperature

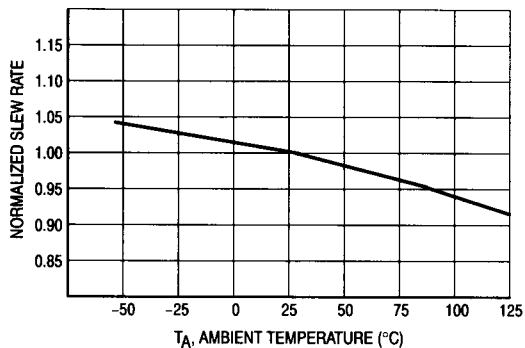


Figure 10. Equivalent Input Noise Voltage versus Frequency


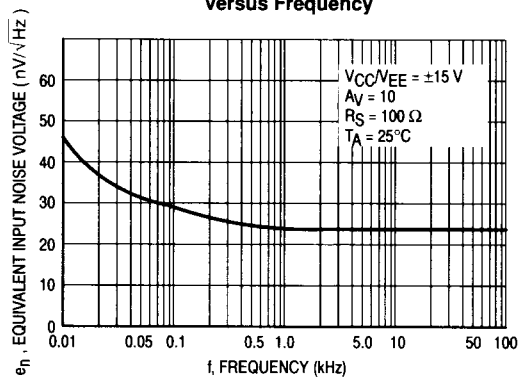


Figure 11. Total Harmonic Distortion versus Frequency

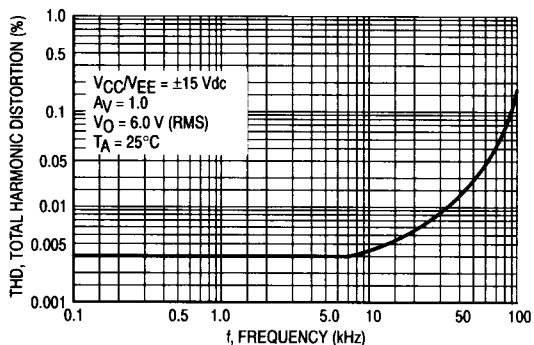

Bias Circuitry Common to All Amplifiers


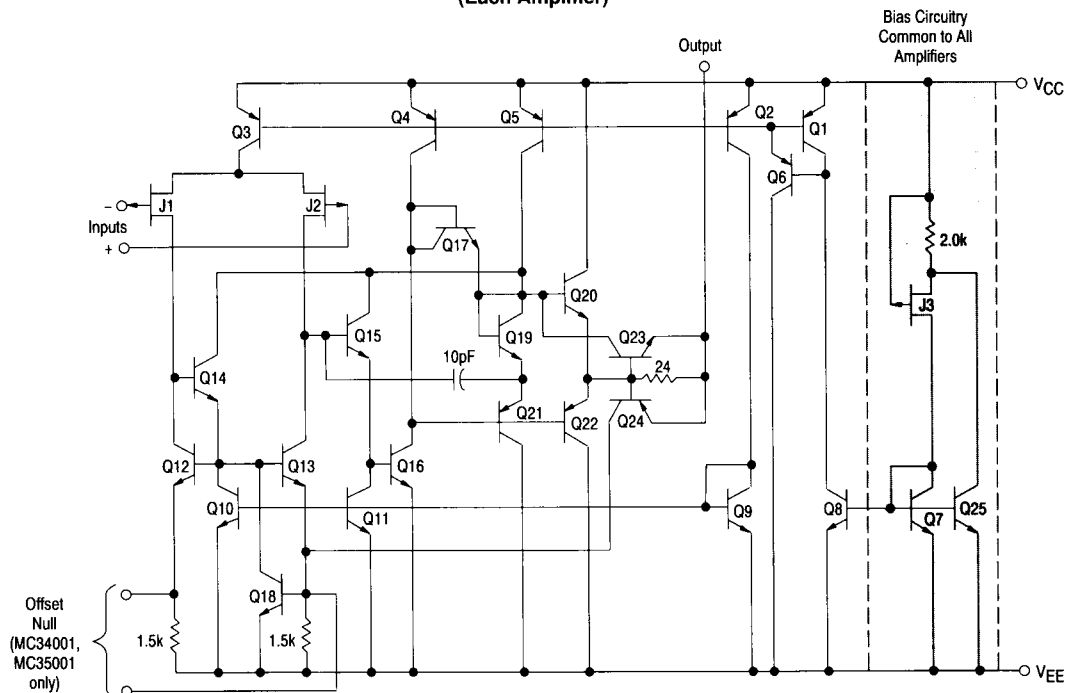


Figure 12. Output Current to Voltage Transformation for a D-to-A Converter

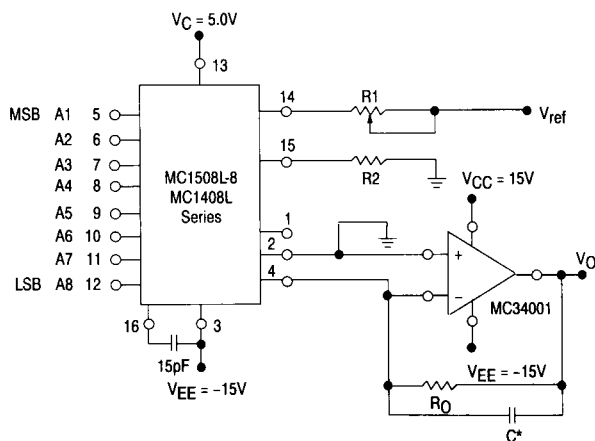

*The value of C may be selected to minimize overshoot and ringing ($C \approx 68 \text{ pF}$)

Theoretical V_0

$$V_0 = \frac{V_{ref}}{R_1} (R_0) \left[\frac{A_1}{2} + \frac{A_2}{4} + \frac{A_3}{8} + \frac{A_4}{16} + \frac{A_5}{32} + \frac{A_6}{64} + \frac{A_7}{128} + \frac{A_8}{256} \right]$$

Adjust V_{ref} , R_1 or R_0 so that V_O with all digital inputs at high level is equal to 9.961 V.

$$\begin{aligned} V_{ref} &= 2.0 \text{ Vdc} \\ R_1 = R_2 &\approx 1.0 \text{ k}\Omega \\ R_O &= 5.0 \text{ k}\Omega \end{aligned}$$

$$V_0 = \frac{2.0 \text{ V}}{1.0 \text{ k}} (5 \text{ k}) \left[\frac{1}{2} + \frac{1}{4} + \frac{1}{8} + \frac{1}{16} + \frac{1}{32} + \frac{1}{64} + \frac{1}{128} + \frac{1}{256} \right]$$

$$= 10 \text{ V} \left[\frac{255}{256} \right] = 9.961 \text{ V}$$

MC34001, MC35001, MC34002, MC35002, MC34004, MC35004

Figure 13. Positive Peak Detector


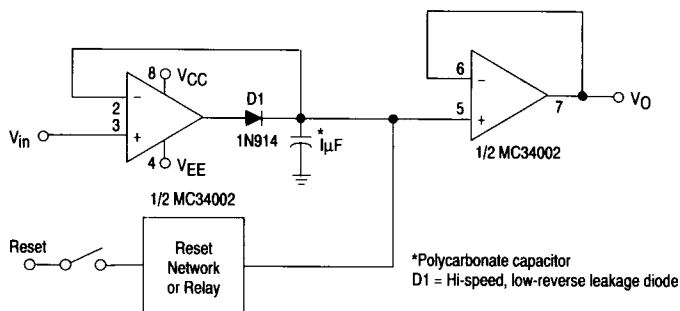


Figure 14. Long Interval RC Timer

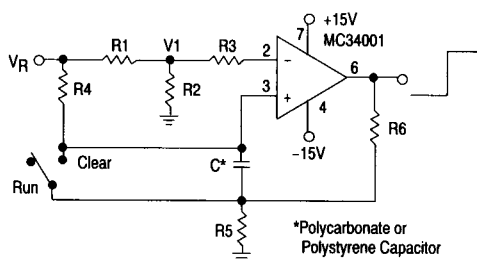

$$\text{Time (t)} = R4 Cn (V_R/V_R - V_i), R3 = R4, R5 = 0.1 R6$$


$$\text{If } R1 = R2: 1 = 0.693 R4 C$$

Design Example: 100 Second Timer

$$V_R = 10 \text{ V} \quad C = 1.0 \mu\text{F} \quad R3 = R4 = 144 \text{ M}$$

$$R6 = 20 \text{ k} \quad R5 = 2.0 \text{ k} \quad R1 = R2 = 1.0 \text{ k}$$


Figure 15. Isolating Large Capacitive Loads

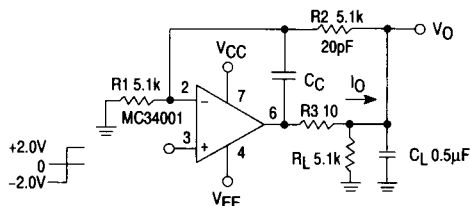

- Overshoot < 10%
- $t_s = 10 \mu\text{s}$
- When driving large C_L , the V_O slew rate is determined by C_L and $I_{O(max)}$:

$$\frac{\Delta V_O}{\Delta t} = \frac{I_O}{C_L} = \frac{0.02}{0.5} \text{ V}/\mu\text{s} = 0.04 \text{ V}/\mu\text{s} \text{ (with } C_L \text{ shown)}$$

Figure 16. Wide BW, Low Noise, Low Drift Amplifier

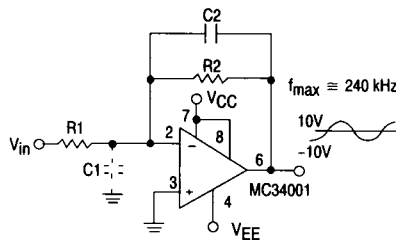

- Power BW: $f_{max} = \frac{S_r}{2\pi V_p} \approx 240 \text{ kHz}$
- Parasitic input capacitance ($C1 \approx 3.0 \text{ pF}$ plus any additional layout capacitance) interacts with feedback elements and creates undesirable high-frequency pole. To compensate add $C2$ such that: $R2C2 \approx R1C1$.