

ACT20M
ACT20M-BAI-AO-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 1429-0

Fax: +49 5231 14292083

www.weidmueller.com

**ACT20M: The slim solution**

- Safe and space-saving (6 mm) isolation and conversion
- Quick installation of the power supply unit using the CH20M mounting rail bus
- Easy configuration via DIP switch or FDT/DTM software
- Extensive approvals such as ATEX, IECEx, GL, DNV
- High interference resistance

General ordering data

Type	ACT20M-BAI-AO-S
Order No.	1375450000
Version	Signal converter/insulator, Configurable, Input : I/U/bidirectional I, Output : I/U/bidirectional I
GTIN (EAN)	4050118236736
Qty.	1 pc(s).

ACT20M
ACT20M-BAI-AO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	6.1 mm	Width (inches)	0.24 inch
Height	112.5 mm	Height (inches)	4.429 inch
Depth	114.3 mm	Depth (inches)	4.5 inch
Net weight	80 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature	-25 °C...70 °C
Ambient temperature	-25 °C...+70 °C	Storage temperature	-40 °C...85 °C

Probability of failure

MTBF	181 Years
------	-----------

Input

Number of inputs	1	Input voltage	configurable, -5 V...0...+5 V, -10 V...0...+10 V
Input resistance, voltage	≥ 1 MΩ	Input current	configurable, -10 mA...0...+10 mA, -20 mA...0...+20 mA
Voltage drop, current input	1 V at 20 mA		

Output

Number of outputs	1	Output voltage, note	configurable, 0(2)...10 V, 0(1)...5 V
Output current	0...20 mA, 4...20 mA	Cut-off frequency (-3 dB)	≥ 100 Hz, 10 Hz
load impedance voltage	≥ 10 kΩ	load impedance current	≤ 600 Ω

General data

Accuracy	< 0.05 % of measuring range	Configuration	DIP switch
Galvanic isolation	4-way isolator;	Mounting rail	TS 35
Power consumption, max.	0.8 W	Power consumption, typ.	0.56 W
Step response time	≤ 7 ms, ≤ 100 ms, Configurable	Supply voltage	24 V DC ± 30 %
Temperature coefficient	< 0.01% of span/°C (TU)		

Insulation coordination

EMC standards	IEC 61326-1, NE 21	Galvanic isolation	4-way isolator;
Insulation voltage	2.5 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V _{eff}	Standards	IEC 61010-1
Surge voltage category	II		

Data for Ex applications (ATEX)

Marking	II 3 G Ex nA IIC T4 Gc
---------	------------------------

ACT20M

ACT20M-BAI-AO-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
www.weidmueller.com

Technical data

Connection data

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, rated connection, min.	0.5 mm ²	Clamping range, rated connection, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Rated data UL

UL certificate	E337701.pdf
----------------	-------------

Ratings IECEx/ATEX/cUL

Certificate No. (ATEX)	KEMA10ATEX0183X	Certificate No. (IECEx)	IECExKEM10.0090X
------------------------	-----------------	-------------------------	------------------

Classifications

ETIM 3.0	EC002479	ETIM 5.0	EC002653
ETIM 6.0	EC002653	eClass 6.2	27-21-01-20
eClass 7.1	27-21-01-20	eClass 8.1	27-21-01-20
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-20

Product information

Descriptive text technical data	Power supply optionally via mounting rail bus CH20M
Descriptive text accessories	Mounting rail bus, see accessories

Approvals

Approvals



ROHS	Conform
------	---------




Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD, Zuken E3.S
Software	DIP switch configuration tool
User Documentation	Instruction sheet


ACT20M ACT20M-BAI-AO-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Drawings

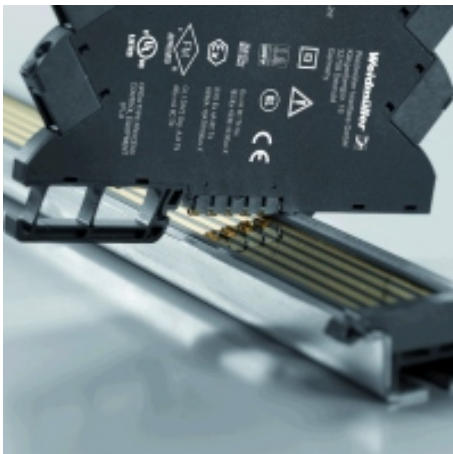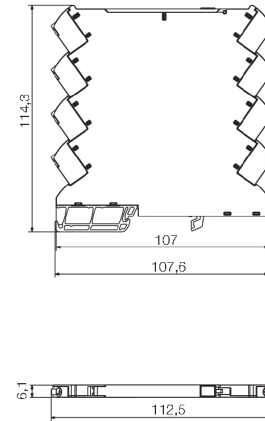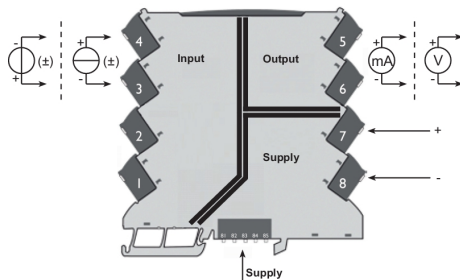

Power supply via the rail bus

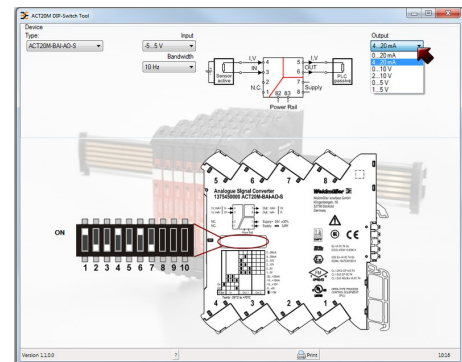

example for DIP switch setting
(with ACT20M tool software)