


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.

EQUIVALENT CIRCUIT



BIAS RESISTOR VALUES

TYPE NO.	R1(k Ω)	R2(k Ω)
KRC416	1	10
KRC417	2.2	2.2
KRC418	2.2	10
KRC419	4.7	10
KRC420	10	4.7
KRC421	47	10
KRC422	100	100

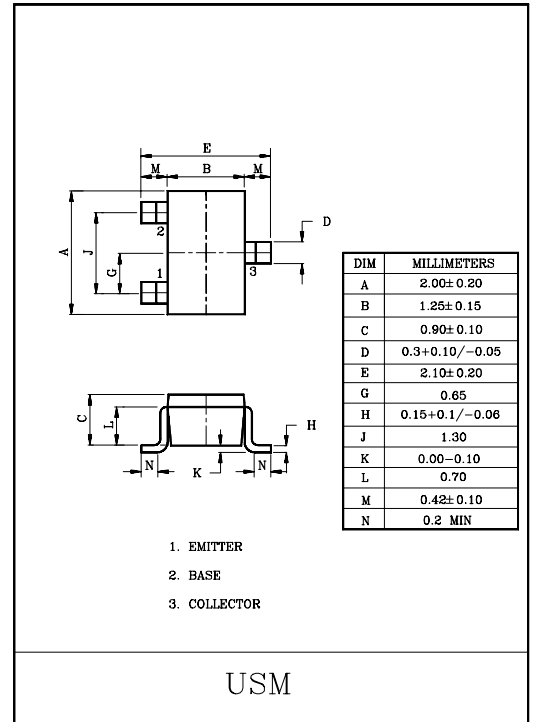


MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC416~422	V _O	50	V
	KRC416		10, -5	
	KRC417		12, -10	
	KRC418		12, -5	
	KRC419		20, -7	
	KRC420		30, -10	
	KRC421		40, -15	
Input Voltage	KRC422	V _I	40, -10	V
Output Current		I _O	100	mA
Power Dissipation		P _D	100	mW
Junction Temperature		T _i	150	°C
Storage Temperature Range	KRC416~422	T _{stg}	-55~150	°C

MARK SPEC

TYPE	KRC416	KRC417	KRC418	KRC419	KRC420	KRC421	KRC422
MARK	N2	N4	N5	N6	N7	N8	N9



KRC416~KRC422

ELECTRICAL CHARACTERISTICS (T_a=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC416~422	I _{O(OFF)}	V _O =50V, V _I =0	–	–	500	nA
DC Current Gain	KRC416	G _I	V _O =5V, I _O =5mA	33	–	–	
	KRC417		V _O =5V, I _O =20mA	20	–	–	
	KRC418		V _O =5V, I _O =10mA	33	–	–	
	KRC419		V _O =5V, I _O =10mA	30	–	–	
	KRC420		V _O =5V, I _O =10mA	24	–	–	
	KRC421		V _O =5V, I _O =5mA	33	–	–	
	KRC422		V _O =5V, I _O =5mA	62	–	–	
Output Voltage	KRC416	V _{O(ON)}	I _O =10mA, I _I =0.5mA	–	–	0.3	V
	KRC417		I _O =10mA, I _I =0.5mA	–	0.1	0.3	
	KRC418		I _O =10mA, I _I =0.5mA	–	–	0.3	
	KRC419		I _O =10mA, I _I =0.5mA	–	0.1	0.3	
	KRC420		I _O =10mA, I _I =0.5mA	–	0.1	0.3	
	KRC421		I _O =10mA, I _I =0.5mA	–	0.1	0.3	
	KRC422		I _O =5mA, I _I =0.25mA	–	0.1	0.3	
Input Voltage (ON)	KRC416	V _{I(ON)}	V _O =0.3V, I _O =20mA	–	0.98	3	V
	KRC417		V _O =0.3V, I _O =20mA	–	1.83	3	
	KRC418		V _O =0.3V, I _O =20mA	–	1.22	3	
	KRC419		V _O =0.3V, I _O =20mA	–	1.76	2.5	
	KRC420		V _O =0.3V, I _O =2mA	–	2	3	
	KRC421		V _O =0.3V, I _O =2mA	–	3.9	5	
	KRC422		V _O =0.3V, I _O =1mA	–	1.64	3	
Input Voltage (OFF)	KRC416	V _{I(OFF)}	V _{CC} =5V, I _O =100μA	0.3	0.63	–	V
	KRC417			0.5	1.15	–	
	KRC418			0.3	0.67	–	
	KRC419			0.3	0.82	–	
	KRC420			0.8	1.68	–	
	KRC421			1	3.09	–	
	KRC422			0.5	1.17	–	
Transition Frequency	KRC416~422	f _T *	V _O =10V, I _O =5mA	–	250	–	MHz
Input Current	KRC416	I _I	V _I =5V	–	–	7.2	mA
	KRC417			–	–	3.8	
	KRC418			–	–	3.8	
	KRC419			–	–	1.8	
	KRC420			–	–	0.88	
	KRC421			–	–	0.16	
	KRC422			–	–	0.15	

Note : *Characteristic of Transistor Only