

Type: **DF51-322-2K2**

Article No.: **289108**

Sales text "Frequency inverter DF51(2,2 kW; 230V)



Ordering information

Rated voltage	U_e	V	1 AC 180...264 V $\pm 0\%$ 3 AC 180...264 V $\pm 0\%$
Max. rated operational current	I_e	A	10
Rated power for motors			
at 230 V 3-phase AC	P	kW	2.2
Rating range			0.25 – 2.2 kW at 230 V
Description			Single and three-phase connection

Notes concerning the table header

All rating data of the power section is based on a switching frequency of 5 kHz (default setting) and an ambient temperature of +40 °C, for operation of a four-pole three-phase asynchronous motor.

General

Standards			EN 50178, IEC 61800-3
Ambient temperature			
Operating temperature		°C	-10 to +40 with rated current I_e at a clock frequency of 5 kHz; up to +50 °C at a reduced clock frequency of 2 kHz and reduced output current of 80 % I_e

Max. duty factor (c.d.f.) with lowest impedance R_B		°C	–25...+70
Shock resistance			Vibration and impact, max. 5.9 m/s ² (0.6 g) at 10 to 55 Hz
Pollution degree			VDE 0110 Part 2, pollution degree 2
Climatic proofing			Class 3K3 according to EN 50178 (non-condensing, average relative humidity 20 to 90 %)
Altitude	m		0 to 1000 a.s.l.
Mounting position			Vertically suspended
Free surrounding areas			100 mm above and below device
Emitted interference			IEC/EN 61800–3 (EN 55011 group 1 class B)
Interference immunity			IEC/EN 61800–3, industrial environment
Insulation resistance			Overshoot category III according to VDE 0110
Discharge current to PE	mA		< 3.5 (to EN 50178)
Protection type			IP 20
Protection against direct contact			Finger and back-of-hand proof
Protective isolation against switching circuitry			Safe isolation from the mains. Double basic isolation (to EN 50178)
Protective measures			Overcurrent, earth fault, overshoot, undervoltage, overload, overtemperature, electronic overload protection: I^2t monitoring and PTC input (thermistor or thermostat)
Heat dissipation with rated operational current I_e	W		95
Dimensions (W × H × D)	mm		110 × 130 × 127
Weight	kg		1,9
Power section			
Rated operating voltage	U_e	V AC	230
Rated voltage	U_e	V	1 AC 180...264 V ± 0 % 3 AC 180...264 V ± 0 %
Supply frequency		Hz	50/60 (47...63 ± 0 %)
Mains current			
U_i = 1-phase 230 V AC	I	A	24

U_i = 3-phase 230 V AC	I	A	13
Alternative DC supply	U_{DC}	V DC	260...370 \pm 0 %
Modulation method			sinusoidal pulse-width modulation (PWM), U/f characteristic control
Switching frequency			5 kHz, can be selected between 2 and 14 kHz
Output voltage		V	3 AC U_e
Output frequency		Hz	0 to 50, max. 400
Frequency resolution		Hz	0.1, with digital setpoint values/maximum frequency/1000 with analog setpoint values
Frequency resolution		kHz	0.1 with digital setpoint values, maximum frequency/1000 with analog setpoint values
Frequency error limit at 20 C \pm 10 K			\pm 0.01 % of maximum frequency for digital reference values, \pm 0.2 % of maximum frequency for analog reference values
Max. rated operational current	I_e	A	10
Permissible overcurrent			150 % for 60 s, every 600 s
Torque during start			From 6 Hz 100 % or higher with torque boost activated
Apparent power at 240 V		kVA	4,1
Standard operation at 150 % overload			
Assigned motor rating (4-pole ASM)			
230 V		kW	2,2
240 V		HP	3
Control circuit			
Relay			1 changeover contact, 230 V AC, 0.2 A inductive load, 2.5 A resistive load; or 24 V DC, 0.7 A inductive load, 3 A resistive load
Serial interface			RS485
Control voltage			
Output setpoint voltage		V	+10 DC, 10 mA
Output control voltage		V	+24 DC, 30 mA
Parameterization			1 parameter set (online/offline parameterization), parameter protection (programmable)
Inputs			


digital (parameters can be defined)			5 × +24 V DC, configurable
Analog	Number		2 × 0 to +10 V DC (input impedance 10 kΩ, 4 to 20 mA (load impedance 250 Ω), resolution 10 bit)
Outputs			
Digital			2 × 24 V DC transistor (open-collector, configurable)
analog (parameters can be defined)			1 × 0 to +10 V DC, 1 mA (configurable), resolution 10 bit

Terminal capacities

Cable lengths			
	mm ²	4	
	AWG	12	
Relay connection			
	mm ²	1,5	
	AWG	6	
Control circuit			
	mm ²	1,5	
	AWG	6	

Notes

Dimensions

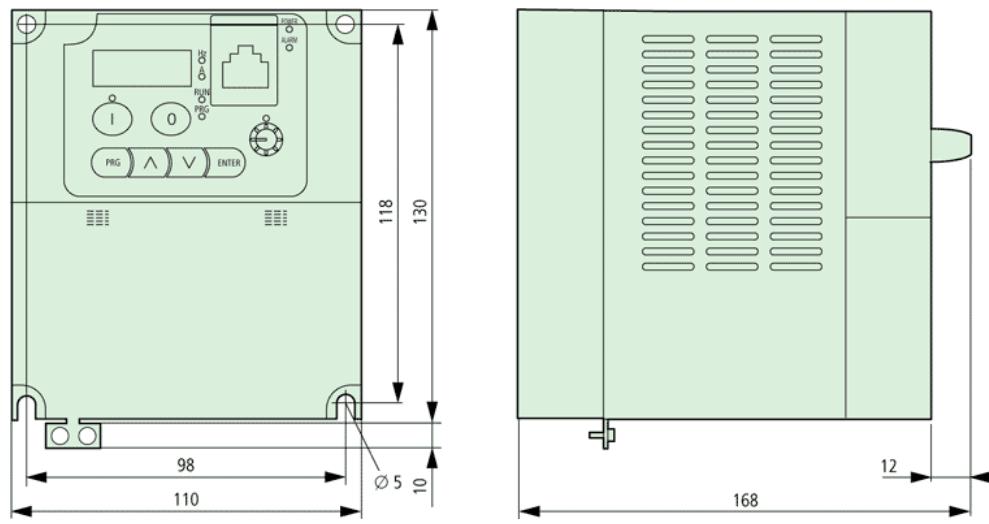

Notes

If the frequency inverter is to be installed in an enclosure, control panel or similar housing, the ambient temperature T_a is taken to be the temperature inside this enclosure or control panel.

All rating data of the power section is based on a switching frequency of 5 kHz (default setting) and an ambient temperature of +40 °C, for operation of a four-pole three-phase asynchronous motor.

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
Copyright 2006 by Moeller GmbH. HPL-C2007G V2.1