


LOC	DIST	REVISIONS				
CE	16	P	LTR	DESCRIPTION	DATE	OWN
			A	REVISE PER 0A00-0379-95	9-27-95	APVD


1. DIMENSIONS IN [] ARE IN INCHES.
2. FIXED SHROUD DUPLEX CONNECTOR WITHOUT KEY IS TYPE S.

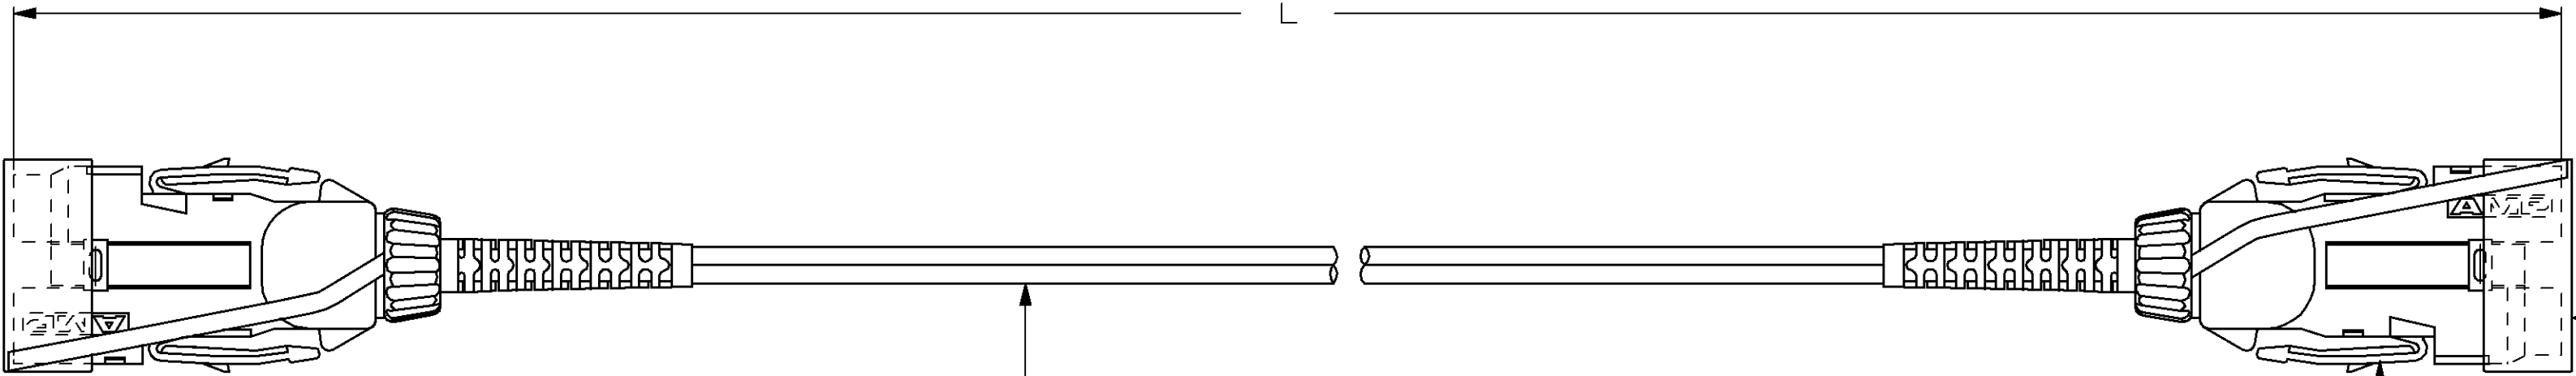

62.5/125μm ZIPCORD PLENUM CABLE
PART NUMBER: 502986-1

AMP FSD CONNECTOR KIT
PART NUMBER: 503347-5

KEYS FOR THE FSD CONNECTOR

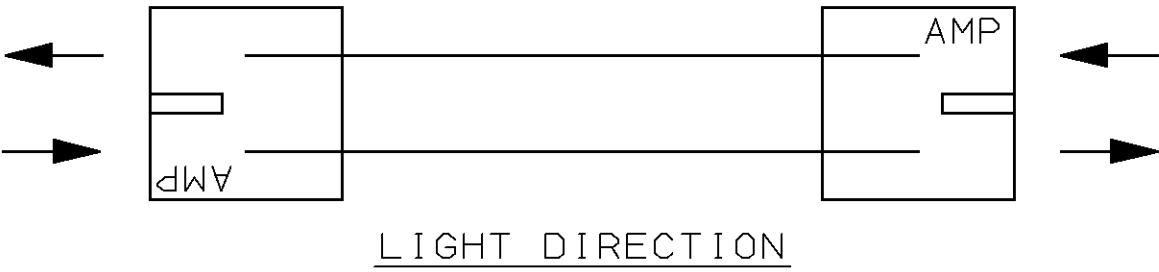

10±0.15 [394±6]	504625-5
5±0.08 [197±3]	504625-4
3±0.05 [118±2]	504625-3
2±0.05 [79±2]	504625-2
1±0.05 [39±2]	504625-1
L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		OWN	15JUN95	AMP AMP Incorporated Harrisburg, PA 17105-3608		
DIMENSIONS:		CHK	16JUN95			
METERS	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	16JUN95	NAME CABLE ASSEMBLY, FIBER OPTIC, 62.5/125μm ZIP PLENUM, AMP POLYMER FSD TO AMP POLYMER FSD, OPTIMATE®		
	0 PLC ±—	PRODUCT SPEC				
	1 PLC ±—	—				
	2 PLC ±—	APPLICATION SPEC				
	3 PLC ±—	—		SIZE	CAGE CODE	DRAWING NO
	4 PLC ±—			A2	00779	C-504625
	ANGLES ±—					
MATERIAL	FINISH	WEIGHT	—			
CUSTOMER DRAWING				SCALE	SHEET	REV
				NTS	1 OF 1	A