


Keysight Technologies

## InfiniiVision Oscilloscope Probes and Accessories

For 2000 X-, 3000 X-, 4000 X-, 6000 X-, 5000, 6000, and 7000 Series

Selection Guide  
Data Sheet

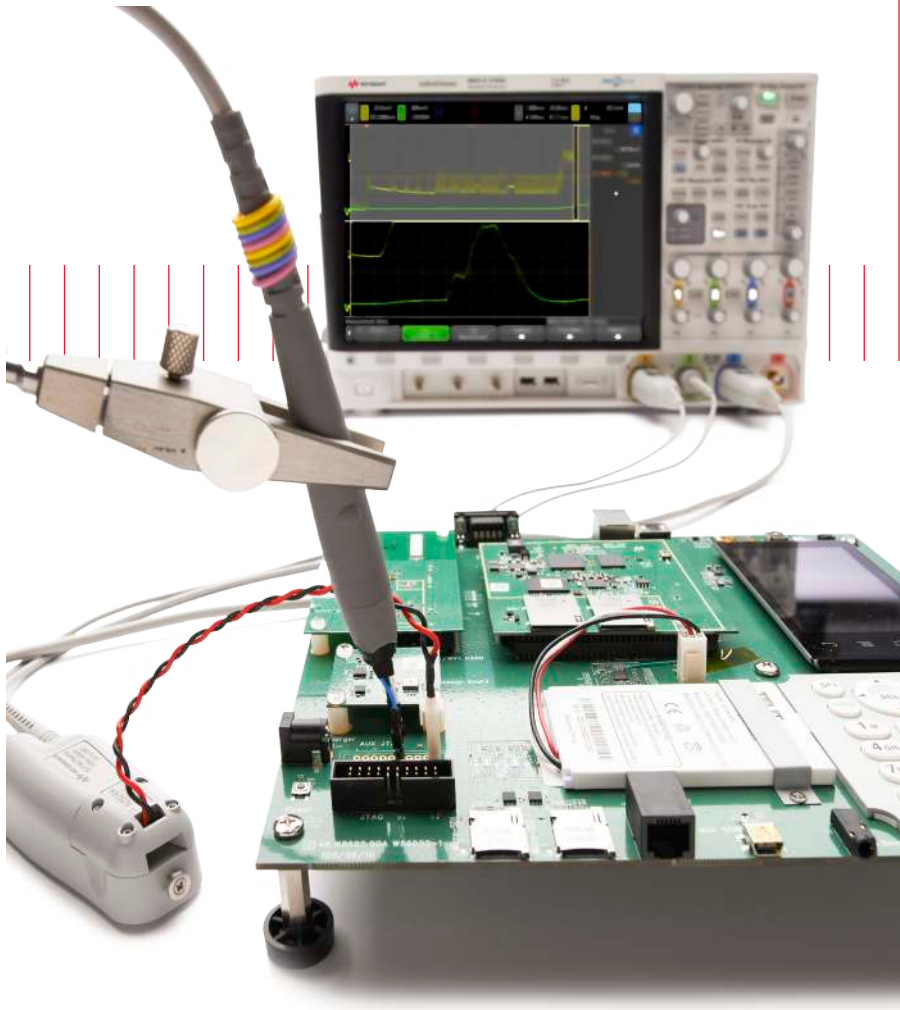

To achieve the best results from your scope, you need the right probes and accessories for your particular application. That's why Keysight Technologies, Inc. offers a complete family of innovative probes and accessories for InfiniiVision oscilloscopes. For the most up-to-date and complete information about Keysight's accessories, please visit our Web site at: [www.keysight.com/find/probes](http://www.keysight.com/find/probes)

## Table of Contents

|                                                              |    |
|--------------------------------------------------------------|----|
| Probe Compatibility Table .....                              | 3  |
| Passive Probes .....                                         | 5  |
| High-voltage Passive Probes .....                            | 7  |
| InfiniiMax Active Probes and Accessories .....               | 8  |
| InfiniiMode Active Probes and Accessories .....              | 10 |
| High-voltage Differential Active Probes .....                | 12 |
| Single-ended Active Probes .....                             | 14 |
| Mixed Signal Oscilloscope Logic Probes .....                 | 15 |
| Clamp-on Current Probes .....                                | 17 |
| High-Sensitivity Current Probes .....                        | 19 |
| Wedge Probe Adapters .....                                   | 21 |
| Miscellaneous Accessories .....                              | 22 |
| N2744A T2A Probe Interface Adapter .....                     | 24 |
| Recommended Probes for Low-/Mid-Speed Bus Measurements ..... | 25 |

## Probe Compatibility Table

For ordering information when replacing your probe or probe accessory: Refer directly to the page number listed in the table of contents for your probe model.

To assist you in selecting the proper probe for your application: Use our probe compatibility table below to find the probes that are recommended for use with your 2000 X-, 3000 X-, 4000 X-, 6000 X-, 5000, 6000, and 7000 Series InfiniiVision oscilloscope.

| Probe type                             | Probe model                                                                   | MSO/DSO<br>2000 X <sup>1</sup> | MSO/DSO<br>3000 X | MSO/DSO<br>4000 X/6000 X <sup>2</sup> |
|----------------------------------------|-------------------------------------------------------------------------------|--------------------------------|-------------------|---------------------------------------|
| Passive probes,<br>page 5              | N2862B 10:1 150 MHz<br>(included in 70/100 MHz models)                        | Recommended                    | Recommended       | Recommended                           |
|                                        | N2863B 10:1 300 MHz<br>(included in 200 MHz models)                           |                                |                   |                                       |
|                                        | N2890A 10:1 500 MHz<br>(included in 350/500 MHz/1 GHz models)                 |                                |                   |                                       |
|                                        | N2894A 10:1 700 MHz (included in 4000 X models)                               | Compatible                     | Compatible        | Recommended                           |
|                                        | N2889A 1:1/10:1 350 MHz                                                       | Recommended                    | Recommended       | Recommended                           |
| High-voltage passive<br>probes, page 7 | 10076B 4 kV                                                                   | Recommended                    | Recommended       | Recommended                           |
|                                        | N2771B 30 kV                                                                  | Recommended                    | Recommended       | Recommended                           |
| Differential active probes,<br>page 8  | 1130A - 1134A 1.5 GHz - 7 GHz                                                 | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2750A - N2752A 1.5 GHz - 6 GHz                                               | Incompatible                   | Recommended       | Recommended                           |
|                                        | 1141A 200 MHz (use with 1142A)                                                | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2791A 25 MHz                                                                 | Recommended                    | Recommended       | Recommended                           |
|                                        | N2891A 70 MHz                                                                 | Recommended                    | Recommended       | Recommended                           |
|                                        | N2790A 100 MHz (with AutoProbe)                                               | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2792A 200 MHz                                                                | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2818A 200 MHz (with AutoProbe)                                               | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2793A 800 MHz                                                                | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2819A 800 MHz (with AutoProbe)                                               | Incompatible                   | Recommended       | Recommended                           |
| Single-ended active probes,<br>page 14 | N2795A 1 GHz (with AutoProbe)                                                 | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2796A 2 GHz (with AutoProbe)                                                 | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2797A 1.5 GHz (with AutoProbe)                                               | Incompatible                   | Recommended       | Recommended                           |
| MSO logic probes,<br>page 15           | 01650-61607 16-channel                                                        | Incompatible                   | Recommended       | Recommended                           |
|                                        | N6459-60001 8-channel MSO cable<br>(included in 2000 X-Series MSOs)           | Recommended                    | Incompatible      | Incompatible                          |
|                                        | N6450-60001 16-channel MSO cable<br>(included in 3000 and 4000 X-Series MSOs) | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2756A 16-Channel MSO cable<br>(included in 6000 X-Series MSOs)               | Incompatible                   | Recommended       | Recommended                           |
| Current probes,<br>page 17             | 1146B 100 kHz                                                                 | Recommended                    | Recommended       | Recommended                           |
|                                        | N2780B 2 MHz (use with N2779A)                                                | Recommended                    | Recommended       | Recommended                           |
|                                        | N2781B 10 MHz (use with N2779A)                                               | Recommended                    | Recommended       | Recommended                           |
|                                        | N2782B 50 MHz (use with N2779A)                                               | Recommended                    | Recommended       | Recommended                           |
|                                        | N2783B 100 MHz (use with N2779A)                                              | Recommended                    | Recommended       | Recommended                           |
|                                        | 1147B 50 MHz (with AutoProbe)                                                 | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2893A 100 MHz (with AutoProbe)                                               | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2820A 3 MHz/50 uA High Sensitivity,<br>2 channel (with AutoProbe)            | Incompatible                   | Recommended       | Recommended                           |
|                                        | N2821A 3 MHz/50 uA High Sensitivity,<br>1 channel (with AutoProbe)            | Incompatible                   | Recommended       | Recommended                           |

1. The 2000 X-Series does not support AutoProbe interface active probes.

2. The 4000 X- and 6000 X-Series comes with the Infiniium AutoProbe interface for higher probe power support.

## Probe Compatibility Table (continued)

| Probe type                                                           | Probe model                                                                                       | DSO5000A<br>100 MHz | DSO5000A<br>300 - 500 MHz | MSO/<br>DSO6000A <sup>4</sup><br>100 MHz | MSO/DSO6000A <sup>4</sup><br>300 MHz - 1 GHz<br>MSO/DSO7000A/B<br>100 MHz - 1 GHz |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------|---------------------------|------------------------------------------|-----------------------------------------------------------------------------------|
| Passive probes<br>page 5                                             | N2863B 10:1 300 MHz<br>(included in 5000 Series<br>100/300 MHz)                                   | Recommended         | Recommended               | Recommended                              | Compatible                                                                        |
|                                                                      | 10070D 1:1 20 MHz                                                                                 | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | 10073D 10:1 500 MHz (included in<br>6000/7000 Series 300 MHz to<br>1 GHz and 5000 Series 500 MHz) | Compatible          | Recommended               | Compatible                               | Recommended                                                                       |
|                                                                      | 10074D 10:1 150 MHz<br>(included in 6000 Series 100 MHz)                                          | Recommended         | Compatible                | Recommended                              | Compatible                                                                        |
|                                                                      | N2873A 10: 1 500 MHz<br>(optional to 7000B)                                                       | Recommended         | Recommended               | Compatible                               | Recommended                                                                       |
| High-voltage<br>passive probes<br>page 7                             | 10076B 4 kV                                                                                       | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2771B 30 kV                                                                                      | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
| Differential<br>active probes<br>page 8                              | 1130A 1.5 GHz <sup>1</sup>                                                                        | Compatible          | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2750A 1.5 GHz                                                                                    | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |
|                                                                      | 1141A 200 MHz (use with 1142A)                                                                    | Compatible          | Recommended               | Compatible                               | Recommended                                                                       |
|                                                                      | N2791A 25 MHz                                                                                     | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2891A 70 MHz                                                                                     | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2790A 100 MHz (with AutoProbe)                                                                   | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2792A 200 MHz                                                                                    | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2818A 200 MHz (with AutoProbe)                                                                   | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |
|                                                                      | N2793A 800 MHz                                                                                    | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2819A 800 MHz (with AutoProbe)                                                                   | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |
| Single-ended<br>active probes<br>page 14                             | N2795A 1 GHz (with AutoProbe)                                                                     | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2796A 2 GHz (with AutoProbe)                                                                     | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2797A 1.5 GHz (with AutoProbe)                                                                   | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |
| Mixed signal<br>oscilloscope<br>logic probes <sup>2</sup><br>page 15 | 01650-61607 16-channel                                                                            | Incompatible        | Incompatible              | Recommended                              | Recommended                                                                       |
|                                                                      | N6450-60001 2x8-channel<br>(included in MSO6000A,<br>MSO7000A/B)                                  | Incompatible        | Incompatible              | Recommended                              | Recommended                                                                       |
| Current probes<br>page 17                                            | 1146B 100 kHz                                                                                     | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2780B 2 MHz (use with N2779A)                                                                    | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2781B 10 MHz (use with N2779A)                                                                   | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2782B 50 MHz (use with N2779A)                                                                   | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | N2783B 100 MHz (use with N2779A)                                                                  | Recommended         | Recommended               | Recommended                              | Recommended                                                                       |
|                                                                      | 1147B 50 MHz (with AutoProbe)                                                                     | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2893A 100 MHz (with AutoProbe)                                                                   | Recommended         | Recommended               | Incompatible                             | Recommended                                                                       |
|                                                                      | N2820A 3 MHz/50 uA High Sensitivity,<br>2 channel (with AutoProbe)                                | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |
|                                                                      | N2821A 3 MHz/50 uA High Sensitivity,<br>1 channel (with AutoProbe)                                | Incompatible        | Incompatible              | Incompatible                             | Incompatible                                                                      |

1. The 1130A probe amplifier supports both single- and differential-ended measurements. Higher bandwidth InfiniiMax probe model 1131A, 1132A, and 1134A are also supported by 3000 X-, 4000 X-, 6000 X-, 5000, 6000 300 MHz - 1 GHz models and, 7000 Series.

2. Recommended for InfiniiVision MSOs only.

3. These Infiniium active probes are not supported by InfiniiVision Series scopes – 1152A, 1153A, 1154A, 1155A, 1159A, 1168A, 1169A, N2800A, N2801A, N2802A, N2803A, N2830A, N2831A and N2832A..

4. MSO/DSO6000A 100-MHz models do not support any Keysight active probes with AutoProbe interface.

## Passive Probes

- Designed for optimal performance with your Keysight InfiniiVision Series oscilloscopes
- 1:1 and 10:1 attenuation
- 20 to 500 MHz

### Rugged, high-quality probes at a reasonable price

Keysight 10070-family passive probes are a great choice if you're looking for high quality at a very reasonable price. These general-purpose probes are designed specifically to give you optimal performance with your InfiniiVision Series oscilloscopes. Ruggedized for general-purpose measurements, they feature a durable cable and a solid stainless steel probe body encased with a hard, fracture-resistant plastic. They're designed and tested to ensure the probes operate in the toughest of conditions

The N2862B, N2863B, N2889A, and N2890A low-cost, general-purpose passive probes provide up to 500 MHz bandwidth and feature a high input resistance of 10 MΩ for low probe loading. These probes provide a 10:1 attenuation ratio except for the N2889A which provides a switch in the probe handle for switching the attenuation ratio between 1:1 and 10:1.

The N2873A/N2894A are 500-MHz/700 MHz 10:1 miniature passive probes that can be used with all InfiniiVision Series. Compact 2.5-mm probe head diameter, low input capacitance, and various fine-pitch probe tip accessories make the N2873A/N2894A passive probes ideal for probing densely populated IC components or surface-mount devices used in today's high-speed digital applications. The N2894A provides 700 MHz system bandwidth when used in conjunction with the 4000 X- and 6000 X-Series  $\geq 1$  GHz models. For more information about N2870A Series passive probes and accessories, check out Keysight's literature number, 5990-3930EN.

### Accessories available for 10070D/73D/74D passive probes

|           |                                                                               |
|-----------|-------------------------------------------------------------------------------|
| N4848A    | Probe-tip-to-BNC (m) adapter, qty 2                                           |
| 5081-7696 | Ground lead with alligator clip for 1007x and N2862B/63B/89A/90A              |
| N4847A    | Retractable hook tip for 1007xC/D (not compatible with 10076A/B), qty 2       |
| N4849A    | Dual-test lead adapter (for 10070/3/4x), qty 2                                |
| 5081-7690 | Replacement parts accessory kit                                               |
| 10072A    | Fine-pitch probing kit includes 10 SMT clips and 2 dual-lead adapters         |
| 10075A    | 0.5 mm IC probing kit. Contains four 0.5 mm IC clips and 2 dual-lead adapters |

### Accessories available for N2862B, N2863B, N2889A, and N2890A passive probe

|           |                                                  |
|-----------|--------------------------------------------------|
| 0960-2900 | Retractable hook tip for N2862B/63B/89A/90A      |
| N4827A    | PCB socket adapter for N2862B/63B/89A/90A, qty 2 |
| N4826A    | Dual-lead adapter for N2862B/63B/89A/90A, qty 2  |
| N4828A    | 5 mm ground spring for N2862B/63B/89A/90A, qty 2 |
| 1250-3978 | BNC adapter                                      |

### Accessories available for N2873A/N2894A (and other N287xA Series passive probes)

|           |                                                                      |
|-----------|----------------------------------------------------------------------|
| N4829A    | Probe tip kit (rigid and spring loaded), 10 each                     |
| N4831A    | Sprung hook adapter 2.5 mm for N2870A/71A/72A/73A/75A, N2894A, qty 2 |
| N4837A    | Ground lead 15 cm, qty 2                                             |
| 0960-2908 | 10 self-adhesive copper pads 2x2                                     |
| N4836A    | Dual lead-adapter, 2.5 mm, 10 cm, qty 2                              |
| 0960-2977 | Ground lead 11 cm to Miniclip                                        |
| 0960-2978 | Ground lead 11 cm to 0.8mm socket                                    |
| 0960-2979 | Rigid probe tips, qty 5                                              |
| N4838A    | Ground spring 2.5 mm, qty 2                                          |
| 0960-2981 | Spring-loaded probe tip, qty 5                                       |
| 0960-2982 | Ground blade 2.5mm                                                   |
| 0960-2983 | IC cap 2.5 - 0.5mm Green                                             |
| 0960-2984 | IC cap 2.5 - 0.65mm Blue                                             |
| 0960-2985 | Insulating cap 2.5mm                                                 |
| 0960-2986 | IC cap 2.5 - 1.27mm Black                                            |
| 0960-2987 | BNC adapter 2.5mm                                                    |
| 0960-2988 | IC cap 2.5 - 0.8mm Gray                                              |
| 0960-2989 | IC cap 2.5 - 1.0mm Brown                                             |
| 0960-2990 | Adapter 2.5 to 0.8mm socket                                          |
| N4863A    | 2.5mm probe tip-to-PCB adapter, horizontal                           |
| N4864A    | 2.5mm probe tip-to-PCB adapter, vertical                             |

### Standard accessories that come with each probe

| 10070D/10073C/10074C                           | N2862B/N2863B/N2880A/N2890A                                       | N2873A /N2894A                                              |
|------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------|
| Retractable hook tip, Qty 1                    | Retractable hook tip, qty 1                                       | Spring loaded probe tips, qty 2                             |
| Colored identification tag, 2 each of 4 colors | Colored identification tag, 2 each of 4 colors                    | Rigid probe tips, qty 2                                     |
| Ground bayonet, Qty 1                          | Spring ground, qty 1                                              | Ground blade, qty 1                                         |
| IC insulation cap, Qty 1                       | IC insulation cap, qty 1                                          | Ground spring, qty 1                                        |
| Adjustment tool, Qty 1                         | Insulation cap, qty 1                                             | Sprung hook, qty 1                                          |
| Ground lead, Qty 1                             | Adjustment tool, qty 1 (with N2862B/63B), qty 2 (with N2889A/90A) | Ground lead, qty 1                                          |
| BNC adapter, Qty 1                             | Ground lead, qty 1                                                | Copper pads, qty 2                                          |
|                                                | BNC adapter, qty 1                                                | IC cap – 0.5 mm, 0.65 mm, 0.8 mm, 1 mm, 1.27 mm, qty 1 each |
|                                                | Probe tip, qty 1                                                  | BNC adapter, qty 1                                          |
|                                                |                                                                   | Insulating cap, qty 1                                       |
|                                                |                                                                   | Protection cap, qty 1                                       |
|                                                |                                                                   | Trimmer tool, qty 1                                         |
|                                                |                                                                   | Color coded rings, 3x4 colors                               |

## Passive Probes (continued)

### Ordering information for Keysight passive probes

|        |                                         |
|--------|-----------------------------------------|
| 10070D | 1:1 20 MHz passive probe                |
| N2862B | 10:1 150 MHz passive probe              |
| 10074D | 10:1 150 MHz passive probe              |
| N2863B | 10:1 300 MHz passive probe              |
| N2889A | 10:1/1:1 350 MHz passive probe          |
| 10073D | 10:1 500 MHz passive probe              |
| N2890A | 10:1 500 MHz passive probe              |
| N2873A | 10:1 500 MHz miniature<br>passive probe |
| N2894A | 10:1 700 MHz miniature passive<br>probe |



10073D/74D passive probe



N2873A/N2894A passive probe with standard accessories



N2862B/63B passive probe



N2889A 10:1/1:1 passive probe



N2890A passive probe

### Characteristics for Keysight passive probes

|                                 | 10070D                      | 10073D                      | 10074D                      | N2862B/63B              | N2889A                                                  | N2890A            | N2873A/<br>N2894A            |
|---------------------------------|-----------------------------|-----------------------------|-----------------------------|-------------------------|---------------------------------------------------------|-------------------|------------------------------|
| Bandwidth                       | 20 MHz                      | 500 MHz                     | 150 MHz                     | 150 MHz/<br>300 MHz     | 350 MHz (at 10:1),<br>10 MHz (at 1:1)                   | 500 MHz           | 500 /700<br>MHz              |
| Risetime (calculated)           | < 17.5 ns                   | < 700 ps                    | < 2.33 ns                   | < 2.33 ns/<br>< 1.16 ns | <1 ns (at 10:1),<br>< 35 ns (at 1:1)                    | < 700 ps          | < 700 ps/<br>< 500 ps        |
| Attenuation ratio               | 1:1                         | 10:1                        | 10:1                        | 10:1                    | 1:1/10:1 switchable                                     | 10:1              | 10:1                         |
| Input resistance                | 1 MΩ                        | 2.2 MΩ                      | 10 MΩ                       | 10 MΩ                   | 10 MΩ (at 10:1)<br>1 MΩ (at 1:1)                        | 10 MΩ             | 10 MΩ                        |
| Input capacitance               | Approx 70 pF                | Approx 12 pF                | Approx 15 pF                | Approx 15 pF            | Approx 11 pF (at<br>10:1), 60 pF (at 1:1)               | Approx 11<br>pF   | Approx 9.5 pF                |
| Maximum input<br>(dc + peak ac) | 500 V CAT I<br>400 V CAT II | 500 V CAT I<br>400 V CAT II | 500 V CAT I<br>400 V CAT II | 300 V<br>CAT I/II       | 300 V CAT I/II (at<br>10:1), 150 V CAT I/II<br>(at 1:1) | 300 V<br>CAT I/II | 400 V CAT I,<br>300 V CAT II |
| Compensation range              | None                        | 6 to 15 pF                  | 9 to 17 pF                  | 5 to 30 pF              | 5 to 30 pF (at 10:1)                                    | 5 to 30 pF        | 10 to 25 pF                  |
| Probe readout                   | Yes                         | Yes                         | Yes                         | Yes                     | No                                                      | YES               | Yes                          |
| Cable length                    | 1.5 m                       | 1.5 m                       | 1.5 m                       | 1.2 m                   | 1.3 m                                                   | 1.3 m             | 1.2 m                        |

Note 1: 700 MHz BW only available on DSOX/MSOX 4000 X-Series oscilloscopes with 1 GHz or 1.5 GHz bandwidth models

## High-voltage Passive Probes

- Ideal for measuring up to 30 kV
- Up to 250 MHz bandwidth
- 100:1 or 1000:1 attenuation

### 10076B high-voltage probe

The Keysight 10076B 4 kV 100:1 passive probe gives you the voltage and bandwidth you need for making high-voltage measurements. Its compact design makes it easier to probe today's small power electronics components and its rugged construction means it can withstand rough handling without breaking.

#### Characteristics 10076B

|                       |                                     |
|-----------------------|-------------------------------------|
| Bandwidth             | 250 MHz (-3 dB)                     |
| Risetime (calculated) | < 1.4 ns                            |
| Attenuation ratio     | 100:1                               |
| Input resistance      | 66.7 MΩ (when terminated into 1 MΩ) |
| Input capacitance     | Approx 3 pF                         |
| Maximum input         | 4000 Vpk                            |
| Compensation          | 6 to 20 pF range                    |
| Probe readout         | Yes                                 |
| Cable length          | 1.8 m                               |



10076B passive probe

### N2771B high-voltage probe

The N2771B is a 1000:1 divider probe for the measurement of fast high voltage signals up to 30 kV dc + peak ac, 10 kV rms.

The probe's large size and rugged construction provide superior protection. The ground lead is fed through the body of the probe and protrudes behind the safety barrier, keeping the ground connection away from the high voltage. Typical applications include PMTs, motor drives, high voltage switches, magnatrons, and modern projection systems.

#### Characteristics for N2771B

|                       |                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------|
| Bandwidth             | 50 MHz (-3 dB)                                                                                    |
| Risetime              | < 7 ns                                                                                            |
| Attenuation ratio     | 1000:1                                                                                            |
| Input resistance      | 100 MΩ (when terminated into 1 MΩ)                                                                |
| Input capacitance     | 1 pF                                                                                              |
| Compensation range    | 6 to 20 pF                                                                                        |
| Max. voltage          | 15 kV dc, 10 kV rms, 30 kV dc + peak ac                                                           |
| Operating temperature | 0 to +50 °C, 80% RH                                                                               |
| Storage temperature   | -20 to +70 °C, 90% RH                                                                             |
| Dimensions            | 2 cm (max width of probe stem after handle) x 33 cm<br>7.5 cm (max probe width at handle) x 33 cm |




N2771B high-voltage probe

## Ordering information for Keysight high-voltage probe


|        |                                                                                                                                                         |
|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10076B | High-voltage probe: includes one retractable hook tip, one ground-bayonet, one IC probing tip, one-alligator ground lead and a compensation screwdriver |
| N2771B | High-voltage probe: includes alligator ground lead, 1-sharp-probe tip                                                                                   |
| 10077A | Accessory kit for 10076A/B: includes one retractable pincher tip, one ground lead, one insulation cap, two measuring pins and two colored tags          |



10077A accessory kit for 10076A/B

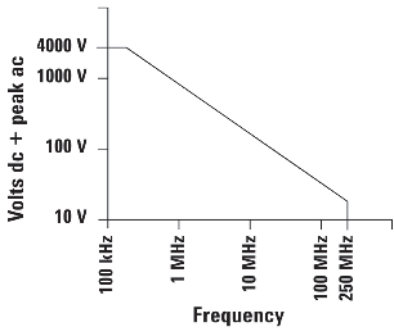

10076B derating curve

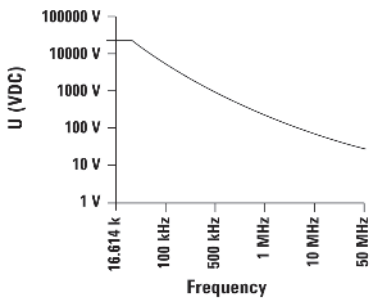

N2771B derating curve

## InfiniiMax Active Probes and Accessories

### 1130A-34A InfiniiMax high-performance active probe system

- 1.5 - 7 GHz InfiniiMax probe system
- InfiniiMax probe amplifier supports both differential- and single-ended measurements for a more cost-effective solution
- Unrivaled InfiniiMax probing accessories support browsing, solder-in, and socketed use models at the maximum performance available
- Compatible with 3000 X-, 4000 X-, 6000 X-, 5000, 6000, and 7000 Series oscilloscopes (except for 6000 Series 100-MHz models)

The InfiniiMax 1130A Series probe amplifier is a perfect complement to the InfiniiVision 1 GHz or higher bandwidth models. Its bandwidth, extremely low input capacitance (0.32 pF), high common mode rejection, and patented resistor probe tip technology provide ultra low loading of the DUT and superior signal fidelity. Keysight's innovative InfiniiMax 1130A Series differential probe is the easiest-to-use, and highest performance probing system available for high-speed digital design, and represents a new industry standard for accuracy, flexibility, and reliability. Designers can achieve full system bandwidth in conjunction with InfiniiVision Series oscilloscopes even when manually browsing with the probe or making hands-off measurements. Optional solder-in probe heads and solder-in sockets, as well as browser configuration provide full bandwidth at the probe tip.

| Operating characteristics                                           |                                                                                                                                                                                                |
|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Probe bandwidth (-3 dB)                                             | 1134A: > 7 GHz<br>1132A: > 5 GHz<br>1131A: > 3.5 GHz<br>1130A: > 1.5 GHz                                                                                                                       |
| Rise and fall time (10 to 90%)                                      | 1134A: 60 psec<br>1132A: 86 psec<br>1131A: 100 psec<br>1130A: 233 psec                                                                                                                         |
| Input capacitance                                                   | Cm = 0.1 pF Cm is between tips<br>Cg = 0.34 pF Cg is ground for each tip<br>Cdiff = 0.27 pF Differential mode capacitance = Cm + Cg/2<br>Cse = 0.44 pF Single-ended mode capacitance = Cm + Cg |
| Input resistance                                                    | Differential mode resistance = 50 kΩ ± 2%<br>Single-ended mode resistance = 25 kΩ ± 2%                                                                                                         |
| Input dynamic range                                                 | ±2.5 V                                                                                                                                                                                         |
| Input common mode range                                             | ±6.75 Vdc to 100 Hz; ±1.25 V > 100 Hz                                                                                                                                                          |
| Maximum signal slew rate                                            | 18 V/ns when probing a single-ended signal<br>30 V/ns when probing a differential signal                                                                                                       |
| DC attenuation                                                      | 10:1 ± 3% before calibration on oscilloscope<br>10:1 ± 1% after calibration on oscilloscope                                                                                                    |
| Offset range                                                        | ±12.0 V when probing single-ended signal                                                                                                                                                       |
| Maximum input voltage                                               | 30 Vpeak, CAT I                                                                                                                                                                                |
| ESD tolerance                                                       | > 8 kV from 100 pF, 300 Ω HBM                                                                                                                                                                  |
| Maximum number of probes supported by 3000 X-/5000/6000/7000 Series | 2                                                                                                                                                                                              |
| Maximum number of probes supported by 4000 X- and 6000 X-Series     | 4                                                                                                                                                                                              |



Keysight 1130A InfiniiMax probe offers you the highest performance available for measuring differential and single-ended signals


## InfiniiMax Active Probes and Accessories (continued)

### 1130A-34A InfiniiMax high-performance active probe system

Ordering information for Keysight InfiniiMax 1130A probe and accessories

| Probe amplifier        |                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------|
| 1130A                  | 1.5 GHz InfiniiMax probe amplifier (order one or more probe heads or connectivity kits per amplifier)        |
| Connectivity kits      |                                                                                                              |
| E2669A                 | InfiniiMax connectivity kit for differential/single-ended measurements                                       |
| E2668A                 | InfiniiMax connectivity kit for single-ended measurements                                                    |
| Individual probe heads |                                                                                                              |
| E2675A                 | InfiniiMax differential browser probe head and accessories                                                   |
| E2676A                 | InfiniiMax single-ended browser probe head and accessories                                                   |
| E2677A                 | InfiniiMax differential solder-in probe head and accessories                                                 |
| E2678A                 | InfiniiMax single-ended/differential socketed probe head and accessories                                     |
| E2679A                 | InfiniiMax single-ended socketed probe head and accessories                                                  |
| E2695A                 | Differential SMA probe head                                                                                  |
| N5425A/N5426A          | 12-GHz differential ZIF solder-in probe head and ZIF probe tips                                              |
| N5451A                 | InfiniiMax long-wire ZIF probe tips (for use with N5425A ZIF probe head)                                     |
| N5450B                 | InfiniiMax extreme temperature extension cable (that allows for probing in environments from -55 to +150 °C) |
| N2880A                 | InfiniiMax in-line attenuator kit (pairs of 6 dB, 12 dB and 20 dB attenuator in a kit)                       |
| N2881A                 | InfiniiMax DC blocking caps (a pair of 30 Vdc blocking cap)                                                  |


For more comprehensive information about the 1130A InfiniiMax probe amplifier and its accessories, refer to the Keysight Infiniium Oscilloscope Probes, Accessories, and Options data sheet with Keysight literature number 5968-7141EN.

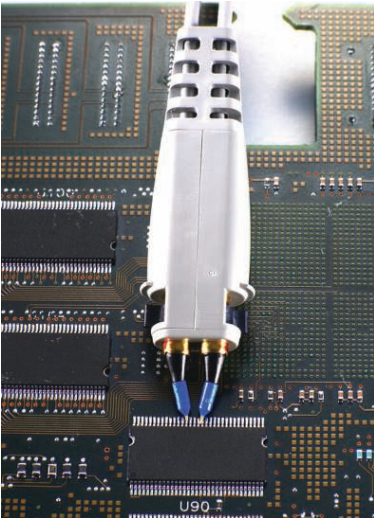

InfiniiMax browser head on board



InfiniiMax ZIF tip soldered on board

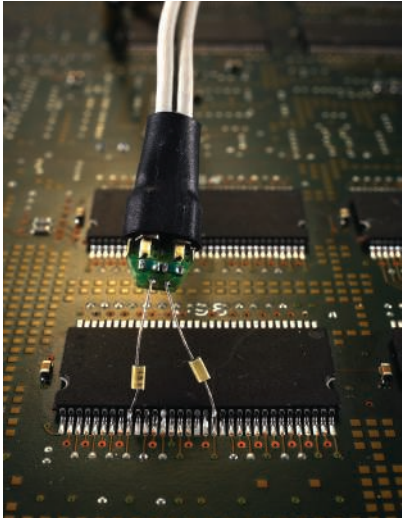

InfiniiMax solder-in probe head with long wires

# InfiniiMode Active Probes and Accessories

## N2750A-52A InfiniiMode probe

- 1.5 - 6 GHz bandwidth
- Dual attenuation ratio (2:1/10:1)
- InfiniiMode probing for making differential, single-ended and common mode measurements with a single probe
- Built-in quick action scope control for quick access to a variety of scope functions
- Built-in headlight
- Includes solder-in, browser, and socketed tips standard
- AutoProbe interface for auto configuration and probe power



The N2750A Series InfiniiMode differential probe is a new generation of low-cost, differential active probe compatible with InfiniiVision 3000 X-, 4000 X-, 6000 X-Series and Infiniium oscilloscope's AutoProbe interface.

### Measurement versatility

The N2750A Series InfiniiMode probe offer 2:1 and 10:1 dual attenuation settings, allowing them to be used for a broad range of applications. Dual attenuation range is automatically configured depending on the size of the input signal.

The new differential probe has an input resistance of 200 k $\Omega$  (differential) or 100 k $\Omega$  (each input to ground) and an extremely low input capacitance of 700 fF to minimize circuit loading. This, accompanied with superior signal fidelity, makes these probes useful for most digital design and debug applications. And with their wide dynamic range (10 Vpp) and offset range ( $\pm 15$  V), these probes can be used in a wide variety of analog signal measurements as well.

### InfiniiMode usability

The N2750A comes with new InfiniiMode operation modes. The InfiniiMode allows convenient measurements of differential, single-ended, and common mode signals with a single probe tip without reconnecting the probe to change the connection. The N2750A probe's InfiniiMode provides the following modes of operation.

- A - B (differential),
- A - ground (single-ended A)
- B - ground (single-ended B)
- (A+B)/2 - ground (common mode)

### Quick action scope control

The N2750A Series InfiniiMode probe provides convenient and quick access to various functions on the scope. You often have a need to control the scope while you hold a probe in your hand. With the quick action scope control feature built into the probe, you can turn the built-in headlight of the probe on and off, or control some frequently used scope functions such as RUN/STOP, auto scale, quick print, quick save, etc. with only a button press on the probe. Get control of your most needed function with a push of the quick action control button on the probe. Flexibility in probe use models is also a

vital necessity. The probes come standard with three different types of exchangeable probe tips that allow for easy connections to the circuit under test. These probe tips enable you to access multiple signals on anything from header connectors to hard-to-reach, high-density circuitry. The probes are equipped with a white LED headlight to illuminate the circuit under test which will help you see where you are probing.

This probe is compatible with InfiniiVision 3000 X-Series with software ver 2.2 or above, 4000 X-Series with software ver 3.01 or above, and 6000 X-Series with software ver. 6.00.

### Ordering information for InfiniiMode probes and accessories

|        |                                                            |
|--------|------------------------------------------------------------|
| N2750A | 1.5 GHz InfiniiMode differential probe                     |
| N2751A | 3.5 GHz InfiniiMode differential probe                     |
| N2752A | 6 GHz InfiniiMode differential probe                       |
| N2776A | Differential browser tips (qty 3)                          |
| N2777A | InfiniiMode solder-in tips (qty 3)                         |
| N2778A | InfiniiMode socketed tips (qty 3)                          |
| N4822A | Socketed tip for USB/Ethernet application fixtures (qty 1) |

Each probe includes two solder-in tips, one socketed tip and one browser tip.

## InfiniiMode Active Probes and Accessories (continued)

Characteristics and specifications for N2750A Series InfiniiMode probes

| Model number                                        | N2750A                                                                                      | N2751A   | N2752A    |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------|----------|-----------|
| Probe bandwidth* (-3 dB)                            | 1.5 GHz                                                                                     | 3.5 GHz  | 6 GHz     |
| Rise time, probe only (10-90%)                      | 233 psec                                                                                    | 100 psec | 58.3 psec |
| Input resistance (@DC)*                             | 200kΩ ± 2% (differential mode)<br>100kΩ ± 2% (single-ended mode)<br>50kΩ ± 2% (common mode) |          |           |
| Input capacitance                                   | 700 fF (with browser)                                                                       |          |           |
| Attenuation ratio (@DC)                             | 2:1 / 10:1                                                                                  |          |           |
| Input dynamic range                                 | ±1 V, 2 Vpp (@2:1) / ±5 V, 10 Vpp (@10:1)                                                   |          |           |
| Input common mode range                             | ±15 V (from DC to 100 Hz), ±2.5 V (for >100 Hz) ***                                         |          |           |
| Offset range                                        | ±15 V                                                                                       |          |           |
| Offset accuracy**                                   | < 3%                                                                                        |          |           |
| Maximum non-destructive Input Voltage               | ±30 V (DC + peak AC)                                                                        |          |           |
| Maximum number of probes supported by 3000 X-Series | 1                                                                                           |          |           |
| Maximum number of probes supported by 4000 X-Series | 4                                                                                           |          |           |

\* Denotes warranted electrical specifications at 2:1 attenuation mode after 20 minute warm-up, All others are typical.

\*\* When calibrated on the oscilloscope, these characteristics are determined by the oscilloscope characteristics.


\*\*\* Assumes symmetric differential signals.



N2750A with browser tip



N2750A with socketed tip

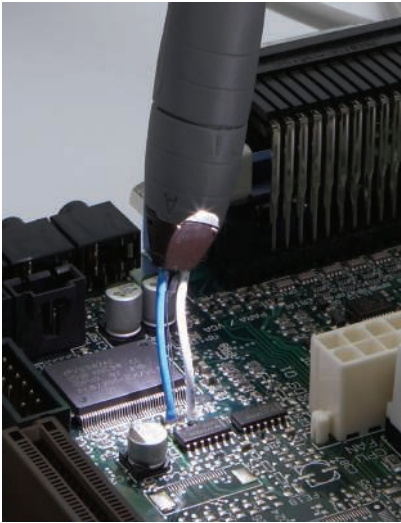

N2750A with solder-in tip

For more information about the N2750A Series InfiniiMode probes, refer to the data sheet with the Keysight literature number, 5991-0560EN.

## High-voltage Differential Active Probes

- 25 to 800 MHz bandwidth
- Switchable attenuation
- Measure up to 1,400 V CAT II and 7 kV CAT I

### N2790A/91A and N2891A high voltage differential probes

Oscilloscope users often need to make floating measurements where neither point of the measurement is at earth ground. Use N2790A, N2791A, or N2891A high voltage differential probes to make safe and accurate floating measurements with an oscilloscope. The N2790A, N2791A, and N2891A high voltage differential probes allow conventional earth-grounded Keysight oscilloscope to be used for floating signal measurements.

Each probe offers user-selectable attenuation settings that make it highly versatile, allowing it to be used for a broad range of applications. The probe comes with probe tip accessories for use with small and large components in tight spaces.

The N2791A and N2891A are compatible with any oscilloscope with 1 M $\Omega$  BNC input. The N2791A and N2891A probe power is supplied by included 4x AA batteries or USB host port of the scope or PC via a supplied USB power cable. The N2790A is compatible with the Keysight's AutoProbe interface where the probe power is supplied by the Keysight oscilloscope's probe interface.

### Characteristics for N2790A, N2791A and N2891A differential probe

|                                                                          | <b>N2790A</b>                                             | <b>N2791A</b>                              | <b>N2891A</b>                                  |
|--------------------------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------|------------------------------------------------|
| Bandwidth                                                                | 100 MHz                                                   | 25 MHz                                     | 70 MHz                                         |
| Risetime                                                                 | 3.5 ns                                                    | 14 ns                                      | 5 ns                                           |
| Attenuation ratio                                                        | 50:1 / 500:1                                              | 10:1 / 100:1                               | 100:1 / 1000:1                                 |
| CMRR                                                                     | -80 dB at 50/60 Hz<br>-50 dB at 1 kHz<br>--50 dB at 1 MHz | -80 dB at 50/60 Hz<br>-40 dB at 1 MHz      | -80 dB at 50/60 Hz<br>-60 dB at 20 kHz         |
| Input impedance (between inputs)                                         | 8 M $\Omega$ //3.5 pF                                     | 8 M $\Omega$ //8 pF                        | 100 M $\Omega$ //5 pF                          |
| Max input voltage to ground                                              | $\pm$ 1000 V (CAT II)<br>$\pm$ 600 V (CAT III)            | $\pm$ 700 V at 100:1<br>$\pm$ 70 V at 10:1 | $\pm$ 7000 V at 1000:1<br>$\pm$ 700 V at 100:1 |
| Max input voltage between two inputs                                     | $\pm$ 1400 V at 500:1<br>$\pm$ 140 V at 50:1              | $\pm$ 700 V at 100:1<br>$\pm$ 70 V at 10:1 | $\pm$ 7000 V at 1000:1<br>$\pm$ 700 V at 100:1 |
| Max number of probes supported by 3000 X-/4000 X-/5000/6000 /7000 Series | 4                                                         | 4                                          | 4                                              |

### 1141A 200 MHz differential probe

The 1141A is a 1x FET differential probe with 200-MHz bandwidth and a 3000:1 CMRR. The probe has a high-input resistance and low-input capacitance of 7 pF to minimize circuit loading. The 1141A must be used with 1142A probe control and power module, which controls input coupling modes dc, dc with variable offset, and dc reject. Two attenuators, 10x and 100x are provided to expand the linear differential input range to  $\pm$ 30 V. This probe works with any 50- $\Omega$  input oscilloscope including 3000 X-, 4000 X-, 5000, 6000 300 MHz - 1 GHz, and 7000 Series.



1141A 200-MHz differential probe with 1142A probe control and power module

### Characteristics for 1141A differential probe

|                                                                         | <b>1141A</b>                                                           |
|-------------------------------------------------------------------------|------------------------------------------------------------------------|
| Bandwidth                                                               | 200 MHz                                                                |
| Risetime                                                                | 1.75 ns                                                                |
| Attenuation ratio                                                       | 10:1 and 100:1 with attenuator                                         |
| CMRR                                                                    | 3000:1 at 1 MHz<br>10:1 at 100 MHz                                     |
| Input impedance                                                         | Between inputs:<br>1 M $\Omega$ //7 pF                                 |
| Max input voltage                                                       | 200 Vdc + peak ac (probe alone)<br>500 Vdc + peak ac (with attenuator) |
| Max number of probes supported by 3000 X-/4000 X-/5000/6000/7000 Series | 4                                                                      |

## High-voltage Differential Active Probes (continued)

### N2792A/N2818A 200-MHz and N2793A/N2819A 800-MHz general-purpose differential probe

The N2792A/N2818A 200-MHz and N2793A/N2819A 800-MHz differential probes provide the superior general-purpose differential signal measurements required for today's high-speed power measurements, vehicle bus measurements, and digital system designs.

The N2792A/N2818A and N2793A/N2819A probes offer a 10:1 attenuation setting and high input resistance and low input capacitance to minimize circuit loading.

The N2792A/93A are compatible with any oscilloscope with 50  $\Omega$  BNC input. The probe can be powered by any USB port on a scope or computer, or by a 9 V battery. The N2818A/19A are the AutoProbe interface versions of the N2792A/93A. They are compatible with the InfiniiVision 3000 X- and 4000 X-Series only.

#### Characteristics for N2792A/N2818A and N2793A/N2819A differential probes

|                                                        | N2792A/N2818A                         | N2793A/N2819A                           |
|--------------------------------------------------------|---------------------------------------|-----------------------------------------|
| Bandwidth                                              | 200 MHz                               | 800 MHz                                 |
| Risetime                                               | 1.75 ns                               | 437 ps                                  |
| Attenuation ratio                                      | 10:1                                  | 10:1                                    |
| CMRR                                                   | 80 dB at 50/60 Hz<br>-50 dB at 10 MHz | -60 dB at 50/60 Hz<br>-15 dB at 500 MHz |
| Input impedance (between inputs)                       | 1 M $\Omega$ /3.5 pF                  | 200 k $\Omega$ /1 pF                    |
| Max input voltage to ground                            | $\pm 60$ V                            | $\pm 40$ V                              |
| Max input voltage between two inputs                   | $\pm 20$ V                            | $\pm 15$ V                              |
| Max number of probes supported by InfiniiVision Series | 4                                     | 4                                       |

#### Ordering information for Keysight high voltage differential probes and power supply

|        |                                                             |
|--------|-------------------------------------------------------------|
| 1141A  | 200-MHz differential probe                                  |
| 1142A  | Probe control and power module for 1141A                    |
| N2790A | 100-MHz, 1.4 kV differential probe with AutoProbe interface |
| N2791A | 25-MHz, 700-V differential probe                            |
| N2792A | 200-MHz, 20-V differential probe                            |
| N2818A | 200-MHz, 20-V differential probe with AutoProbe interface   |
| N2793A | 800-MHz, 15-V differential probe                            |
| N2819A | 800-MHz, 15-V differential probe with AutoProbe interface   |
| N2891A | 70-MHz, 7,000-V differential probe                          |
| N4853A | Variable pitch browser for N2793A/N2819A, qty 2             |
| N4854A | DC blocking capacitor for N2793A/N2819A, qty 2              |



N2790A 100-MHz, 1.4-kV differential probe with AutoProbe interface



N2791A 25-MHz, 700-V differential probe



N2792A 200-MHz, 20-V differential probe



N2793A 800-MHz, 15-V differential probe

# Single-ended Active Probes


## N2795A/96A/97A low-cost single-ended active voltage



- High resistance (1MΩ) and low capacitance (1 pF) input for low loading
- Wide input dynamic range (±8 V) and offset range (±12 V for N2796A/97A, ±8 V for N2795A)
- Built-in headlight
- Direct connection to AutoProbe interface (no power supply required)
- N2797A for extreme temperature environmental chamber testing at -40 to +85 °C

The N2795A/96A are a new generation of low-cost, 1 to 2 GHz single-ended active probes with the AutoProbe interface (compatible with Keysight’s InfiniVision and Infiniium family of oscilloscopes). These probes integrate many of the characteristics needed for today’s general-purpose, high-speed probing—especially in digital system design, component design/characterization, and educational research applications. Its 1 MΩ input resistance and extremely low input capacitance (1 pF) provide ultra low loading of the DUT. This, accompanied with superior signal fidelity, makes these probes useful for most of today’s digital logic voltages. Testing devices over extreme temperature ranges is quite common these days. The N2797A 1.5 GHz single-ended active probe is the industry’s first low-cost high input impedance active probe with rugged probe tips for environmental chamber testing of ICs and devices. It gives the ability to probe signals at drastic temperature swings ranging from -40 to +85 °C. The probe provides a 2 m long cable. Order N2798A for re-ordering accessories.

The N2795A/96A/97A are equipped with a white LED headlight to illuminate the circuit under test. The probes are powered directly by the InfiniiVision and Infiniium Autoprobe interface, eliminating the need for an additional power supply. The probes also come with a number of accessories that allow for easy connections to the circuit under test.

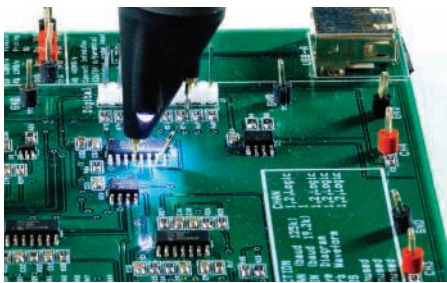

| Model number                                                                    | N2795A                                                                                                         | N2796A                                                                                                            | N2797A   |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------|
| Probe bandwidth* (–3 dB)                                                        | 1 GHz                                                                                                          | 2 GHz                                                                                                             | 1.5 GHz  |
| Risetime                                                                        | 350 ps                                                                                                         | 175 ps                                                                                                            | 233 psec |
| System bandwidth                                                                | 500/600 MHz with Keysight’s 500/600 MHz InfiniiVision/Infiniium, 1 GHz with 1 GHz InfiniiVision 3000 X, 4000 X | 1 GHz with Keysight’s 1 GHz InfiniiVision/Infiniium, 1.5 GHz with Keysight’s 1.5 GHz InfiniiVision 4000 X, 6000 X |          |
| Attenuation ratio (at dc)                                                       | 10:1 ± 0.5%                                                                                                    |                                                                                                                   |          |
| Input dynamic range                                                             | –8 to +8 V (DC or peak AC)                                                                                     |                                                                                                                   |          |
| Non-destructive input voltage                                                   | –20 to +20 V                                                                                                   |                                                                                                                   |          |
| Offset range                                                                    | ±8 V                                                                                                           | ±12 V                                                                                                             |          |
| DC offset error (output zero)                                                   | ±1 mV                                                                                                          |                                                                                                                   |          |
| Low frequency accuracy                                                          | 0.5% at 70 Hz, 1 Vpp                                                                                           |                                                                                                                   |          |
| Input resistance*                                                               | 1 MΩ                                                                                                           |                                                                                                                   |          |
| Input capacitance                                                               | 1 pF                                                                                                           |                                                                                                                   |          |
| Output impedance                                                                | 50 Ω                                                                                                           |                                                                                                                   |          |
| Max number of probes supported by InfiniiVision 3000 X-/5000/6000/7000 Series** | 2                                                                                                              |                                                                                                                   |          |
| Max number of probes supported by InfiniiVision 4000X, 6000X                    | 4                                                                                                              |                                                                                                                   |          |

\* Denotes warranted electrical specifications after 20 minute warm-up, all others are typical  
\*\* The N2797A is compatible with 3000 X-, 4000 X- and 6000 X-Series only.

### Replacement accessories

|        |                                          |
|--------|------------------------------------------|
| N4839A | Dual lead socketed adapter, 6 cm, qty 2  |
| N4840A | Dual lead solder-in adapter, 5 cm, qty 2 |
| N4841A | Dual lead socketed adapter, 9 cm, qty 2  |
| N4842A | Dual pin PCB header, qty 2               |
| N4843A | Solderable tips, qty 10                  |
| N4844A | Right angle ground lead, 5 cm, qty 2     |
| N4845A | Ground blade, qty 2                      |
| N4846A | Offset ground, qty 2                     |

For more information about N2795A/96A/97A active probe, refer to the Keysight N2795A/96A/97A active probe data sheet, literature number 5990-6480EN.



## Mixed Signal Oscilloscope Logic Probes

- Compatible with all 40-pin logic probe
- Flying leads offer flexibility and convenience

### MSO probes offer great value and performance

These logic probes for the InfiniiVision mixed signal oscilloscopes (MSOs) are the same ones used with Keysight industry-leading high-performance logic analyzers. This means we can offer the best performance, great value and access to the industry’s broadest range of logic probing accessories.

The N6450-60001 2 x 8-signal logic probes are divided into two sets of eight channels so you can probe pins that are far apart and work conveniently with only one set if that’s all you require. For optimal signal fidelity, connect ground at each logic probe, in addition to taking a common ground to all eight signals via a separate ground connector on the probe pod. The N6450-60001 probe is included with 6000, 7000, 3000 X- and 4000 X-Series MSOs.

The N6459-60001 is an 8-channel MSO logic probe designed to work with the 2000 X-Series MSOs.

The N2756A is the 16-ch MSO cable kit that comes with the 6000 X-Series MSOs.


### Characteristics for Keysight 54620-68701, N6450-60001, N6459-60001 logic probes

|                   |        |
|-------------------|--------|
| Input impedance   | 100 kΩ |
| Input capacitance | 8 pF   |

The 01650-61607 is the 40-pin (F) to 40-pin (F) logic probe cable for Keysight's InfiniiVision and 54600 Series MSOs. This cable gives the MSO the standard 40-pin female input connector that many Keysight logic analyzers have. With this cable, a user can connect a wide variety of logic analyzer probes such as Mictor, Samtec, and Soft Touch probes.

### Characteristics for Keysight 01650-61607 logic probe

|                   |        |
|-------------------|--------|
| Input impedance   | 100 kΩ |
| Input capacitance | 12 pF  |




01650-61607 logic probe

### Ordering information for Keysight logic probes

|             |                                                                                        |
|-------------|----------------------------------------------------------------------------------------|
| N2756A      | 16-ch MSO cable kit for 6000 X-Series MSO                                              |
| N6450-60001 | Logic probe with 2 x 8 flying leads. Includes 20 IC clips and 5 ground extension leads |
| N6459-60001 | Logic probe with 1 x 8 flying leads. Includes 10 IC clips and 3 ground extension leads |
| 01650-61607 | 40-pin (F) to 40-pin (F) logic probe cable                                             |



N2756A 16-ch MSO cable kitn

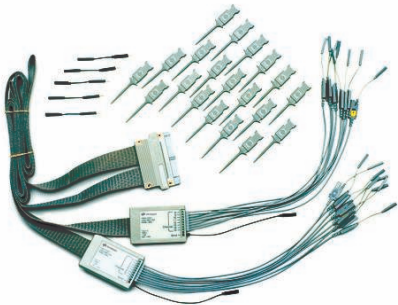

N6450-60001

## Mixed Signal Oscilloscope Logic Probes (continued)

The InfiniiVision MSO digital channels were architected to be compatible with a wide variety of probing accessories developed over 20 years for logic analyzers. There's a good chance that the logic analyzer accessories you already own work with your MSO. With the addition of an optional 40-pin cable, 01650-61607, the MSO accepts numerous logic analyzer accessories:

- E5346A 34-channel Mictor connector probe
- E5385A 34-channel Samtec connector
- E5383A 16-channel flying lead set
- 01650-63203 16-channel termination adaptor (also available as a bundle of both the termination adapter and the 40-pin cable with PN 10085-68701)
- E5404A 34-channel soft touch probe connectorless probe
- E5394A 34-channel soft touch connectorless probe
- E5396A 16-channel soft touch connectorless probe
- Any other accessory that connects to a logic analyzer via a 40-pin cable

For logic accessories of greater channel width than MSO digital channels (> 16 channels), there are two use models.

- Route up to 16 signals to the probe and don't use the additional probe channels.
- Route up to 32 signals to the probe and measure 1/2 of them at a time. Simply plug the 40-pin cable to the other side of the probe to see the other 1/2 of the signals.



E5346A 34-channel Mictor connector probe



E5385A 34-channel Samtec connector probe



E5396A 16-channel soft touch connectorless probe

## Clamp-on Current Probes

- Up to 100 MHz bandwidth and 500 Arms current
- Hybrid technology to measure ac and dc
- Compatible with 1 M $\Omega$  scope input

### Accurate current measurements without breaking the circuit

Compatible with any scope or voltage measuring instruments with BNC input, the 1146B and N2780B Series current probes offer accurate and reliable solutions for measuring dc and ac currents. The probes use a hybrid technology that includes a Hall effect sensor, which senses the dc current and a current transformer, which senses the ac current, making it unnecessary to make an electrical connection to the circuit.

#### 1146B 100 kHz current probe

The 1146B ac/dc current probe provides accurate display and measurement of currents from 100 mA to 100 Arms, dc to 100 kHz, without breaking into the circuit. A battery level indicator and overload indicator help ensure proper readings. It connects directly to the scope through a 2-m coaxial cable with an insulated BNC.



1147B 50-MHz current probe with AutoProbe interface



1146B 100-kHz current probe

#### 1147B/N2893A 50-MHz/100-MHz current probe with AutoProbe interface

The 1147B/N2893A is a wide bandwidth, dc to 50-MHz/100-MHz current probe. The probe offers flat frequency response across the entire dc to 50-MHz/100-MHz bandwidth, low noise ( $< -2.5$  mArms) and low circuit insertion loss.

The 1147B/N2893A probe is compatible with the AutoProbe interface, which completely configures the oscilloscope for the probe when used with the 3000 X-, 4000 X-, 5000, 6000 300 MHz - 1 GHz, 7000 Series scopes. Probe power is provided by the scope, so there is no need for an external power supply. The N2893A uniquely provides auto demagnetization and offset elimination feature when used in conjunction with InfiniiVision or Infiniium scopes.



N2893A 100-MHz current probe with AutoProbe interface

#### N2780B/81B/82B/83B/83L 2-MHz/10-MHz/50-MHz/100-MHz current probe

The N2780B Series current probes are high bandwidth, active current probes, featuring flat bandwidth, low noise (2.5 mArms) and low circuit insertion loss. In conjunction with the power supply (model N2779A), this probe can be used with any oscilloscope having a high-impedance BNC input. The companion power supply N2779A (3 x 12 Vdc output) lets you connect up to any three N2780B-83B current probes to a single power supply.

The N2783L 80 MHz current probe offers 5 m long cable, which allows you to reach DUTs in long distances very easily. Other than the bandwidth performance, the N2783A and N2783L have the same electrical performance. The N2783L also requires the N2779A power supply to power the probe.



N2780B Series current probes with N2779A power supply

## Clamp-on Current Probes (continued)

### Characteristics of the 1146B current probe

|                                 |                                                          |
|---------------------------------|----------------------------------------------------------|
| Bandwidth*                      | dc to 100 kHz (–3 dB)                                    |
| Current range*                  | 100 mV/A:100 mA to 10 A peak<br>10 mV/A:1 to 100 A peak  |
| Output signal                   | 1000 mV peak max                                         |
| AC current accuracy*            |                                                          |
| Range                           | 100 mV/A<br>(50 mA to 10 A peak)                         |
| Accuracy Range                  | 3% of reading ±50 mA<br>10 mV/A<br>(500 mA to 40 A peak) |
| Accuracy Range                  | 4% of reading ±50 mA<br>10 mV/A<br>(40 A to 100 A peak)  |
| Accuracy                        | 15% max at 100 A                                         |
| Noise                           | Range 10 mV/A: 480 µV<br>Range 100 mV/A: 3 mV            |
| Insertion impedance             | 0.01 Ω (50/60 Hz)                                        |
| Maximum working voltage         | 600 Vrms CAT II or 300 Vrms CAT III                      |
| Maximum common mode voltage     | 600 Vrms CAT II or 300 Vrms CAT III                      |
| Influence of adjacent conductor | < 0.2 mA/A AC                                            |
| Influence of conductor position | 0.5% of reading at 1 kHz in jaw                          |
| Battery                         | 9 V alkaline (NEDA 1604A, IEC 6LR61)                     |
| Low battery                     | Green LED on when ≤ 6.5 V                                |
| Battery life                    | 55 hours typical                                         |

Note: Reference conditions 23 ±5 °C, (73.4 ±41 °C) 20 to 75% relative humidity, dc to 1 kHz, probe zeroed, 1-minute warmup, batteries at 9 V + 0.1 V, external magnetic field <40 A/m, no dc component, no external current carrying conductor, 1 MΩ/100 pF load, conductor centered in jaw.

\* Characteristics marked with asterisks are specified performance. Others are typical characteristics.

### Characteristics of the 1147B/ N2893A current probe

|                                         |                                                                                                                                                                 |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bandwidth (–3 dB)                       | dc to 50 MHz (1147B)<br>dc to 100 MHz (N2893A)                                                                                                                  |
| Risetime                                | 7 ns or less                                                                                                                                                    |
| Maximum current (continuous)            | 15 A peak, 15 A DC, 10 Arms (when two probes are used with InfiniiVision scope)<br>30A peak, 30 A DC, 24 Arms (when one probe is used with InfiniiVision scope) |
| Maximum peak current (non-continuous)   | 30 A peak (when two probes are used with InfiniiVision scope)<br>32 A peak (when one probe is used with InfiniiVision scope)                                    |
| Output voltage rate                     | 0.1 V/A                                                                                                                                                         |
| Amplitude accuracy                      | ±1% rdg, ±10 mA (dc and 45 to 66 Hz, rated current)                                                                                                             |
| Noise                                   | Equivalent to 2.5 mArms or less (for 20 MHz bandwidth measuring instrument)                                                                                     |
| Temperature coefficient for sensitivity | ±2% or less (within a range of 0 to 40 °C or 32 to 104 °F)                                                                                                      |
| Effect of external magnetic fields      | Equivalent to a maximum of 20 mA (in a dc to 60 Hz, 400 A/m magnetic field)                                                                                     |
| Maximum rated power                     | 3 VA (with rated current)                                                                                                                                       |
| Maximum input voltage                   | 300 V CAT I                                                                                                                                                     |
| Diameter of measurable conductors       | 5 mm dia. (0.2 in dia.)                                                                                                                                         |
| Probe interface                         | AutoProbe interface                                                                                                                                             |
| Cable lengths                           | Sensor cable:<br>Approx. 1.5 m (59.0 in)<br>Power supply cable:<br>Approx. 1 m (39.4 in)                                                                        |
| Maximum number of probes supported      | 2                                                                                                                                                               |

Note: The above specifications are guaranteed at 23 ±3 °C (or 73 ±5 °F)

### Characteristics of N2780B Series current probes

|                                       |                                                                                                                            |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Bandwidth (–3 dB)                     | dc to 2 MHz (N2780B)<br>dc to 10 MHz (N2781B)<br>dc to 50 MHz (N2782B)<br>dc to 80 MHz (N2783L)<br>dc to 100 MHz (N2783A)  |
| Maximum current (continuous)          | 500 A (N2780B)<br>150 A (N2781B)<br>30 A (N2782B/83B/83L)                                                                  |
| Maximum peak current (non-continuous) | 700 A peak (N2780B)<br>300 A peak (N2781B)<br>50 A peak (N2782B/83B/83L)                                                   |
| Maximum input voltage                 | 300 V CAT I (N2782B/83B/83L)<br>300 V CAT III, 600 V CAT II (N2780B/81B)                                                   |
| Output voltage rate                   | 0.01 V/A (N2780B/81B)<br>0.1 V/A (N2782B/83B/83L)                                                                          |
| Amplitude accuracy                    | ±1.0 % rdg ±500 mA (N2780B)<br>±1.0 % rdg ±100 mA (N2781B)<br>±1.0 % rdg ±10 mA (N2782B)<br>±1.0 % rdg ±10 mA (N2783B/83L) |

### Ordering information for Keysight current probes

|        |                                                   |
|--------|---------------------------------------------------|
| 1146B  | 100-kHz current probe                             |
| 1147B  | 50-MHz current probe with AutoProbe interface     |
| N2893A | 100-MHz current probe with AutoProbe interface    |
| N2780B | 2-MHz current probe                               |
| N2781B | 10-MHz current probe                              |
| N2782B | 50-MHz current probe                              |
| N2783L | 80-MHz current probe with 5 m long cable          |
| N2783B | 100-MHz current probe                             |
| N2779A | 3-channel power supply for N2780B/81B/82B/83B/83L |

For more information about the N2780B Series current probes, refer to the Keysight N2780B Series current probe data sheet, literature number 5989-6432EN.

## High-Sensitivity Current Probes

- Measure AC/DC currents as low as 50  $\mu\text{A}$
- Ideal for capturing and analyzing low level current flow in the DUT to characterize sub-circuits or measure current consumption of battery-powered devices or integrated circuits
- Simultaneous high- and low-gain views of the current waveform for more precise wide dynamic range measurement (with N2820A)




As modern battery-powered devices and integrated circuits become more green and energy efficient, there is a growing need to make high-sensitivity, low-level current measurements to ensure the current consumption of these devices is in acceptable limits. The N2820A high-sensitivity probe is engineered to make high-dynamic-range, high-sensitivity measurements to meet today's challenging current measurement needs.

Use an area-under-the-curve measurement (Charge) on InfiniiVision oscilloscopes to easily calculate the integrated current consumptions over time in Ah.

The N2820A/21A high-sensitivity current probes are compatible with InfiniiVision 3000 X-, 4000 X- and 6000 X-Series oscilloscopes.

The ultra-sensitive N2820A AC/DC current probe can support measurements from 50  $\mu\text{A}$  to 5 A on Keysight oscilloscopes. The N2820A interface uses a make-before-break (MBB) connector, allowing you to quickly probe multiple locations on your DUT without having to solder or unsolder the leads. The N2820A 2-channel current probe connects to two oscilloscope channels to provide simultaneous low- and high-gain views for wider dynamic range measurement, while the N2821A 1-channel current probe provides one user-selectable view at a time.

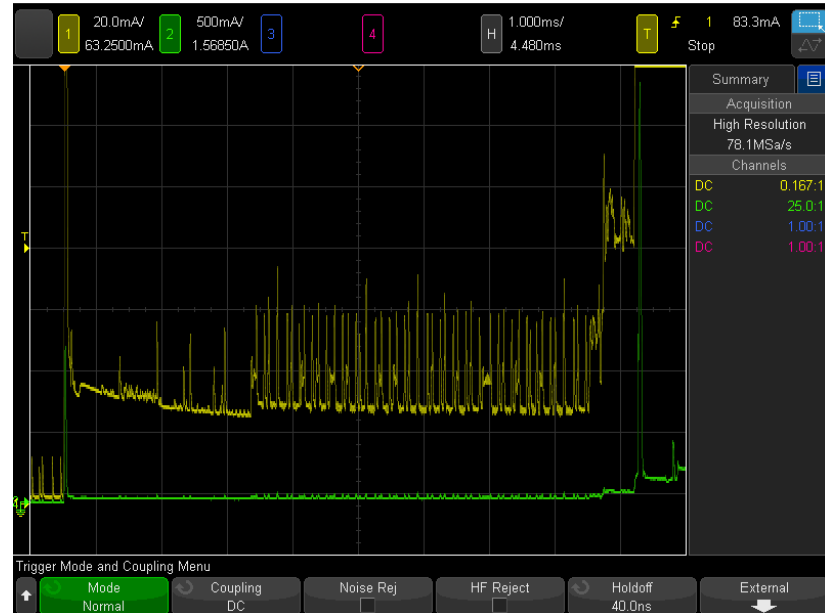

The N2820A 2-channel current probe connects to two oscilloscope channels to provide simultaneous low- and high-gain views for wider dynamic range measurement

## High-Sensitivity Current Probes (continued)

| Probe characteristics and specification               |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bandwidth (–3 dB)                                     | Zoom-out channel: DC to 3 MHz<br>Zoom-in channel: DC to 500 kHz                                                                                                                                                                                                                                                                                                                                                                        |
| Risetime ( $T_r = 0.35/\text{bandwidth}$ , 10% - 90%) | Zoom-out channel: < 0.116 $\mu\text{sec}$<br>Zoom-in channel: < 0.7 $\mu\text{sec}$                                                                                                                                                                                                                                                                                                                                                    |
| Minimum measurable current*                           | 250 $\mu\text{A}$ (with N2822A 20 m $\Omega$ , 500 mW)<br>50 $\mu\text{A}$ (with N2824A 100 m $\Omega$ , 500 mW)<br>5 mA (with N2825A user-defined 1 m $\Omega$ , 500 mW)<br>50 $\mu\text{A}$ (with N2825A user-defined 1 k $\Omega$ , 500 mW)                                                                                                                                                                                         |
| Maximum measurable current                            | 5 A (with N2822A 20 m $\Omega$ , 500 mW)<br>2.2 A (with N2824A 100 m $\Omega$ , 500 mW)<br>5 A** (with N2825A user-defined 1 m $\Omega$ , 500 mW)<br>1.2 mA** (with N2825A user-defined 1 k $\Omega$ , 500 mW)                                                                                                                                                                                                                         |
| DC amplitude accuracy                                 | $\pm 3\%$ or 10 $\mu\text{A}$ (whichever is greater)                                                                                                                                                                                                                                                                                                                                                                                   |
| Gain***                                               | Zoom-in channel: $300 \pm 3\%$<br>Zoom-out channel: $1.97 \pm 3\%$                                                                                                                                                                                                                                                                                                                                                                     |
| Max input voltage                                     | $\pm 12\text{ V}$                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Output impedance                                      | 1 M $\Omega$                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Standard accessories                                  | – 1 each 20 m $\Omega$ resistor sensor head<br>– 1 each 100 m $\Omega$ resistor sensor head<br>– 1 each user defined resistor sensor head<br>– 5 each twisted leads (22 AWG) with sockets<br>– 5 each twisted leads (22 AWG) without sockets<br>– 5 each MBB headers<br>– 5 each MBB receptacles<br>– 1 each ground lead<br>– 1 each screw driver<br>– 1 each passive cable (with N2820A only)<br>– 1 each user guide manual (English) |
| Compatible InfiniiVision oscilloscopes                | InfiniiVision 3000 X-Series (with software version 2.30 or higher)<br>InfiniiVision 4000 X-Series (with software version 3.10 or higher)<br>InfiniiVision 6000 X-Series (with software version 6.00 or higher)                                                                                                                                                                                                                         |
| Max number of probes supported by 3000 X-Series       | Two N2820A probes using both pods or two N2821A probes                                                                                                                                                                                                                                                                                                                                                                                 |
| Max number of probes supported by 4000 X-Series       | Two N2820A probes using both pods, four N2820A probes using only the primary pod, or four N2821A probes                                                                                                                                                                                                                                                                                                                                |

\*  $V_{\text{supply}}$  is equal to 5 V, solder attached.

\*\* Max current varies with max resistor power rating. The examples in the table assume 500 mW power rating.

\*\*\* Denotes warranted specification after 20-minute warm up. All others entries in the table are characteristics

### Ordering information

| Model numbers | Descriptions                        |
|---------------|-------------------------------------|
| N2820A        | High-sensitivity 2-ch current probe |
| N2821A        | High-sensitivity 1-ch current probe |

| Replacement part numbers |                                                                                                 |
|--------------------------|-------------------------------------------------------------------------------------------------|
| N2822A                   | 20 m $\Omega$ resistor tips                                                                     |
| N2824A                   | 100 m $\Omega$ resistor tips                                                                    |
| N2825A                   | User-defined resistor tips                                                                      |
| N2826A                   | Replacement wires (15.5 cm, 22 AWG bare wires) (qty 5)                                          |
| N2827A                   | Passive cable (for N2820A secondary channel)                                                    |
| N2828A                   | Replacement MBB (Make Before Break) headers (qty 5)                                             |
| N2829A                   | Replacement MBB (Make Before Break) receptacles and 15.5 cm, AWG 22 socketed wires (qty 5 each) |

## Wedge Probe Adapters

- Easy connection to surface mount ICs
- Safe, with no chance of shorting
- Mechanically non-invasive contact
- 3-, 8-, and 16-signal versions
- Supports 0.5 and 0.65-mm TQFP and PQFP packages

### Problem-free probing

The Keysight wedge probe adapter eliminates many of the frustrations associated with probing surface mount components. If you've ever accidentally shorted IC pins together, experienced electrical and/or mechanical problems with soldering small wires onto leads, or gotten frustrated juggling multiple probes while you're trying to operate your scope, the Wedge was designed with you in mind.

### Make the inaccessible accessible

When you use the Wedge, you don't have to worry about shorting IC pins together on a delicate component—or worse yet on an irreplaceable prototype. The Wedge is easy to insert and it stays put. There's no need to solder small wires onto leads. The Wedge is mechanically non-invasive, so you won't damage the legs of the IC. Instead, you'll have easy access to hard-to-reach components.

### Electrical reliability

The Wedge makes two contact points with each leg of the IC. This redundant physical connection increases the electrical reliability of the connection. And the Wedge's low capacitance and inductance provides superior performance to many other alternatives.

The wedge probe adapter connects directly to 1145A/1155A active probes and the dual lead adapter provided with the 1160A-65A passive probe family and N2877A/N2879A accessory kits for use with N287xA Series passive probes.

### IC clip kits

An inexpensive solution for probing fine-pitch ICs, the 10072A SMT Kit includes 10 IC clips and 2 dual-lead adapters that connect the clips directly to 10070-family probes.

The 10075A 0.5-mm IC clip kit is ideal for connecting to IC's as fine as 0.5 mm. The clip body allows many clips to be mounted side-by-side. The kit includes four 0.5-mm IC clips and two dual-lead adapters that connect the IC clips directly to 10070-family probes.

### Keysight Wedge electrical characteristics

|                              |                                                                                                 |
|------------------------------|-------------------------------------------------------------------------------------------------|
| Operating voltage            | < 40 Vdc + peak ac                                                                              |
| Operating current            | 0.5 A maximum                                                                                   |
| Capacitance between contacts | 2 pF typical (all except Keysight-E2643A/44A)<br>4.33 pF typical at 1 MHz (Keysight-E2643A/44A) |
| Self-inductance              | 15 nH typical (all except Keysight E2643A/44A)<br>37 nH typical at 1 MHz (Keysight E2642A/44A)  |
| Cross coupling               | -31 dB typical at 100 MHz (Keysight E2643A/44A)                                                 |
| Contact resistance           | < 0.1 $\Omega$                                                                                  |

### Ordering information

|        |                                               |
|--------|-----------------------------------------------|
| E2613A | 0.5 mm Wedge probe adapter, 3 signal, qty 1   |
| E2614A | 0.5 mm Wedge probe adapter, 8 signal, qty 1   |
| E2643A | 0.5 mm Wedge probe adapter, 16 signal, qty 1  |
| E2615A | 0.65 mm Wedge probe adapter, 3 signal, qty 1  |
| E2616A | 0.65 mm Wedge probe adapter, 8 signal, qty 1  |
| E2644A | 0.65 mm Wedge probe adapter, 16 signal, qty 1 |
| 10072A | SMT kit for 10070 probe family                |
| 10075A | 0.5 mm IC clip kit                            |



## Miscellaneous Accessories

### Testmobile

The sturdy Keysight 1180CZ Testmobile for use with 6000 Series oscilloscopes makes sharing your scope easy. Its large wheels make it easy to roll from place to place. For use with the Keysight 6000 Series scope, the 1180CZ Testmobile scope cart with the N2919A bracket provides convenient mobility and secure mounting of your scope.

### Specifications for the Keysight Testmobiles

| 1180CZ              |                                                       |
|---------------------|-------------------------------------------------------|
| Total load capacity | 59 kg (130 lbs)                                       |
| Tilt tray           | 45.7 cm wide x 45.7 cm deep (18 in Wide x 18 in Deep) |

### Carrying cases

The Keysight N6457A soft carrying case makes transporting and shipping your 2000 X- and 3000 X-Series oscilloscope safe and simple. An oscilloscope and other accessories fit neatly inside the padded shell for shipment. For use with the 7000, 4000 X-, and 6000 X-Series, order N2733B soft carrying case.



N2760A soft carrying case for the 5000 Series



N2733B soft carrying case for 7000, 4000 X-, and 6000 X-Series

### Rackmount kit

The Keysight N2916B rackmount kit positions your 5000 and 6000 Series scope in the center of the rack. Each kit includes a custom shelf with rails, 6 BNC pass-throughs and all necessary screws. For mounting the 7000 Series in the rack, order N2732A. For mounting all 2000 X- and 3000 X-Series in a rack, order N6456A. For mounting any 4000 X-Series in a rack, order N2763A. For mounting a 6000 X-Series in a rack, order the N2111A.

### Ordering information

|        |                                                        |
|--------|--------------------------------------------------------|
| 1180CZ | Testmobile for 6000 Series                             |
| N2919A | Bracket for 1180CZ Testmobile and 6000 Series scope    |
| N2917B | Hard carrying case for 5000 and 6000 Series            |
| N6457A | Soft carrying case for 2000 X- and 3000 X-Series       |
| N2733B | Soft carrying case for 7000, 4000 X- and 6000 X-Series |
| N2760A | Soft carrying case for 5000 Series                     |
| N2916B | Rackmount kit for 5000 and 6000 Series                 |
| N2732A | Rackmount kit for 7000 Series                          |
| N6456A | Rackmount kit for 2000 and 3000 X-Series               |
| N2763A | Rackmount kit for 4000 X- Series                       |
| N2111A | Rack mount kit for 6000 X-Series                       |



N2916B rackmount kit for 5000/6000 Series

## Miscellaneous Accessories (continued)

### Probe positioners

- Easy-to-manipulate probe arms for hands-free browsing
- One- or two-articulated arms with stable high-mass base (N2784A and N2785A)
- Quick and stable XY positioning (N2786A)
- Stable 3D probe positioning for hard-to-reach XYZ access (N2787A)
- Compatible with most scope probes
- Applications: Hands-free browsing for electronic components on PC board

The N2784A and N2785A probe positioners provide quick and stable X-Y positioning for PC boards and devices that require hands-free probing.

Unlike other probe positioners that require multiple adjustments to lock the probe holder into position, the N2784A and N2785A need only the “lift and drop” motion to put the probe in place. The weight stabilization technique used in these probe holders keeps constant pressure at the probing point so the probe tip stays in position even when the target board is bumped.

The N2786A is a low cost, easy-to-use XY axis probe holder for general purpose probing applications. The two-leffed positioner is designed to be easy to use—the positioner itself has no controls to positioner it in place.


The N2787A is a 3D probe positioner with a flexible, articulating arm that can be quickly positioned in a variety of configurations.

For more information about Keysight’s probe positioners, refer to literature number 5989-9131EN.

### Ordering information

| Product number      | Description            |
|---------------------|------------------------|
| N2784A <sup>1</sup> | 1-arm probe positioner |
| N2785A <sup>1</sup> | 2-arm probe positioner |
| N2786A              | 2-leg probe positioner |
| N2787A              | 3D probe positioner    |

Note<sup>1</sup> Includes 3x magnifying glass, arm strap, cable tie, probe rest, and manual.

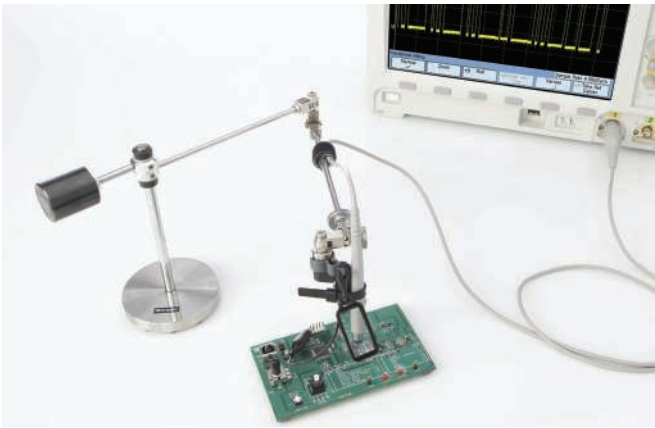

N2784A one-arm probe positioner



N2786A 2-leg probe positioner



N2787A 3D probe positioner

## N2744A T2A Probe Interface Adapter

- Enables Tektronix® TekProbe-BNC® level 2 probes to connect to Keysight's AutoProbe interface on InfiniiVision 3000 X-, 4000 X-, 6000 X-, 5000, 6000, and 7000 oscilloscopes
- An easy-to-use plug-on adapter to the Keysight oscilloscope's AutoProbe interface
- Provides necessary probe power, calibration, and offset control as needed to the attached TekProbe probe



The N2744A T2A interface adapter enables selected TekProbe® interface level 2 probes to be used with Keysight oscilloscopes with AutoProbe interface. Existing TekProbe-BNC probe types can simply be plugged into the T2A adapter which is then plugged directly into any AutoProbe input channel on an InfiniiVision or Infiniium oscilloscope. Select the probe model in the scope menu and the Keysight oscilloscope sets up the attenuation factor and the probe type automatically. The T2A interface adapter supplies the necessary probe power, calibration (for selected models only) and offset control as used by the connected TekProbe probe. The adapter is targeted for customers using both Tek active probes with TekProbe-BNC level 2 interfaces and Keysight oscilloscopes with the AutoProbe interface.

### Tek probe compatibility

The N2744A T2A adapter supports only the probes listed below with TekProbe interfaces.

#### AC/DC current probe

|        |                            |
|--------|----------------------------|
| TCP202 | 50-MHz AC/DC current probe |
|--------|----------------------------|

#### Single-ended active probes

|       |                                                                 |
|-------|-----------------------------------------------------------------|
| P6243 | Single-ended active probe, 1 GHz, 10:1 without offset control   |
| P6245 | Single-ended active probe, 1.5 GHz, 10:1 with offset control    |
| P6205 | Single-ended active probe, 750 MHz, 10:1 without offset control |
| P6241 | Single-ended active probe, 4 GHz, 10:1 with offset control      |
| P6249 | Single-ended active probe, 4 GHz, 5:1 with offset control       |

#### Differential active probes

|                 |                                                              |
|-----------------|--------------------------------------------------------------|
| P5205 or P5205A | Differential probe, 100 MHz, 50:1/500:1 with offset control  |
| P5210 or P5210A | Differential probe, 50 MHz, 100:1/1000:1 with offset control |
| P6246           | 400 MHz, 10:1/1:1 with offset control                        |
| P6247           | 1 GHz, 10:1/1:1 with offset control                          |
| P6248           | 1.5 GHz, 10:1/1:1 with offset control                        |
| P6250           | 500 MHz, 50:1/5:1 with offset control                        |
| P6251           | 1 GHz, 50:1/5:1 with offset control                          |

#### Keysight scope compatibility

- Keysight InfiniiVision 6000 X-Series with software version 6.00 or higher
- Keysight InfiniiVision 3000 X-/4000 X-Series with software version 1.10 or higher
- Keysight InfiniiVision 5000, 6000, and 7000 Series and future revisions (except 6000 100-MHz) with software version 06.16 or higher

#### Optical-to-Electrical Converters (works with InfiniiVision 5000, 6000 and 7000 with version 6.16 software only)

|        |                                                              |
|--------|--------------------------------------------------------------|
| P6701B | 1 GHz Optical-to-electrical converter with FC/PC connector   |
| P6703B | 1.2 GHz Optical-to-electrical converter with FC/PC connector |
| P6711  | 250 MHz Optical-to-electrical converter                      |
| P6713  | 300 MHz Optical-to-electrical converter                      |

#### Ordering information

|        |                             |
|--------|-----------------------------|
| N2744A | T2A probe interface adapter |
|--------|-----------------------------|

## Recommended Probes for Low-/Mid-Speed Bus Measurements

| Applications | Speed and signal type           | Recommended probe    | Required probe bandwidth          |
|--------------|---------------------------------|----------------------|-----------------------------------|
| LIN          | 10 kHz, single-ended            | SE passive           | > 100 MHz                         |
| ARINC 425    | 1000 kbps, differential         | N2792A/N2818A        | 200 MHz                           |
| CAN          | 1 Mbps, differential            | N2792A/N2818A        | 200 MHz                           |
| MIL-STD 1553 | 1 Mbps, differential<br>±25 Vpp | N2792A/N2818A        | 200 MHz                           |
| I²S (audio)  | ~2.8 MHz, single-ended          | SE passive           | > 100 MHz                         |
| I²C/SMBus    | < 4 MHz, single-ended           | SE passive           | > 100 MHz                         |
| RS232/UART   | < 10 Mbps, single-ended         | SE passive           | > 100 MHz                         |
| RS422/485    | 10 Mbps, differential           | N2792A/N2818A        | 200 MHz                           |
| FlexRay      | 10 Mbps, differential           | N2792A/N2818A        | 200 MHz                           |
| SPI          | 1 – 100 MHz, single-ended       | SE passive or N2795A | > 100 MHz passive or 1 GHz active |
| MOST         | 150 Mbps, differential          | N2750A               | 1.5 GHz                           |
| USB 2.0      | 480 Mbps, differential          | N2750A               | 1.5 GHz                           |



# Keysight Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications

## myKeysight

### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.



[www.axiestandard.org](http://www.axiestandard.org)

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium. ATCA®, AdvancedTCA®, and the ATCA logo are registered US trademarks of the PCI Industrial Computer Manufacturers Group.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



[www.pxisa.org](http://www.pxisa.org)

PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.



### Three-Year Warranty

[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.



### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2008  
Quality Management System

### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

TekProbe®, TEKTRONIX® and TEK® are registered trademarks of Tektronix, Inc

[www.keysight.com/find/probes](http://www.keysight.com/find/probes)

For more information on Keysight

Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

## Americas

|               |                  |
|---------------|------------------|
| Canada        | (877) 894 4414   |
| Brazil        | 55 11 3351 7010  |
| Mexico        | 001 800 254 2440 |
| United States | (800) 829 4444   |

## Asia Pacific

|                    |                |
|--------------------|----------------|
| Australia          | 1 800 629 485  |
| China              | 800 810 0189   |
| Hong Kong          | 800 938 693    |
| India              | 1 800 112 929  |
| Japan              | 0120 (421) 345 |
| Korea              | 080 769 0800   |
| Malaysia           | 1 800 888 848  |
| Singapore          | 1 800 375 8100 |
| Taiwan             | 0800 047 866   |
| Other AP Countries | (65) 6375 8100 |

## Europe & Middle East

|                |               |
|----------------|---------------|
| Austria        | 0800 001122   |
| Belgium        | 0800 58580    |
| Finland        | 0800 523252   |
| France         | 0805 980333   |
| Germany        | 0800 6270999  |
| Ireland        | 1800 832700   |
| Israel         | 1 809 343051  |
| Italy          | 800 599100    |
| Luxembourg     | +32 800 58580 |
| Netherlands    | 0800 0233200  |
| Russia         | 8800 5009286  |
| Spain          | 0800 000154   |
| Sweden         | 0200 882255   |
| Switzerland    | 0800 805353   |
|                | Opt. 1 (DE)   |
|                | Opt. 2 (FR)   |
|                | Opt. 3 (IT)   |
| United Kingdom | 0800 0260637  |

For other unlisted countries:

[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

(BP-07-10-14)