

Quad analog switch


BU4066BC / BU4066BCF / BU4066BCFV

The BU4066BC, BU4066BCF, and BU4066BCFV each consist of four independent switches capable of controlling either digital or analog signals. When Enable Input (CONT) is set to the "H" level, impedance is low (ON status) between switch input and output, and when Enable Input (CONT) is set to the "L" level, impedance is high (OFF status). As the BU4066BC has a good propagation characteristic, it can control large input voltage amplitudes. These switches can be used in analog and digital signal switching and in chopper modulator and demodulator circuits.

●Absolute maximum ratings (Ta=25°C)


Parameter	Symbol	Limits	Unit
Power supply voltage	V_{DD}	-0.3~+20	V
Power dissipation	P_d	1000(DIP), 450(SOP) 350(SSOP)	mW
Operating temperature	T_{opr}	-40~+85	°C
Storage temperature	T_{stg}	-55~+150	°C
Input voltage	V_{IN}	-0.5~ $V_{DD}+0.5$	V

●Block diagram

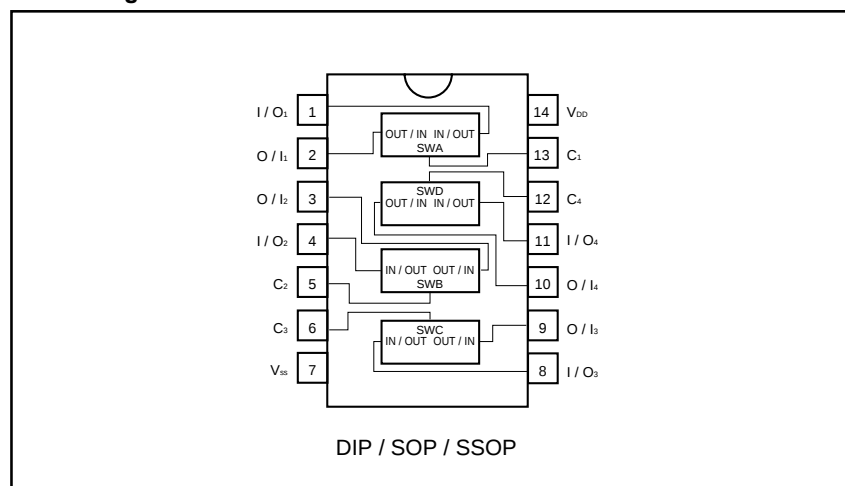

Standard ICs

●Logic circuit diagram

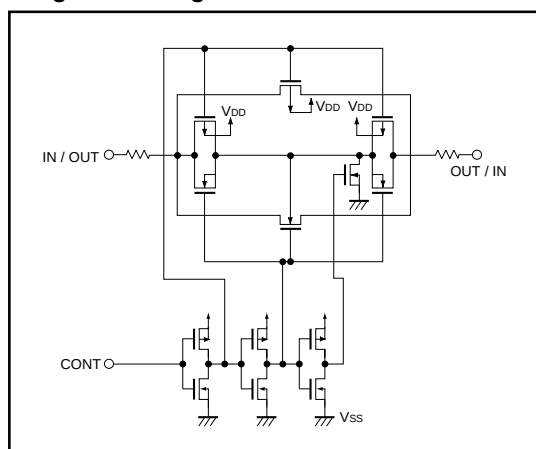

●Electrical characteristics

DC characteristics (unless otherwise noted, Ta=25°C, Vss=0V)

Parameter	Symbol	Min.	Typ.	Max.	Unit	V _{DD} (V)	Conditions	Measurement circuit
Input high-level voltage	V _{IH}	3.5	—	—	V	5	—	Fig. 1
		7.0	—	—		10		
		11.0	—	—		15		
Input low-level voltage	V _{IL}	—	—	1.5	V	5	—	Fig. 1
		—	—	3.0		10		
		—	—	3.75		15		
Input high-level current	I _{IH}	—	—	0.3	μA	15	V _{IH} =15V	Fig. 1
Input low-level current	I _{IL}	—	—	−0.3	μA	15	V _{IL} =0V	Fig. 1
ON resistance	R _{ON}	—	150	600	Ω	5	V _{IN} =0.25V, R _L =10kΩ	Fig. 1
		—	500	950		5	V _{IN} =2.5V, R _L =10kΩ	
		—	200	600		5	V _{IN} =5V, R _L =10kΩ	
		—	230	500		10	V _{IN} =5V, R _L =10kΩ	
		—	180	280		15	V _{IN} =7.5V, R _L =10kΩ	
ON resistance deflexion	ΔR _{ON}	—	25	—	Ω	5	V _I =V _{DD} /2 R _L =10kΩ	Fig. 1
		—	10	—		10		
		—	5	—		15		
OFF-channel leakage current	I _{OFF}	—	—	0.3	μA	15	V _{IN} =15V, V _{OUT} =0V	Fig. 1
		—	—	−0.3		15	V _{IN} =0V, V _{OUT} =15V	
Static current dissipation	I _{DD}	—	—	1.0	μA	5	V _I =V _{DD} or GND	—
		—	—	2.0		10		
		—	—	4.0		15		
Input capacitance (control input)	C _C	—	8	—	pF	—	f=1MHz	—
Input capacitance (switch input)	C _S	—	10	—	pF	—	f=1MHz	—

BU4066BC / BU4066BCF / BU4066BCFV

Standard ICs

Switching characteristics (unless otherwise noted, Ta=25°C, CL=50pF)

Parameter	Symbol	Min.	Typ.	Max.	Unit	VDD (V)	Conditions	Measurement circuit
Propagation delay time SW IN→OUT	tPLH tPHL	—	20	50	ns	5	RL=10kΩ	Fig.2
		—	12	40		10		
		—	10	30		15		
Propagation delay time CONT→OUT	tPHZ tPLZ	—	40	90	ns	5	Output "H", "L" → "High-Z" RL=1kΩ	Fig.2
		—	35	80		10		
		—	30	70		15		
Propagation delay time CONT→OUT	tPZH tPZL	—	60	140	ns	5	Output "High-Z"→ "H", "L" RL=1kΩ	Fig.2
		—	20	50		10		
		—	15	40		15		
Feedthrough attenuation	FT	—	0.7	—	MHz	5	VSS=−5V, RL=10kΩ *1	Fig.2
Sine wave distortion	D	—	0.1	—	%	5	VSS=−5V, RL=10kΩ *2	Fig.2
Crosstalk (CONT→OUT)	CTC	—	—	600	mVp-p	5	VSS=−5V, RL=10kΩ f=1MHz	Fig.2
Crosstalk (2) between channels	CT	—	1	—	MHz	5	VSS=−5V, RL=10kΩ *1	Fig.2

*1 VIN : 5Vp-p sine wave, frequency that enables $\frac{V_{OUT}}{V_{IN}} - 50\text{dB}$ at channel off.

*2 VIN : 5Vp-p sine wave.

●Measurement circuits




Fig.1 (a) Input voltage, current

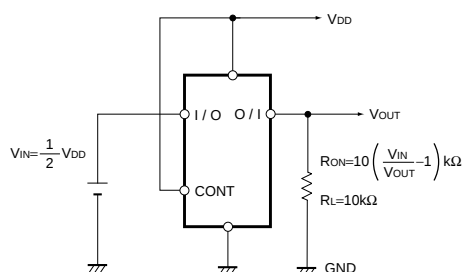


Fig.1 (b) On resistance




Fig.1 (c) Channel off leakage current

Standard ICs

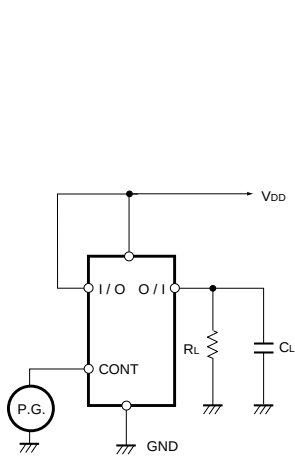


Fig.2 (a) Propagation delay time (IN to OUT)

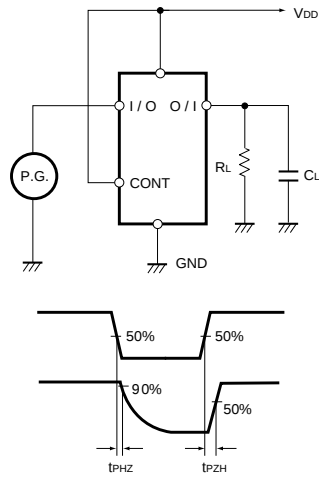


Fig.2 (b) Propagation delay time (CONT to OUT)

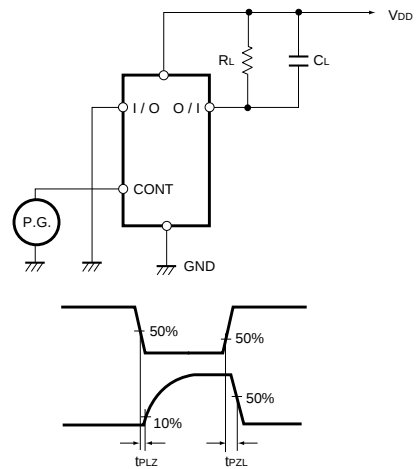


Fig.2 (c) Propagation delay time (CONT to OUT)

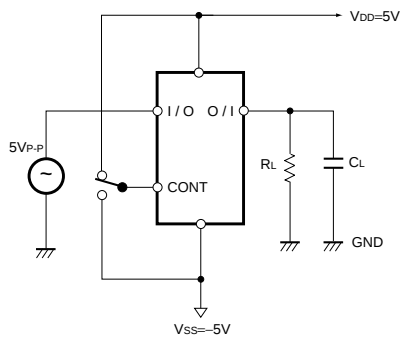


Fig.2 (d) Sine wave distortion, feedthrough attenuation

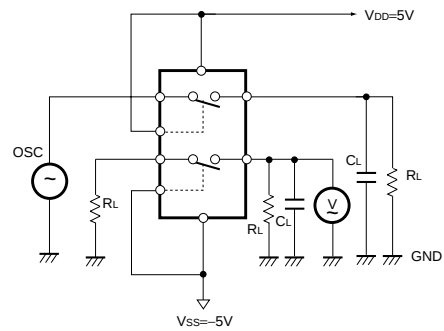


Fig.2 (e) Crosstalk




Fig.2 (f) Control IN→OUT crosstalk

Standard ICs

●Electrical characteristics curves


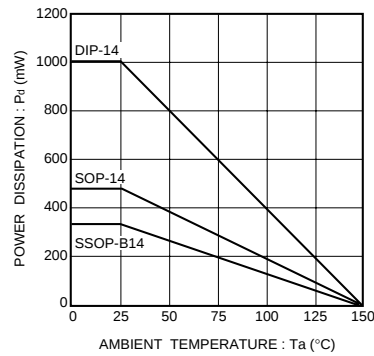


Fig.3 Power dissipation vs. ambient temperature

●External dimensions (Units : mm)

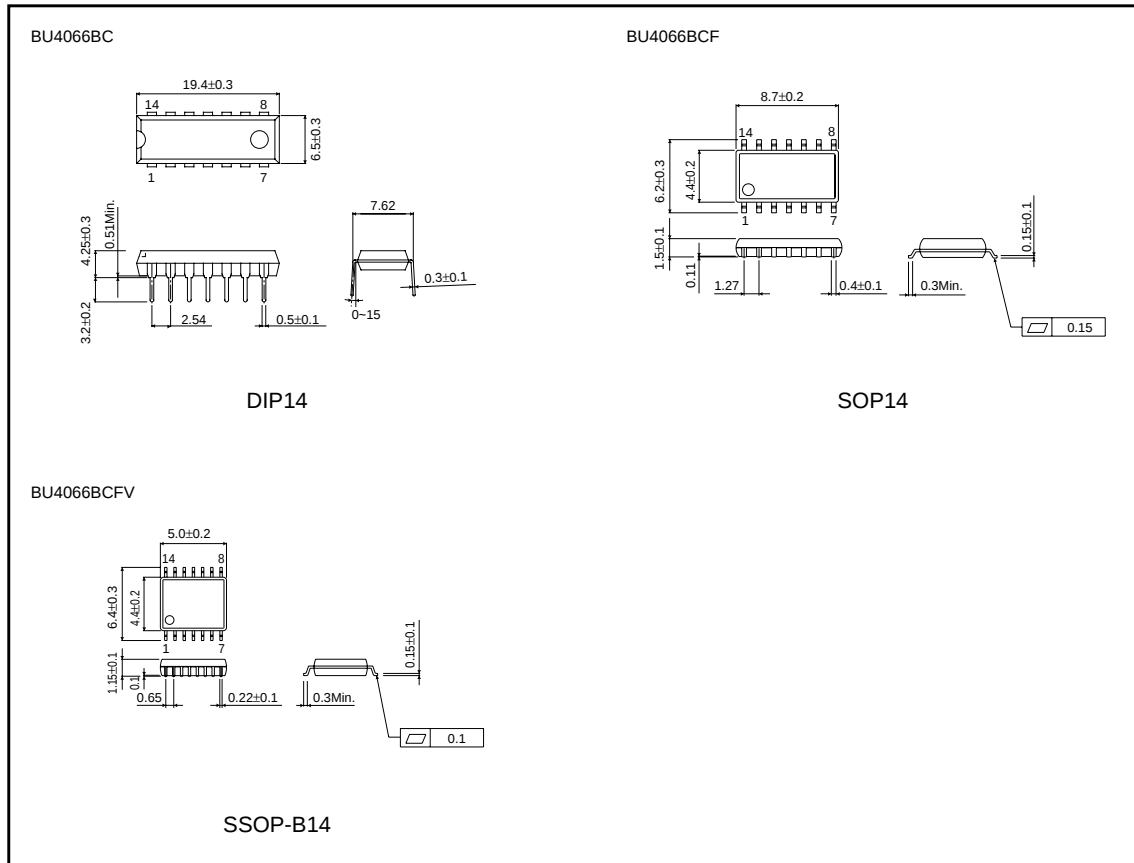

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.