


MC3303, MC3403

QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101A – FEBRUARY 1979 – REVISED MAY 1999

- Wide Range of Supply Voltages, Single Supply . . . 3 V to 36 V or Dual Supplies
- Class AB Output Stage
- True Differential Input Stage
- Low Input Bias Current
- Internal Frequency Compensation
- Short-Circuit Protection
- Designed to Be Interchangeable With Motorola MC3303, MC3403

D OR N PACKAGE
(TOP VIEW)




description

The MC3303 and the MC3403 are quadruple operational amplifiers similar in performance to the μ A741, but with several distinct advantages. They are designed to operate from a single supply over a range of voltages from 3 V to 36 V. Operation from split supplies also is possible, provided the difference between the two supplies is 3 V to 36 V. The common-mode input range includes the negative supply. Output range is from the negative supply to $V_{CC} - 1.5$ V. Quiescent supply currents are less than one-half those of the μ A741.

The MC3303 is characterized for operation from -40°C to 85°C , and the MC3403 is characterized for operation from 0°C to 70°C .

logic diagram (each amplifier)



AVAILABLE OPTIONS

T _A	V _{IO} MAX AT 25°C	PACKAGE	
		SMALL OUTLINE (D)	PLASTIC DIP (N)
0°C to 70°C	10 mV	MC3403D	MC3403N
-40°C to 85°C	8 mV	MC3303D	MC3303N

The D packages are available taped and reeled. Add R suffix to the device type (e.g., MC3403DR).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1999, Texas Instruments Incorporated

MC3303, MC3403
QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101A – FEBRUARY 1979 – REVISED MAY 1999

schematic (each amplifier)

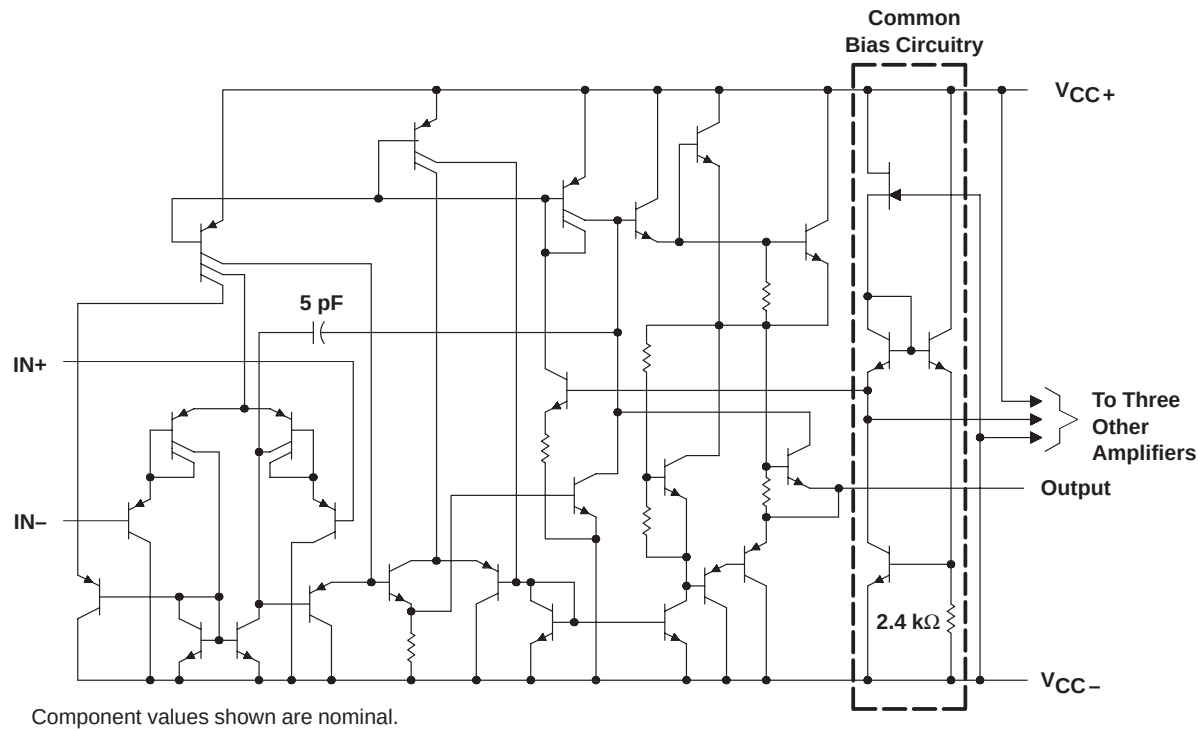

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

		MC3303	MC3403	UNIT
Supply voltage (see Note 1)	V _{CC+}	18	18	V
	V _{CC−}	−18	−18	
Supply voltage, V _{CC+} with respect to V _{CC−}		36	36	V
Differential input voltage (see Note 2)		±36	±36	V
Input voltage (see Notes 1 and 3)		±18	±18	V
Package thermal impedance, θ _{JA} (see Note 4)	D package	127		°C/W
	N package	78		
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds		260	260	°C
Storage temperature range		− 65 to 150	− 65 to 150	°C

NOTES: 1. These voltage values are with respect to the midpoint between V_{CC+} and V_{CC-}.
2. Differential voltages are at IN+ with respect to IN-.
3. Neither input must ever be more positive than V_{CC+} or more negative than V_{CC-}.
4. The package thermal impedance is calculated in accordance with JESD 51, except for through-hole packages, which use a trace length of zero.

recommended operating conditions

		MIN	MAX	UNIT
Single-supply voltage, V _{CC}		5	30	V
Dual-supply voltage	V _{CC+}	2.5	15	V
	V _{CC-}	-2.5	-15	
Operating free-air temperature range, T _A	MC3303	-40	85	°C
	MC3403	0	70	

MC3303, MC3403

QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101A – FEBRUARY 1979 – REVISED MAY 1999

electrical characteristics at specified free-air temperature, $V_{CC+} = 14\text{ V}$, $V_{CC-} = 0\text{ V}$ for MC3303, $V_{CC\pm} = \pm 15\text{ V}$ for MC3403 (unless otherwise noted)

PARAMETER		TEST CONDITIONS†		MC3303			MC3403			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
V _{IO}	Input offset voltage	See Note 5	25°C	2		8	2		10	mV
			Full range	10			12			
α _{VIO}	Temperature coefficient of input offset voltage	See Note 5	Full range	10			10			μV/°C
I _{IO}	Input offset current	See Note 5	25°C	30		75	30		50	nA
			Full range	250			200			
α _{IIO}	Temperture coefficient of input offset current	See Note 5	Full range	50			50			pA/C
I _{IB}	Input bias current	See Note 5	25°C	−0.2		−0.5	−0.2		−0.5	μA
			Full range	−1			−0.8			
V _{ICR}	Common-mode input voltage range‡		25°C	V _{CC} − to 12	V _{CC} − to 12.5		V _{CC} − to 13	V _{CC} − to 13.5		V
V _{OM}	Peak output voltage swing	R _L = 10 kΩ	25°C	12	12.5		±12	±13.5		V
		R _L = 2 kΩ	25°C	10	12		±10	±13		
		R _L = 2 kΩ	Full range	10			±10			
A _{VD}	Large-signal differential voltage amplification	V _O = ±10 V, R _L = 2 kΩ	25°C	20	200		20	200		V/mV
			Full range	15			15			
B _{OM}	Maximum-output-swing bandwidth	V _{OPP} = 20 V, A _{VD} = 1, THD ≤ 5%, R _L = 2 kΩ	25°C	9			9			kHz
B ₁	Unity-gain bandwidth	V _O = 50 mV, R _L = 10 kΩ	25°C	1			1			MHz
φ _m	Phase margin	C _L = 200 pF, R _L = 2 kΩ	25°C	60°			60°			
r _i	Input resistance	f = 20 Hz	25°C	0.3	1		0.3	1		MΩ
r _o	Output resistance	f = 20 Hz	25°C	75			75			Ω
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICRmin}	25°C	70	90		70	90		dB
k _{SVS}	Supply voltage sensitivity (ΔV _{IO} /ΔV _{CC})	V _{CC±} = ±2.5 to ±15 V	25°C	30		150	30		150	μV/V
I _{OS}	Short-circuit output current§		25°C	±10	±30	±45	±10	±30	±45	mA
I _{CC}	Total supply current	No load, See Note 5	25°C	2.8		7	2.8		7	mA

[†] All characteristics are measured under open-loop conditions with zero common-mode voltage unless otherwise specified. Full range for T_A is -40°C to 85°C for MC3303, and 0°C to 70°C for MC3403.

[‡] The V_{ICR} limits are linked directly, volt-for-volt, to supply voltage; the positive limit is 2 V less than V_{CC+} .

[§] Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

NOTE 5: V_{IO} , I_{IO} , I_{IB} , and I_{CC} are defined at $V_O = 0$ for MC3403 and $V_O = 7\text{ V}$ for MC3303.

MC3303, MC3403

QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101A – FEBRUARY 1979 – REVISED MAY 1999

electrical characteristics, $V_{CC+} = 5\text{ V}$, $V_{CC-} = 0\text{ V}$, $T_A = 25^\circ\text{C}$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS†	MC3303			MC3403			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_O = 2.5\text{ V}$			10		2	10	mV
I_{IO} Input offset current	$V_O = 2.5\text{ V}$			75		30	50	nA
I_{IB} Input bias current	$V_O = 2.5\text{ V}$			–0.5		–0.2	–0.5	μA
V_{OM} Peak output voltage swing‡	$R_L = 10\text{ k}\Omega$	3.3	3.5		3.3	3.5		V
	$R_L = 10\text{ k}\Omega$, $V_{CC+} = 5\text{ V to } 30\text{ V}$	V_{CC+} –1.7			V_{CC+} –1.7			
A_{VD} Large-signal differential voltage amplification	$V_O = 1.7\text{ V to } 3.3\text{ V}$, $R_L = 2\text{ k}\Omega$	20	200		20	200		V/mV
k_{SVS} Supply-voltage sensitivity ($\Delta V_{IO}/\Delta V_{CC\pm}$)	$V_{CC\pm} = \pm 2.5\text{ V to } \pm 15\text{ V}$			150			150	$\mu\text{V/V}$
I_{CC} Supply current	$V_O = 2.5\text{ V}$, No load		2.5	7		2.5	7	mA
V_{O1}/V_{O2} Crosstalk attenuation	$f = 1\text{ kHz to } 20\text{ kHz}$		120			120		dB

† All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified.

‡ Output will swing essentially to ground.

operating characteristics, $V_{CC+} = 14\text{ V}$, $V_{CC-} = 0\text{ V}$ for MC3303, $V_{CC\pm} = \pm 15\text{ V}$ for MC3403, $T_A = 25^\circ\text{C}$, $A_{VD} = 1$ (unless otherwise noted)

PARAMETER	TEST CONDITIONS				MIN	TYP	MAX	UNIT
SR Slew rate at unity gain	$V_I = \pm 10\text{ V}$,	$C_L = 100\text{ pF}$,	$R_L = 2\text{ k}\Omega$,	See Figure 1		0.6		V/ μs
t_r Rise time	$\Delta V_O = 50\text{ mV}$, $C_L = 100\text{ pF}$, $R_L = 10\text{ k}\Omega$, See Figure 1					0.35		μs
t_f Fall time						0.35		μs
Overshoot factor						20%		
Crossover distortion	$V_{I(PP)} = 30\text{ mV}$,	$V_{OPP} = 2\text{ V}$,	$f = 10\text{ kHz}$			1%		

PARAMETER MEASUREMENT INFORMATION

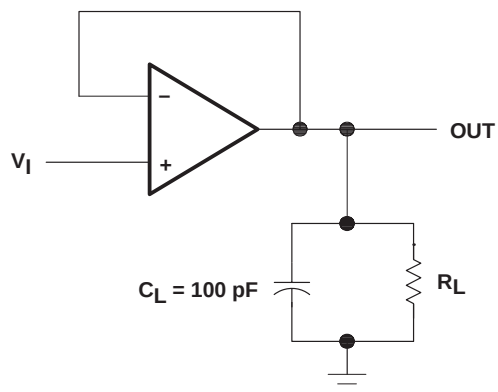


Figure 1. Unity-Gain Amplifier

TYPICAL CHARACTERISTICS†

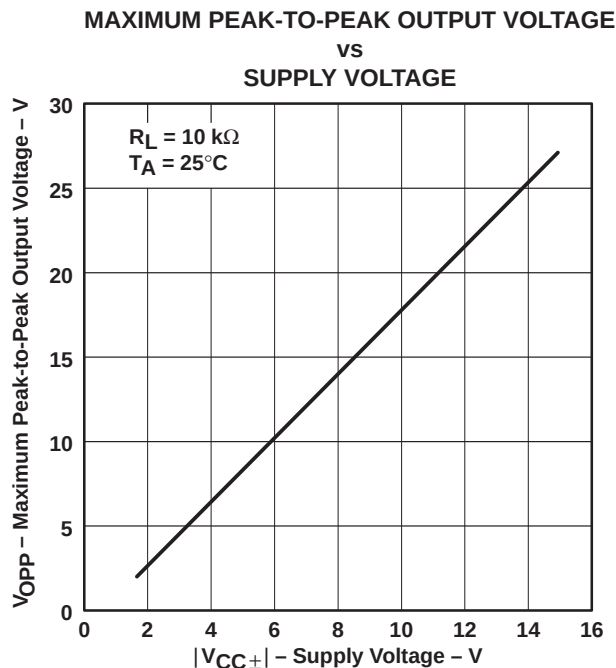


Figure 2

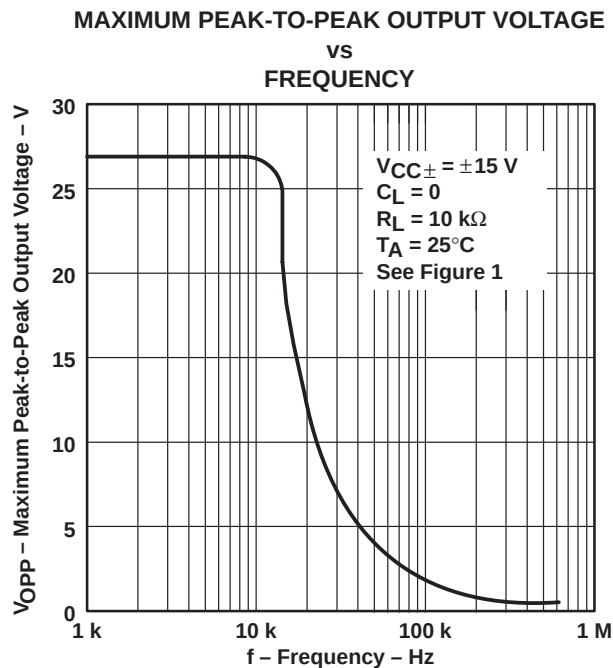


Figure 3

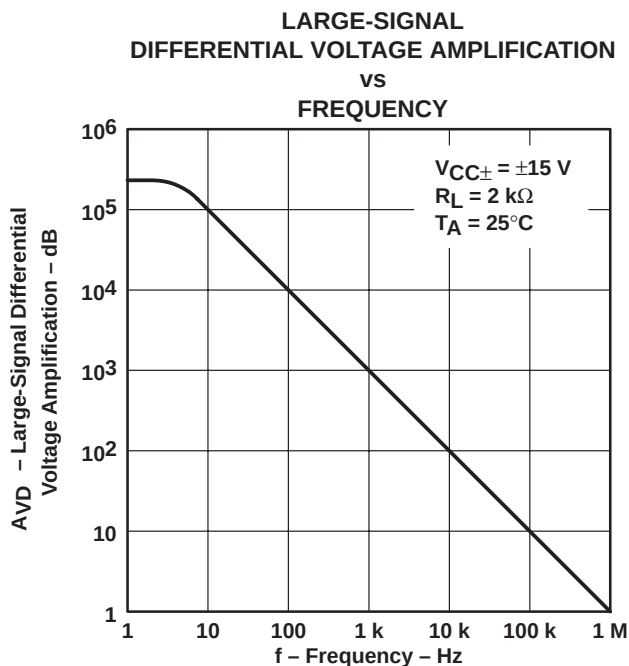


Figure 4

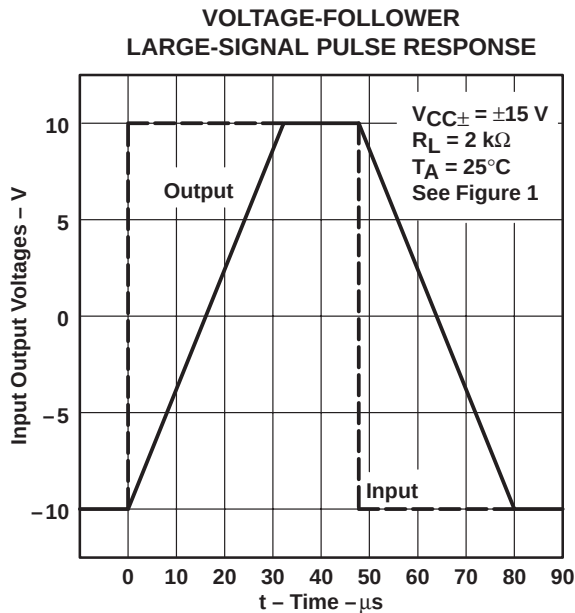


Figure 5

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

MC3303, MC3403
QUADRUPLE LOW-POWER OPERATIONAL AMPLIFIERS

SLOS101A – FEBRUARY 1979 – REVISED MAY 1999

TYPICAL CHARACTERISTICS†

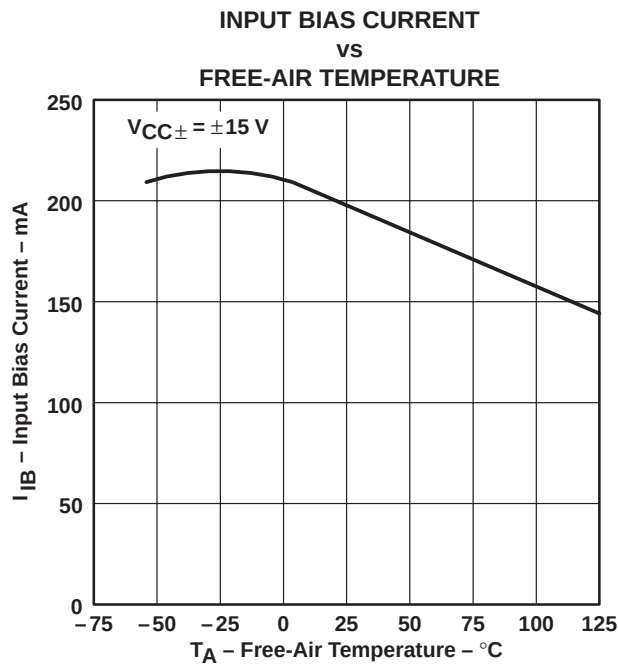


Figure 6

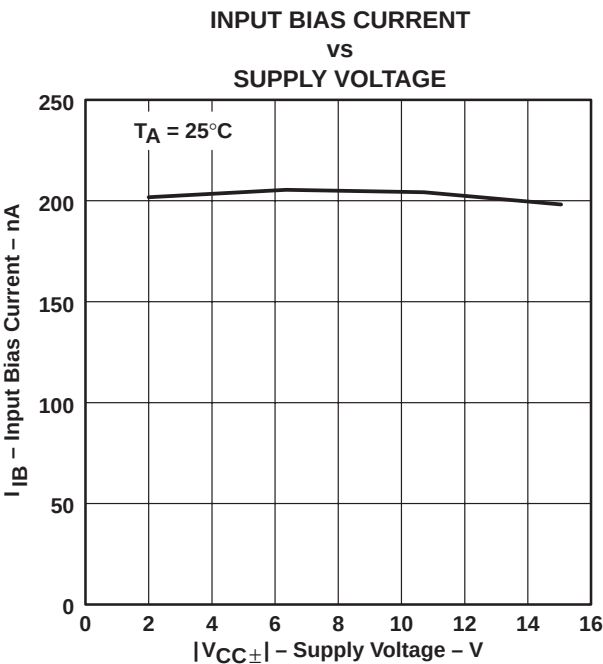


Figure 7

† Operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.