



EMIFIL® (Inductor type) Chip Ferrite Bead

BLM18R Series (0603 Size)

■ Dimensions

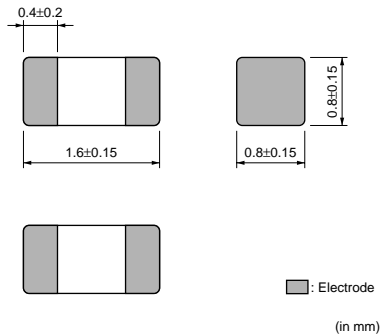

■ Equivalent Circuit

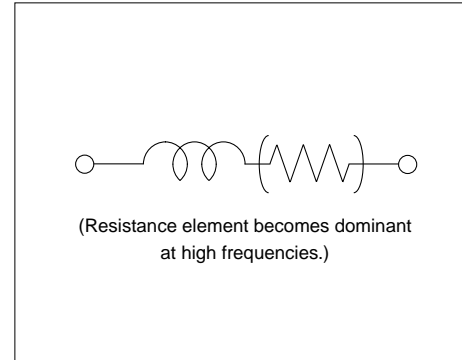

■ Packaging

Code	Packaging	Minimum Quantity
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000
B	Bulk(Bag)	1000

■ Rated Value (□: packaging code)

Part Number	Impedance (at 100MHz/20°C)	Impedance (at 1GHz/20°C)	Rated Current	DC Resistance	Operating Temperature Range
BLM18RK121SN1□	120ohm ±25%	-	200mA	0.25ohm max.	-55 to +125°C
BLM18RK221SN1□	220ohm ±25%	-	200mA	0.30ohm max.	-55 to +125°C
BLM18RK471SN1□	470ohm ±25%	-	200mA	0.50ohm max.	-55 to +125°C
BLM18RK601SN1□	600ohm ±25%	-	200mA	0.60ohm max.	-55 to +125°C
BLM18RK102SN1□	1000ohm ±25%	-	200mA	0.80ohm max.	-55 to +125°C

Number of Circuits: 1

Continued on the following page.


● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

Impedance-Frequency Characteristics (Main Items)

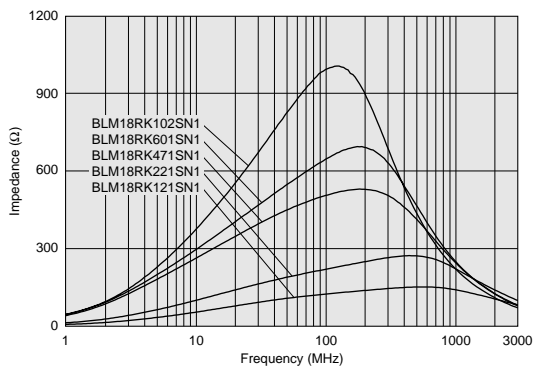


Impedance-Frequency Characteristics

BLM18RK121SN1

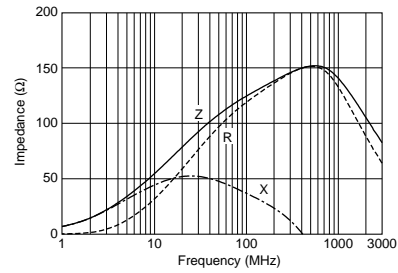


Impedance-Frequency Characteristics

BLM18RK221SN1

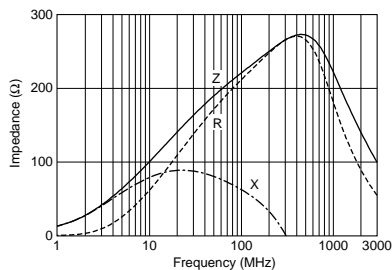


Impedance-Frequency Characteristics

BLM18RK471SN1

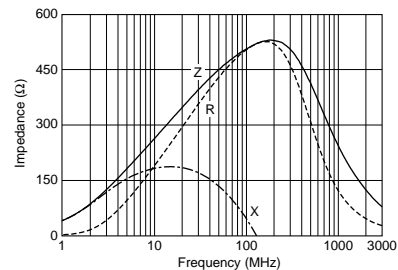


Impedance-Frequency Characteristics

BLM18RK601SN1

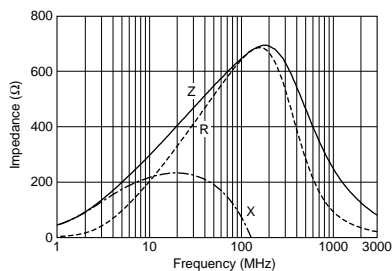

Impedance-Frequency Characteristics

BLM18RK102SN1

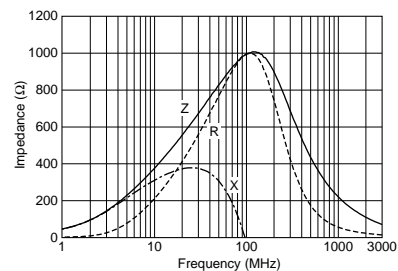


Continued on the following page.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

 Continued from the preceding page.

■ ⚠ Caution/Notice

⚠ Caution (Rating)

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

Notice

Solderability of Tin plating termination chip might be deteriorated when low temperature soldering profile where peak solder temperature is below the Tin melting point is used. Please confirm the solderability of Tin plating termination chip before use.

● This data sheet is applied for CHIP FERRITE BEAD used for General Electronics equipment for your design.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.