




microSD™ Small Memory Card Connector

ST1- G / T Series

CONNECTOR
MB-0195-3
January 2012



RoHS Compliant

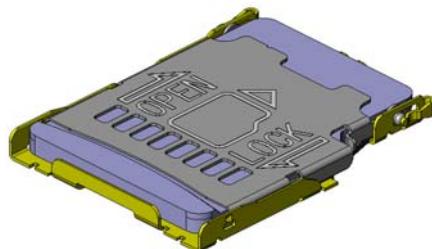

Images of Type G

The ST1 Series is a one-piece type connector for microSD™ memory cards. It is a low-profile, high-density, SMT mounted connector which is compatible with the microSD™ card used in a variety of portable devices and standardized by the SDA (SD Card Association).

* microSD™ is a trademark of SD Card Association.

Features

- Push-slide, hinge type connector for microSD™ small memory card.
- Available with card insertion detection switch (T type), and without (G type).
- Shield feature is secured by 4 ground connection points on hinge cover.
- Slim design with 1.4mm height, 15.5mm depth, 11.9mm width.
- Lock structure to prevent the cover from opening when dropped.

General Specifications

<ul style="list-style-type: none"> ■ No. of Contacts: 8 position ■ Contact Resistance: 100m ohm max. ■ Dielectric Withstanding Voltage : AC500Vr.m.s. per minute ■ Operating Temperature: -25 Deg. C to +85 Deg. C ■ Storage Temperature: -10 Deg. C to +60 Deg. C 	<ul style="list-style-type: none"> ■ Rated Current: 0.5A per pin ■ Rated Voltage: 10V per pin ■ Insulation Resistance: 1,000M ohm min. ■ Lifetime: 10,000 insertions ■ Temperature Rise: 30 Deg. C rise max.
---	---

Materials and Finishes

Component	Material / Finish
Contact	Copper alloy / Contact Area: 0.5µm min. Au plating over Ni Terminal Area: Au flash plating over Ni
Housing	Synthetic resin / None
Cover	Stainless steel / None (Terminal Area: same as contact)

Ordering Information

ST1 W 008 S 4 T (R2000)

Series

Connector Type
W: Hinge Type

No. of Contacts

Reel Part Number (Note)


Modification Code
T: With Small D-SW
G: Without Small D-SW

4: Au 0.5 µm / Au Flash Plating

S: Socket Contact


Part Number	SJ Drawing
ST1W008S4T	SJ111744

Unit: mm

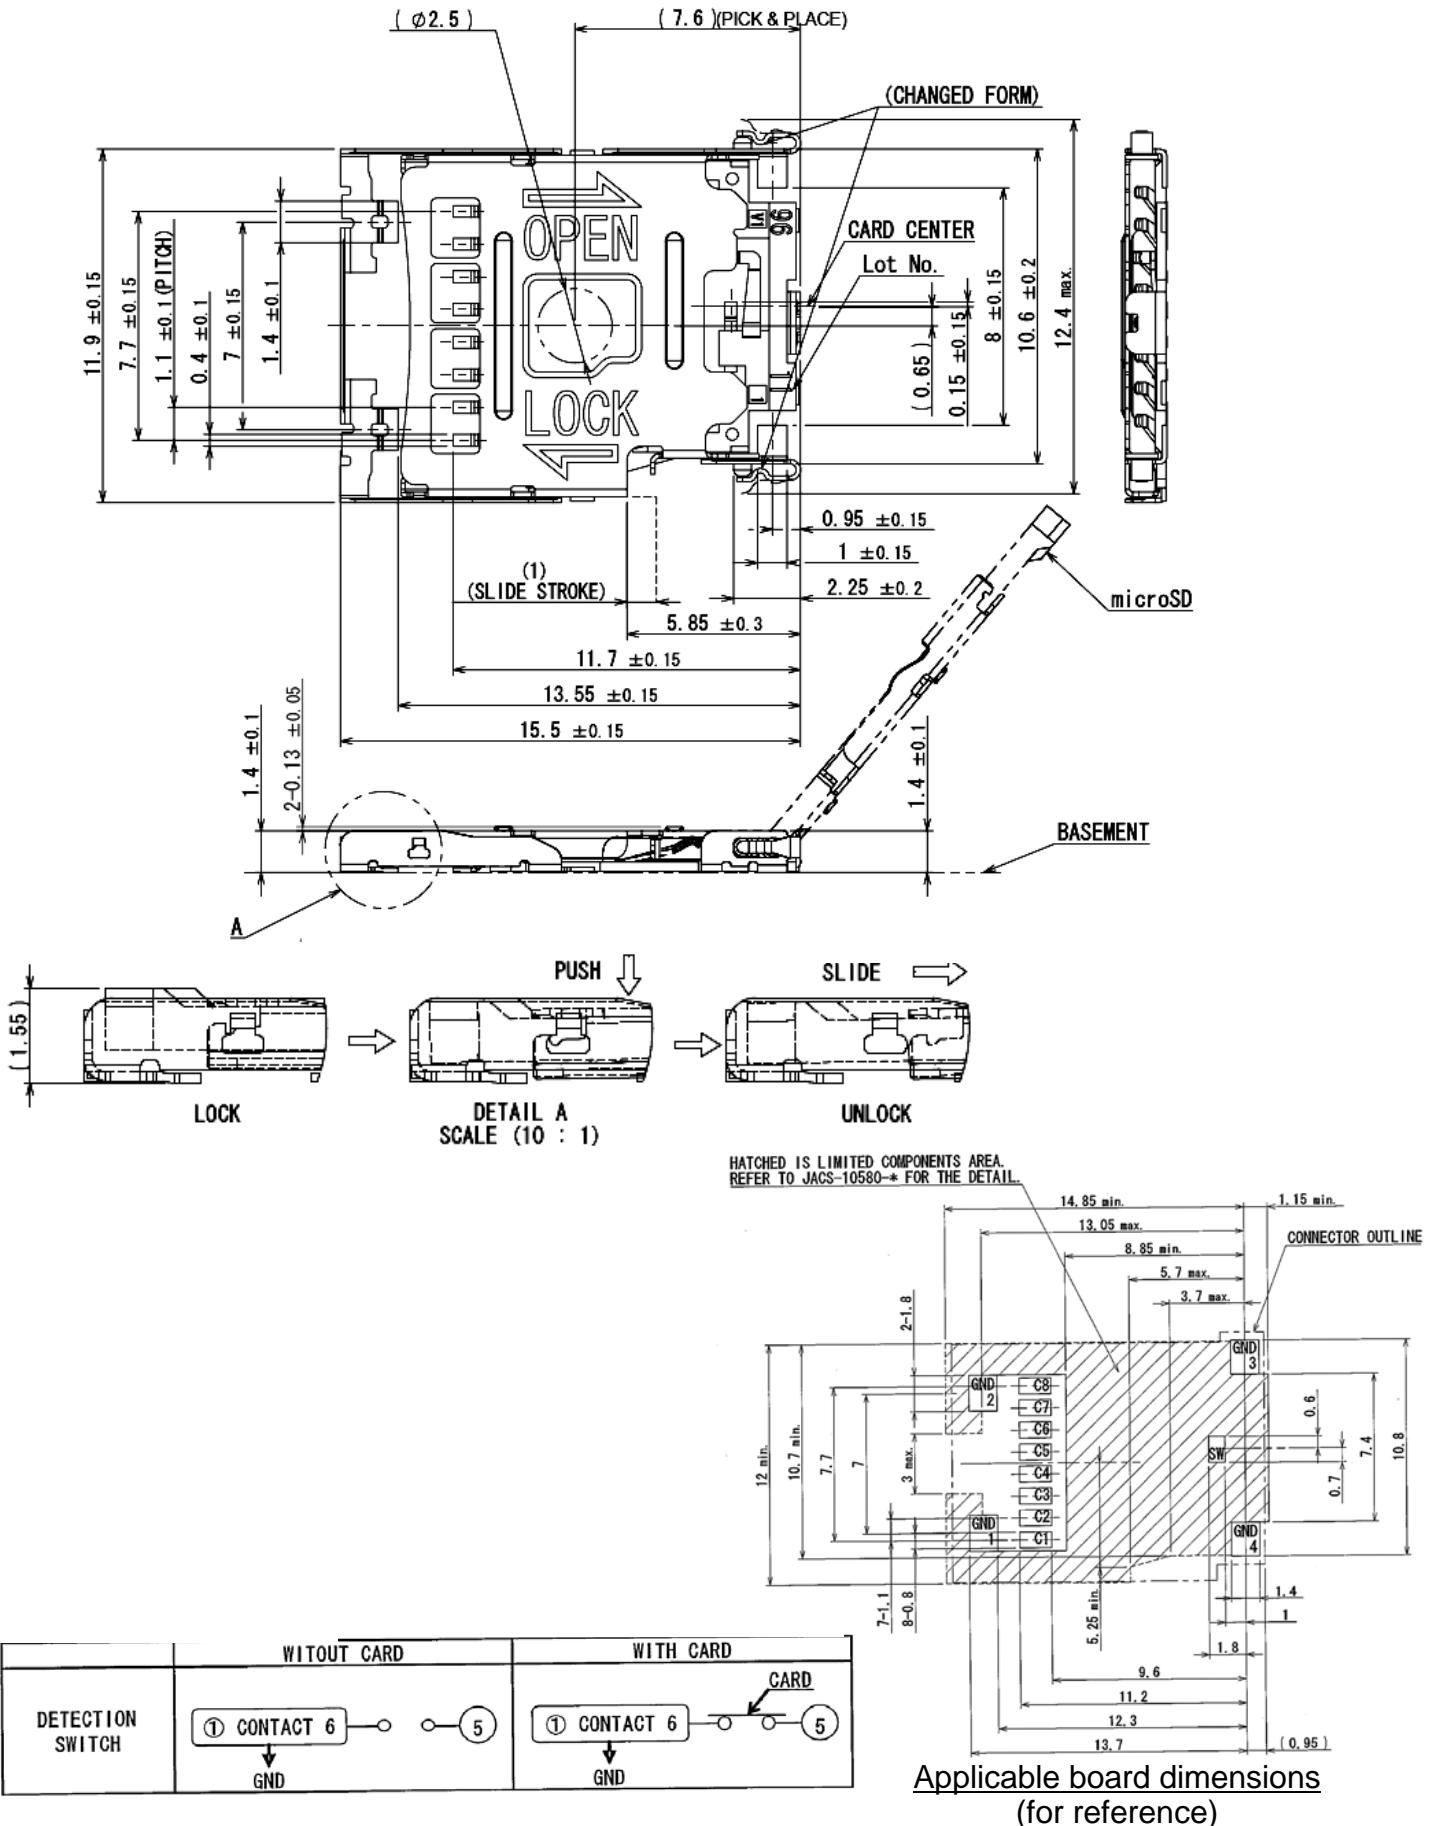

Part Number	SJ Drawing
ST1W008S4G	SJ109285

Unit: mm

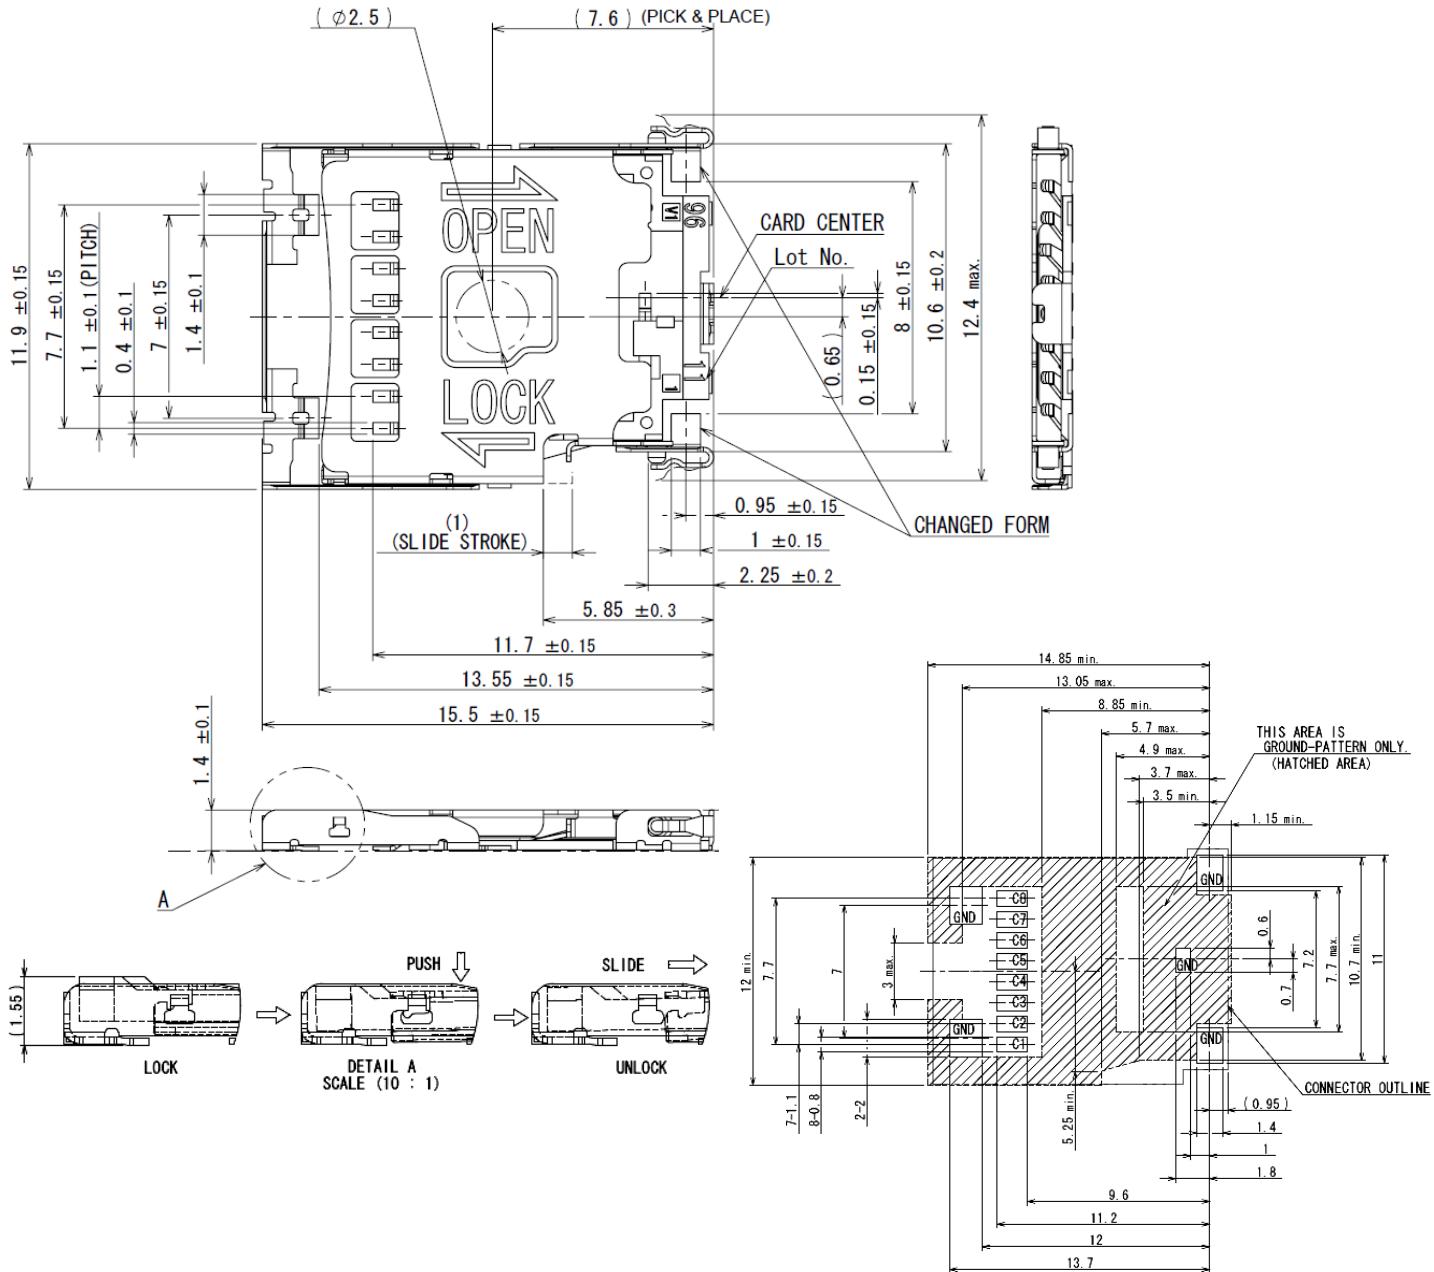

Applicable board dimensions (for reference)

Note: An embossed tape reel contains 2,000 pieces.

Please contact us for details on embossed tape specifications.

Japan Aviation Electronics Industry, Limited

Product Marketing Division

Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539
Phone: +81-3-3780-2787 FAX: +81-3-3780-2946

Notice: Products shown in this brochure are made for the applications listed below. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for life-support systems, or any other specific application requiring extremely high reliability, please contact JAE for further information.

Recommended applications: computers, office machines, measuring devices, telecommunication devices (terminals, mobile devices), AV devices, household applications, FA devices, etc.

* The specifications in this brochure are subject to change without notice. Please contact JAE for information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[JAE Electronics:](#)

[ST1W008S4TR300](#)