

HRM Series

PCB Power Relays



Features:

- SPCO contacts.
- Sealed to allow washing after flow soldering.

Specifications:

Coil Data:

Nominal Voltage : 3V dc to 24V dc.
Nominal Power consumption : 540mW to 720mW.

Contact Data:

Contact Arrangement : 1 form C.
Contact Material : AgCdo.
Contact Rating : Resistive Load : 10A 250V ac / 30V dc.
Inductive Load : 5A 240V ac $\cos\phi = 0.4$
5A 30V dc L/R = 7ms.
Maximum Switching Voltage : 110V dc / 250V ac.
Maximum Switching Current : 10A.
Maximum Switching Power : 2500VA, 300W.
Contact Resistance (initial) : 100m Ω at 6V dc 1A.
Life Expectancy Electrical : 100,000 operations at nominal load TV-5 120V ac.
Mechanical : 50,000 operations at $\cos\phi = 0.4$, L/R = 7ms
10,000,000 operations.

General Data:

Insulation Resistance : Minimum 100M Ω at 500V dc.
Dielectric Strength : 1000V ac, 1 minute between open contacts
5000V ac, 1 minute between contacts and coil.
Operate Time : Maximum 15ms.
Release Time : Maximum 8ms.
Temperature Range : -30 to +55°C (720mW).
-30 to +70°C (540mW).
Shock Resistance : 10G.
Vibration Resistance : 10 - 55Hz, Amplitude 1.5mm.
Weight : 13 grams.




HRM Series

PCB Power Relays




Dimensions

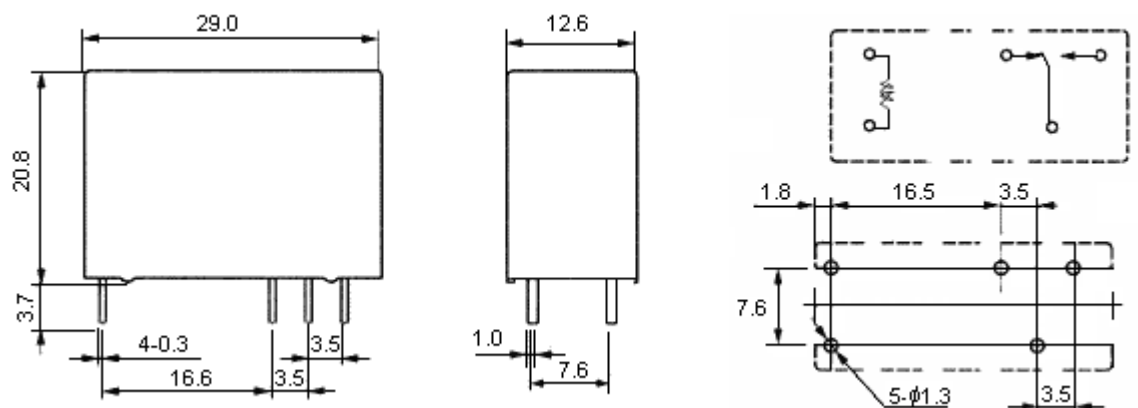


Dimensions : Millimetres

HRM Characteristic Data

Timing (Standard Type)

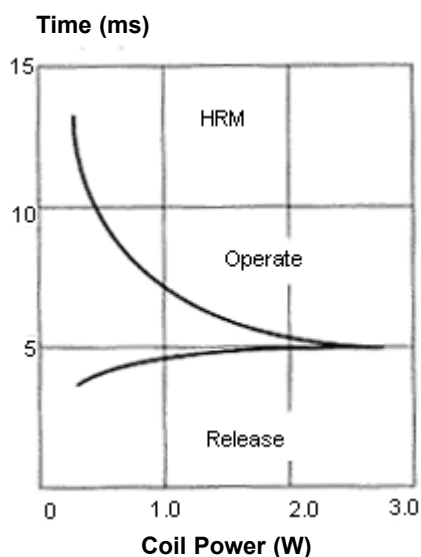

Coil Temperature Rise (Standard Type)

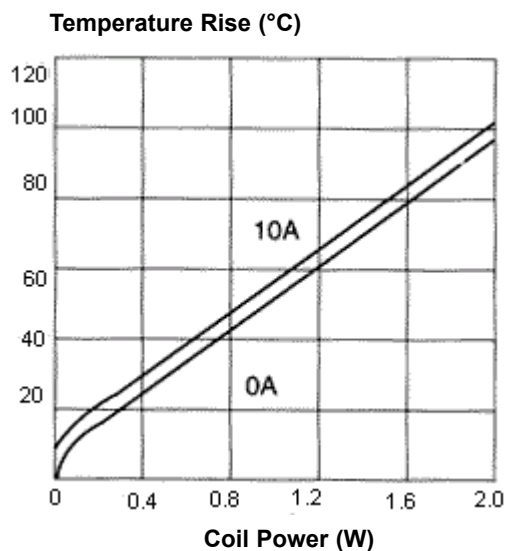


HRM Series

PCB Power Relays




Operating Range
Nominal Voltage Multiplying Factor

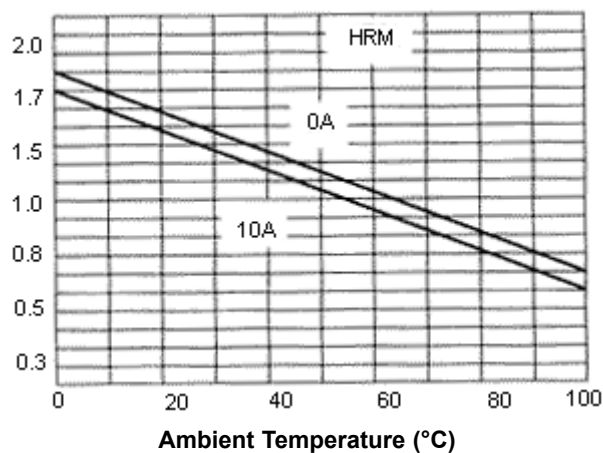


Maximum Switching Power

Switching Current (A)

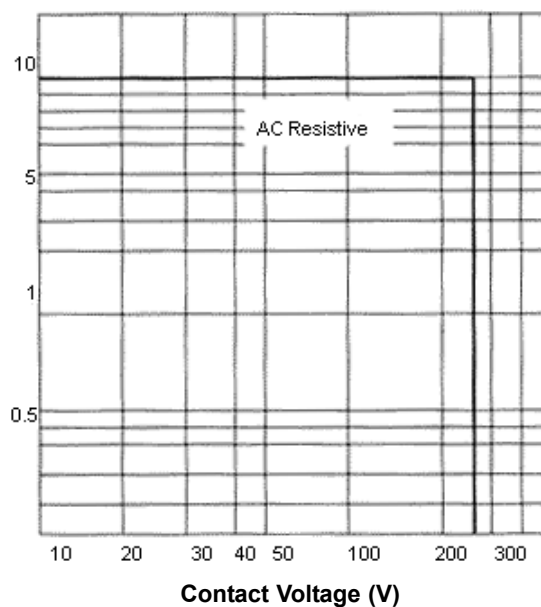

Life Curve

Operations (x 10,000)

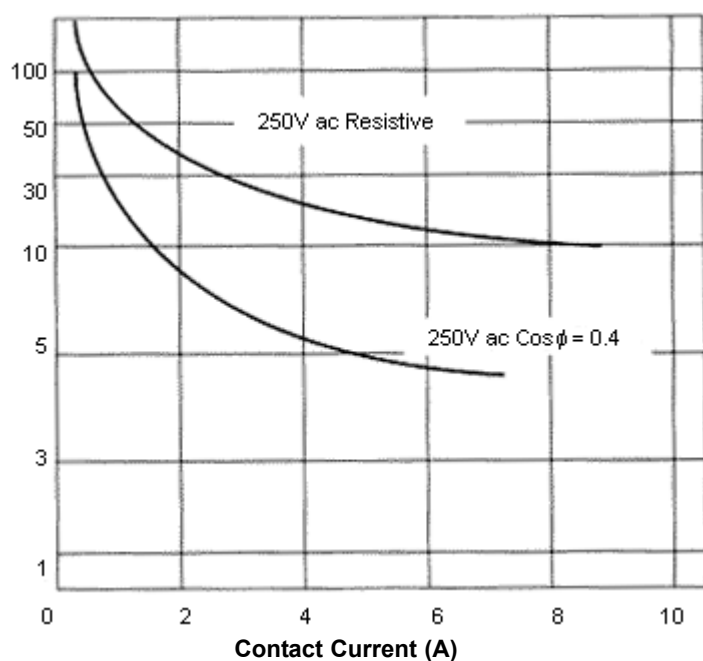

Coil Nominal (V dc)	Coil Resistance (Ω) $\pm 10\%$	Operate Voltage (V dc)	Release Voltage (V dc)	Part Number
5	36	4.0	0.25	HRM-S DC5V
9	115	7.2	0.45	HRM-S DC9V
12	200	9.6	0.6	HRM-S DC12V
24	820	19.2	1.20	HRM-S DC24V

HRM - **S** **DC5V**

Type Enclosure Nominal Voltage

Nominal Voltage : DC5V = 5V, DC9V = 9V, DC12V = 12V and DC24V = 24V.

HRM Series

PCB Power Relays



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

