







Description

The 1E1305-3 is a low profile 3dB hybrid coupler in an easy to use surface mount package covering the Japanese PDC bandwidth. The 1E1305-3 is ideal for balanced amplifiers and signal distribution and can be used in most high power designs. Parts have been subjected to rigorous qualification testing and units are 100% tested. They are manufactured using materials with x and y thermal expansion coefficients compatible with common substrates such as FR4, G-10 and polyamide.

Features:


- 1.20 1.85 GHz
- Low Loss
- High Isolation
- 90° Quadrature
- Surface Mountable
- Tape And Reel
- Convenient Package
- 100% Tested

ELECTRICAL SPECIFICATIONS**

Frequency	Isolation	Insertion Loss	VSWR	
GHz	dB Min	dB Max	Max:1	
1.4 – 1.7	25	0.25	1.15	
1.20 - 1.85	21	0.25	1.20	
Amplitude Balance	Phase Balance	Power	ΘJC	Operating Temp.
dB Max	Degrees	Ave. CW Watts	°C/Watt	°C
± 0.30	± 3	100	13.6	-55 to +85
± 0.50	± 4	100	13.6	-55 to +85

**Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance. Specifications subject to change without notice.

Outline Drawing

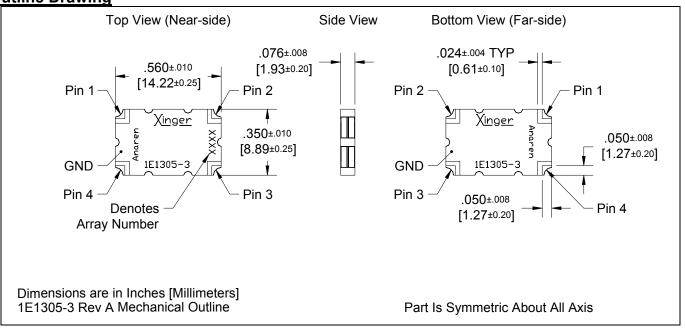







Available on Tape and Reel For Pick and Place Manufacturing.


USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392




Typical Performance: 1.0 GHz. to 2.0 GHz.

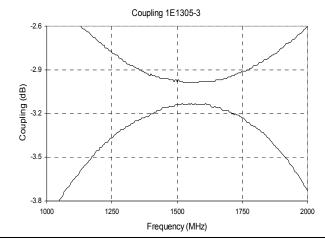

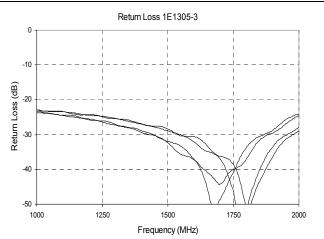


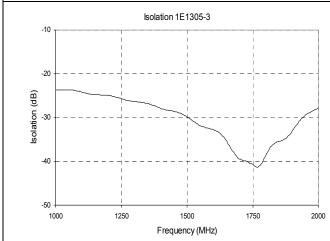

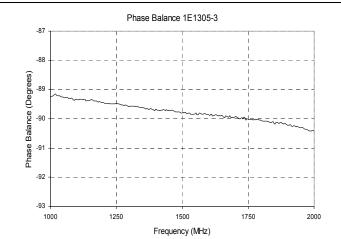


Mounting Footprint

Pin Configuration



Hybrid Coupler Pin Configruation							
	Pin 1	Pin 2	Pin 3	Pin 4			
Configuration #1	Input	Isolated	-3dB, -90°	-3dB, 0°			
Configuration #2	Isolated	Input	-3dB, 0°	-3dB, -90°			
Configuration #3	-3dB, -90°	-3dB, 0°	Input	Isolated			
Configuration #4	-3dB, 0°	-3dB, -90°	Isolated	Input			

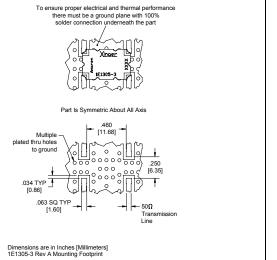

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.

